

Basler Accessories



Technical Specification

POWER-I/O CABLE M5 4P/OPEN

Order Number

2000031224

Document Number: DG001110

Version: 02 Language: 000 (English)

Release Date: 29 August 2017

Contacting Basler Support Worldwide

Europe, Middle East, Africa

Basler AG
An der Strusbek 60–62
22926 Ahrensburg
Germany

Tel. +49 4102 463 515

Fax +49 4102 463 599

support.europe@baslerweb.com

The Americas

Basler, Inc.
855 Springdale Drive, Suite 203
Exton, PA 19341
USA

Tel. +1 610 280 0171

Fax +1 610 280 7608

support.usa@baslerweb.com

Asia-Pacific

Basler Asia Pte. Ltd.
35 Marsiling Industrial Estate Road 3
#05–06
Singapore 739257

Tel. +65 6367 1355

Fax +65 6367 1255

support.asia@baslerweb.com

www.baslerweb.com

**All material in this publication is subject to change without notice and is copyright
Basler AG.**

Order Number	Description	Applicable Cameras
2000031224	Power-I/O Cable M5 4p/open, 10 m	ace CL

Table 1: Cable Type

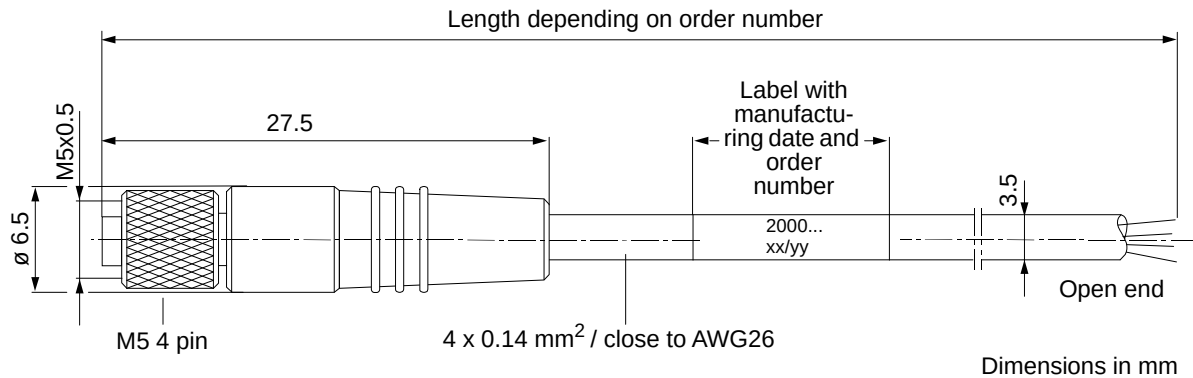


Fig. 1: Cable Overview

	⚠ CAUTION
	Personal Injury Hazard and Risk of Damage to Camera in Case of Short Circuits Short circuits may cause an extreme rise in temperature of the camera's housing. This may damage the camera and may also lead to personal injuries, e.g., burns if touching the housing. In the worst case, the overheating may cause a fire. In order to prevent that, you should take additional measures to limit the current flowing through each individual wire during a short circuit. The maximum current allowed is 1 A. There are two ways how to do this: ■ Using a fuse ■ Using a limited power supply

Wiring Information

Pin Number	Wire Color	Function
1	Brown	12 VDC Camera Power (12 VDC $\pm$ 10 %)
2	White	General Purpose I/O (GPIO)
3	Blue	Camera Power Ground
4	Black	GPIO Ground

Table 2: Wiring Information

Physical Specifications

Camera-Side Connector	M5, 4 pin
Host-Side Connector	None, open end
Cable Cross-Section	4 x 0.14 mm ² (close to AWG 26)
Cable Diameter	3.5 mm
Wire Insulation	PVC
Outer Jacket	PUR
Minimum Bending Radius	10 x cable diameter (fixed installation)
Maximum Bending Cycles	None
Suitable for Drag Chain/Robotics Applications	No/No

Table 3: Physical Specifications

Electrical Specifications

Maximum Operating Voltage	See camera user's manual
Test Voltage	≥ 800 Vrms
Wire Resistance	≤ 148 Ω /km at 20 °C

Table 4: Electrical Specifications

Environmental Specifications

Operating Temperature Range	-25–80 °C (not moving)
-----------------------------	------------------------

Table 5: Environmental Specifications

Plug Specifications

Durability	>100 mating cycles
Contact Resistance	$\leq 3 \text{ m}\Omega$
Contact Plating	Gold
Protection Rating	IP 67
Plug Insulation Material	PUR

Table 6: Plug Specifications

General Information

RoHS Compliant	Yes
Warranty	1 year

Table 7: General Information



The cables are intended for use with the cameras specified in [Table 1](#) only. If they are used as intended, the cables are covered by the low voltage directive. Therefore, even though the cables conform to CE standards, CE certification is not required.

Read the camera user's manual including the safety warnings before connecting the cable to the camera. The user's manual also contains further information about pin assignments, power requirements, as well as comprehensive information about installing and using the camera.

You can download the user's manual and related documents for your camera free of charge from the Basler website: www.baslerweb.com

Revision History

Doc. ID Number	Date	Changes
DG00111001000	19 Jul 2013	Initial release of this document.
DG00111002000	29 Aug 2017	Added warning about additional short circuit protection on page 1 . Removed information about 5 m cable.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9