



## FEATURES

- Single or Dual Isolated Outputs
- 1kVDC or 3kVDC options
- Wide temperature performance at full 1 watt load, -40°C to 85°C
- Industry Standard Pinouts
- 5V, 12V and 24V Inputs
- 5V, 12V and 15V Outputs
- Pin compatible with NMR, MER1, MMV, MEV1, NMK, MEV3, NMV series.

## DESCRIPTION

The CMR series are a cost effective 0.75W DC/DC converter series, in an industry standard package with industry standard pinouts. Popular input and output voltages are available as a lower power alternative to a 1W DC/DC converter. The galvanic isolation allows the device to be configured to provide an isolated negative rail in systems where only positive rails exist. The wide temperature range guarantees startup from -40°C and full 0.75 watt output at 85°C.

# CMR Series

Isolated 0.75W Single and Dual Output Isolated DC/DC Converters

## SELECTION GUIDE

| Order Code              | Nominal Input Voltage | Output Voltage | Output Current | Load Regulation |      | Ripple & Noise |      | Input Current at rated load | Efficiency |      | Isolation Capacitance | MTTF <sup>1</sup> |
|-------------------------|-----------------------|----------------|----------------|-----------------|------|----------------|------|-----------------------------|------------|------|-----------------------|-------------------|
|                         | V                     | V              | mA             | Typ.            | Max. | mV p-p         |      | mA                          | %          |      | pF                    | kHrs              |
|                         |                       |                |                |                 |      | Typ.           | Max. |                             | Min.       | Typ. |                       |                   |
| CMR100C                 | 5                     | 5              | 150            | 9               | 11   | 6              | 10   | 218                         | 65         | 69   | 30                    | 1850              |
| CMR118C                 | 24                    | 5              | 150            | 6.8             | 10   | 8              | 15   | 46                          | 65         | 70   | 60                    | 1250              |
| 3KVDC Isolation Options |                       |                |                |                 |      |                |      |                             |            |      |                       |                   |
| CMR0505SA3C             | 5                     | 5              | 150            | 9               | 11   | 15             | 25   | 220                         | 64         | 68   | 30                    | 4240              |
| CMR0512S3C              | 5                     | ±12            | ±31            | 5               | 6    | 6.7            | 8    | 192                         | 74         | 78   | 30                    | 1560              |
| CMR0515S3C              | 5                     | ±15            | ±25            | 4               | 6    | 6.3            | 8.2  | 188                         | 76         | 79   | 30                    | 1060              |
| CMR1215S3C              | 12                    | ±15            | ±25            | 3               | 4.5  | 6.5            | 13   | 80                          | 76         | 79   | 40                    | 925               |

## INPUT CHARACTERISTICS

| Parameter                | Conditions                            | Min. | Typ. | Max. | Units  |
|--------------------------|---------------------------------------|------|------|------|--------|
| Voltage range            | Continuous operation, 5V input types  | 4.5  | 5    | 5.5  | V      |
|                          | Continuous operation, 12V input types | 10.8 | 12   | 13.2 |        |
|                          | Continuous operation, 24V input types | 21.6 | 24   | 26.4 |        |
| Reflected ripple current | 5V & 12V input types                  |      | 2.6  | 4    | mA p-p |
|                          | 24V input types                       |      | 10   | 15   |        |

## OUTPUT CHARACTERISTICS

| Parameter                  | Conditions                                  | Min. | Typ. | Max. | Units |
|----------------------------|---------------------------------------------|------|------|------|-------|
| Rated Power <sup>2</sup>   | T <sub>A</sub> = -40°C to 85°C              |      |      | 0.75 | W     |
| Voltage Set Point Accuracy | See tolerance envelope                      |      |      |      |       |
| Line regulation            | High V <sub>IN</sub> to low V <sub>IN</sub> |      | 1.0  | 1.2  | %/%   |

## ISOLATION CHARACTERISTICS

| Parameter         | Conditions                            | Min. | Typ. | Max. | Units |
|-------------------|---------------------------------------|------|------|------|-------|
| Isolation voltage | C versions flash tested for 1 second  | 1000 |      |      | VDC   |
|                   | 3C versions flash tested for 1 minute | 3000 |      |      |       |
| Resistance        | Viso = 1000VDC                        | 10   |      |      | GΩ    |

## ABSOLUTE MAXIMUM RATINGS

|                                                 |       |
|-------------------------------------------------|-------|
| Lead temperature 1.5mm from case for 10 seconds | 260°C |
| 5V input types                                  | 7V    |
| 12V input types                                 | 15V   |
| 24V input types                                 | 28V   |

1. Calculated using MIL-HDBK-217FN2 with nominal input voltage at full load.

2. See derating graph.

3. See ripple & noise characterisation method.

All specifications typical at T<sub>A</sub> = 25°C, nominal input voltage and rated output current unless otherwise specified.



For full details go to  
[www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)

#### GENERAL CHARACTERISTICS


| Parameter           | Conditions      | Min. | Typ. | Max. | Units |
|---------------------|-----------------|------|------|------|-------|
| Switching frequency | 5V input types  |      | 110  |      | kHz   |
|                     | 12V input types |      | 120  |      |       |
|                     | 24V input types |      | 80   |      |       |

#### TEMPERATURE CHARACTERISTICS


| Parameter                      | Conditions             | Min. | Typ. | Max. | Units |
|--------------------------------|------------------------|------|------|------|-------|
| Specification                  | All output types       | -40  |      | 85   | °C    |
| Storage                        |                        | -50  |      | 125  |       |
| Case Temperature above ambient | 5V output types        |      | 33   |      |       |
|                                | All other output types |      | 28   |      |       |
| Cooling                        | Free air convection    |      |      |      |       |

#### TOLERANCE ENVELOPES

All 5V output types

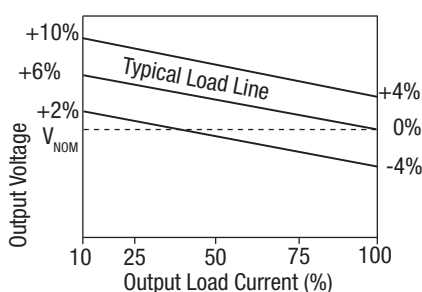

All other output types

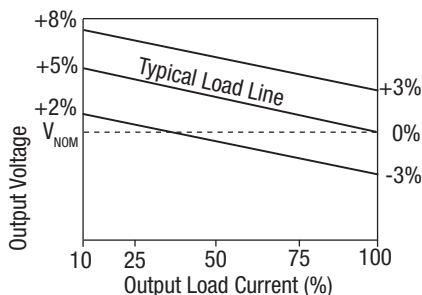

The voltage tolerance envelope shows typical load regulation characteristics for this product series. The tolerance envelope is the maximum output voltage variation due to changes in output loading.

#### TECHNICAL NOTES

##### ISOLATION VOLTAGE

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions CMR series of DC/DC converters are all 100% production tested at their stated isolation voltage. This is 1kVDC for 1 second for C versions and 3kVDC for 1 minute for 3C versions.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

For a part holding no specific agency approvals, such as the CMR series, both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

##### REPEATED HIGH-VOLTAGE ISOLATION TESTING

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The CMR series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enameled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognized parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

#### RoHS COMPLIANCE INFORMATION



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 260°C for 10 seconds. The pin termination finish on this product series is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The series is backward compatible with Sn/Pb soldering systems.

For further information, please visit [www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)

## APPLICATION NOTES

### Minimum load


The minimum load to meet datasheet specification is 10% of the full rated load across the specified input voltage range. Lower than 10% minimum loading will result in an increase in output voltage, which may rise to typically double the specified output voltage if the output load falls to less than 5%.

### Capacitive loading and start up

Typical start up times for this series, with a typical input voltage rise time of 2.2 $\mu$ s and output capacitance of 10 $\mu$ F, are shown in the table below. The product series will start into a capacitance of 47 $\mu$ F with an increased start time, however, the maximum recommended output capacitance is 10 $\mu$ F.

|             | Start-up time |
|-------------|---------------|
|             | $\mu$ s       |
| CMR100C     | 2300          |
| CMR118C     | 670           |
| CMR0505SA3C | 1970          |
| CMR0512S3C  | 11200         |
| CMR0515S3C  | 16300         |
| CMR1215S3C  | 11200         |

Typical Start-Up Wave Form




### Ripple & Noise Characterisation Method

Ripple and noise measurements are performed with the following test configuration.

|                                                                      |                                                                                                                                                                        |
|----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| C1                                                                   | 1 $\mu$ F X7R multilayer ceramic capacitor, voltage rating to be a minimum of 3 times the output voltage of the DC/DC converter                                        |
| C2                                                                   | 10 $\mu$ F tantalum capacitor, voltage rating to be a minimum of 1.5 times the output voltage of the DC/DC converter with an ESR of less than 100m $\Omega$ at 100 kHz |
| C3                                                                   | 100nF multilayer ceramic capacitor, general purpose                                                                                                                    |
| R1                                                                   | 450 $\Omega$ resistor, carbon film, $\pm$ 1% tolerance                                                                                                                 |
| R2                                                                   | 50 $\Omega$ BNC termination                                                                                                                                            |
| T1                                                                   | 3T of the coax cable through a ferrite toroid                                                                                                                          |
| RLOAD                                                                | Resistive load to the maximum power rating of the DC/DC converter. Connections should be made via twisted wires                                                        |
| Measured values are multiplied by 10 to obtain the specified values. |                                                                                                                                                                        |

### Differential Mode Noise Test Schematic

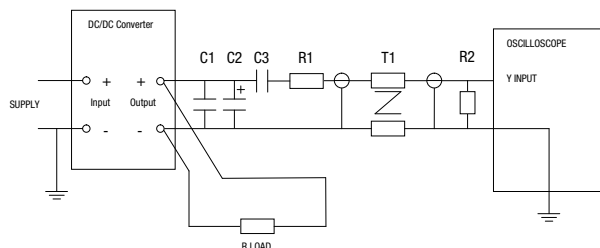

**APPLICATION NOTES (continued)**


**Output Ripple Reduction**

By using the values of inductance and capacitance stated, the output ripple at the rated load is lowered to 5mV p-p max.

**Component selection**


**Capacitor:** It is required that the ESR (Equivalent Series Resistance) should be as low as possible, ceramic types are recommended. The voltage rating should be at least twice (except for 15V output), the rated output voltage of the DC/DC converter.

**Inductor:** The rated current of the inductor should not be less than that of the output of the DC/DC converter. At the rated current, the DC resistance of the inductor should be such that the voltage drop across the inductor is <2% of the rated voltage of the DC/DC converter. The SRF (Self Resonant Frequency) should be >20MHz.

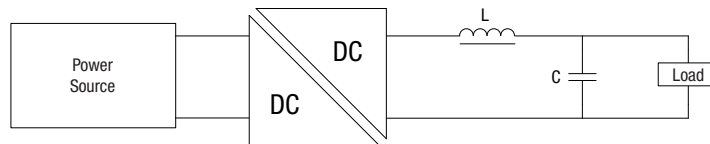


|             | Inductor   |        |              | Capacitor  |
|-------------|------------|--------|--------------|------------|
|             | L, $\mu$ H | SMD    | Through Hole | C, $\mu$ F |
| CMR100C     | 10         | 82103C | 11R103C      | 4.7        |
| CMR118C     | 10         | 82103C | 11R103C      | 4.7        |
| CMR0505SA3C | 22         | 82223C | 11R223C      | 1          |
| CMR0512S3C  | 150        | 82154C | 11R154C      | 0.33       |
| CMR0515S3C  | 220        | 82224C | 11R224C      | 0.33       |
| CMR1215S3C  | 220        | 82224C | 11R224C      | 0.22       |

**TEMPERATURE DERATING GRAPH**

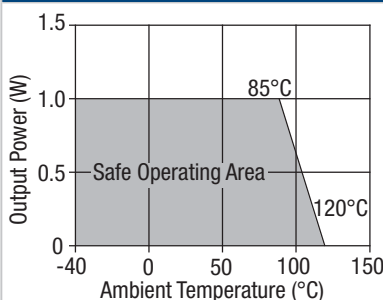


## PACKAGE SPECIFICATIONS

## MECHANICAL DIMENSIONS

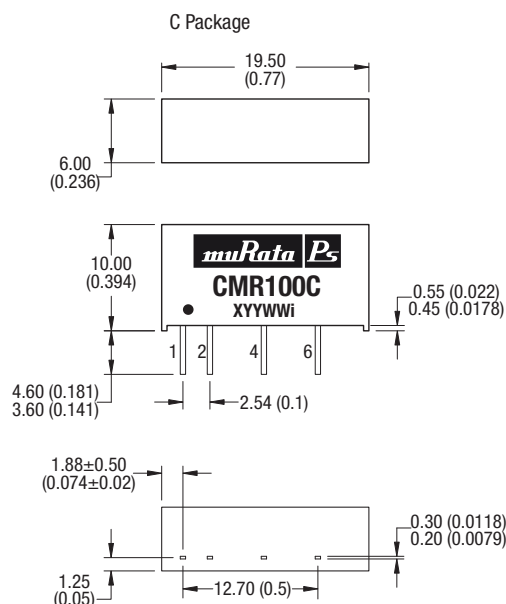


All dimensions in millimetres  $\pm 0.01$  (inches  $\pm 0.25$ ). All pins on a 2.54 (0.1) pitch and within  $+0.25$  (0.01) of true position.

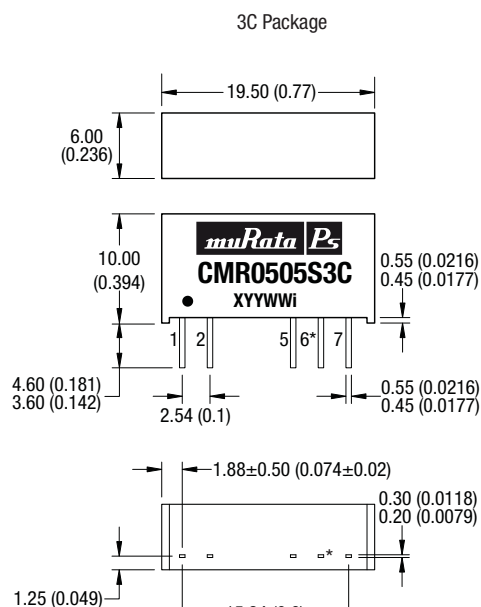

\*PIN 6 not fitted on single output variants

Weight: 2.1g

### TUBE OUTLINE DIMENSIONS

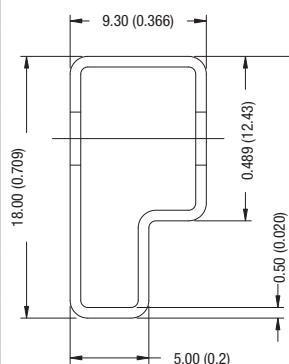

All dimensions in millimetres  $\pm 0.25$  (inches  $\pm 0.1$ )

Tube quantity: 25


## PIN CONNECTIONS

| PIN | C                 | 3C                |                   |
|-----|-------------------|-------------------|-------------------|
|     |                   | Single            | Dual              |
| 1   | +V <sub>IN</sub>  | +V <sub>IN</sub>  | +V <sub>IN</sub>  |
| 2   | -V <sub>IN</sub>  | -V <sub>IN</sub>  | -V <sub>IN</sub>  |
| 4   | -V <sub>OUT</sub> |                   |                   |
| 5   |                   | -V <sub>OUT</sub> | -V <sub>OUT</sub> |
| 6   | +V <sub>OUT</sub> |                   | 0V                |
| 7   |                   | +V <sub>OUT</sub> | +V <sub>OUT</sub> |

**PACKAGE SPECIFICATIONS (continued)**


**RECOMMENDED FOOTPRINT DETAILS**

C Package

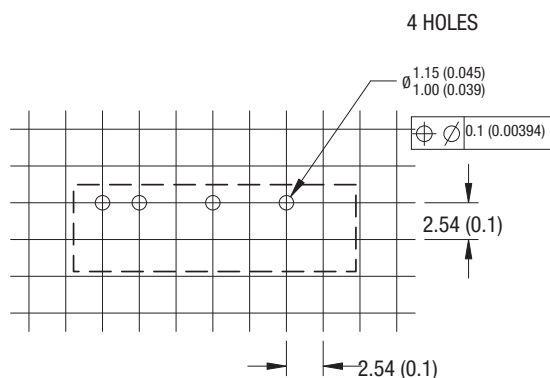

All dimensions in millimetres  $\pm 0.25$  (inches  $\pm 0.1$ )

3C Package

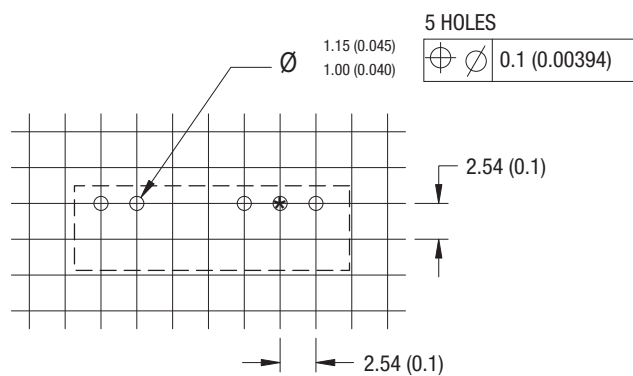

\* Hole not required for single output variants

Murata Power Solutions, Inc.  
11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.  
ISO 9001 and 14001 REGISTERED



This product is subject to the following [operating requirements](#) and the [Life and Safety Critical Application Sales Policy](#).  
Refer to: <http://www.murata-ps.com/requirements/>

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.  
© 2013 Murata Power Solutions, Inc.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9