

## JTD SERIES INDICATOR® POWR-PRO® FUSES

**POWR-PRO®** 600 V ac • Time Delay •  $\frac{8}{10}$ -600 A


## Description

The Littelfuse POWR-PRO® JTD\_ID Indicator Class J fuse provides visual blown fuse indication and maximum protection in a compact package. The current-limiting time delay JTD\_ID offers a patented design which reduces nuisance fuse openings.

## Features/Benefits

- POWR-PRO® Performance
- Current-Limiting
- IEC Type 2 Protection
- Indication and non-indication version available
- Indicating and DIN mount holders available
- Dual-element design

## Applications

- Fused combination motor controllers and motor control centers
- Transformer protection
- Protection for series rated molded case circuit-breaker panels
- General purpose circuits

## Specifications

### Voltage Ratings

AC: 600 V  
 DC: 300 V ( $\frac{8}{10}$ –100 A)  
 500 V (110–600 A)

### Amperage Range

$\frac{8}{10}$ –600 A

### Interrupting Rating

AC: 200 kA rms symmetrical  
 300kA rms symmetrical  
 (Littelfuse self-certified)

### Material

DC: 20 kA  
 Body: Melamine  
 Caps: Nickel-plated Bronze ( $\frac{8}{10}$ –60 A)  
 Brass (70–200 A)  
 Brass Cap with Copper Blade (225–600 A)

### Approvals

AC: Standard 248-8, Class J  
 UL Listed (File: E81895)  
 CSA Certified (File: LR29862)

### Country of Origin

DC: Littelfuse self-certified  
 Mexico

## Ordering Information

| AMPERAGE RATINGS |    |    |     |    |     |     |     |
|------------------|----|----|-----|----|-----|-----|-----|
| $\frac{8}{10}$   | 2¼ | 4½ | 10  | 35 | 90  | 225 | 600 |
| 1                | 2½ | 5  | 12  | 40 | 100 | 250 | —   |
| 1¼               | 2¾ | 5¾ | 15  | 45 | 110 | 300 | —   |
| 1½               | 3  | 6  | 17½ | 50 | 125 | 350 | —   |
| 1¾               | 3¾ | 7  | 20  | 60 | 150 | 400 | —   |
| 1¾               | 3½ | 8  | 25  | 70 | 175 | 450 | —   |
| 2                | 4  | 9  | 30  | 80 | 200 | 500 | —   |

| TYPE           | SERIES | AMPERAGE | CATALOG NUMBER | ORDERING NUMBER |
|----------------|--------|----------|----------------|-----------------|
| INDICATING     | JTD_ID | 60       | JTD60ID        | 0JTD060.TXID    |
| NON-INDICATING | JTD    | 60       | JTD60          | 0JTD060.T       |

## Web Resources

Time-current curves, data sheets and additional technical information: [littelfuse.com/jtd](http://littelfuse.com/jtd)

## Recommended Fuse Holders

LFJ60 Series  
 LFPSJ Series ( $\frac{8}{10}$ –60 A)

# JTD DIMENSIONS AND CURRENT-LIMITING EFFECTS

## Dimensions Inches (mm)

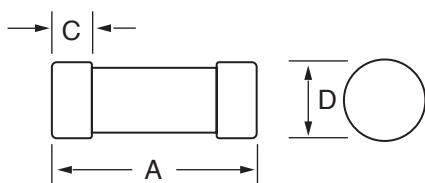


Fig. 1

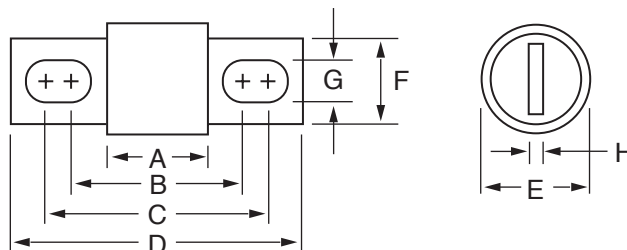


Fig. 2

## Dimensions of JTD\_ID & JTD

| AMPERAGE  | FIG. NO. | DIMENSIONS INCHES (mm) |                                         |                                         |              |           |           |              |         |
|-----------|----------|------------------------|-----------------------------------------|-----------------------------------------|--------------|-----------|-----------|--------------|---------|
|           |          | A                      | B                                       | C                                       | D            | E         | F         | G            | H       |
| 1 – 30    | 1        | 2¼ (57.2)              | —                                       | ½ (12.7)                                | 13⁄16 (20.6) | —         | —         | —            | —       |
| 35 – 60   | 1        | 2¾ (60.3)              | —                                       | 5⁄8 (15.9)                              | 1½ (27.0)    | —         | —         | —            | —       |
| 70 – 100  | 2        | 2⅝ (66.7)              | 3⅞ (89.7)                               | 3 <sup>23</sup> / <sub>32</sub> (94.5)  | 4⅝ (117.5)   | 1⅞ (28.6) | ¾ (19.1)  | 9⁄32 (7.1)   | ⅞ (3.2) |
| 110 – 200 | 2        | 3 (76.2)               | 4⅞ (108.7)                              | 4 <sup>15</sup> / <sub>32</sub> (113.5) | 5¾ (146.1)   | 1½ (38.1) | 1⅞ (28.6) | 9⁄32 (7.1)   | ¾ (4.8) |
| 225 – 400 | 2        | 3⅜ (85.7)              | 5⅞ (130.2)                              | 5⅜ (136.5)                              | 7⅞ (181.0)   | 2 (50.8)  | 1⅞ (41.3) | 13⁄32 (10.3) | ¼ (6.4) |
| 450 – 600 | 2        | 3¾ (95.3)              | 5 <sup>27</sup> / <sub>32</sub> (148.4) | 6 <sup>5</sup> / <sub>32</sub> (156.4)  | 8 (203.2)    | 2½ (63.5) | 2 (50.8)  | 17⁄32 (13.5) | ¾ (9.5) |

## Electrical Specifications

| ORDERING NUMBER | AMPERAGE RATING | VOLTAGE RATING |     | INTERRUPTING RATING |       | WATTS LOSS AT 100% RATED CURRENT (W) | WATTS LOSS AT 80% RATED CURRENT (W) | TOTAL CLEARING I²T (A² SEC) 200 kA | AGENCY APPROVALS |     |
|-----------------|-----------------|----------------|-----|---------------------|-------|--------------------------------------|-------------------------------------|------------------------------------|------------------|-----|
|                 |                 | AC             | DC  | AC                  | DC    |                                      |                                     |                                    | UL               | CSA |
| OJTD003.T       | 3               | 600            | 300 | 200 kA              | 20 kA | 4.537                                | 2.801                               | 820                                | •                | •   |
| OJTD010.T       | 10              | 600            | 300 | 200 kA              | 20 kA | 4.087                                | 2.418                               | 1690                               | •                | •   |
| OJTD030.T       | 30              | 600            | 300 | 200 kA              | 20 kA | 4.247                                | 2.92                                | 4754                               | •                | •   |
| OJTD060.T       | 60              | 600            | 300 | 200 kA              | 20 kA | 6.447                                | 3.83                                | 10450                              | •                | •   |
| OJTD100.V       | 100             | 600            | 300 | 200 kA              | 20 kA | 7.463                                | 4.447                               | 68150                              | •                | •   |
| OJTD200.X       | 200             | 600            | 500 | 200 kA              | 20 kA | 18.39                                | 10.187                              | 159000                             | •                | •   |
| OJTD400.X       | 400             | 600            | 500 | 200 kA              | 20 kA | 40.037                               | 23.463                              | 1055000                            | •                | •   |
| OJTD600.X       | 600             | 600            | 500 | 200 kA              | 20 kA | 61.187                               | 34.983                              | 1970000                            | •                | •   |

## Fuse Weight

| AMPERAGE | JTD-ID (POUNDS) | JTD-ID (GRAMS) | JTD (POUNDS) | JTD (GRAMS) |
|----------|-----------------|----------------|--------------|-------------|
| 8/10–3 ½ | 0.088           | 39.92          | 0.084        | 38.10       |
| 4–12     | 0.090           | 40.82          | 0.086        | 39.01       |
| 15–30    | 0.090           | 40.82          | 0.086        | 39.01       |
| 35–60    | 0.180           | 81.65          | 0.176        | 79.83       |
| 70–100   | 0.242           | 109.77         | 0.238        | 107.95      |
| 110–200  | 0.774           | 351.08         | 0.770        | 349.27      |
| 225–400  | 1.704           | 772.92         | 1.700        | 771.11      |
| 450–600  | 3.124           | 1417.02        | 3.120        | 1415.21     |

# JTD SERIES CLASS J FUSE


## Current-Limiting Effects of JTD & JTDID (600 V) Fuses

| SHORT CIRCUIT<br>CURRENT† | APPARENT RMS SYMMETRICAL CURRENT FOR VARIOUS FUSE RATINGS |       |       |       |        |        |
|---------------------------|-----------------------------------------------------------|-------|-------|-------|--------|--------|
|                           | 30 A                                                      | 60 A  | 100 A | 200 A | 400 A  | 600 A  |
| 5,000                     | 699                                                       | 1,331 | 1,903 | 2,858 | 4,702  | -      |
| 10,000                    | 881                                                       | 1,676 | 2,397 | 3,601 | 5,925  | 7,689  |
| 15,000                    | 1,008                                                     | 1,919 | 2,744 | 4,123 | 6,782  | 8,802  |
| 20,000                    | 1,110                                                     | 2,112 | 3,020 | 4,537 | 7,464  | 9,687  |
| 25,000                    | 1,196                                                     | 2,275 | 3,254 | 4,888 | 8,041  | 10,436 |
| 30,000                    | 1,271                                                     | 2,418 | 3,457 | 5,194 | 8,545  | 11,089 |
| 35,000                    | 1,338                                                     | 2,545 | 3,640 | 5,468 | 8,995  | 11,674 |
| 40,000                    | 1,398                                                     | 2,661 | 3,805 | 5,717 | 9,405  | 12,205 |
| 50,000                    | 1,506                                                     | 2,867 | 4,099 | 6,158 | 10,131 | 13,148 |
| 60,000                    | 1,601                                                     | 3,046 | 4,356 | 6,544 | 10,766 | 13,972 |
| 80,000                    | 1,762                                                     | 3,353 | 4,795 | 7,203 | 11,849 | 15,378 |
| 100,000                   | 1,898                                                     | 3,612 | 5,165 | 7,759 | 12,764 | 16,565 |
| 150,000                   | 2,173                                                     | 4,134 | 5,912 | 8,882 | 14,611 | 18,963 |
| 200,000                   | 2,391                                                     | 4,551 | 6,507 | 9,776 | 16,082 | 20,871 |

†Prospective RMS Symmetrical Amperes Short-Circuit Current

Note: Data derived from Peak Let-Thru Curves

## Peak Let-Thru Curve (JTD & JTDID)

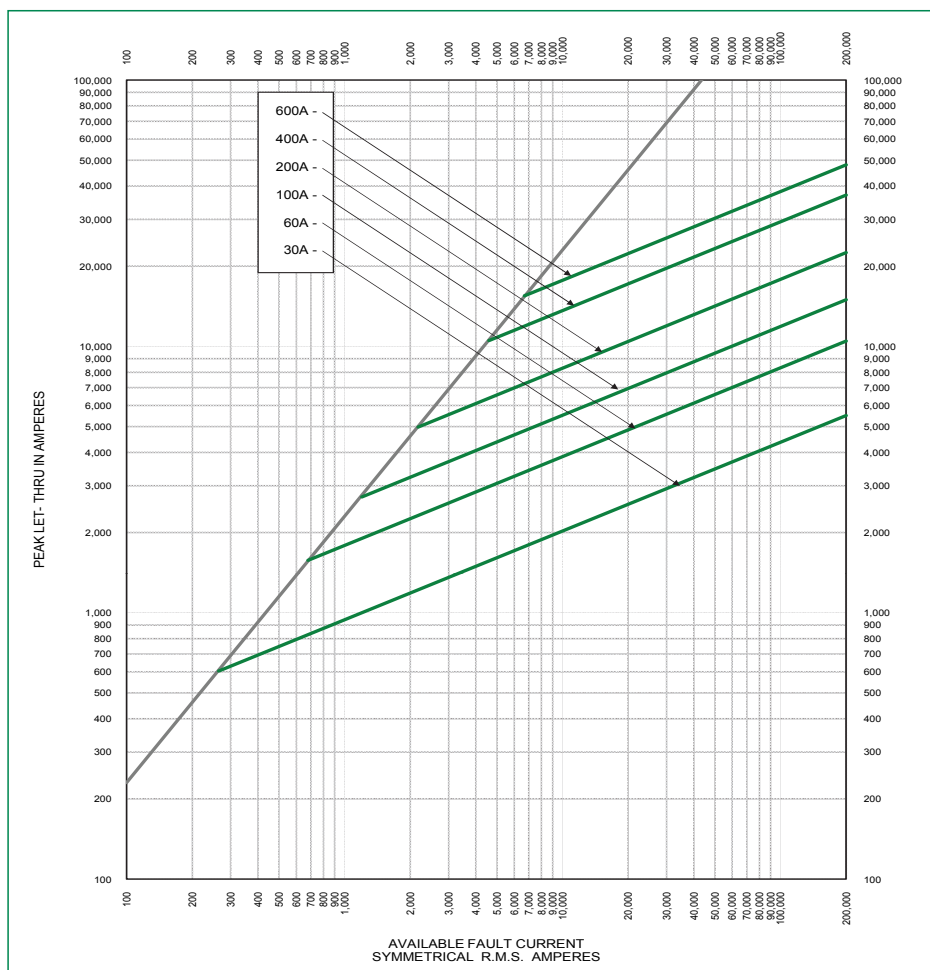

**Disclaimer Notice** – Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/product-disclaimer](http://www.littelfuse.com/product-disclaimer).

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9