




## T2 Terminator Tooling Specification Sheet Order No. 63910-6500



### FEATURES


- It is ideally suited for mid-volume bench operations
- This terminator can be installed in the TM42 and the TM40 press or Base Unit adapter for 3BF press
- Quick punch removal with the push of a button for fast and easy tooling change
- Track adjustment capabilities in the T2 Terminators for improved control of the bell mouth size and cutoff tab length
- T2 Terminator has standardized tooling with the Molex FineAdjust Applicator which will reduce your inventory requirements

### SCOPE

Products: Picoflex® Discrete Wire Crimp Terminal, 24-28 AWG.

| Terminal Series No. | Terminal Order No. | Wire Size |                 | Insulation Diameter |           | Strip Length |           |
|---------------------|--------------------|-----------|-----------------|---------------------|-----------|--------------|-----------|
|                     |                    | AWG       | mm <sup>2</sup> | mm                  | In.       | mm           | In.       |
| 91821               | 91821-0001         | 24-28     | 0.20-0.09       | 0.90-1.50           | .035-.059 | 2.00-2.50    | .079-.098 |
|                     | 91821-0003         |           |                 |                     |           |              |           |

### DEFINITION OF TERMS

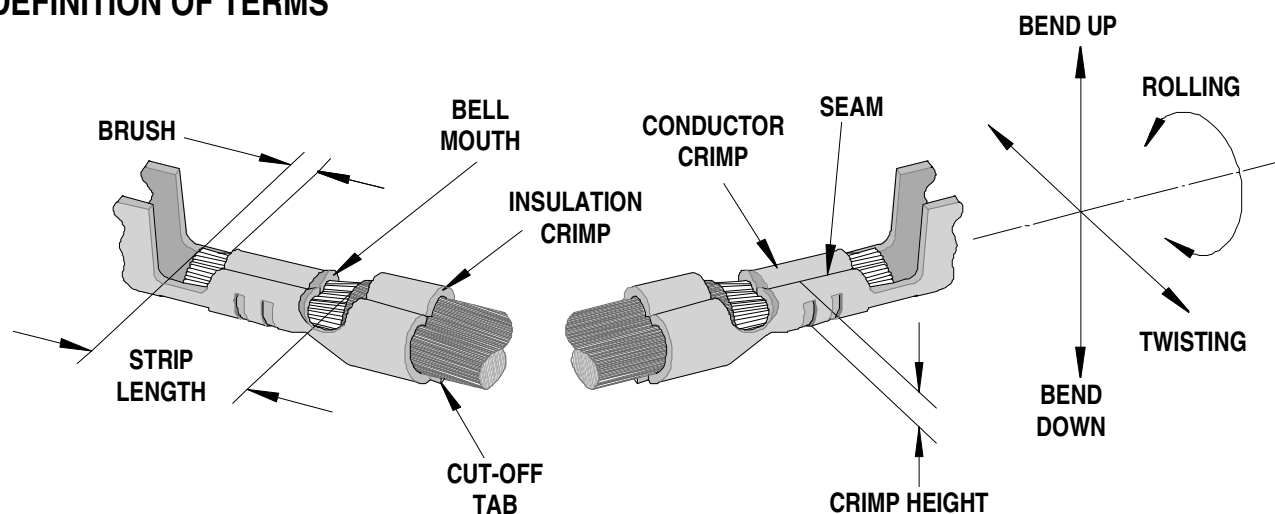


The above terminal drawing is a generic terminal representation. It is not an image of a terminal listed in the scope.

## INSULATION CRIMP FORM

This crimp terminal is designed for miniaturization; therefore each dimension of insulation crimp portion appears small as compared to the terminal material thickness. In order to avoid insulation piercing the crimp forms by the insulation barrel, coining is provided inside of the insulation barrel. For this reason, various crimp forms will occur at the tip of the insulation crimp barrel shown in the figure below.

These crimp forms maybe changed completely by a small change in the wire, insulation punch or terminal.

These crimp forms are satisfactory for original function of the insulation crimp portion and it is confirmed that all of these forms below are acceptable insulation crimps.

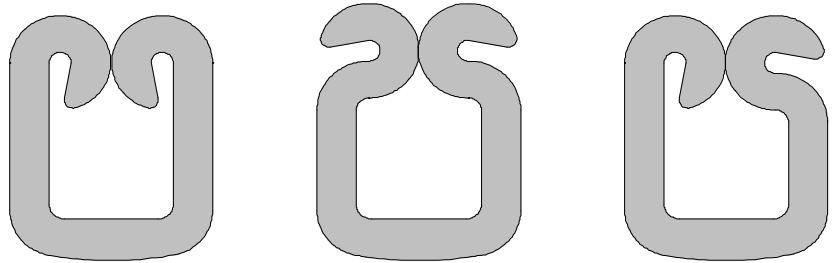

## CRIMP SPECIFICATION

| Terminal Series No. | Bell mouth |           | Cut-off Tab Maximum |      |                |      | Conductor Brush |           |
|---------------------|------------|-----------|---------------------|------|----------------|------|-----------------|-----------|
|                     |            |           | Front (Contact)     |      | Rear (Contact) |      |                 |           |
|                     | mm         | In.       | mm                  | In.  | mm             | In.  | mm              | In.       |
| 91821               | 0.20-0.40  | .008-.016 | 0.10                | .004 | 0.15           | .006 | 0.20-0.70       | .008-.028 |

| Terminal Series No. | Bend up    Bend down |   | Twist    Roll |   | Punch Width mm (Ref) |      |            |      | Seam<br>Seam shall not be open<br>and no wire allowed out of<br>the crimping area |
|---------------------|----------------------|---|---------------|---|----------------------|------|------------|------|-----------------------------------------------------------------------------------|
|                     | Degree               |   | Degree        |   | Conductor            |      | Insulation |      |                                                                                   |
|                     |                      |   |               |   | mm                   | In   | mm         | In   |                                                                                   |
| 91821               | 3                    | 3 | 3             | 8 | 1.00                 | .039 | 1.80       | .071 |                                                                                   |

After crimping, the conductor profile should measure the following.

| Terminal Series No. | Wire Size |                 | Conductor Crimp Height |           | Insulation Crimp Height Maximum |      | Pull Force Minimum |     |
|---------------------|-----------|-----------------|------------------------|-----------|---------------------------------|------|--------------------|-----|
|                     | AWG       | mm <sup>2</sup> |                        |           |                                 |      |                    |     |
|                     |           |                 | mm                     | In.       | mm                              | In.  | N                  | Lb. |
| 91821               | 24        | 0.20            | 0.67-0.72              | .026-.028 | 1.65                            | .065 | 30.0               | 6.7 |
|                     | 26        | 0.12            | 0.64-0.69              | .025-.027 | 1.65                            | .065 | 20.0               | 4.5 |
|                     | 28        | 0.08            | 0.60-0.65              | .024-.026 | 1.65                            | .065 | 10.0               | 2.3 |

Pull Force should be measured with no influence from the insulation crimp.  
The above specifications are guidelines to an optimum crimp.

**PARTS LIST**

| <b>T2 Terminator 63910-6500</b>                                              |                 |                        |                          |                 |
|------------------------------------------------------------------------------|-----------------|------------------------|--------------------------|-----------------|
| <b>Item</b>                                                                  | <b>Order No</b> | <b>Engineering No.</b> | <b>Description</b>       | <b>Quantity</b> |
| <b>Perishable Tooling</b>                                                    |                 |                        |                          |                 |
|                                                                              | 63910-6570      | 63910-6570             | Tool Kit (All "Y" Items) | REF             |
| 1                                                                            | 63444-1005      | 63444-1005             | Conductor Punch          | 1 Y             |
| 2                                                                            | 63445-1010      | 63445-1010             | Conductor Anvil          | 1 Y             |
| 3                                                                            | 63446-1810      | 63446-1810             | Insulation Punch         | 1 Y             |
| 4                                                                            | 63445-1820      | 63445-1820             | Insulation Anvil         | 1 Y             |
| 5                                                                            | 63443-0003      | 63443-0003             | Cut-Off Plunger          | 2 Y             |
| 6                                                                            | 63443-0012      | 63443-0012             | Front Plunger Retainer   | 1 Y             |
| 7                                                                            | 63443-1403      | 63443-1403             | Cut-off Die Blade        | 1 Y             |
| 8                                                                            | 63443-1002      | 63443-1002             | Rear Plunger Retainer    | 1 Y             |
| <b>Other Components (REF 106550)</b>                                         |                 |                        |                          |                 |
| 9                                                                            | 11-18-4083      | 60707-8                | Feed Guide               | 1               |
| 10                                                                           | 11-24-1067      | 4996-4                 | Cut-Off Plunger Spring   | 2               |
| 11                                                                           | 11-40-4039      | 8302-5                 | Plunger Striker          | 1               |
| 12                                                                           | 63443-0009      | 63443-0009             | Scrape Chute             | 1               |
| 13                                                                           | 63443-0024      | 63443-0024             | Key                      | 1               |
| 14                                                                           | 63443-0085      | 63443-0085             | Wire Stop L-Bracket      | 1               |
| 15                                                                           | 63443-0090      | 63443-0090             | Wire Stop                | 1               |
| 16                                                                           | 63443-1740      | 63443-1740             | 21.00mm Height Spacer    | 1               |
| 17                                                                           | 63443-2133      | 63443-2133             | Spacer                   | 1               |
| 18                                                                           | 63443-2203      | 63443-2203             | 3.00mm Coarse Spacer     | 1               |
| 19                                                                           | 63443-2312      | 63443-2312             | 3.60mm Fine Spacer       | 1               |
| 20                                                                           | 63443-6003      | 63443-6003             | Rear Cover               | 1               |
| 21                                                                           | 63800-8506      | 63800-8506             | Rear Striker             | 1               |
| <b>Frame</b>                                                                 |                 |                        |                          |                 |
| 22                                                                           | 63800-8500      | 63800-8500             | T2 Terminator            | 1               |
| <b>Hardware</b>                                                              |                 |                        |                          |                 |
| 23                                                                           | N/A             | N/A                    | M3 by 6 Long SHCS        | 2**             |
| 24                                                                           | N/A             | N/A                    | M3 by 6 Long FHCS        | 1**             |
| 25                                                                           | N/A             | N/A                    | M4 by 6 Long SHCS        | 2**             |
| 26                                                                           | N/A             | N/A                    | M4 by 12 Long BHCS       | 2**             |
| 27                                                                           | N/A             | N/A                    | M4 by 14 Long SHCS       | 2**             |
| 28                                                                           | N/A             | N/A                    | M4 by 50 Long SHCS       | 2**             |
| 29                                                                           | N/A             | N/A                    | M5 by 10 Long SHCS       | 1**             |
| 30                                                                           | N/A             | N/A                    | M5 by 12 Long SHCS       | 1**             |
| 31                                                                           | N/A             | N/A                    | #10-32 by 3/8" Long BHCS | 1**             |
| ** Available from an industrial supply company such as MSC (1-800-645-7270). |                 |                        |                          |                 |

## Assembly Drawing

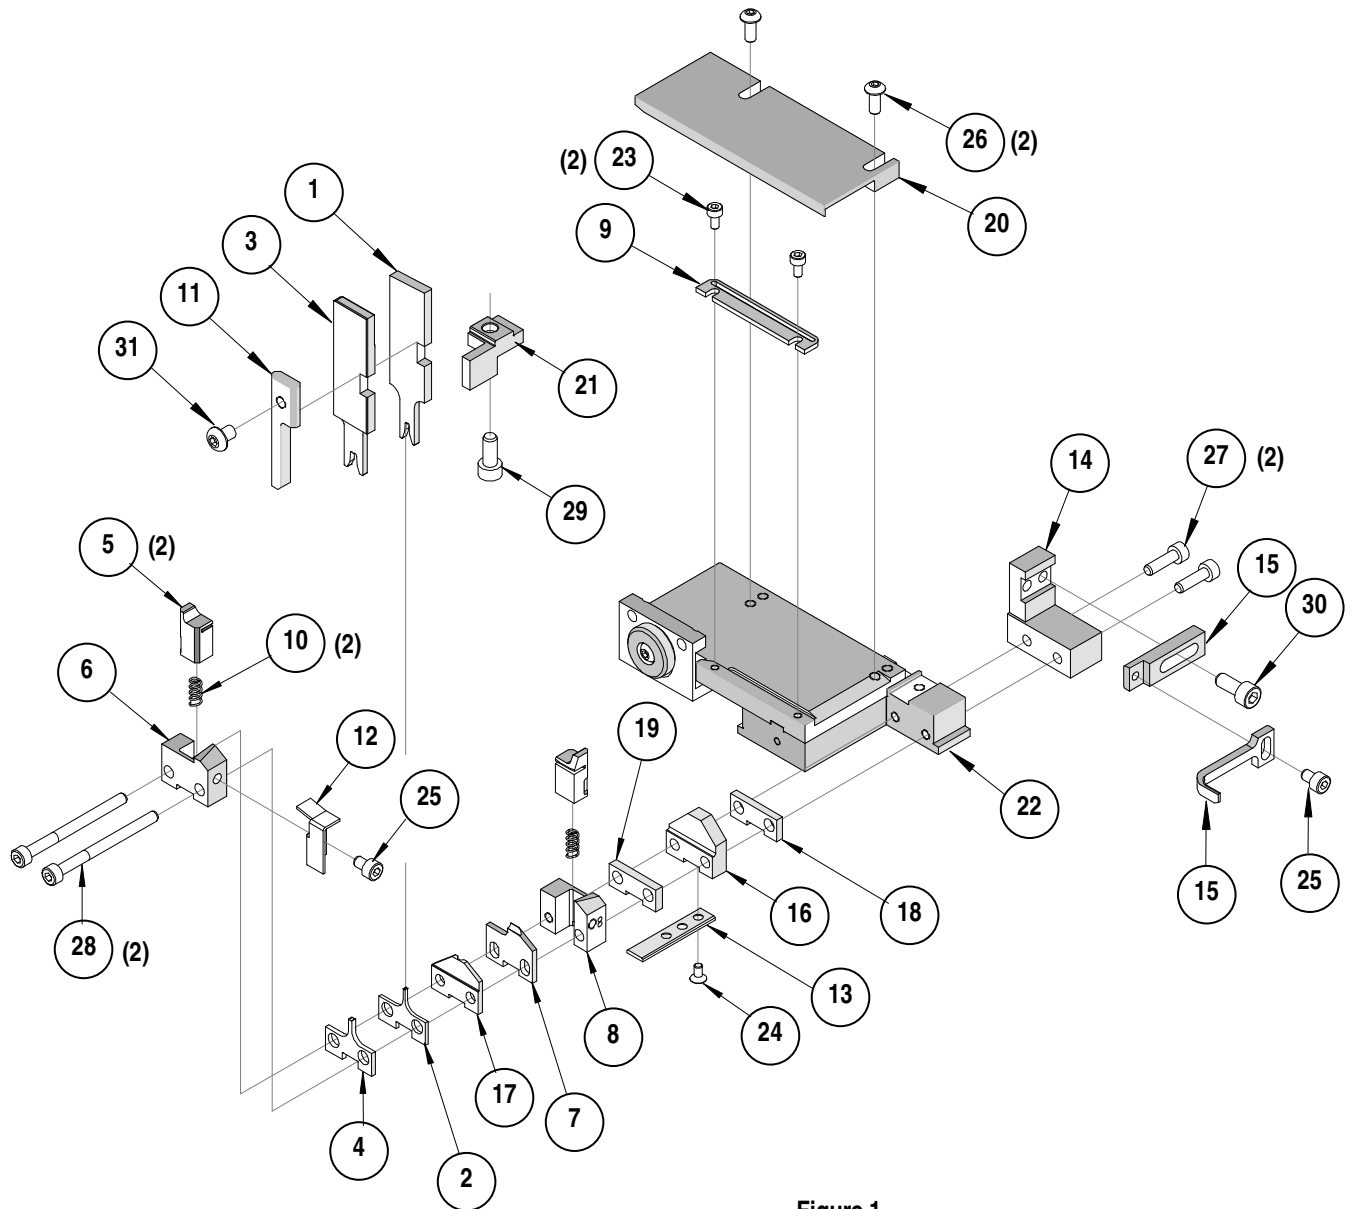


Figure 1

## NOTES

Depending on the press vintage a feed finger assembly is supplied with the T2 Terminator.

1. To remove the existing feed finger assembly loosens the M4 x 10 mm set screw in the feed lever.
2. Select T2 Feed finger assembly from Terminator box.
3. Insert a screwdriver into the slot behind the feed lever and force the feed arm spring to the right.
4. Slide the T2 feed finger shaft for TM42 (11-40-5307) or (11-40-0123) for TM40 /Base Unit into the feed lever and to the left of the feed arm spring.
5. Release the feed arm spring.
6. Position feed finger for selected product. (Refer to Figure 5.1 in the T2 Manual).

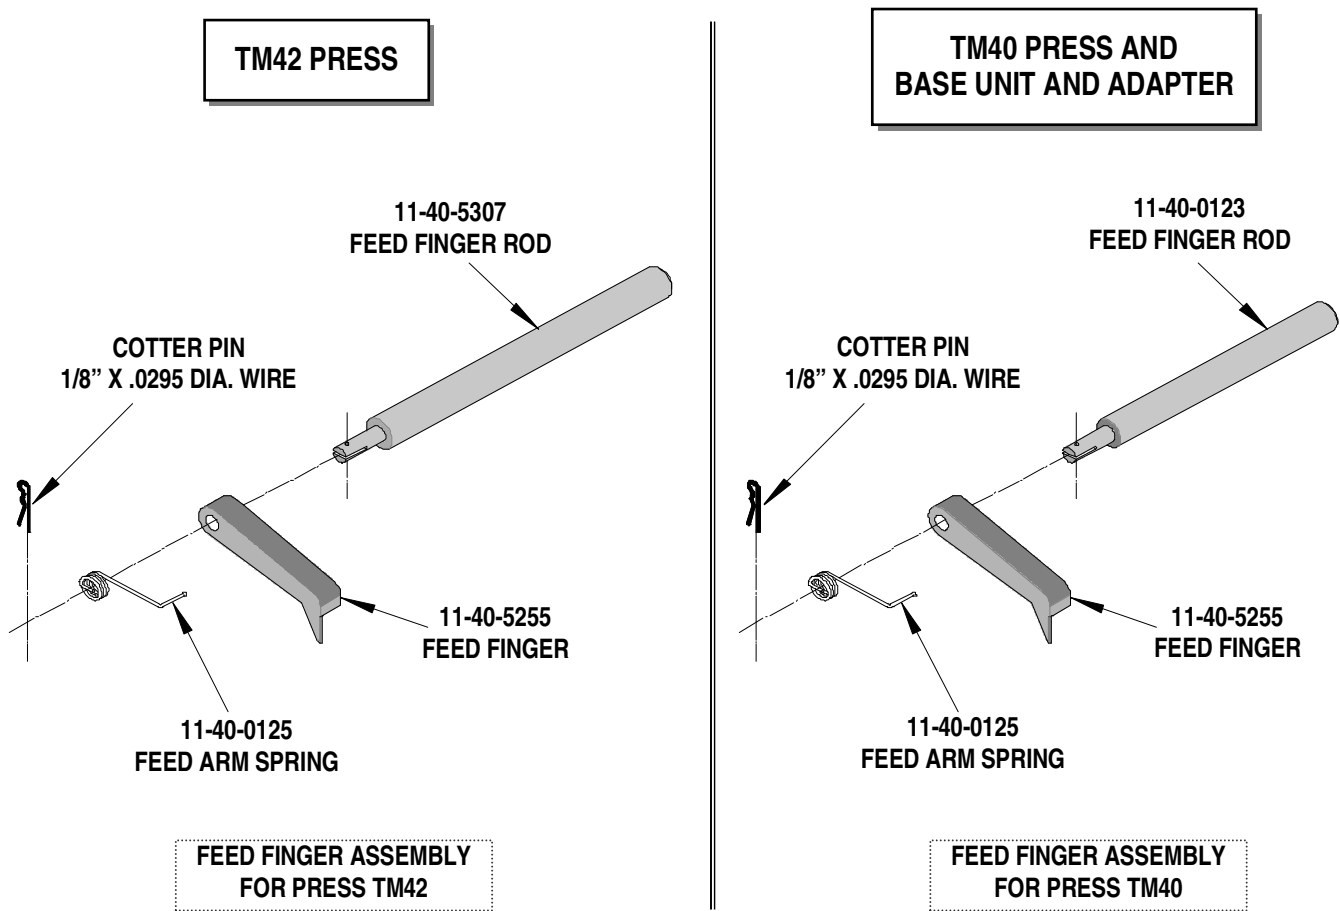


Figure 2

## NOTES

1. Molex recommends an extra perishable tooling kit be maintained at your facility.
2. Verify tooling alignment by manually cycling the press before crimping under power. Check that all screws are tight.
3. Slugs, Terminals, Dirt and Oil should be kept clear of work area.
4. This Terminator should be only used in a Molex TM42, TM40, or 3BF Press with a Base Unit adaptor.
5. Wear safety glasses at all times.
6. For recommended maintenance refer to the TM40, TM42 Manual.

**CAUTION:** To prevent injury never operate this Terminator without the guards supplied with the press or in place. Reference the TM42 press manufacturer's instruction manual.

**CAUTION:** Molex crimp specifications are valid only when used with Molex terminals, applicators and tooling.

**Americas Headquarters**  
Lisle, Illinois 60532 U.S.A.  
1-800-78MOLEX  
amerinfo@molex.com

**Far East North Headquarters**  
Yamato, Kanagawa, Japan  
81-462-65-2324  
feninfo@molex.com

**Far East South Headquarters**  
Jurong, Singapore  
65-6-268-6868  
fesinfo@molex.com

**European Headquarters**  
Munich, Germany  
49-89-413092-0  
eurinfo@molex.com

**Corporate Headquarters**  
2222 Wellington Ct.  
Lisle, IL 60532 U.S.A.  
630-969-4550  
Fax: 630-969-1352

Visit our Web site at <http://www.molex.com>

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9