



# TAOGLAS®



## Datasheet

### Triton – TD.10.5113

**Description:**

5dBi C-V2X 5.9GHz Dipole Terminal Antenna SMA(M) Hinged Connector

**Features:**

5.9GHz C-V2X Terminal Mount Dipole Antenna

5850MHz to 5925MHz

5dBi Gain

SMA(M) Hinged Connector

Dimensions: 169\*18\*13mm

RoHS & REACH Compliant

1. Introduction	3
2. Specifications	4
3. Antenna Characteristics	6
4. 2D Radiation Patterns	10
5. 3D Radiation Patterns	26
6. Mechanical Drawing	30
7. Packaging	31
<hr/>	
Changelog	32

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



## 1. Introduction



The Triton TD.10 is a dipole terminal DSRC antenna. This high performance, compact 5 dBi antenna designed to operate between 5850-5925MHz for C-V2X systems. The TD.10 does not require a ground-plane to connect to and has market-leading efficiency of 70%. Connection is made via the hinged SMA(M) connector which can be oriented straight, 45 degrees, or at a right angle to best fit your needs.

C-V2X is the communications medium of choice for active safety V2V/V2X (Vehicle-to-Vehicle and Vehicle-to-Other) systems. Primarily allocated for vehicle safety applications, C-V2X supports high-speed, low-latency, short-range, V2V/V2X wireless communications.

For further optimization to customer-specific device environments and for support to integrate and test this antennas performance in your device, contact your regional Taoglas Customer Services Team.

## 2. Specifications



Electrical	
In Free Space	
Frequency	5850~5925MHz
Efficiency (%)	
Straight Pose	73.48
Bent Pose	64.58
Average Gain (dBi)	
Straight Pose	-1.34
Bent Pose	-1.9
Peak Gain (dBi)	
Straight Pose	5.88
Bent Pose	5.67
With 15*9cm Ground Plane	
Frequency	5850~5925MHz
Efficiency (%)	
Straight Pose	49.00
Bent Pose	46.77
Average Gain (dBi)	
Straight Pose	-3.10
Bent Pose	-3.30
Peak Gain (dBi)	
Straight Pose	3.07
Bent Pose	4.01
On 30*30cm Ground Plane Edge	
Frequency	5850~5925MHz
Efficiency (%)	
Straight Pose	58.49
Bent Pose	55.84
Average Gain (dBi)	
Straight Pose	-2.33
Bent Pose	-2.53
Peak Gain (dBi)	
Straight Pose	3.64
Bent Pose	5.39
On 30*30cm Ground Plane Center	
Frequency	5850~5925MHz
Efficiency (%)	
Straight Pose	65.24
Bent Pose	62.49
Average Gain (dBi)	
Straight Pose	-1.86
Bent Pose	-2.04
Peak Gain (dBi)	
Straight Pose	5.19
Bent Pose	10.41
Operation Band	DSRC 5.9GHz
Return Loss	< -10dB
VSWR	< 2:1
Polarization	Linear
Impedance	50 $\Omega$

Mechanical	
Dimensions	Length 169mm, $\Phi$ 18mm
Casing	PC+ABS
Connector	Hinged SMA Male
Weight	21.75 g
Recommended Torque for Mounting	0.9 N·m
Max Torque for Mounting	1.176 N·m



Environmental	
Temperature Range	-40°C to 85°C
Humidity	Non-condensing 65°C 95% RH

### 3. Antenna Characteristics



#### 3.1 Return Loss

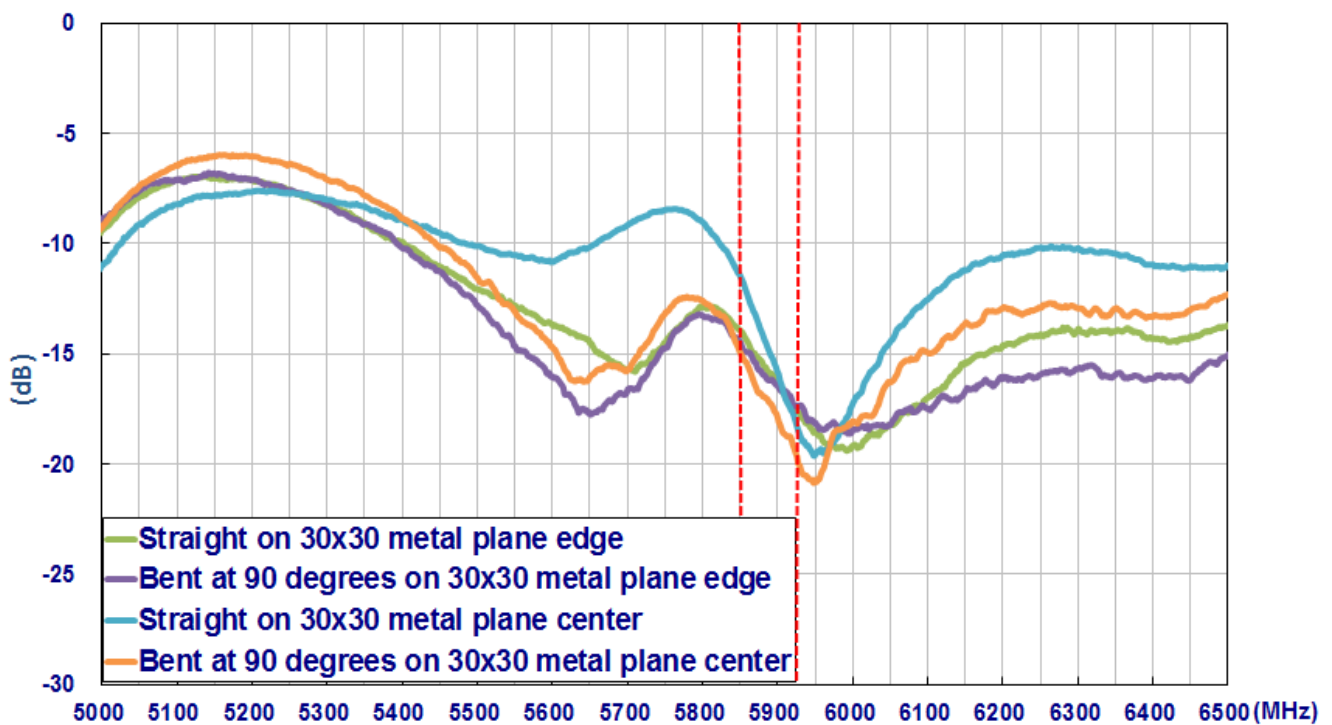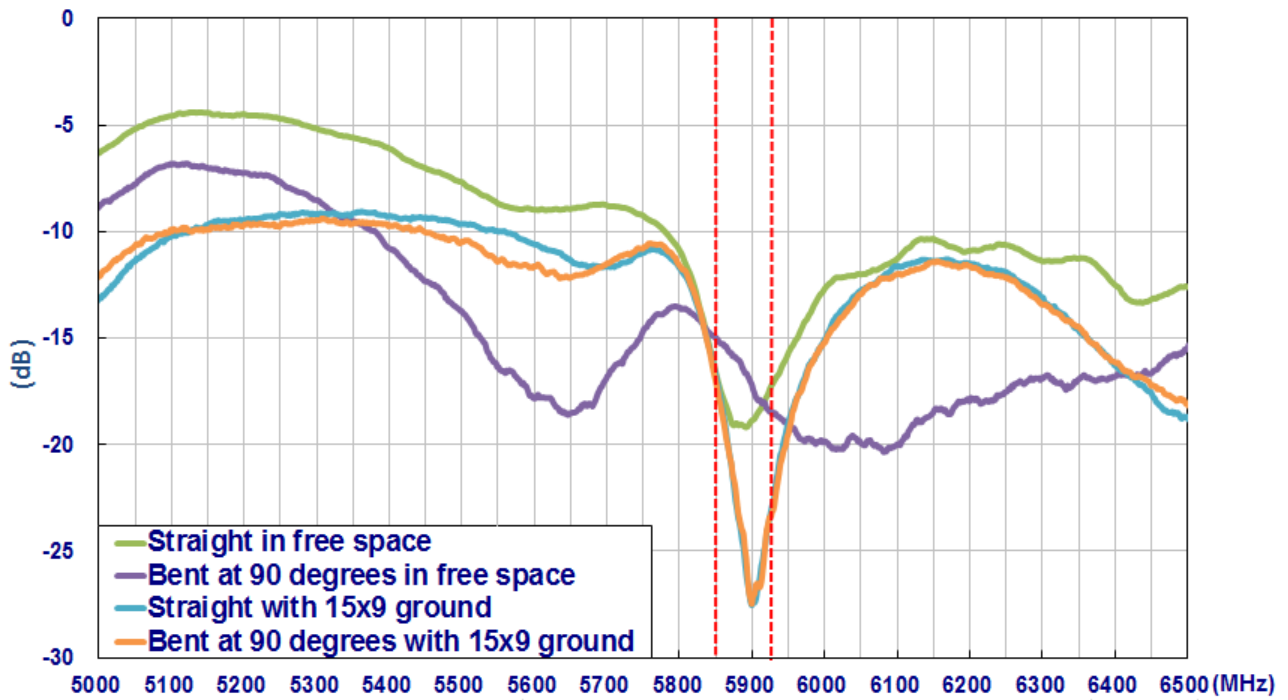

### 3.2 Peak Gain

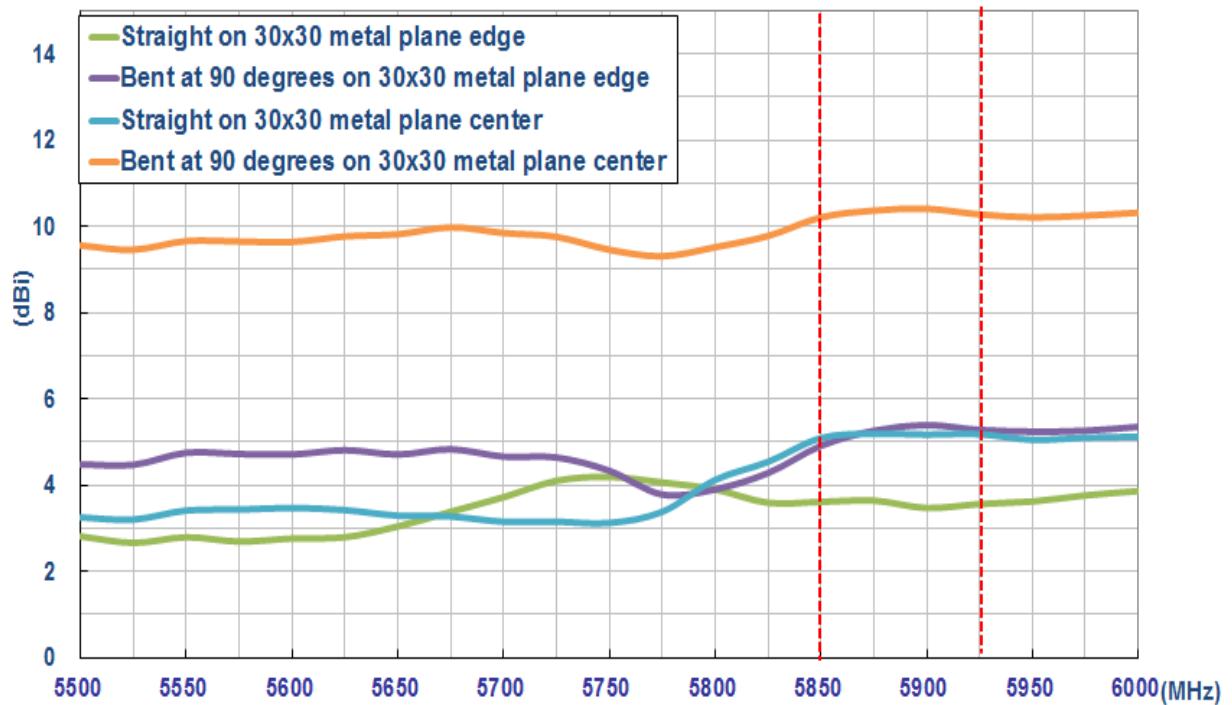
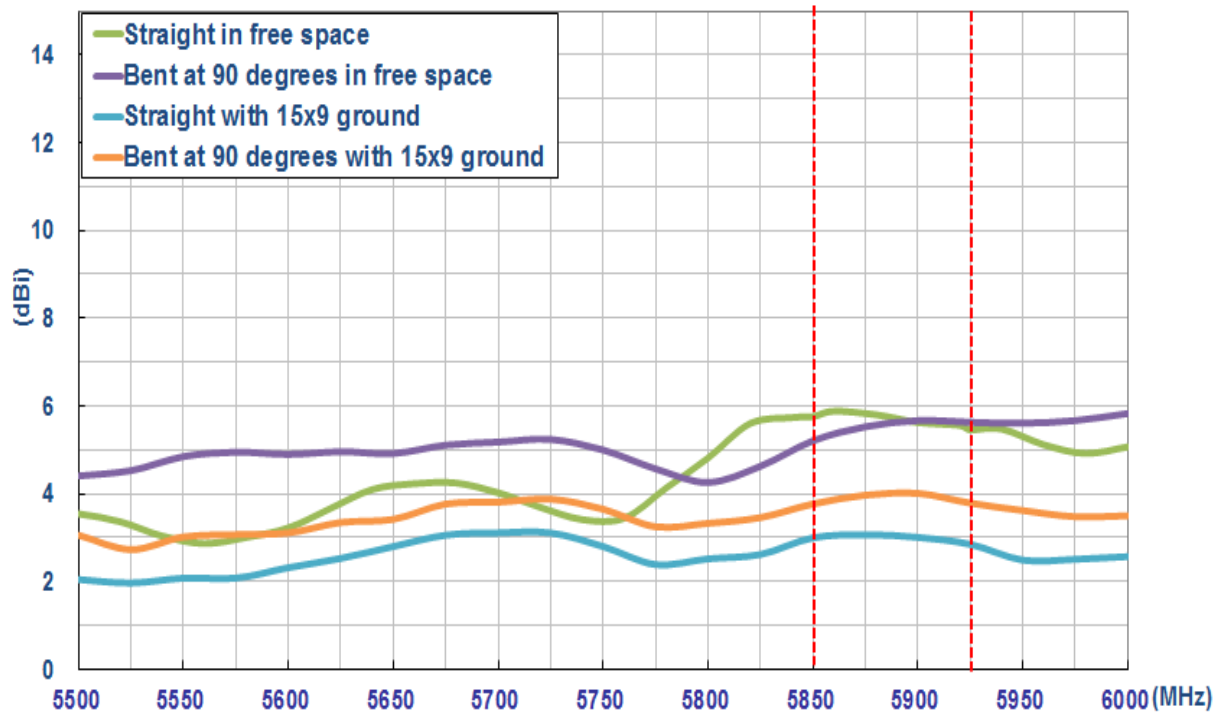


### 3.3 Efficiency

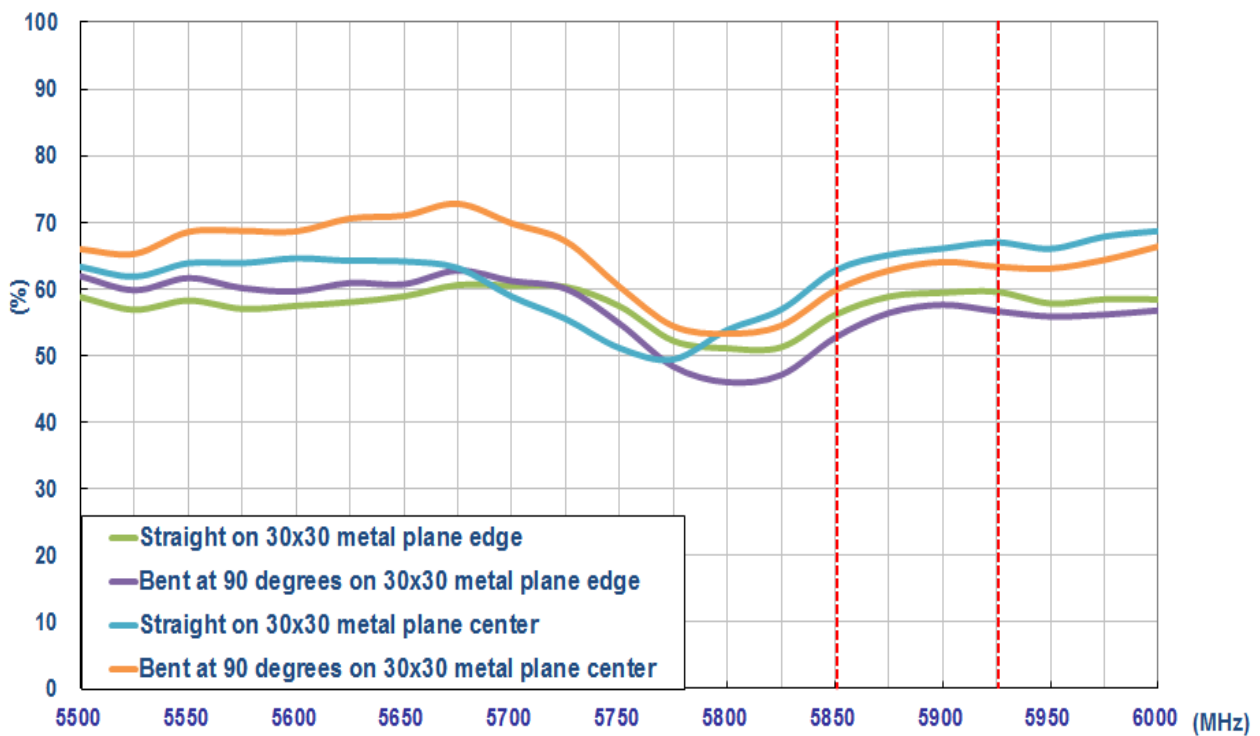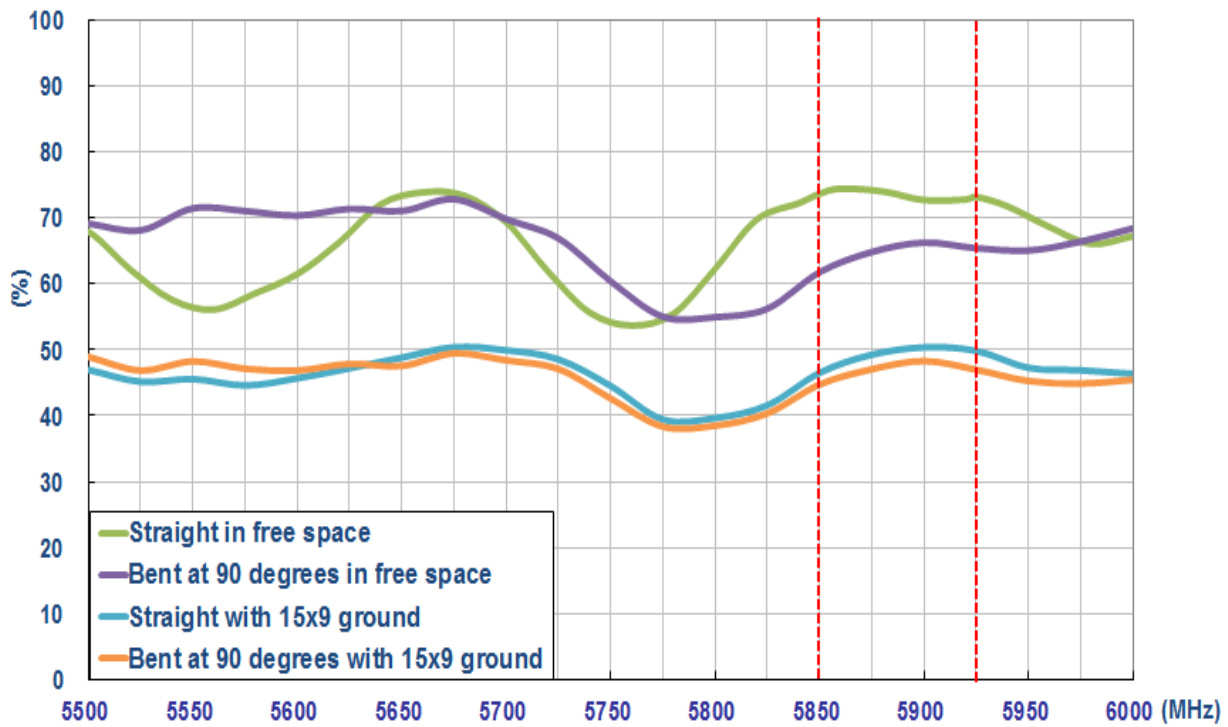




### 3.4 Average Gain

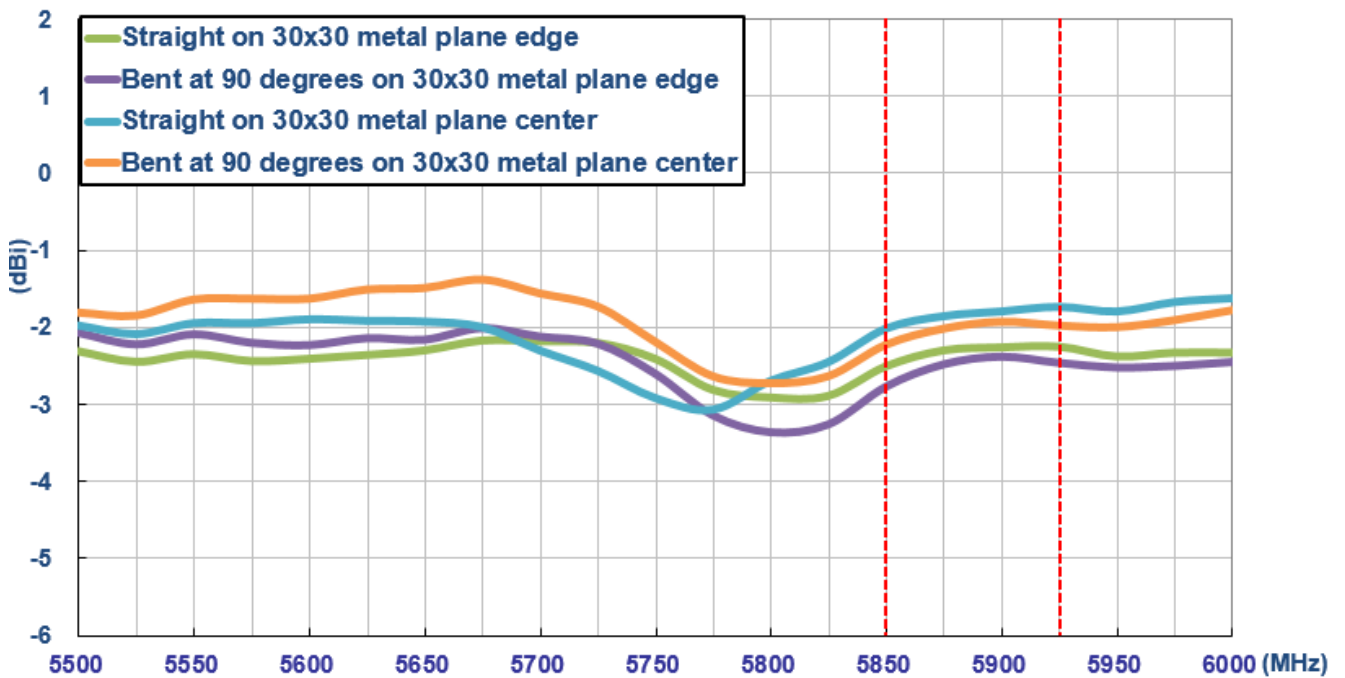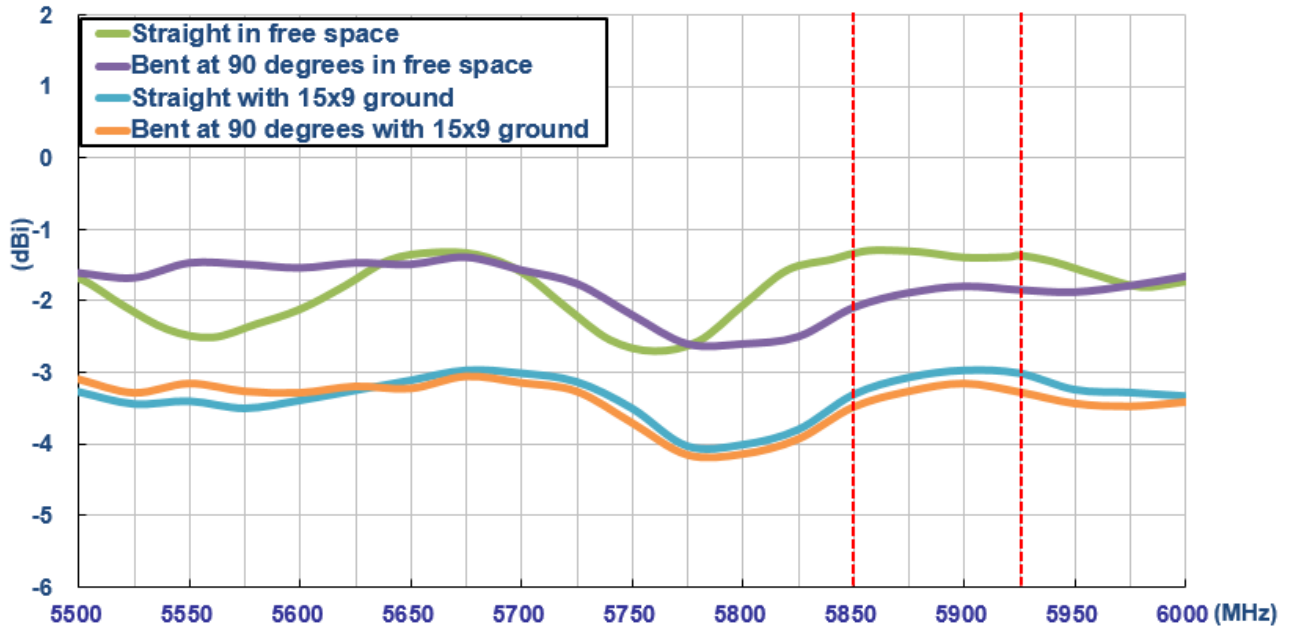


## 4. 2D Radiation Patterns

### 4.1 Test Setup

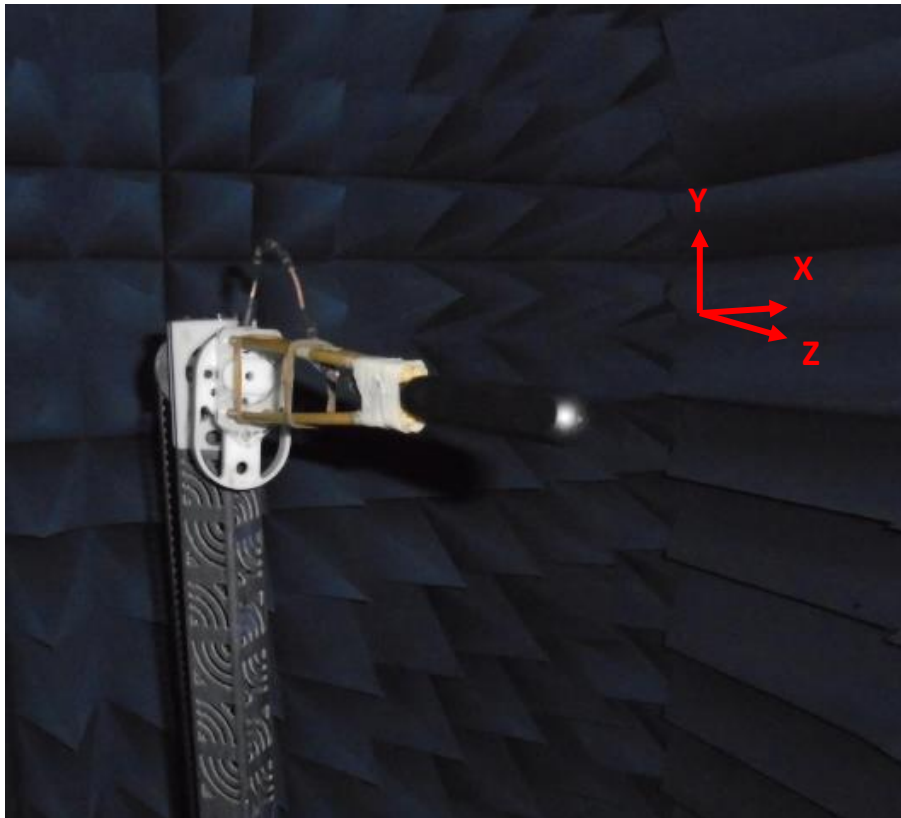


Free space Straight


# XY Plane

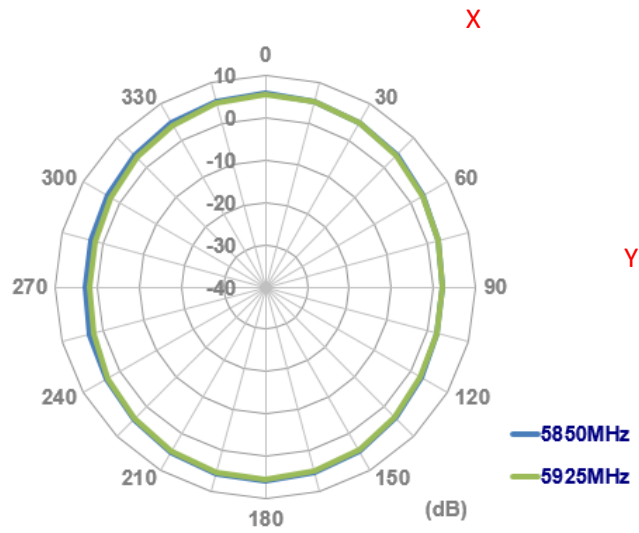


# XZ Plane

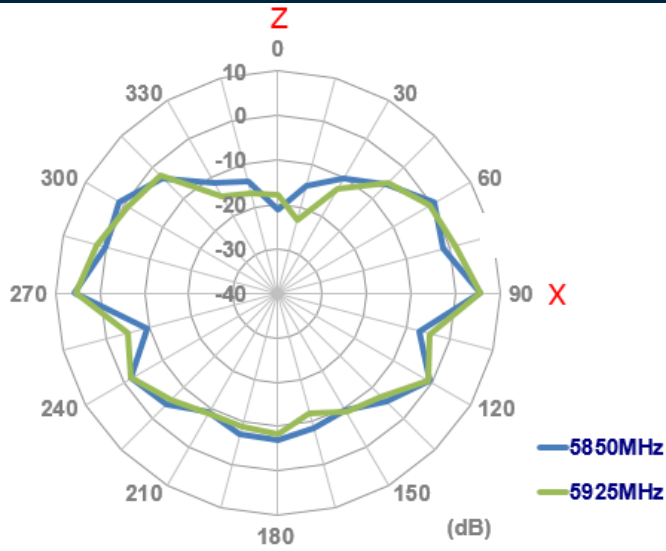

# YZ Plane

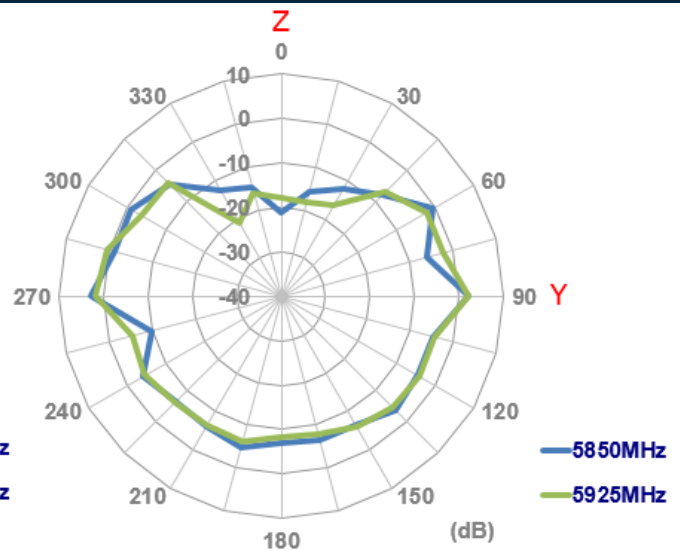


4.2 Test Setup


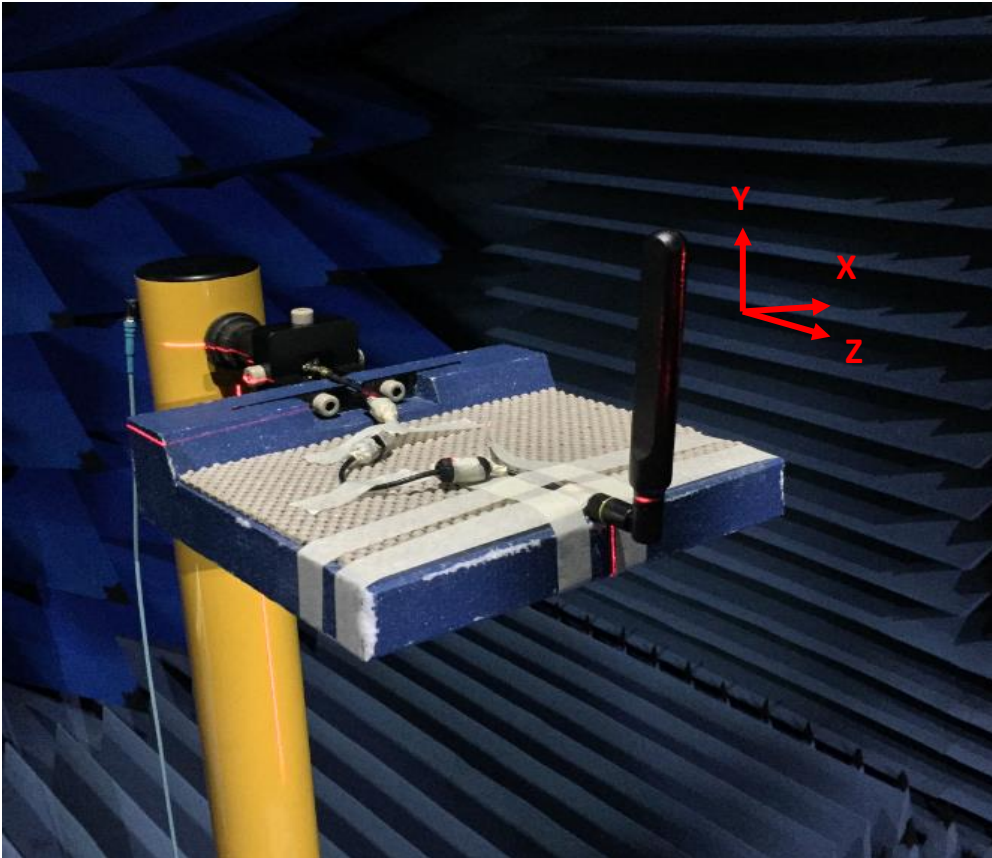


Free space bend


**XY Plane**

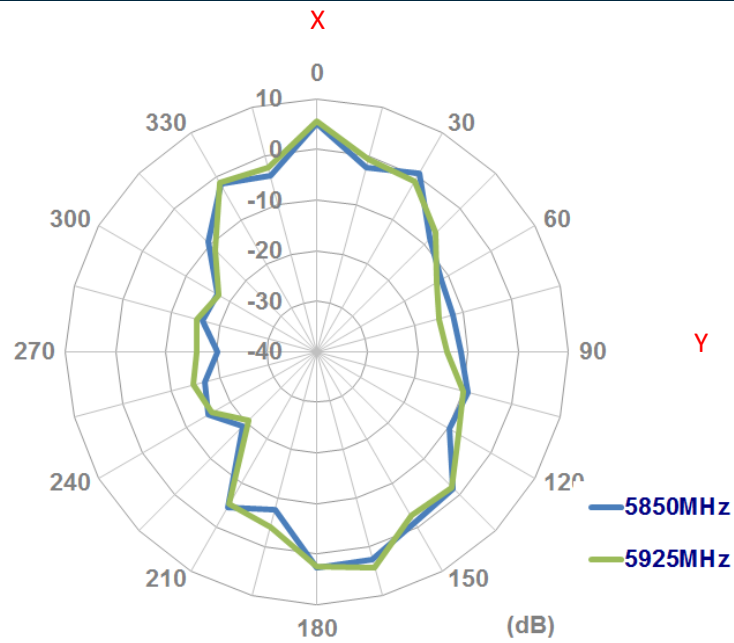

**XZ Plane      YZ Plane**

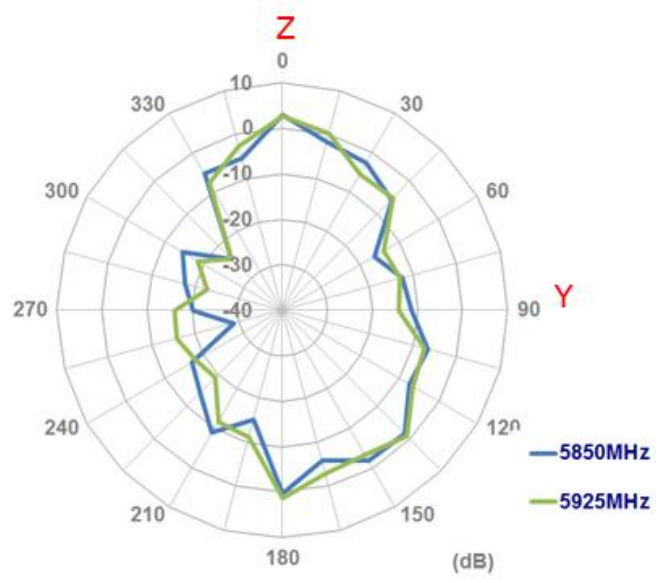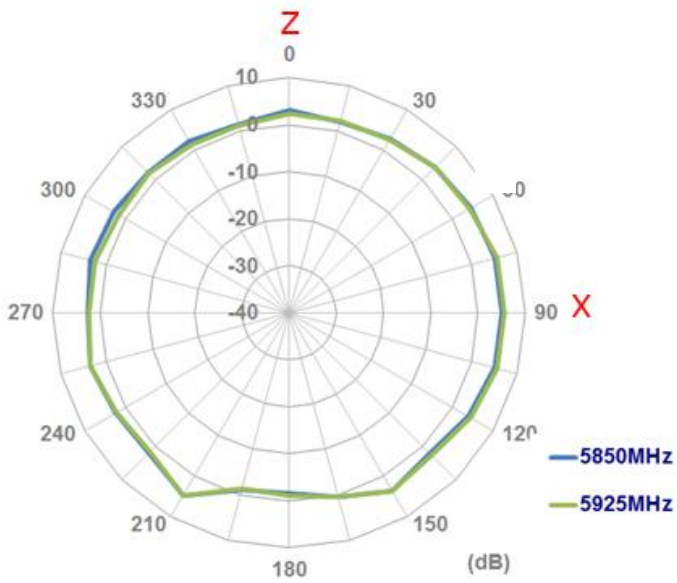


4.3 Test Setup

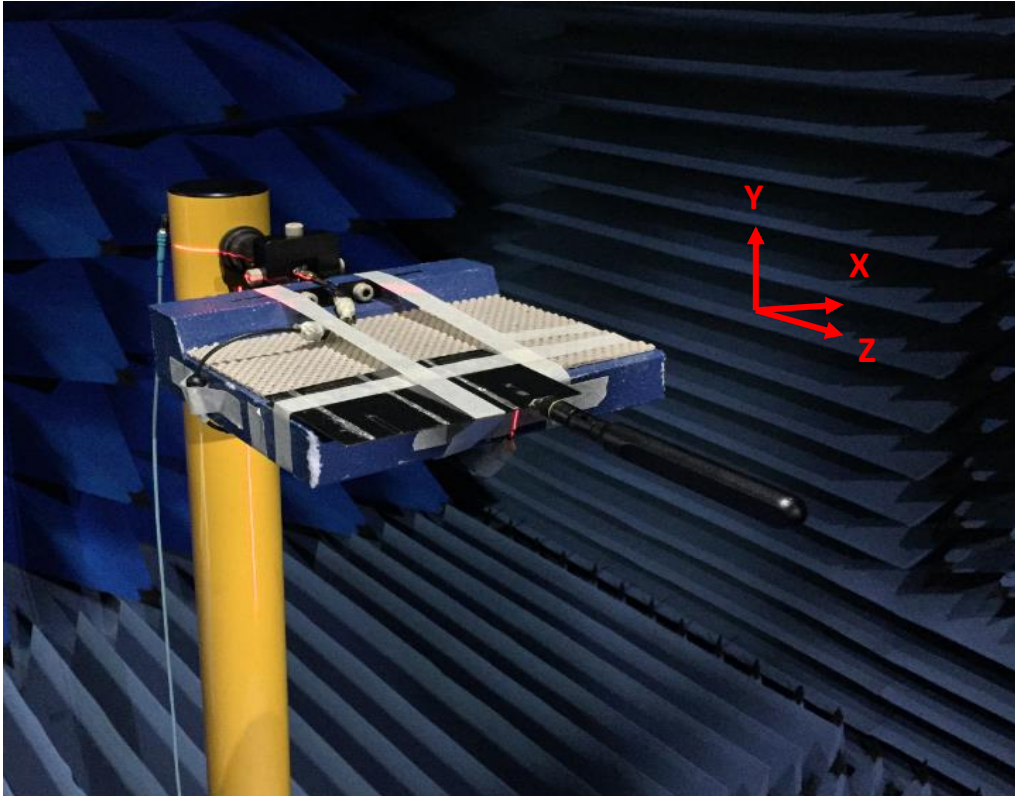



straight with 15\*9cm ground plane




**XY Plane**

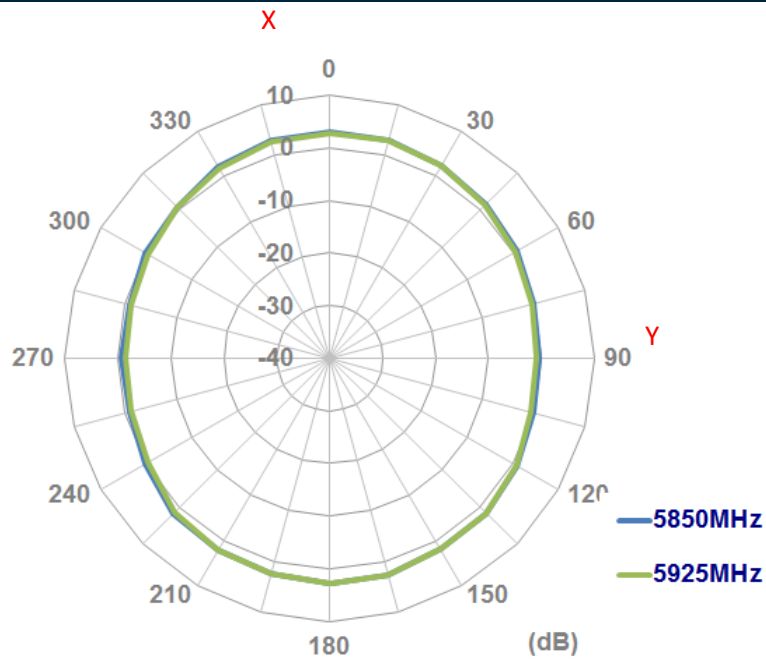

**XZ Plane** **YZ Plane**

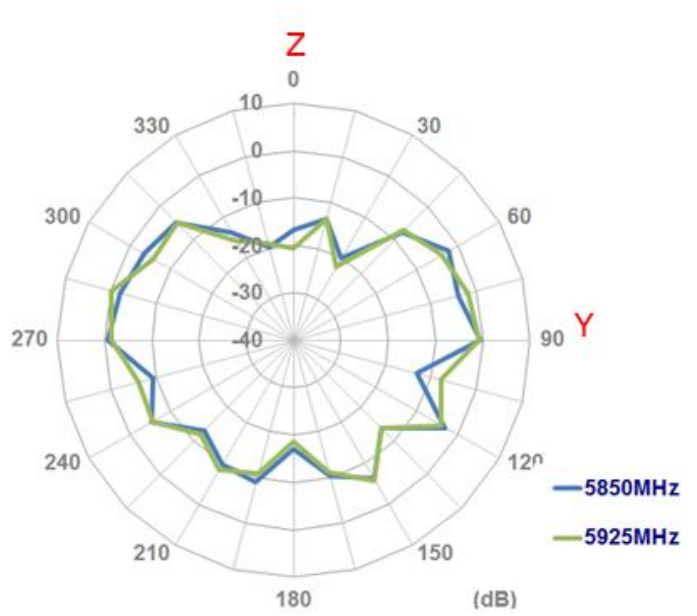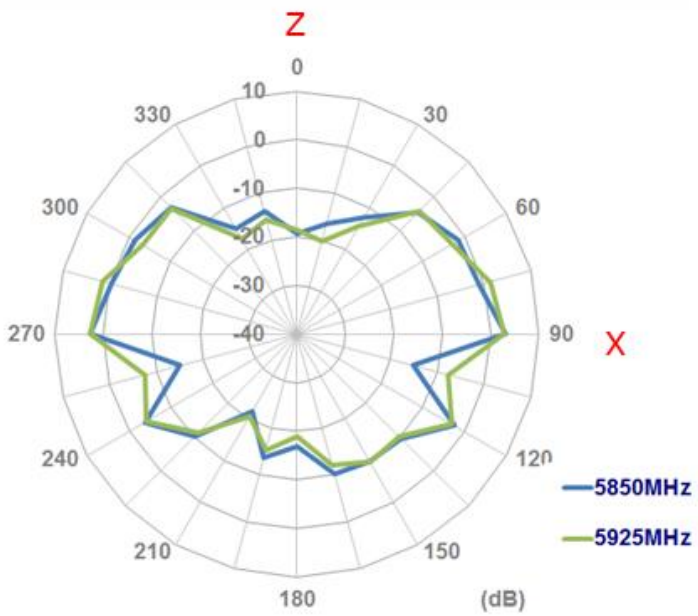


4.4 Test Setup

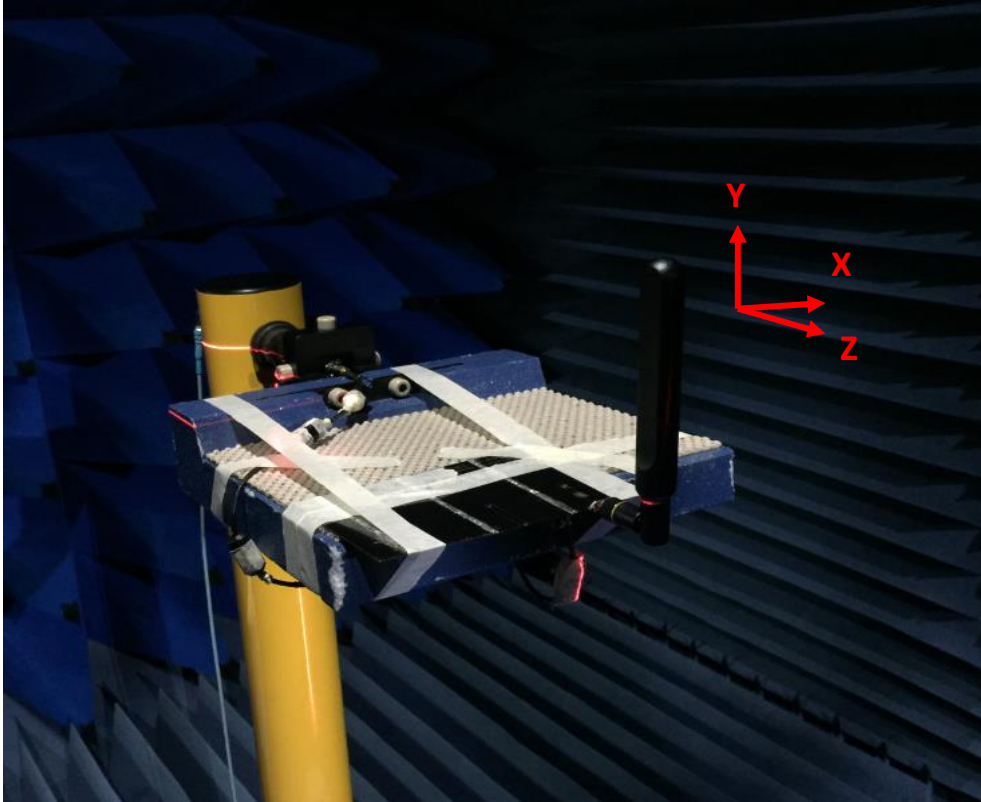

bent with 15\*9cm ground plane





XY Plane

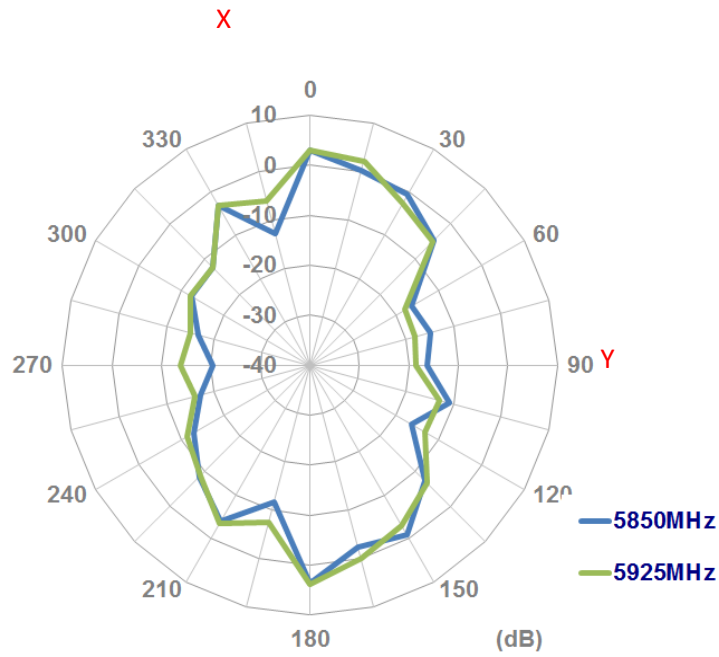


XZ Plane

YZ Plane

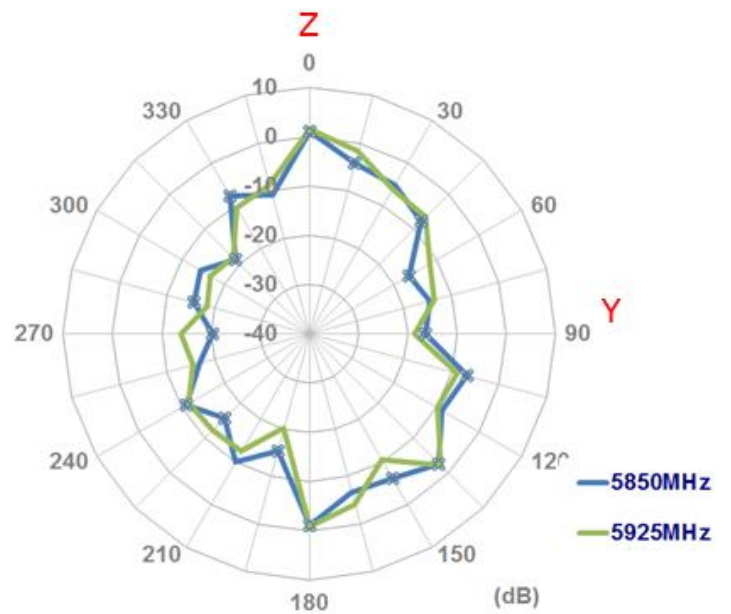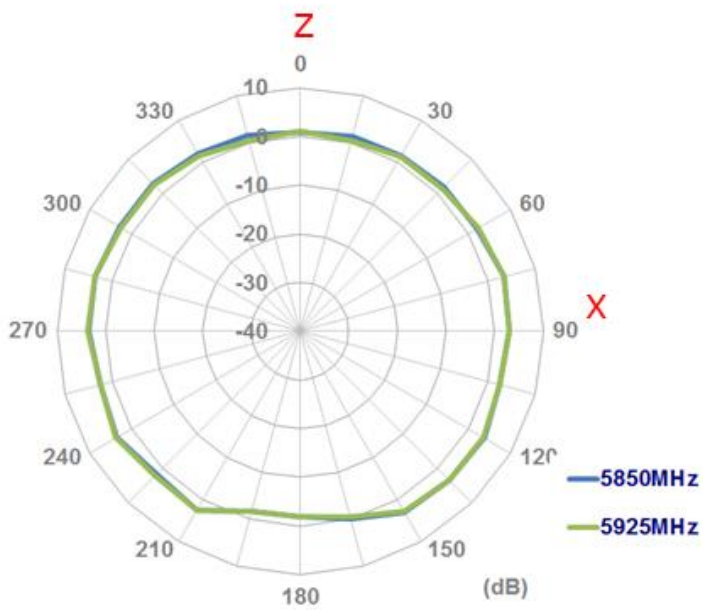


4.4 Test Setup

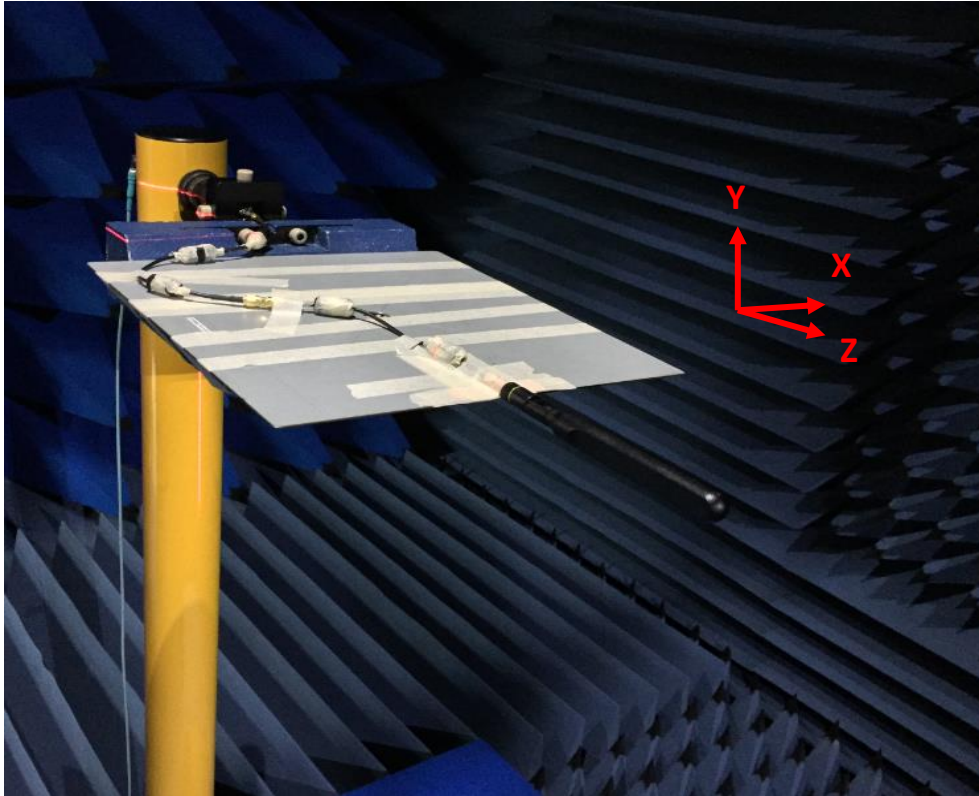



Straight with 30\*30cm Ground Plane edge

XY Plane

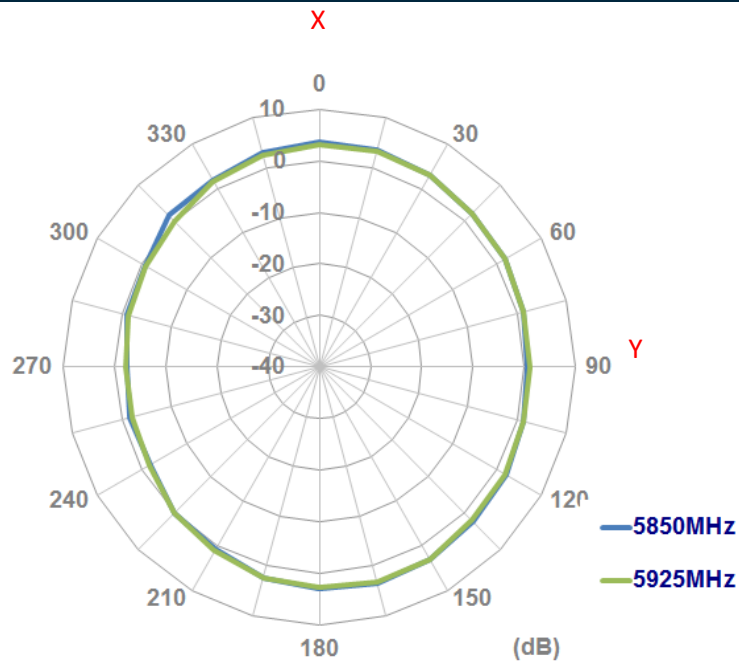


XZ Plane

YZ Plane

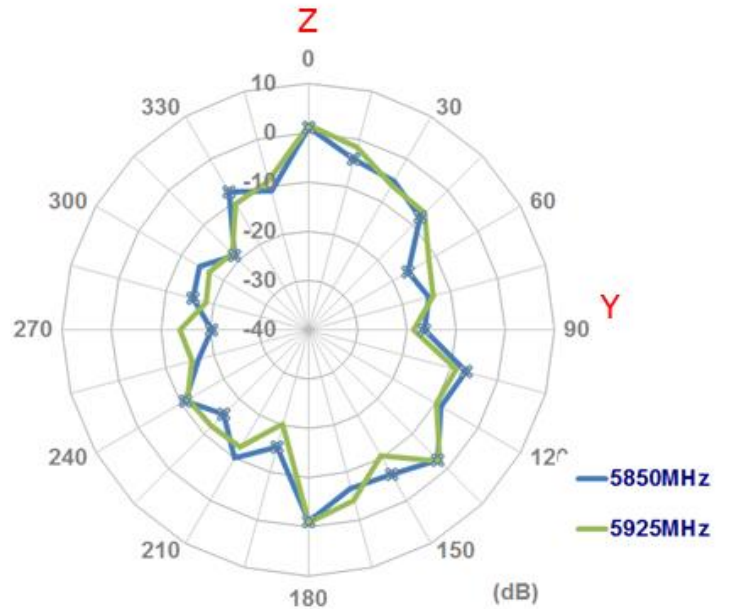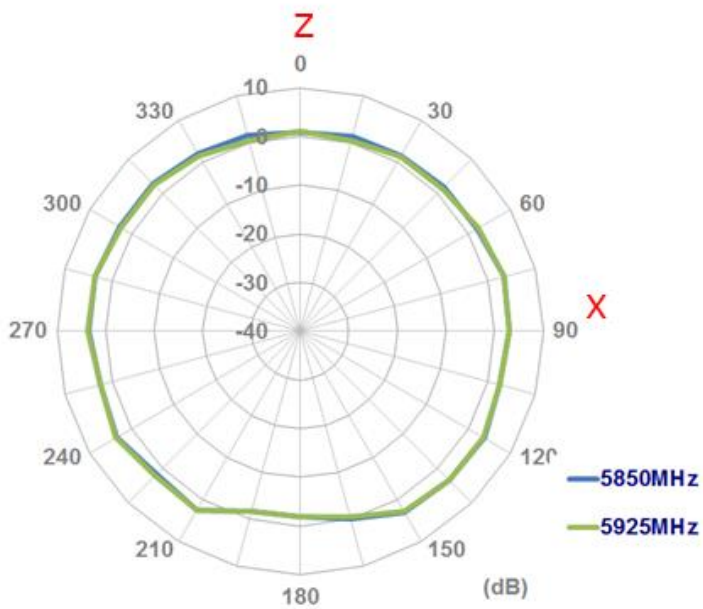


4.5 Test Setup

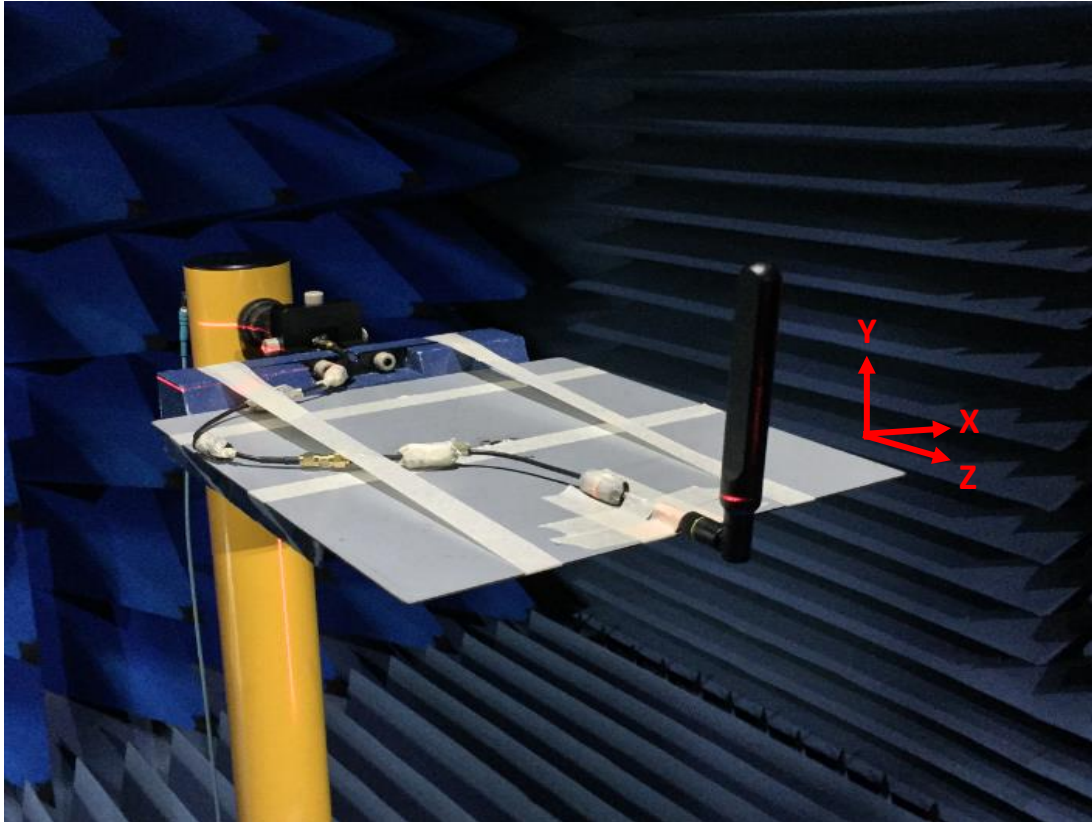


Bent with 30\*30cm Ground Plane edge


XY Plane

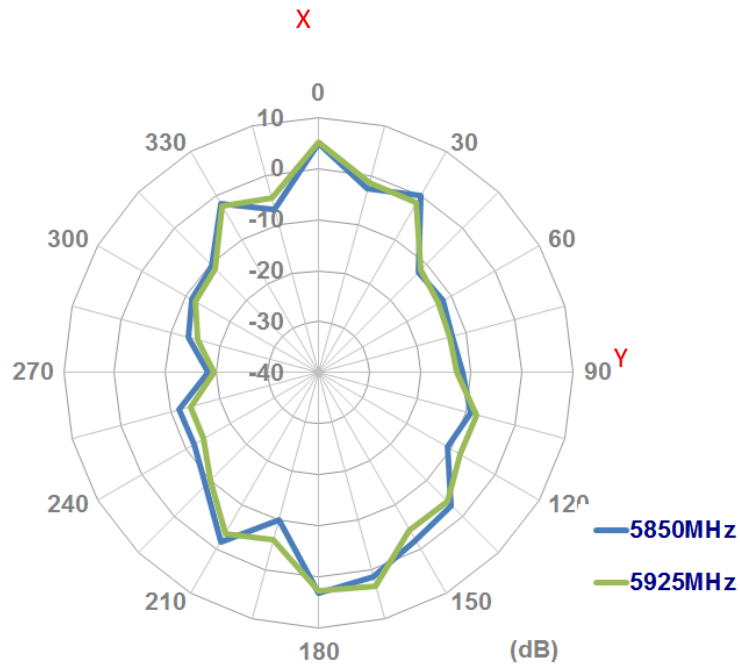

XZ Plane

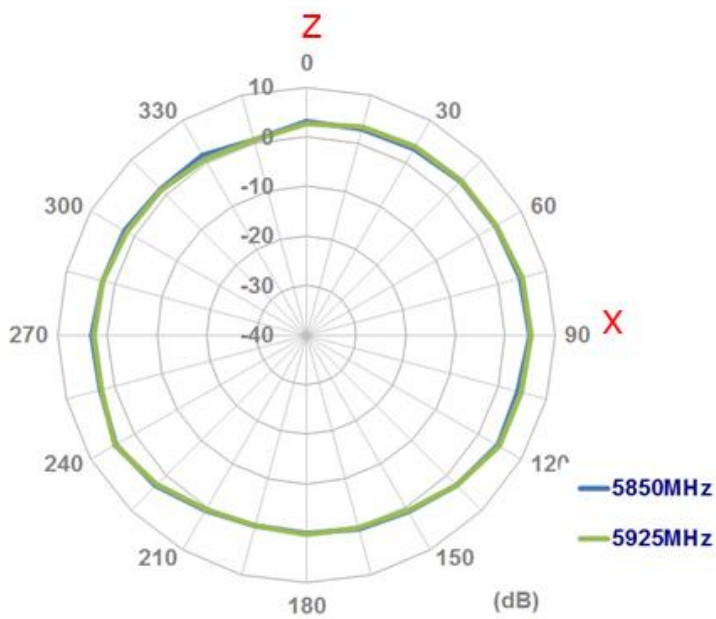


YZ Plane

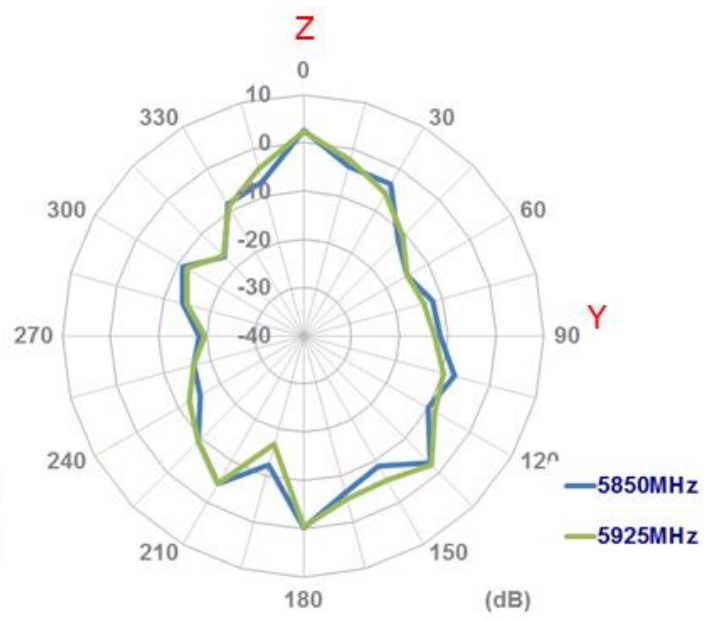




4.6 Test Setup

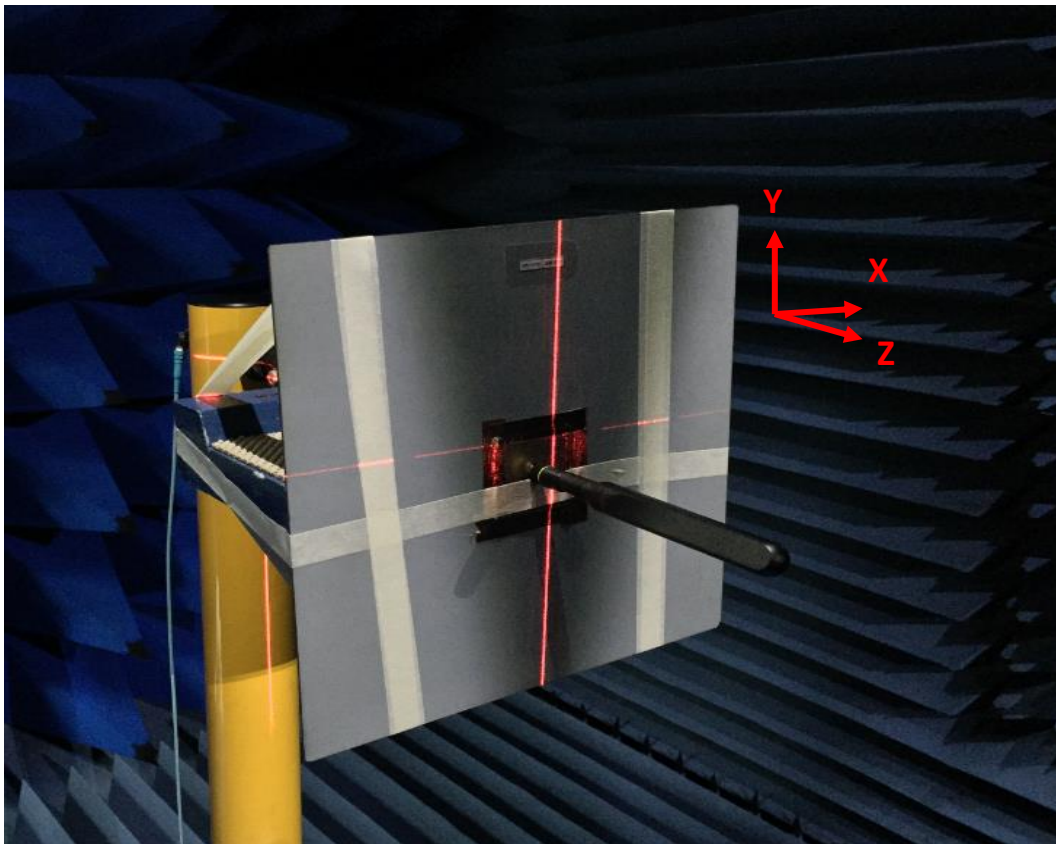


Straight with 30\*30cm Ground Plane Center


XY Plane

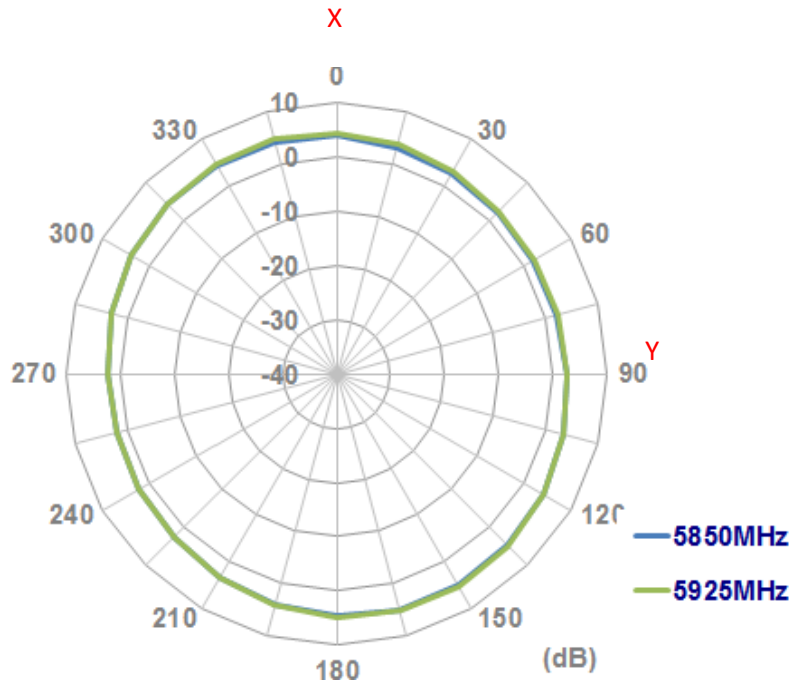


XZ Plane

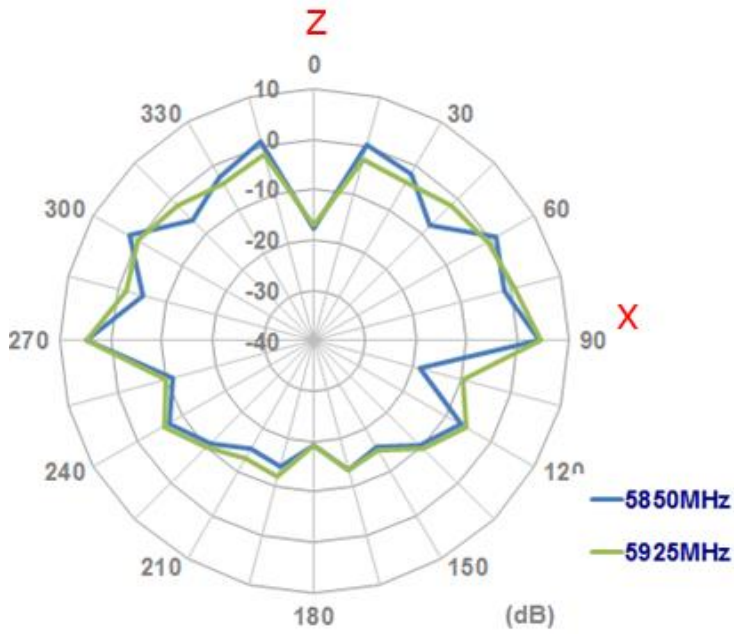

YZ Plane

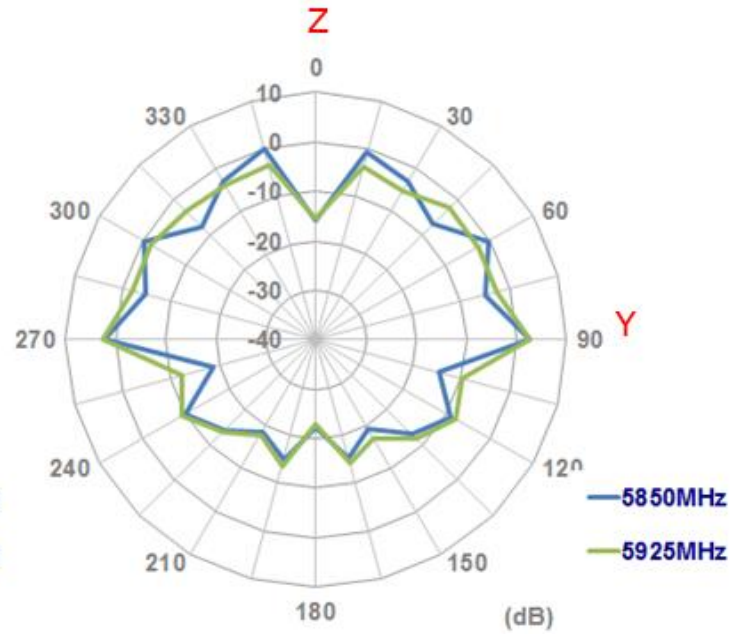


4.7 Test Setup

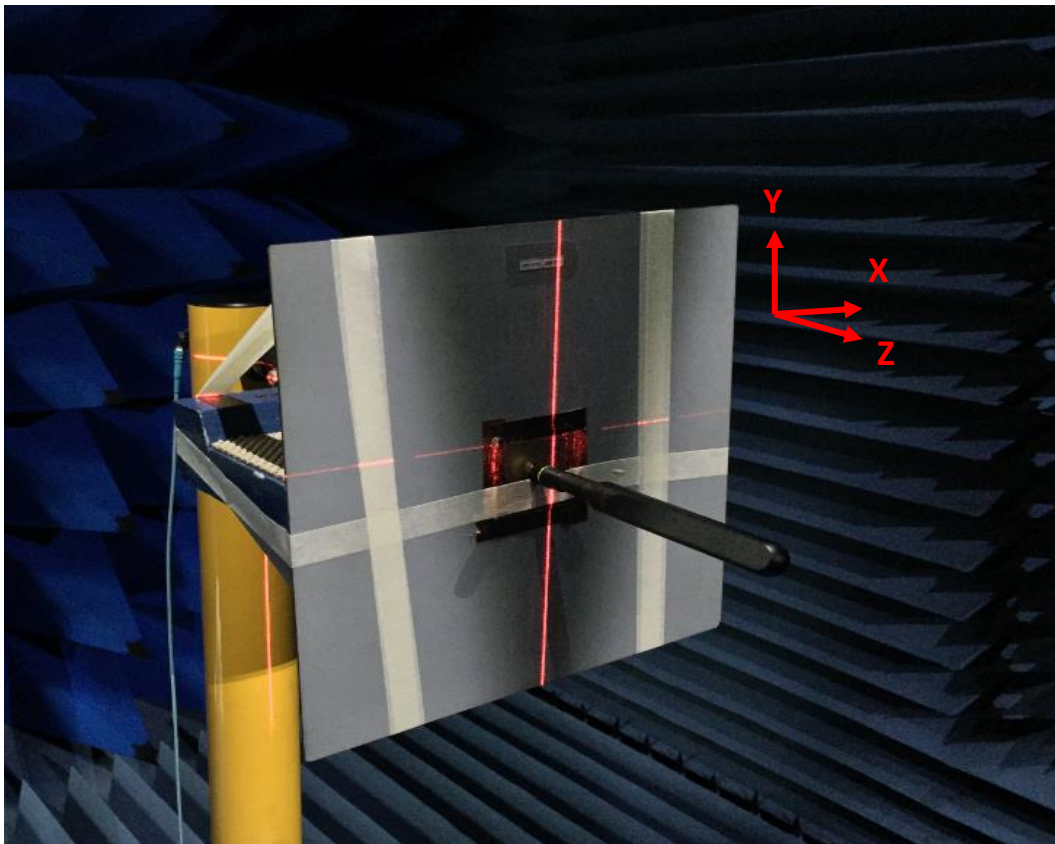


Bent at 90° with 30\*30cm Ground Plane Center




XY Plane

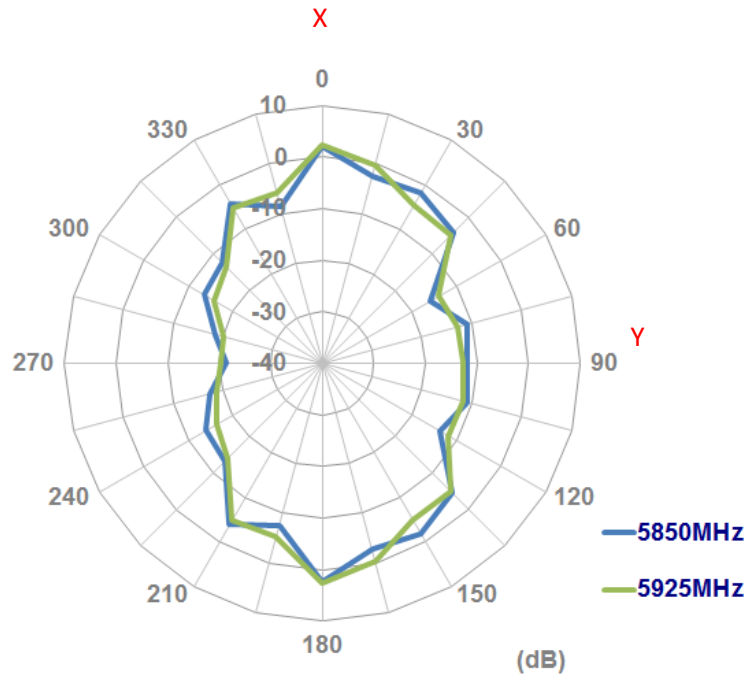

XZ Plane

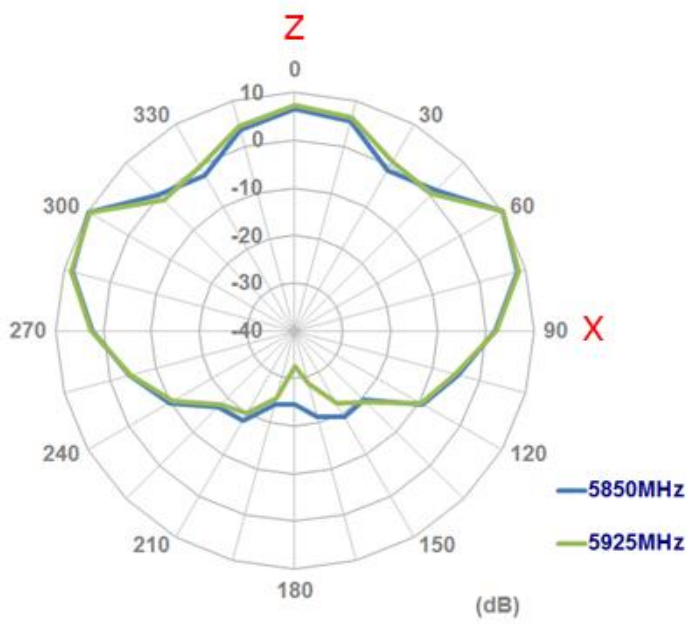


YZ Plane

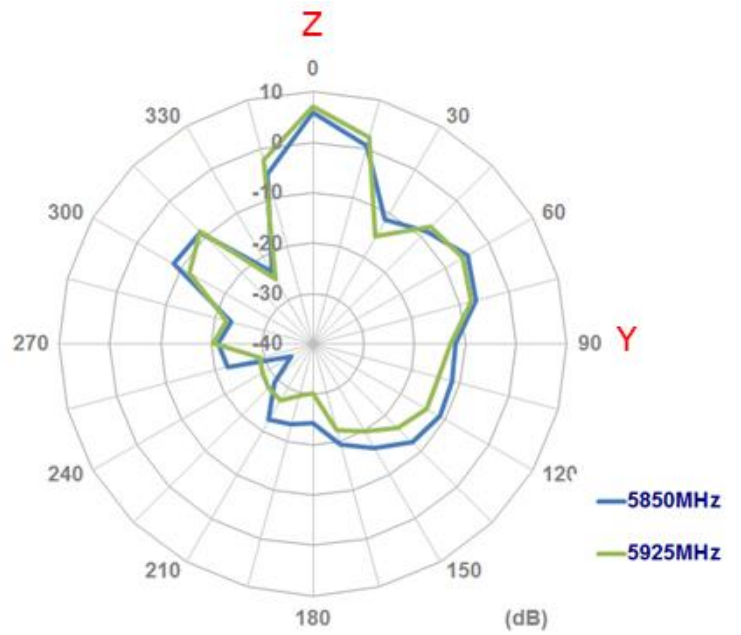


## 5. 3D Radiation Patterns

### 5.1 Free Space

Straight

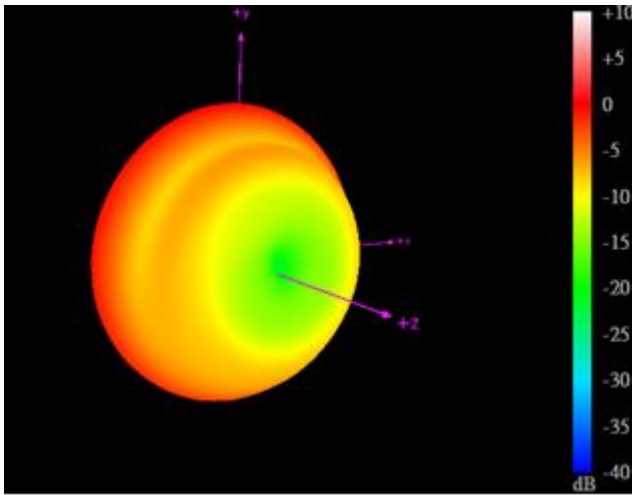


5850MHz

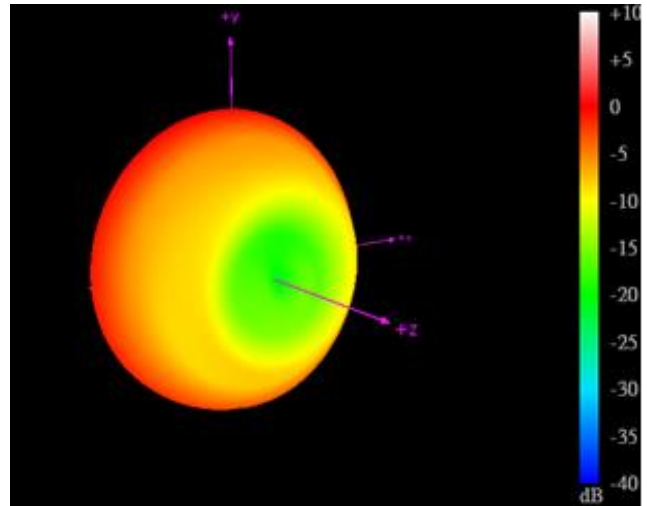


5925MHz

Bent at 90 Degrees

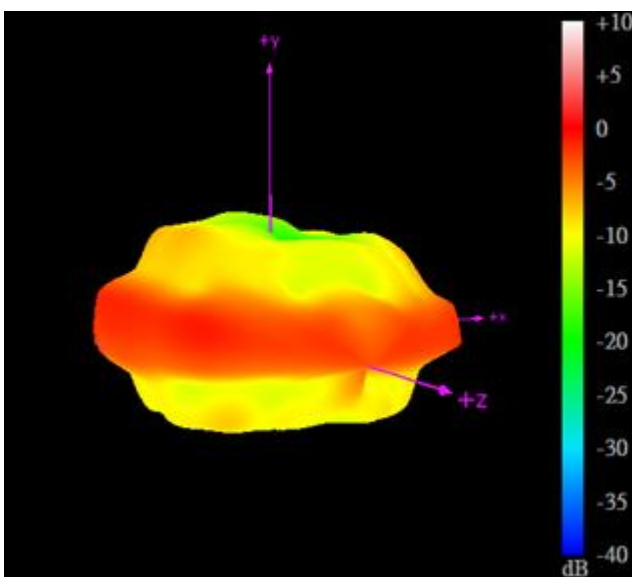


5850MHz

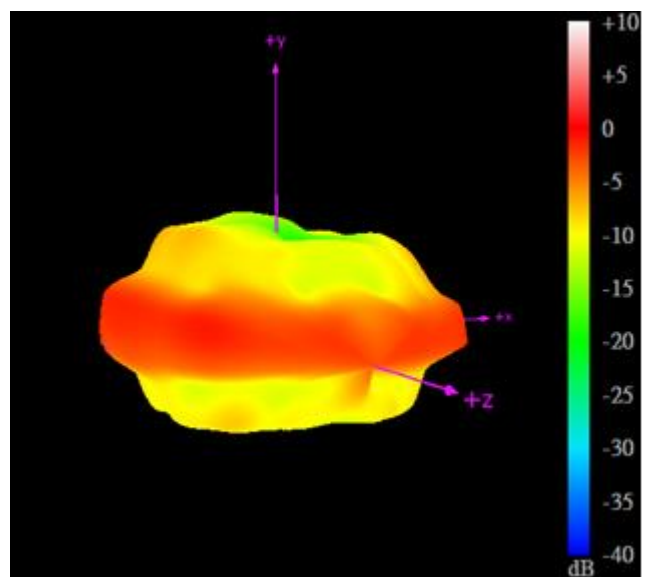


5925MHz

5.2 15\*9cm Ground Plane

Straight

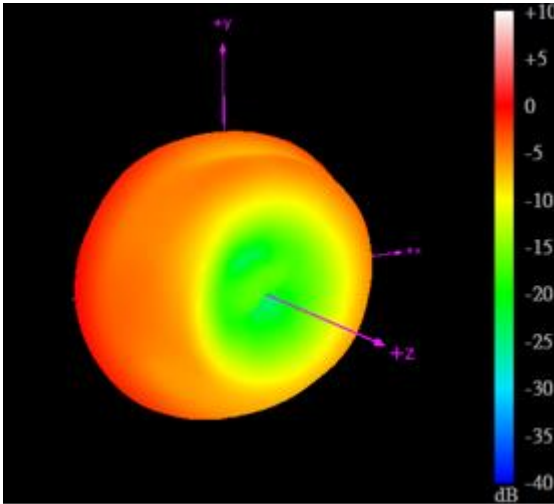


5850MHz

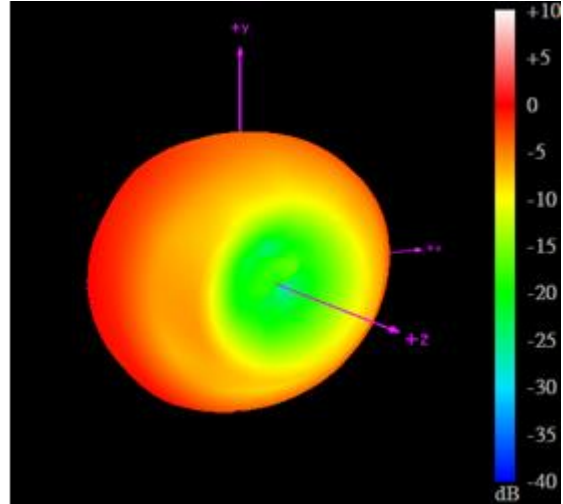


5925MHz

Bent at 90 Degrees

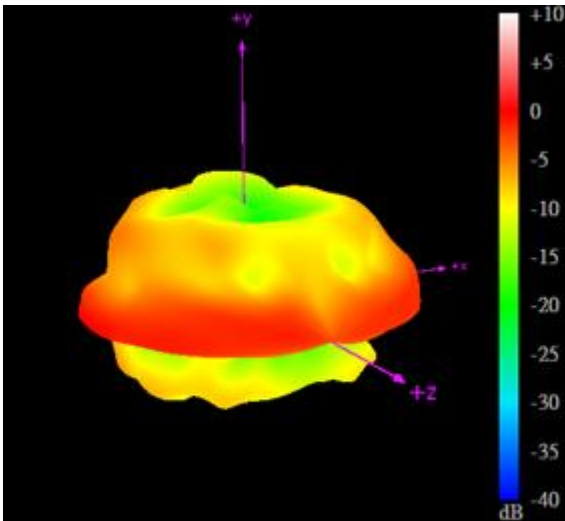


5850MHz

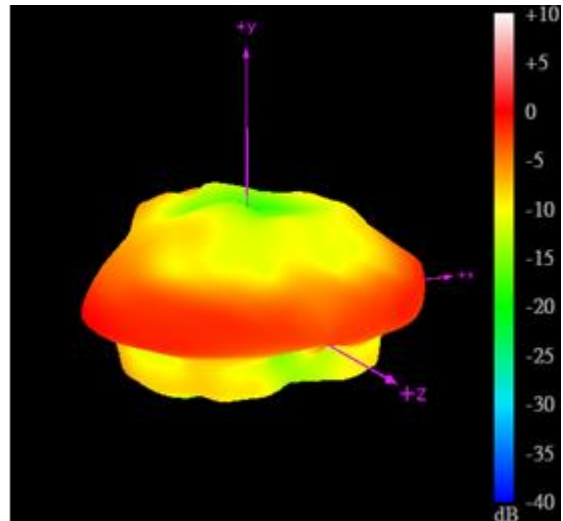


5925MHz

5.3 30\*30cm Ground Plane edge

Straight

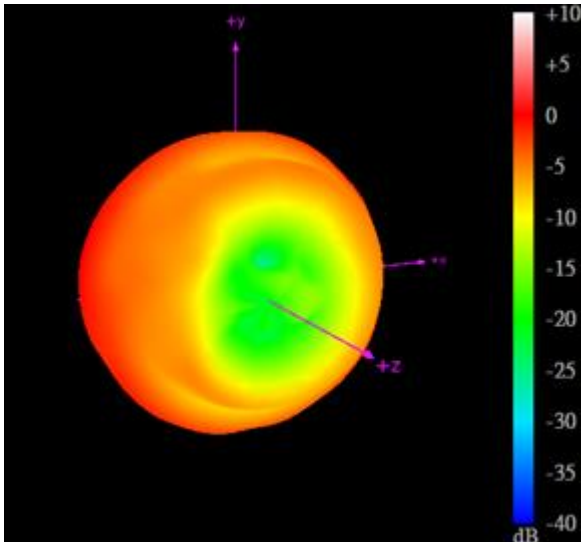


5850MHz

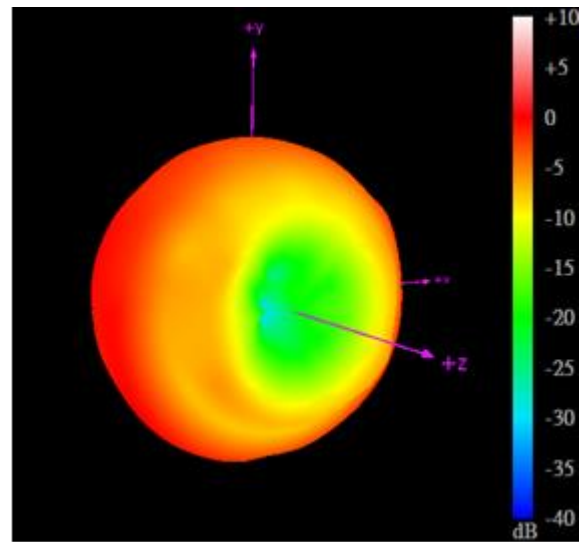


5925MHz

Bent at 90 Degrees

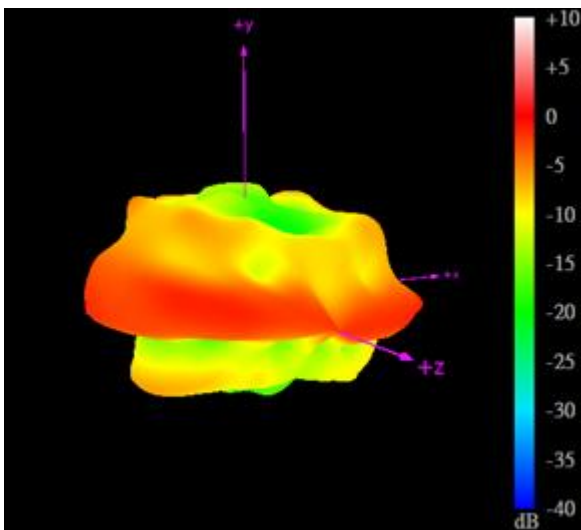


5850MHz

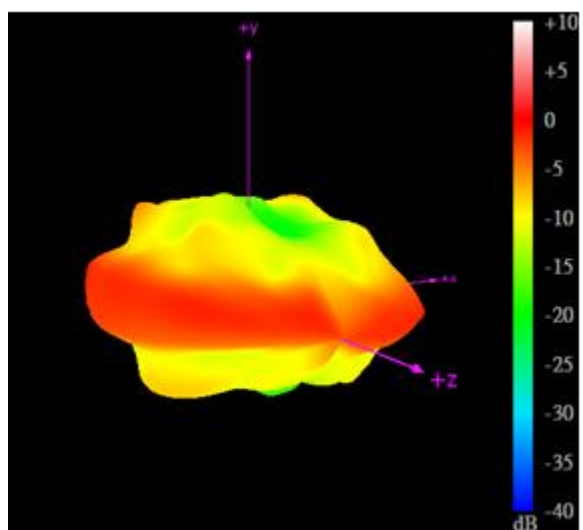


5925MHz

5.4 30\*30cm Ground Plane Center

Straight

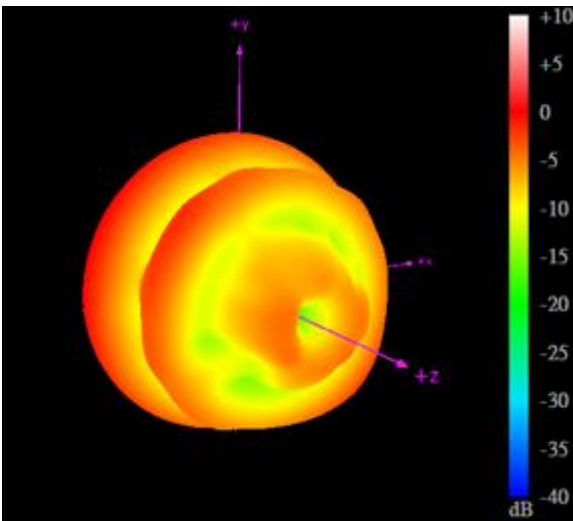


5850MHz

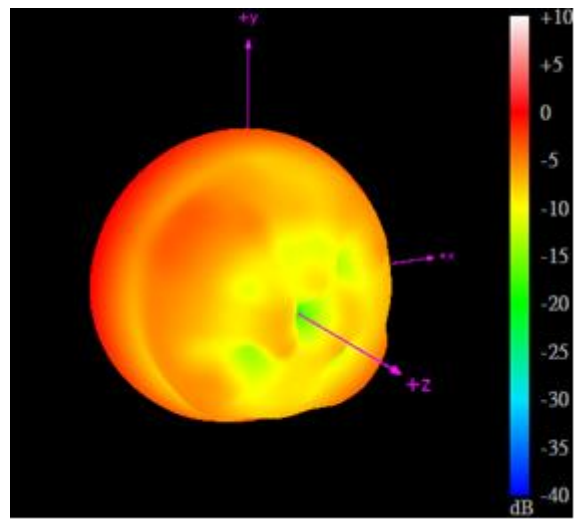


5925MHz

Bent at 90 Degrees

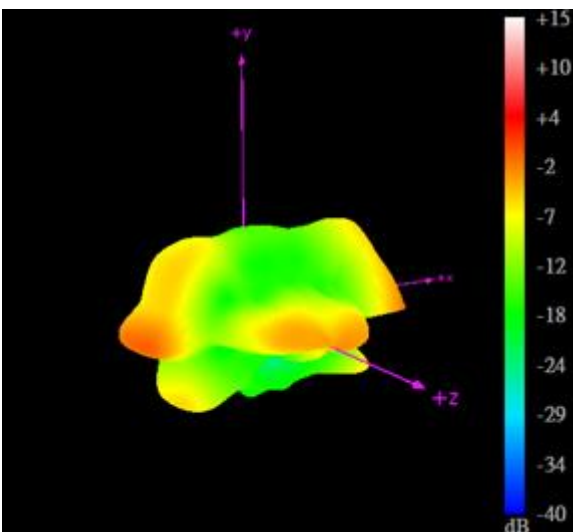


5850MHz

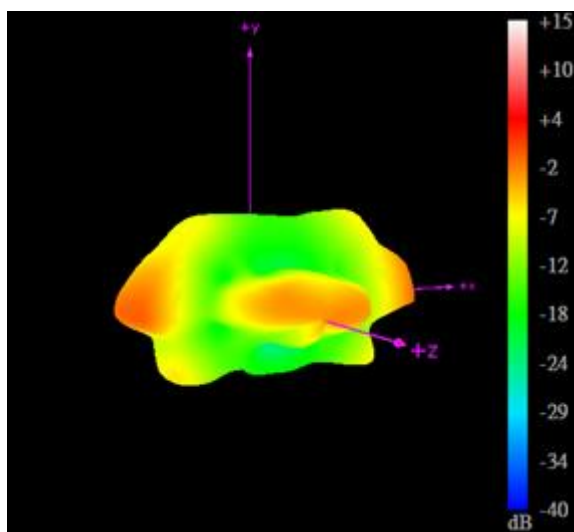


5925MHz

# 6. Mechanical Drawing (Units: mm)

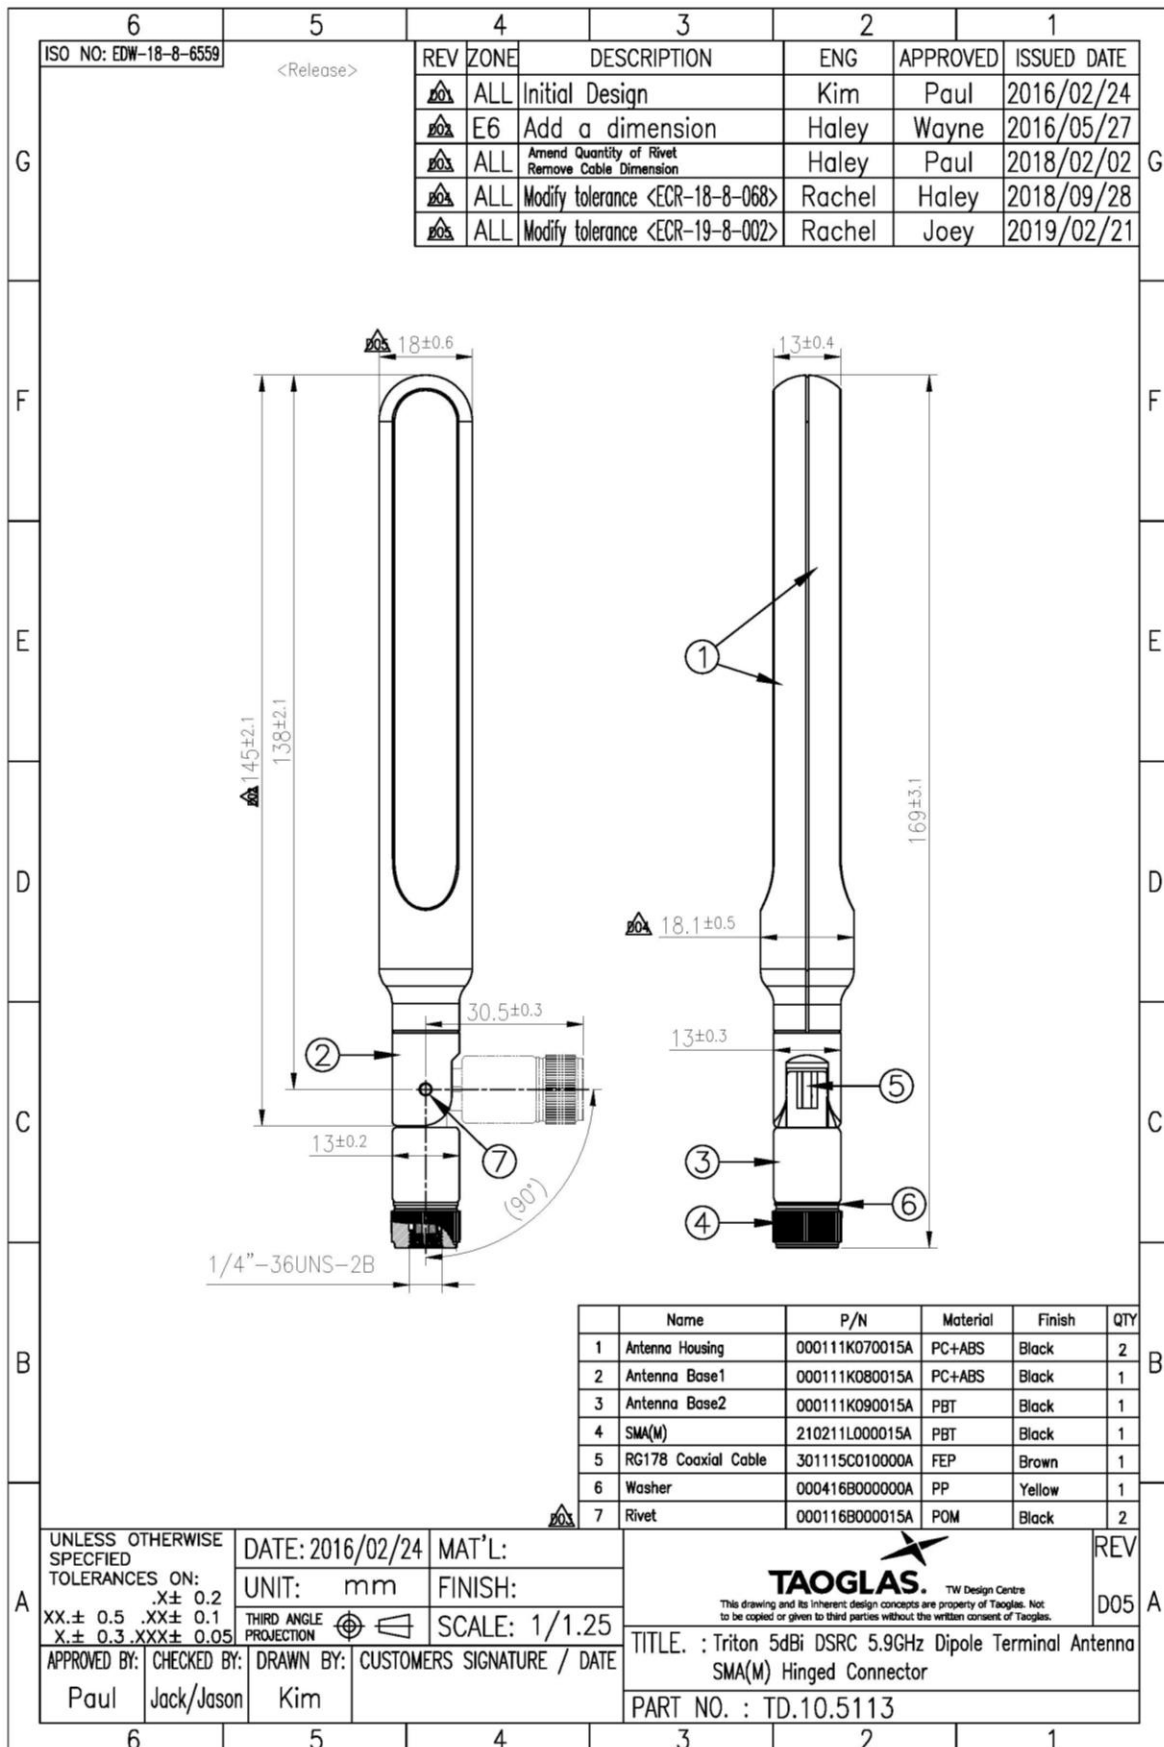


## 7. Packaging


1 pc TD.10.5113 per PE bag  
 PE Bag Dimensions - 240\*100mm  
 Weight - 200g

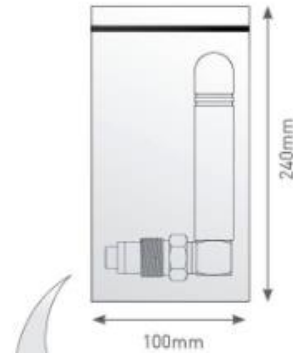


50 pcs TD.10.5113 per Large PE bag  
 PE Bag Dimensions - 440\*240mm  
 Weight - 1.1kg

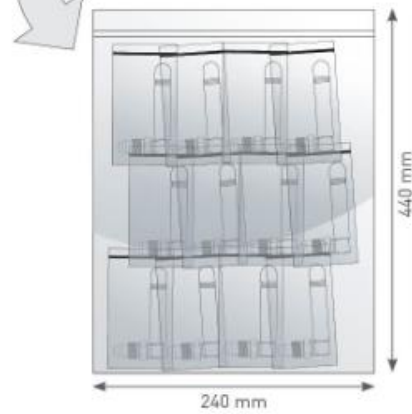

300 pcs TD.10.5113 per carton  
 Carton Dimensions - 400\*340\*220mm  
 Weight - 7.7kg

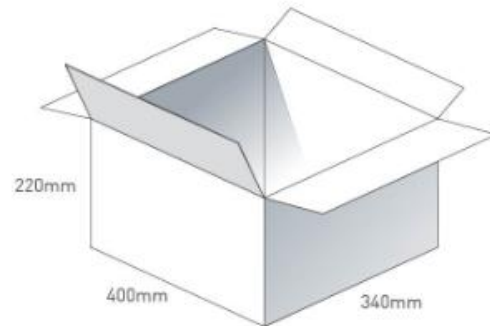

Pallet Dimensions 1200\*1000\*1500mm  
 54 Cartons per Pallet  
 6 Cartons per layer  
 9 Layers

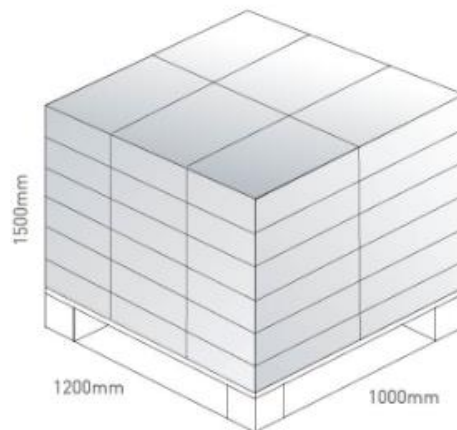

Changelog for the datasheet

**SPE-16-8-063 – TD.10.5113**

**Revision: B (Current Version)**

Date:	2019-02-27
Changes:	Installation Guide Amended
Changes Made by:	Jack Conroy

**Previous Revisions**

**Revision: A (Original First Release)**

Date:	2016-09-27
Notes:	
Author:	Your Name Here





**TAOGLAS**®

[www.taoglas.com](http://www.taoglas.com)



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9