




# RF1417D

## 315.0 MHz SAW Filter

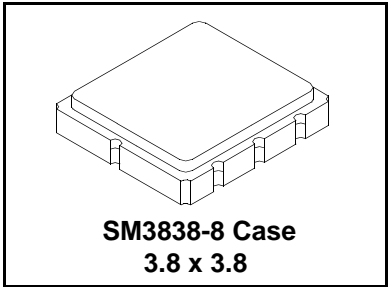

- **Ideal Front-End Filter for Domestic Wireless Receivers**
- **Low-Loss, Coupled-Resonator Quartz Design**
- **Simple External Impedance Matching**
- **Complies with Directive 2002/95/EC (RoHS)**

The RF1417D is a low-loss, compact, and economical surface-acoustic-wave (SAW) filter designed to provide front-end selectivity in 315.0 MHz receivers. Receiver designs using this filter include superhet with 10.7 MHz or 500 kHz IF, direct conversion and superregen. Typical applications of these receivers are wireless remote-control and security devices (especially for automotive keyless entry) operating in the USA under FCC Part 15, in Canada under RSS-210, and in Italy

This coupled-resonator filter (CRF) uses selective null placement to provide suppression, typically greater than 40 dB, of the LO and image spurious responses of superhet receivers with 10.7 MHz IF. RFM's advanced SAW design and fabrication technology is utilized to achieve high performance and very low loss with simple external impedance matching.

### Electrical Characteristics

Characteristic		Sym	Notes	Minimum	Typical	Maximum	Units
Center Frequency at 25°C	Absolute Frequency	$f_c$	1, 2, 3	314.85	315.00	315.15	MHz
Insertion Loss		$IL_{MIN}$	1, 3		1.6	2.5	dB
Passband Ripple (Relative to $IL_{MIN}$ )	$F_c \pm 200kHz$		1, 3		0.4	1.2	dB
3 dB Bandwidth		$BW_3$	1, 3	500	600	800	kHz
Rejection Attenuation: (relative to $IL_{min}$ )	10 - 295 MHz		1, 3	46	51		dB
	295 - 305 MHz			41	46		
	305 - 310 MHz			27	30		
	310 - 313 MHz			17	20		
	313 - 314 MHz			7	10		
	316 - 320 MHz			9	12		
	320 - 325 MHz			16	20		
	325 - 335 MHz			32	36		
	335 - 600 MHz			42	46		
	600 - 1000 MHz			55	60		
Temperature	Freq. Temp. Coefficient	FTC			0.032		ppm/°C <sup>2</sup>
Frequency Aging	Absolute Value during the First Year	fAI	5		≤10		ppm/yr
Impedance @ $f_c$	Input $Z_{IN}=R_{IN}  C_{IN}$	$Z_{IN}$	1	1.92kΩ//5.93pf			
	Output $Z_{OUT}=R_{OUT}  C_{OUT}$	$Z_{OUT}$		1.28kΩ//6.09pf			
Lid Symbolization (Y=year WW=week S=shift)				550 // YWWS			
Standard Reel Quantity	Reel Size 7 Inch		9	500 Pieces/Reel			
	Reel Size 13 Inch			3000 Pieces/Reel			

**CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.**  
Notes:

1. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture which is connected to a 50 Ω test system with VSWR ≤ 1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency,  $f_c$ . Note that insertion loss and bandwidth and passband shape are dependent on the impedance matching component values and quality.
2. The frequency  $f_c$  is defined as the midpoint between the 3dB frequencies.
3. Where noted specifications apply over the entire specified operating temperature range of -40°C to +90°C.
4. The turnover temperature,  $T_o$ , is the temperature of maximum (or turnover) frequency,  $f_o$ . The nominal frequency at any case temperature,  $T_c$ , may be calculated from:  $f = f_o [1 - FTC (T_o - T_c)^2]$ .
5. Frequency aging is the change in  $f_c$  with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing significantly in subsequent years.
6. The design, manufacturing process, and specifications of this device are subject to change.
7. One or more of the following U.S. Patents apply: 4,54,488, 4,616,197, and others pending.
8. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
9. Tape and Reel Standard Per ANSI / EIA 481.

## Absolute Maximum Ratings

Rating	Value	Units
Input Power Level	10	dBm
DC Voltage	12	VDC
Storage Temperature	-40 to +125	°C
Operable Temperature Range	-40 to +125	°C
Soldering Temperature (10 seconds / 5 cycles max.)	260	°C

## Electrical Characteristics

Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units
Center Frequency at 25°C Absolute Frequency	$f_c$	1, 2, 3	314.85	315.00	315.15	MHz
Insertion Loss	$IL_{MIN}$	1, 3		2.3	3.0	dB
Passband Ripple (Relative to $IL_{MIN}$ ) $f_c \pm 200kHz$		1, 3		0.5	1.4	dB
3 dB Bandwidth	$BW_3$	1, 3	500	600	800	kHz
Rejection Attenuation: (relative to $IL_{min}$ )		1, 3	10 - 295 MHz	44	49	dB
			295 - 305 MHz	39	44	
			305 - 310 MHz	27	30	
			310 - 313 MHz	17	20	
			313 - 314 MHz	7	10	
			316 - 320 MHz	9	12	
			320 - 325 MHz	16	20	
			325 - 335 MHz	32	36	
			335 - 600 MHz	42	45	
600 - 1000 MHz	55	60				
Temperature Freq. Temp. Coefficient	FTC			0.032		ppm/°C <sup>2</sup>
Frequency Aging Absolute Value during the First Year	$ f $	5		≤10		ppm/yr
Impedance @ $f_c$	Input $Z_{IN}=R_{IN}  C_{IN}$	$Z_{IN}$	1	1.92kΩ//5.93pf		
	Output $Z_{OUT}=R_{OUT}  C_{OUT}$	$Z_{OUT}$		1.28kΩ//6.09pf		




**CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.**

### Notes:


- Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture which is connected to a 50 Ω test system with VSWR ≤ 1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency,  $f_c$ . Note that insertion loss and bandwidth and passband shape are dependent on the impedance matching component values and quality.
- The frequency  $f_c$  is defined as the midpoint between the 3dB frequencies.
- Where noted specifications apply over the entire specified operating temperature range of -40°C to +125°C.
- The turnover temperature,  $T_o$ , is the temperature of maximum (or turnover) frequency,  $f_o$ . The nominal frequency at any case temperature,  $T_c$ , may be calculated from:  $f = f_o [1 - FTC (T_o - T_c)^2]$ .
- Frequency aging is the change in  $f_c$  with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing significantly in subsequent years.
- The design, manufacturing process, and specifications of this device are subject to change.
- One or more of the following U.S. Patents apply: 4,54,488, 4,616,197, and others pending.
- All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.

### Electrical Connections

Pin	Connection
1	Input
2	Input Ground
3	Ground
4	Case Ground
5	Output
6	Output Ground
7	Ground
8	Case Ground

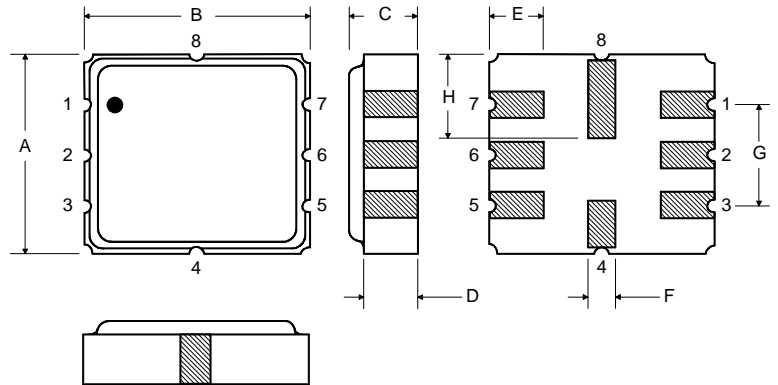

### Matching Circuit to 50W

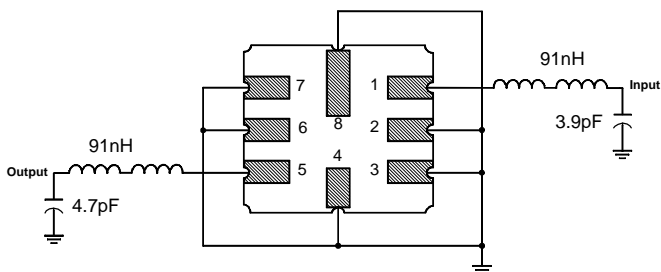

### Case Dimensions


Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	3.6	3.8	4.0	0.14	0.15	0.16
B	3.6	3.8	4.0	0.14	0.15	0.16
C	1.00	1.20	1.40	0.04	0.05	0.055
D	0.95	1.10	1.25	0.033	0.043	0.05
E	0.90	1.0	1.10	0.035	0.04	0.043
F	0.50	0.6	0.70	0.020	0.024	0.028
G	2.39	2.54	2.69	0.090	0.100	0.110
H	1.40	1.75	2.05	0.055	0.069	0.080

### Optional


#### Electrical Connections

Pin	Connection
1	Input Ground
2	Input
3	Ground
4	Case Ground
5	Output Ground
6	Output
7	Ground
8	Case Ground


### Matching Circuit to 50W

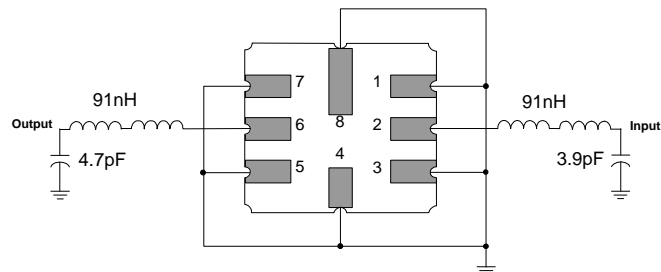

1 Aug 2007 13:57:44

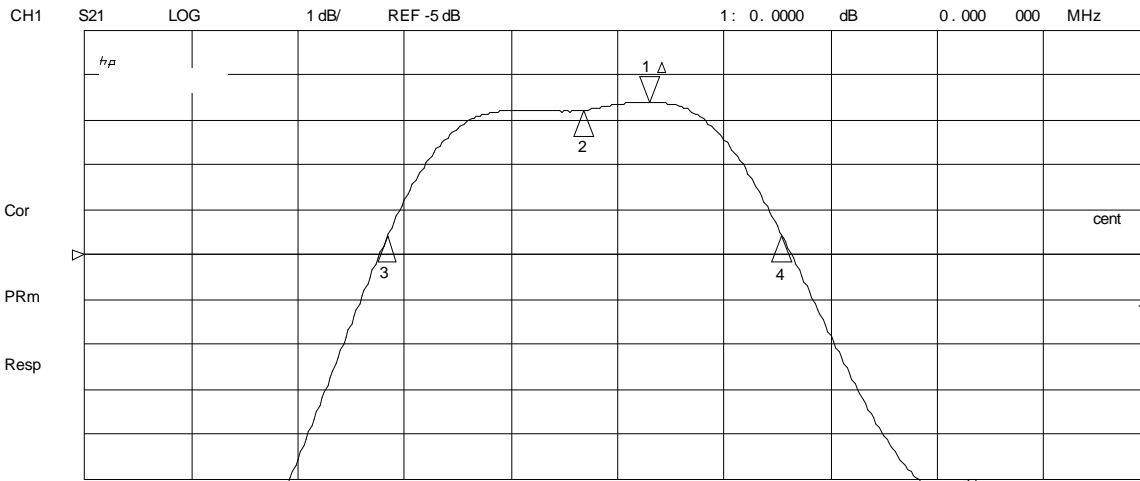

CH1 Markers  
Max  $\Delta$  REF=1  
BW: .741804 MHz  
: 314.938373 MHz  
Q: 424.56  
1\_loss: -1.5997 dB

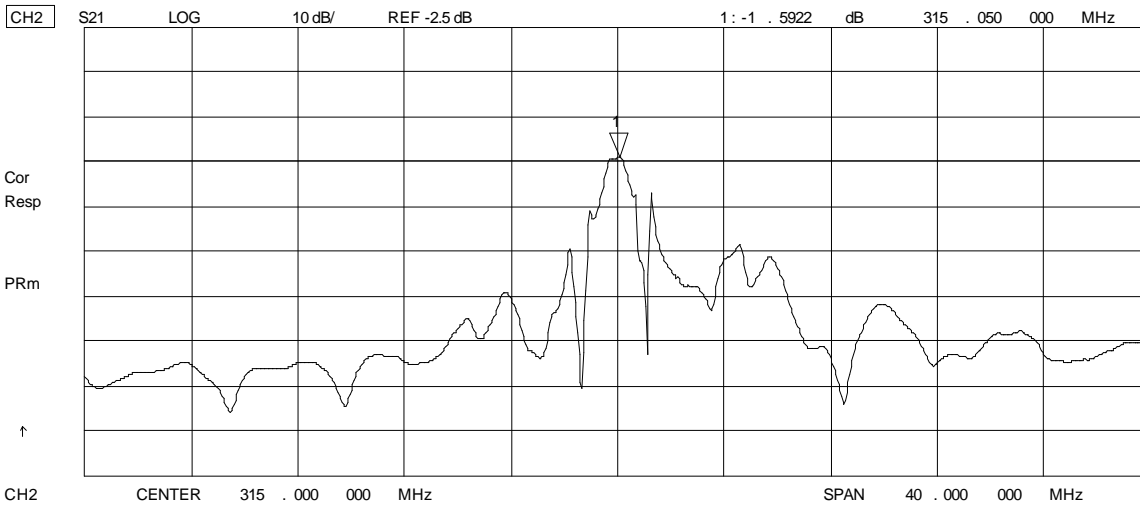

Max

# 315.0 MHz

# SAW Filter

1 Aug 2007 13:57:58

CH1 S11 1 UFS 1: 49 . 209  $\Omega$  -5 . 3047  $\Omega$  95 . 247 pF 315 . 000 000 MHz


h<sub>p</sub>

Cor

PRm

Full

↑

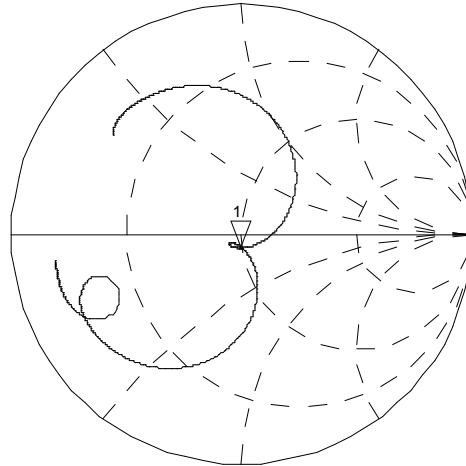


CH2 S22 1 UFS 1: 51 . 926  $\Omega$  -3 . 5059  $\Omega$  144 . 12 pF 315 . 000 000 MHz

Cor

Full

PRm

↑

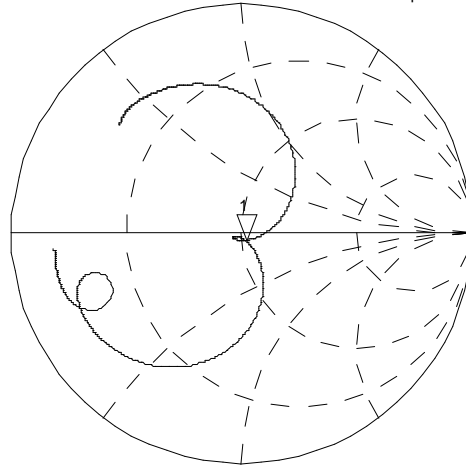

CENTER 315 . 000 000 MHz

SPAN 2. 000 000 MHz

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9