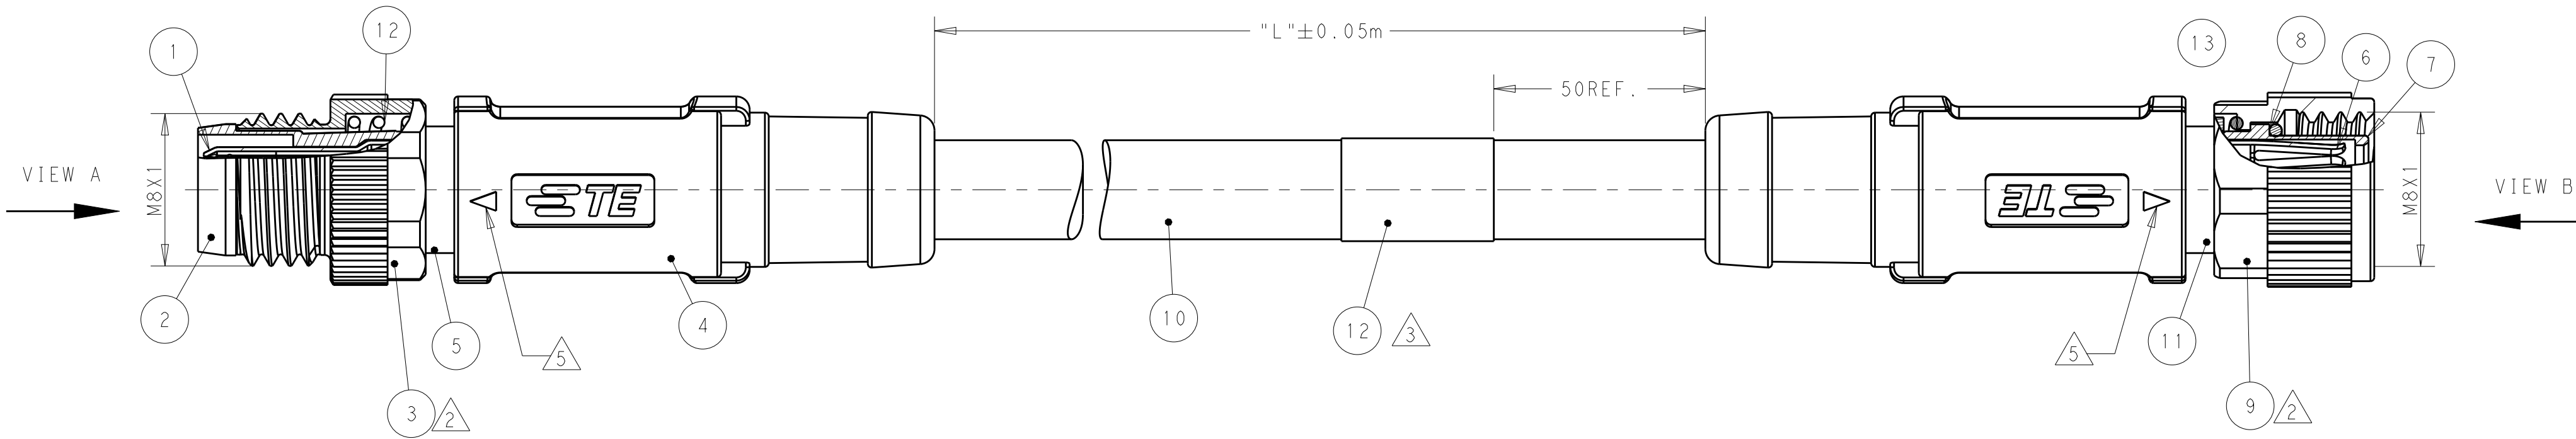


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	02MAR2016	N.P	X.X
	A1	ECR-17-003823 , ADD NEW PN	20MAR2017	BP	CW



NOTES:

1. TECHNICAL DATA: SEE TABLE 1;

2. RECOMMEND TORQUE 0.4Nm;

3. TE LABEL AREA;

4. -*: CABLE LENGHT. -0.5:0.5m, -1.0:1.0m, -1.5:1.5m...;

5. INSERT MARK FOR MATING;

6. ALL PRODUCT MUST COMPLIANCE WITH ROHS AND REACH;

7. -00X: FOR CABLE LENGTH, SEE TABLE E AND REFER TO LENGH"L".

注意事项

1. 技术参数:见表1;

2. 推荐扭矩0.4Nm;

3. TE 标签位置;

4. -*线长:-0.5:0.5m,-1.0:1.0m,-1.5:1.5m;

5. 产品对插标示;

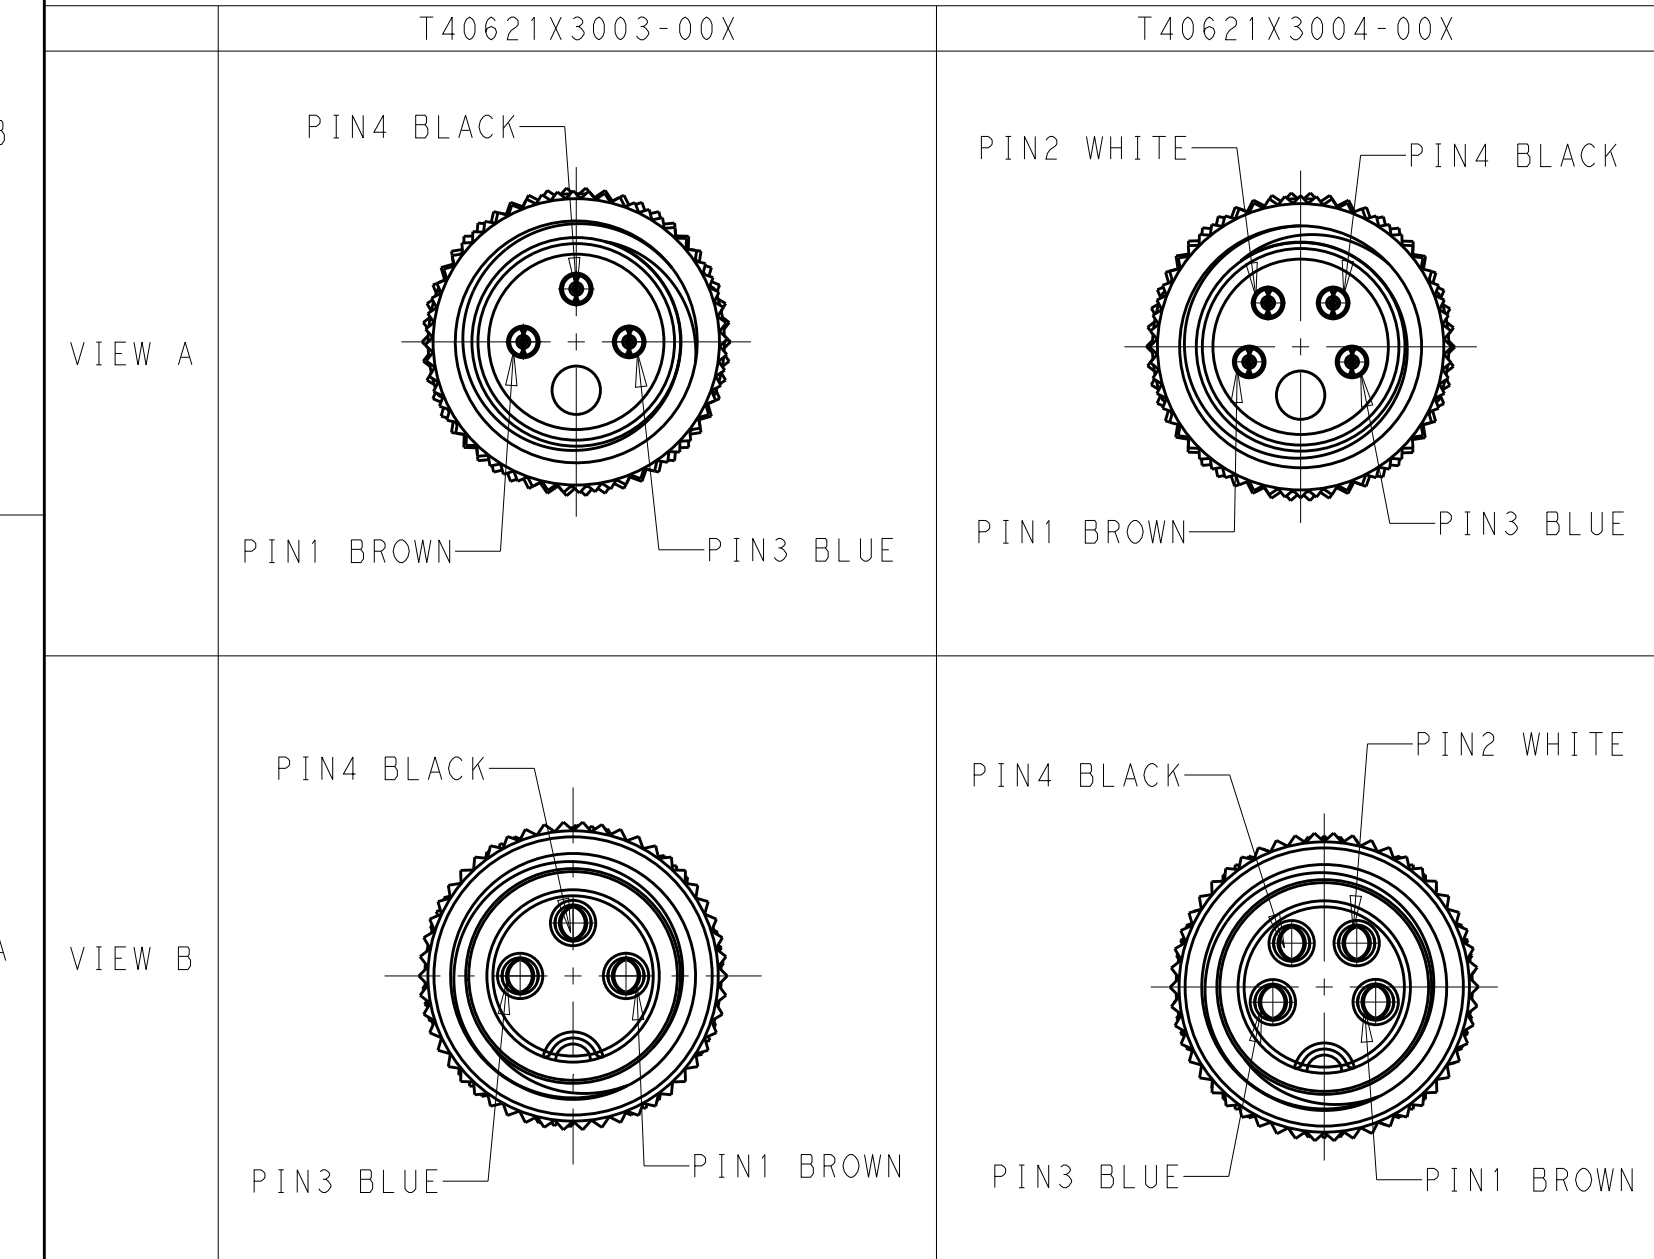
6. 产品必须符合ROHS与REACH;

7. -00X:线缆长度,参考表2,参照长度"L".




TABLE 1

TECHNICAL DATA	T40621X3003-00X	T40621X3004-00X
RATED VOLTAGE	60V	30V
RATED CURRENT	3A	
POLLETION DEGREE	3	
OVERVOLTAGE CATEGORY	II	
MATERIAL GROUP	II	
DEGREE OF PROTECTION	IP67	

-	-	TE LABEL	14
-	STEEL	WAVE WASHER	13
-	STEEL	SPRING	12
-	BRASS	SHIELDING	11
-	-	CABLE	10
-	COPPER ALLOY	COUPLING NUT	9
GRAY COLOR	RUBBER	O-RING	8
BALCK COLOR	PA66	HOUSING	7
GOLD FLASH	COPPER ALLOY	CONTACT	6
-	COPPER ALOY	SHIELDING	5
BLUE COLOR	POLYURETHANE	OVER-MOLDING	4
-	COPPER ALLOY	COUPLING NUT	3
BALCK COLOR	PA66	HOUSING	2
GOLD FLASH	COPPER ALLOY	CONTACT	1
COMMENTS	MATERIAL	DESCRIPITON	ITEM



WIRES: 0.34mm ² (22AWG)	-001: 0.5m -002: 1.0m -003: 1.5m -004: 3.0m -005: 5.0m -006: 7.0m -007: 10.0m	FIXED: -25°C~80°C FLXIBLE: -10°C~80°C	GRAY	PUR (UL)	RPC-M8-4MS-**SHS0.34-M8-4FS-PUR ⁴	4	T4062143004-00X ⁷	
		FIXED: -10°C~80°C FLXIBLE: -5°C~80°C	BLACK	PVC (UL)	RPC-M8-3MS-**SHS0.34-M8-3FS-PUR ⁴	4	T4062143003-00X ⁷	
		FIXED: -25°C~80°C FLXIBLE: -5°C~80°C	GRAY	PUR (UL)	RPC-M8-4MS-**SH-M8-4FS-PVC ⁴	3	T4062133004-00X ⁷	
		FIXED: -10°C~80°C FLXIBLE: -5°C~80°C	BLACK	PVC (UL)	RPC-M8-3MS-**SHS0.34-M8-3FS-PVC ⁴	3	T4062133003-00X ⁷	
WIRES: 0.25mm ² (24AWG)	-001: 0.5m -002: 1.0m -003: 1.5m -004: 3.0m -005: 5.0m -006: 7.0m -007: 10.0m	FIXED: -25°C~80°C FLXIBLE: -10°C~80°C	GRAY	PUR (UL)	RPC-M8-4MS-**SH-M8-4FS-PUR ⁴	4	T4062123004-00X ⁷	
		FIXED: -10°C~80°C FLXIBLE: -5°C~80°C	BLACK	PVC (UL)	RPC-M8-3MS-**SH-M8-3FS-PUR ⁴	3	T4062123003-00X ⁷	
		FIXED: -25°C~80°C FLXIBLE: -5°C~80°C	GRAY	PUR (UL)	RPC-M8-4MS-**SH-M8-4FS-PVC ⁴	4	T4062113004-00X ⁷	
		FIXED: -10°C~80°C FLXIBLE: -5°C~80°C	BLACK	PVC (UL)	RPC-M8-3MS-**SH-M8-3FS-PVC ⁴	3	T4062113003-00X ⁷	
CABLE CHARACTERISTIC	LENGTH "L"	RECOMMEND OPERATION TEMPERATURE FOR CABLE	JACKET COLOR	JACKET MATERIAL	TYPE		POS.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.					DWN 23FEB2016 Nick Pan		TE Connectivity																																				
<table><tr><td>DIMENSIONS:</td><td rowspan="4"></td><td colspan="2">TOLERANCES UNLESS OTHERWISE SPECIFIED:</td></tr><tr><td>mm</td><td></td><td></td></tr><tr><td></td><td>0 PLC ±</td><td></td></tr><tr><td></td><td>1 PLC ±0.50</td><td></td></tr><tr><td></td><td>2 PLC ±0.35</td><td></td></tr><tr><td></td><td>3 PLC ±</td><td></td></tr><tr><td></td><td>4 PLC ±</td><td></td></tr><tr><td></td><td>ANGLES ±</td><td></td></tr><tr><td>MATERIAL</td><td>FINISH</td><td></td><td></td><td></td><td>WEIGHT</td><td></td><td></td><td></td></tr></table>					DIMENSIONS:					TOLERANCES UNLESS OTHERWISE SPECIFIED:		mm				0 PLC ±			1 PLC ±0.50			2 PLC ±0.35			3 PLC ±			4 PLC ±			ANGLES ±		MATERIAL	FINISH				WEIGHT				CHK 23FEB2016 Kobby Zhao	
					DIMENSIONS:						TOLERANCES UNLESS OTHERWISE SPECIFIED:																																
					mm																																						
	0 PLC ±																																										
	1 PLC ±0.50																																										
	2 PLC ±0.35																																										
	3 PLC ±																																										
	4 PLC ±																																										
	ANGLES ±																																										
MATERIAL	FINISH				WEIGHT																																						
					APVD 23FEB2016 Xiang Xu		NAME																																				
					PRODUCT SPEC 108-106140		M8 CABLE ASSEMBLY SHIELDED TYPE DOUBLE ENDED																																				
					APPLICATION SPEC		SIZE																																				
							CAGE CODE																																				
							DRAWING NO																																				
							RESTRICTED TO																																				
					A2		C-T40621X300X00X																																				
					CUSTOMER DRAWING		SCALE 1:1																																				
							SHEET 1 OF 1																																				
							REV A1																																				

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9