



**【 PRECAUTIONS FOR HANDLING 】**

1. Connector insertion and extraction
  - a. Connector shall be extracted vertically by specialised extraction JIG.  
Part No. :H.FL-LP-N (CL331-0551-7)  
Never hold the cable when extracting the cable because it damages the connector.
  - b. Insert the connector as perpendicularly to the mating surface as possible by aligning the mating axes of both connectors. Do not excessively slant the connectors when inserting.

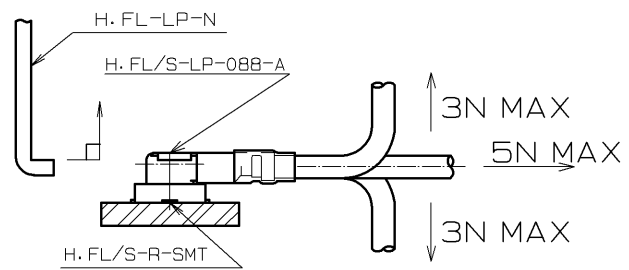

2. Allowable loads on the cable after the connectors are mated.  
The figures below show the maximum allowable loads on the cable. Do not apply loads exceeding these values to the cable.
3. Use all component within 6 months after the delivery.  
Store in manufacturer's package or tightly re-closed box with the following conditions.  
Use this product within 6 months after receipt.  
Temperature: -10°C To +40°C  
Humidity : 15 To 85% RH.
4. Environment condition  
Do not use the product under the environmental condition as shown below due to possible product deterioration.  
Special gas atmosphere (hydrogen sulfide gas, sulfur sulfide gas and hydrogen chloride gas)  
Place attention required : heating system, area near hot spring, volcanic mountain and alike  
Water splashed and condensation places.  
Place attention required : harsh temperature change.

**【 DIMENSIONS OF CONNECTOR 】**

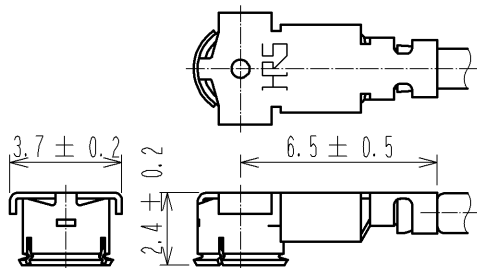

RoHS COMPLIANT

2	H. FL/S-CONTACT	CL331-0804-0	4	SHRINK TUBE(BLACK)	SUMITOMO ELECTRIC INDUSTRIES, LTD.		
1	H. FL/S-LP-088-A	CL331-0803-8	3	UL1745-SB-CX-50 30AWG TAD1.37(GRAY)	HITACHI METALS, LTD.		
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	MANUFACTURER		
UNITS mm		SCALE FREE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : TS. NOBE	13. 11. 20	DRAWING NO. EDC4-355079-01			
		CHECKED : NK. NINOMIYA	13. 11. 20	PART NO. H. FL/S-2LPA-088H1T-A-200			
		DESIGNED : YI. FUNADA	13. 11. 06	CODE NO. CL321-6096-8-01			
		DRAWN : YI. FUNADA	13. 11. 06	1/1			

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9