



Product Description

GRF2373 can serve as a low current, high gain LNA or linear driver tunable over 100 to 3800 MHz. It exhibits outstanding gain and NF with a typical bias condition of 3.3 volts and 15 mA. Iccq.

The device is operated from a supply voltage (V_{CC}) of 1.8 to 5.0 V with a selectable Iccq range of 10 to 25 mA for optimal efficiency and linearity.

Consult with the GRF applications engineering team for custom tuning/evaluation board data and device s-parameters.


Features

Reference: 3.3V/15mA/1900 MHz

- EVB NF: 1.3 dB
- Gain: 18.5 dB
- OP1dB: 13.5 dBm
- OIP3: 25.0
- Flexible Bias Voltage and Current
- Process: InGaP HBT

Applications

- Drones
- Small Cells and Cellular Repeaters
- Distributed Antenna Systems
- Set Top Boxes
- General Purpose Amplification
- VHF/UHF/900/2400 ISM

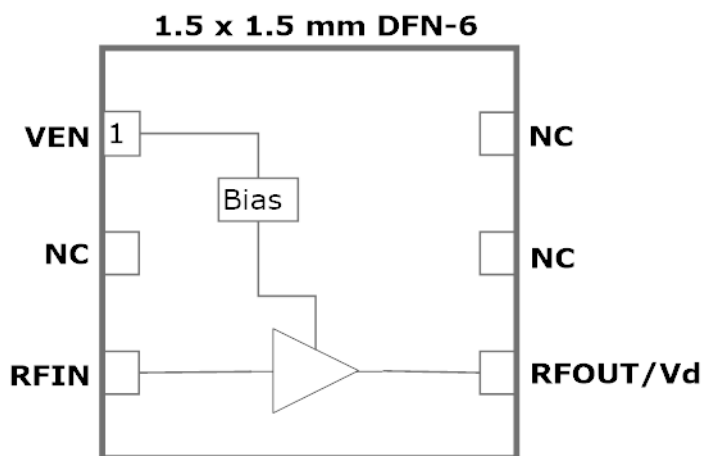



Preliminary

GRF2373

Low-current LNA/Driver
0.1–3.8 GHz

Absolute Ratings:

Parameter	Symbol	Min.	Max.	Unit
Supply Voltage	V _{CC}	0	5.5	V
RF Input Power: (Load VSWR < 2:1; V _{CC} : 5.0 volts)	P _{IN MAX}		22	dBm
Operating Temperature (Package Heat Sink)	T _{AMB}	-40	105	°C
Maximum Junction Temperature (MTTF > 10 ⁶ Hours)	T _{MAX}		150	°C
Maximum Dissipated Power	P _{DISS MAX}		100	mW
Electrostatic Discharge:				
Charged Device Model: (TBD)	CDM	1500		V
Human Body Model: (TBD)	HBM	250		V
Storage:				
Storage Temperature	T _{STG}	-65	150	°C
Moisture Sensitivity Level	MSL		TBD	--



Caution! ESD Sensitive Device




Exceeding Absolute Maximum Rating conditions may cause permanent damage to the device.

Note: For package dimensions and manufacturing information, see the Guerrilla-RF.com website for the following document located on the GRF2373 landing page (coming soon): **Manufacturing Note—MN-001 Product Tape and Reel, Solderability and Package Outline Specification.**

[Link to manufacturing note](#)

Pin Out (Top View)



Pin Assignments:

Pin	Name	Description	Note
1	V _{ENABLE}	Enable Voltage Input	V _{ENABLE} and series resistor set I _{DDQ} . V _{ENABLE} < =0.2 volts disables device. On -die pull-down resistor will turn the part off if this node is allowed to float.
2	NC	No Connect or Ground	No internal connection to die
3	RF_In	LNA RF input	An external DC blocking cap must be used
4	RF_Out	LNA RF output	V _{CC} must be applied through a choke to this pin
5	NC	No Connect or Ground	No internal connection to die
6	NC	No Connect or Ground	No internal connection to die
PKG BASE	GND	Ground	Provides DC and RF ground for LNA, as well as thermal heat sink. Recommend multiple 8 mil vias beneath the package for optimal RF and thermal performance. Refer to evaluation board top layer graphic on schematic page.



Preliminary

GRF2373

Low-current LNA/Driver
0.1–3.8 GHz

Nominal Operating Parameters:

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Test Frequency	F_{TEST}		1900		MHz	$V_{CC} = 3.3\text{ V}$, $T_A = 25^\circ\text{C}$
Gain	S_{21}		18.5		dB	
Evaluation Board Noise Figure	NF		1.3		dB	
Output 3rd Order Intercept	OIP3		25.0		dBm	-5.0 dBm P_{OUT} per tone at 2 MHz Spacing (1899 and 1901 MHz)
Output 1dB Compression Point	OP1dB		13.5		dBm	
Switching Rise Time	T_{RISE}		200		ns	
Switching Fall Time	T_{FALL}		100		ns	
Supply Current	I_{CC}		15		mA	
Enable Current	I_{ENABLE}		3.0		mA	
Disabled Mode						
Leakage Current	$I_{LEAKAGE}$		< 1.0		uA	$V_{CC}: 3.3\text{V}$; $V_{ENABLE}: 0.0\text{V}$
Thermal Data						
Thermal Resistance: (Estimated)	Θ_{JC}		700		$^\circ\text{C/W}$	On standard Evaluation Board
Junction Temperature @ +85 C Reference (Package heat sink)	$T_{JUNCTION}$		120		$^\circ\text{C}$	$V_{CC}: 3.3\text{ V}$; $I_{CCQ}: 15\text{ mA}$; No RF; $P_{BISS}: 50\text{ mW}$





Preliminary

GRF2373

Low-current LNA/Driver
0.1–3.8 GHz

GRF2373 Evaluation Board Data (3.3V/15mA)

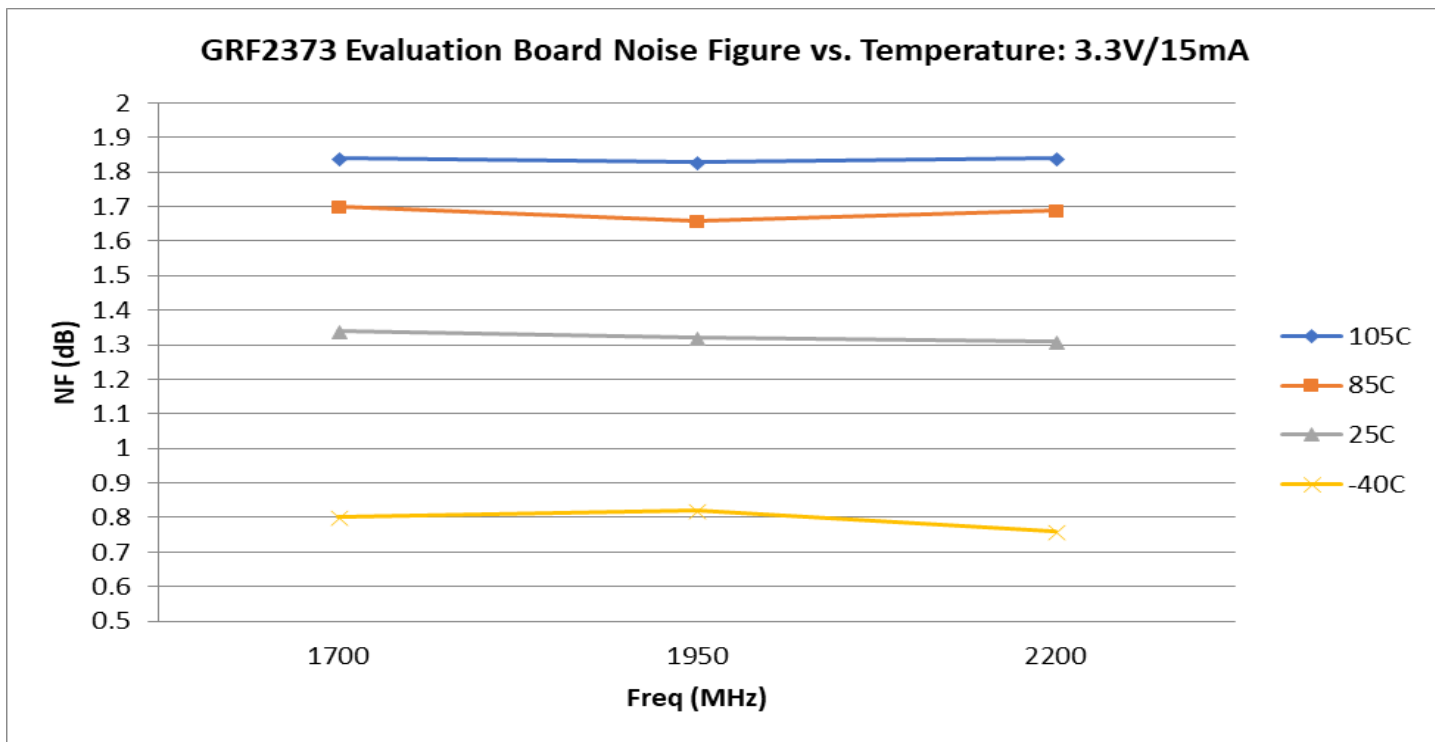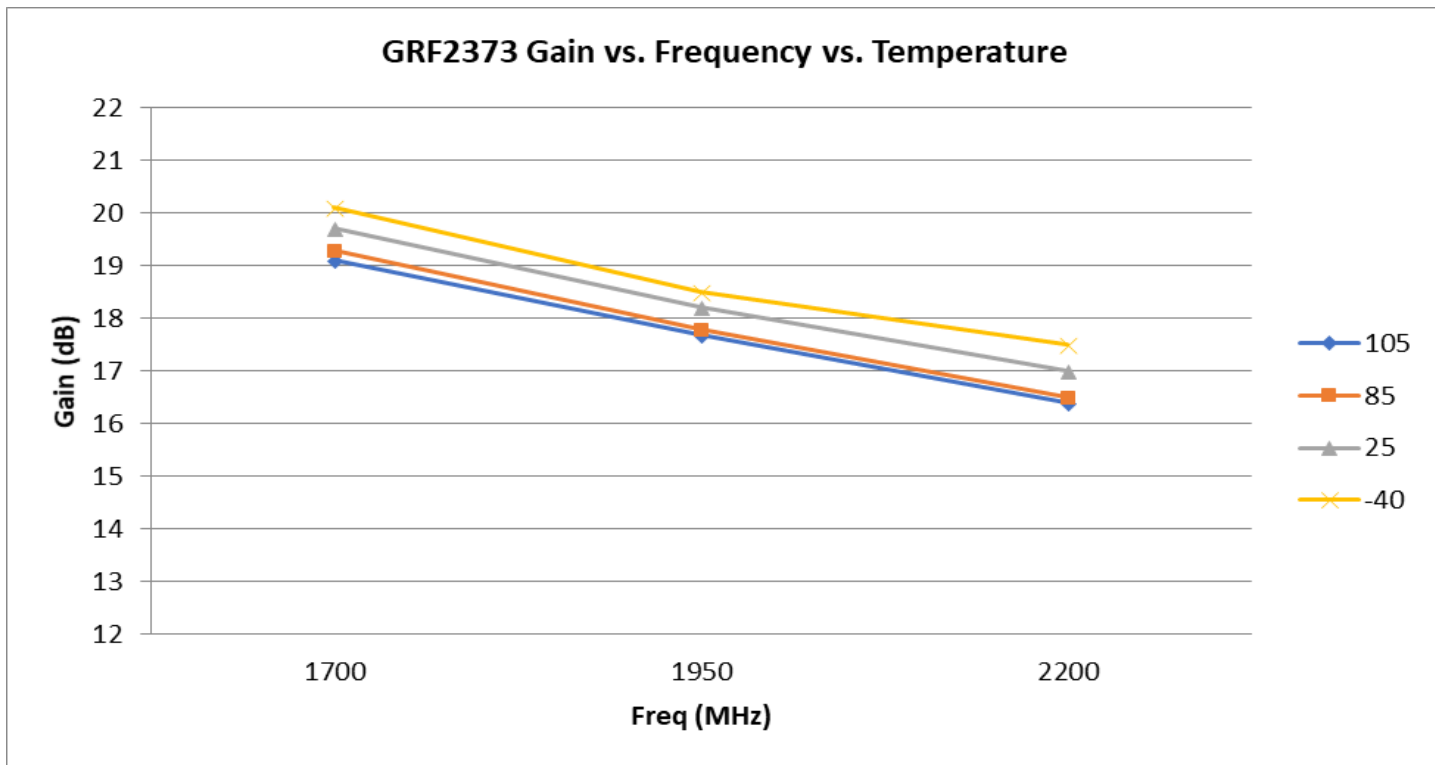

Guerrilla RF Proprietary Information. Guerrilla RF™ and the composite logo of Guerrilla RF™ are trademarks of Guerrilla RF, Inc. ©2014 Guerrilla RF, Inc. All rights reserved.





Preliminary


GRF2373

Low-current LNA/Driver
0.1–3.8 GHz


GRF2373 Evaluation Board Data (3.3V/15mA)

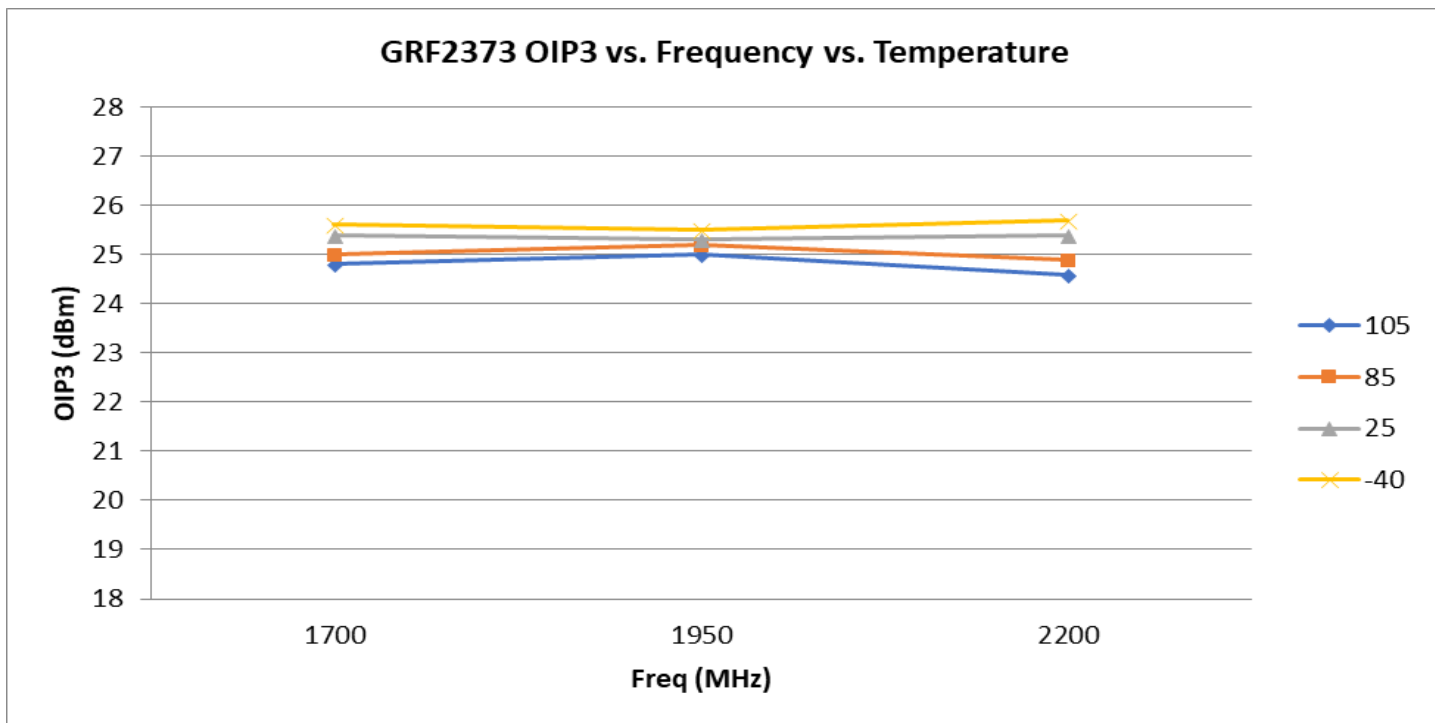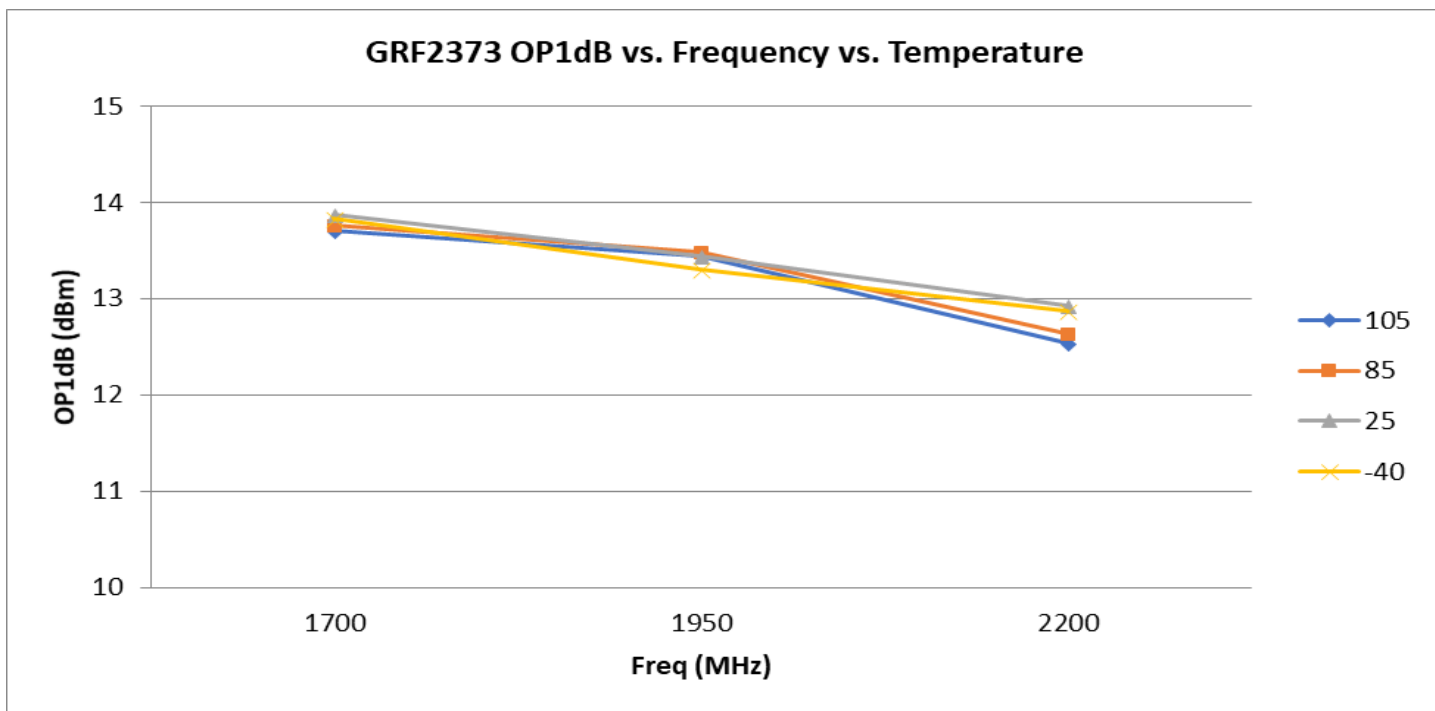


GRF2373 Evaluation Board S-Pars and Stability Mu Factor: (1.7 to 2.2 GHz Match)

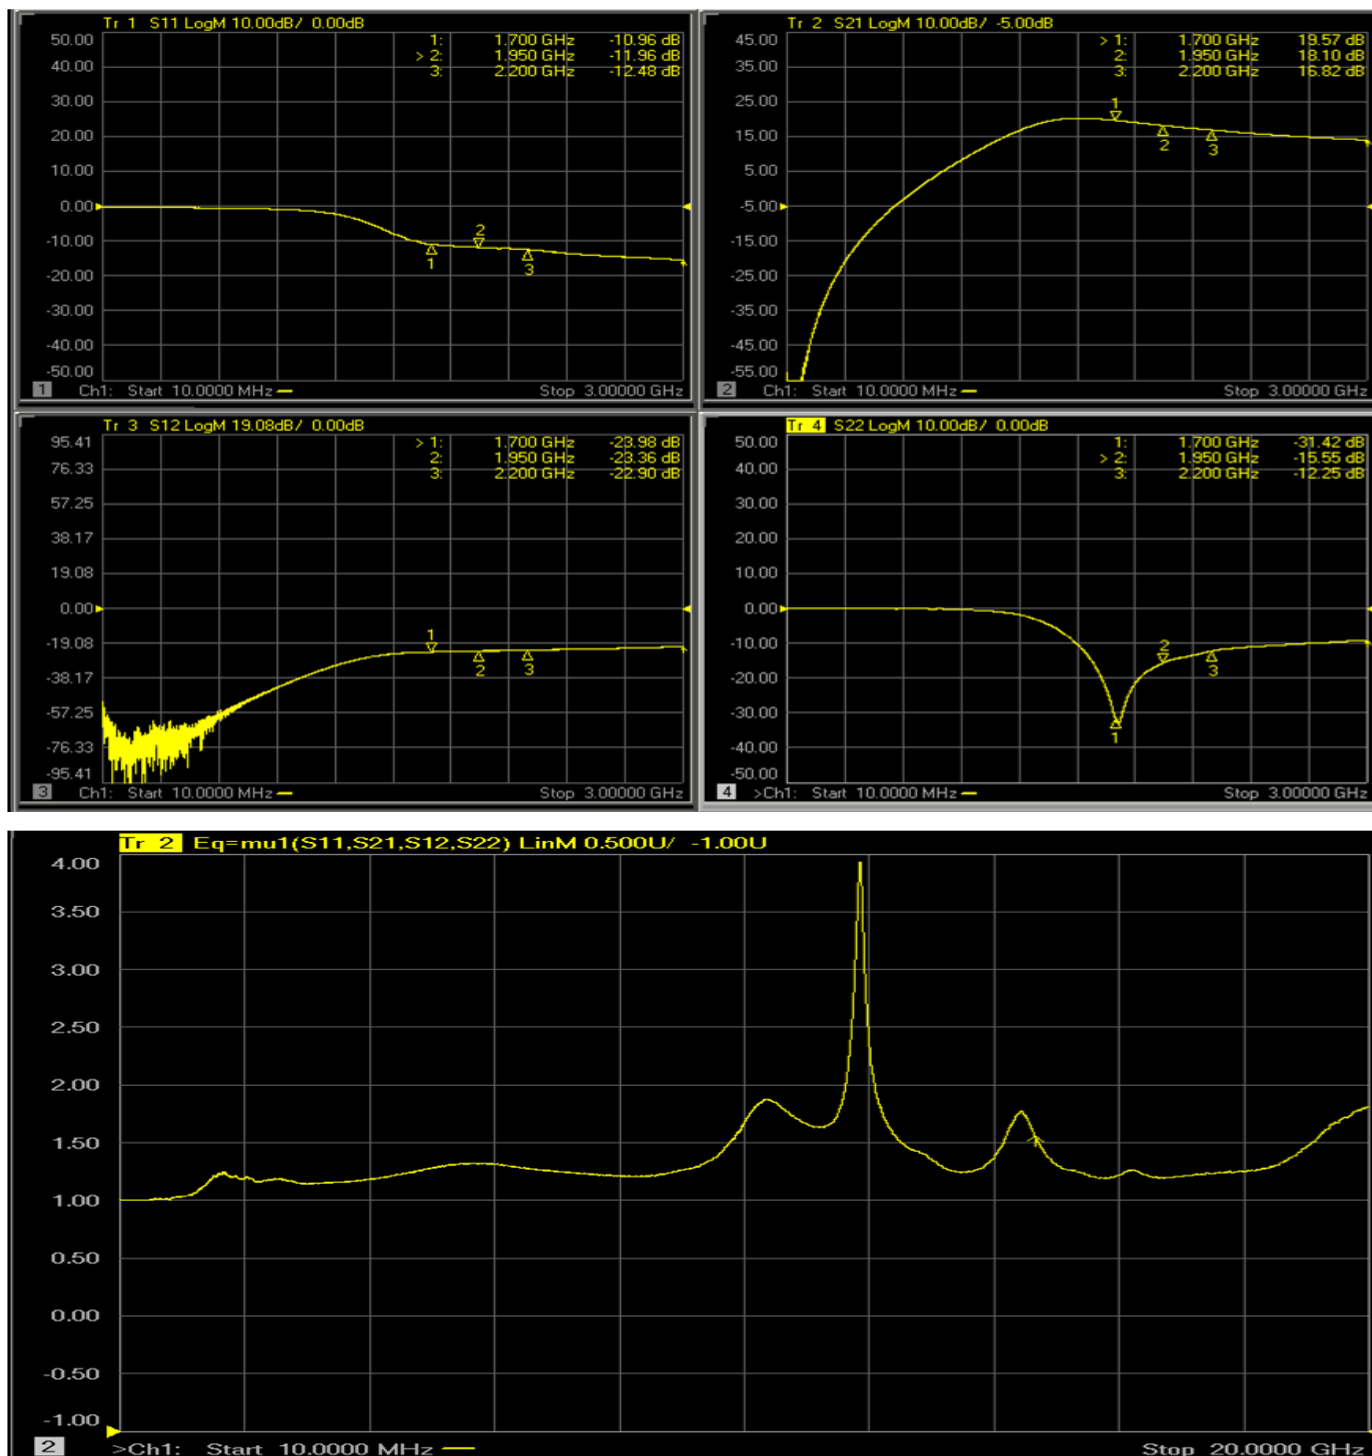

Note: Mu factor ≥ 1.0 implies unconditional stability.

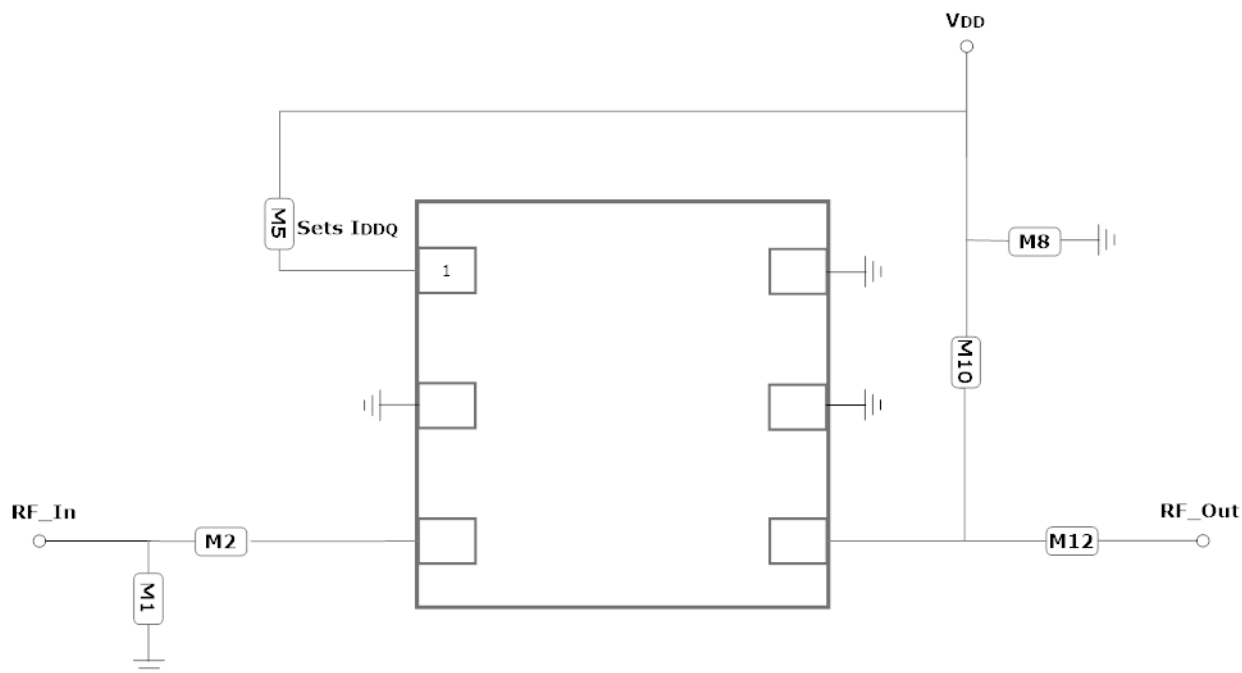

GRF2373 Application Schematic

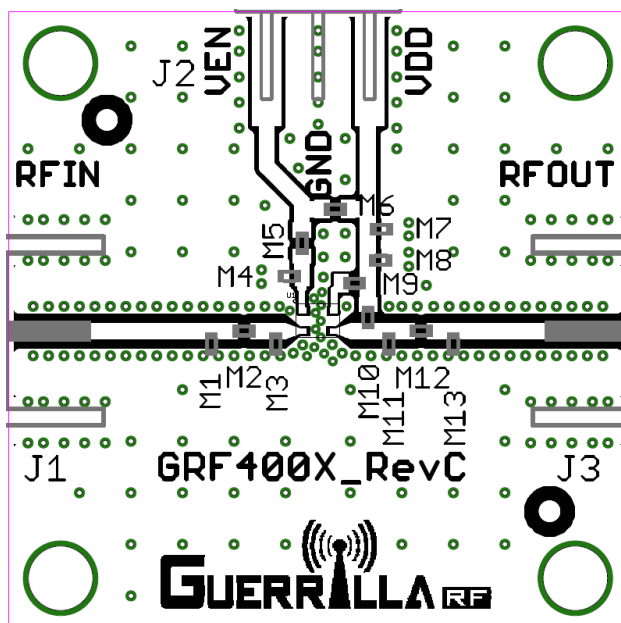

GRF2373 Evaluation Board Assembly Diagram



Preliminary


GRF2373

Low-current LNA/Driver
0.1–3.8 GHz

GRF2373 Standard Evaluation Board BOM: (1.7 to 2.2 GHz Tune; Vdd = Venable = 3.3V; Iddq: 15 mA)

Component	Type	Manufacturer	Family	Value	Package Size	Substitution
M1	Inductor	Murata	LQG	5.1 nH	0402	Ok
M2	Capacitor	Murata	GJM	3.0 pF	0402	Ok
M5 (Sets Iddq)	Resistor	Various	5%	—	0402	Ok
M8	Capacitor	Murata	GRM	0.1 uF	0402	Ok
M10	Inductor	Murata	LQG	3.0 nH	0402	Ok
M12	Capacitor	Murata	GJM/GRM	1.5 pF	0402	Ok
Evaluation Board	GRF400X_RevC	—	—	—	—	—

GRF2373 w/Vdd = 5.0V: Required Bias R @ Venable vs. Iddq

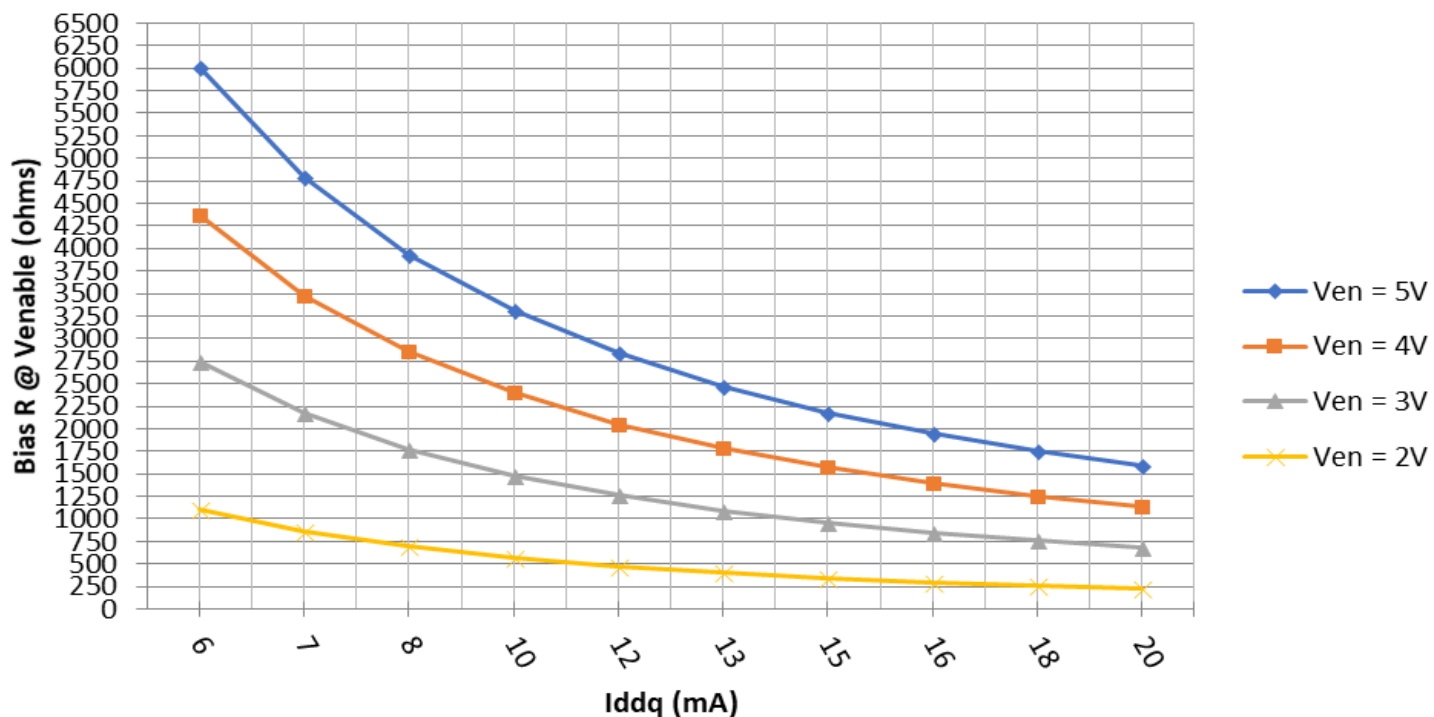



Preliminary

GRF2373

Low-current LNA/Driver
0.1–3.8 GHz

Data Sheet Release Status:	Notes
Advance	S-parameter and NF data based on EM simulations for the fully packaged device using foundry supplied transistor s-parameters. Linearity estimates based on device size, bias condition and experience with related devices.
Preliminary	All data based on evaluation board measurements in the Guerrilla RF Applications Lab.
Released	All data based on device qualification data. Typically, this data is nearly identical to the data found in the preliminary version. Max and min values for key RF parameters are included.

Information in this datasheet is specific to the Guerrilla RF, Inc. ("Guerrilla RF") product identified.

This datasheet, including the information contained in it, is provided by Guerrilla RF as a service to its customers and may be used for informational purposes only by the customer. Guerrilla RF assumes no responsibility for errors or omissions on this datasheet or the information contained herein. Information provided is believed to be accurate and reliable, however, no responsibility is assumed by Guerrilla RF for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. Guerrilla RF assumes no liability for any datasheet, datasheet information, materials, products, product information, or other information provided hereunder, including the sale, distribution, reproduction or use of Guerrilla RF products, information or materials.

No license, whether express, implied, by estoppel, by implication or otherwise is granted by this datasheet for any intellectual property of Guerrilla RF, or any third party, including without limitation, patents, patent rights, copyrights, trademarks and trade secrets. All rights are reserved by Guerrilla RF.

All information herein, products, product information, datasheets, and datasheet information are subject to change and availability without notice. Guerrilla RF reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice. Guerrilla RF may further change its datasheet, product information, documentation, products, services, specifications or product descriptions at any time, without notice. Guerrilla RF makes no commitment to update any materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

GUERRILLA RF INFORMATION, PRODUCTS, PRODUCT INFORMATION, DATASHEETS AND DATASHEET INFORMATION ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. GUERRILLA RF DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. GUERRILLA RF SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are solely responsible for their use of Guerrilla RF products in the Customer's products and applications or in ways which deviate from Guerrilla RF's published specifications, either intentionally or as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Guerrilla RF assumes no liability or responsibility for applications assistance, customer product design, or damage to any equipment resulting from the use of Guerrilla RF products outside of stated published specifications or parameters.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9