

General Description

The MAX14699 evaluation kit (EV kit) is a fully assembled and tested circuit board that demonstrates the MAX14699 high-accuracy, surge-protected overvoltage protector device. The EV kit comes with the MAX14699EWC+ installed.

Features

- 2.1V to 28V Operating Voltage Range
- $\overline{\text{ACOK}}$ LED Reading
- Proven PCB Layout
- Fully Assembled and Tested

EV Kit Contents

- EV Kit Board Containing a MAX14699

Ordering Information appears at end of data sheet.

Quick Start

Required Equipment

- MAX14699 EV kit
- 15V power supply
- Multimeter

Procedure

The EV kit is fully assembled and tested. Follow the steps below to verify board operation:

- 1) Connect 5V on IN. Verify OUT is 5V and LED1 is on.
- 2) Install shunt on JU1. The OUT voltage goes down.
- 3) Remove shunt on JU1. OUT is 5V.
- 4) Increase IN voltage. Verify OUT voltage follows IN voltage.
- 5) The switch turns off, OUT voltage goes down, and LED1 turns off when IN voltage goes up to about 13.75V.

Detailed Description

The MAX14699 EV kit is a fully assembled and tested circuit board demonstrating the MAX14699 high accuracy, surge protected overvoltage protector device in a 12-bump wafer-level package (WLP).

LED Indicator

The EV kit features LED1 that indicates $\overline{\text{ACOK}}$ is asserted.

Enable Pin

Use jumper JU1 and JU2 to set $\overline{\text{EN}}$ pin connection. (Table 1)

OVLO

Use jumper JU3 to choose OVLO pin connection. (Table 2)

Digital Voltage

Use jumper JU4 to power digital voltage from V_{IN} . (Table 3)

Table 1. JU1, JU2 Jumper Setting

JUMPER	SHUNT POSITION	DESCRIPTION
JU1	Installed	$\overline{\text{EN}}$ is pulled up.
	Not installed*	$\overline{\text{EN}}$ is pulled down.
JU2	Installed	$\overline{\text{EN}}$ is connected to TP8 (external control).
	Not installed*	$\overline{\text{EN}}$ is not connected to TP8.

*Default position.

Table 2. JU3 Jumper Setting

JUMPER	SHUNT POSITION	DESCRIPTION
JU3	Installed*	OVLO is connected to ground. Internal OVLO threshold is used.
	Not installed	OVLO is connected to external resistor divider. Adjustable OVLO threshold is used.

*Default position.

Table 3. JU4 Jumper Setting

JUMPER	SHUNT POSITION	DESCRIPTION
JU4	Installed*	U2 is powered from V_{IN} .
	Not installed	U2 is not powered from V_{IN} . Please disconnect U2 from V_{IN} when testing high/surge voltage.

*Default position.

Ordering Information


PART	TYPE
MAX14699EVKIT#	EVKIT

#Denotes RoHS compliant.


MAX14699 EV Kit Bill of Materials

ITEM	REF_DES	DNIDNP	QTY	MFG PART #	MANUFACTURER	VALUE	DESCRIPTION	COMMENTS
1	C1	-	1	06035C102KAT2A	AVX	1000PF	CAPACITOR; SMT (0603); CERAMIC CHIP; 1000PF; 50V; TOL=10%; TG=-55 DEGC TO +125 DEGC; TC=X7R	
2	C2	-	1	C0603C105K3PAC; GRW188R61E105KA12; 06033D105KAT2A	KEMET; MURATA; AVX	1UF	CAPACITOR; SMT (0603); CERAMIC CHIP; 1UF; 25V; TOL=10%; TG=-55 DEGC TO +85 DEGC;	
3	C3	-	1	TAJB475M035RNU	AVX	4.7UF	CAPACITOR; SMT (3528); TANTALUM CHIP; 4.7UF; 35V; TOL=20%; TG=-55 DEGC TO +125 DEGC; AUTO	
4	C4	-	1	TPSA106M010R0900; T491A106M010AT	AVX; KEMET	10UF	CAPACITOR; SMT (3216); TANTALUM CHIP; 10UF; 10V; TOL=20%	
5	JU1-JU4	-	4	68001-202HLF	FCI CONNECT	68001-202HLF	CONNECTOR; MALE; THROUGH HOLE; BERGSTIK BREAKAWAY HEADER; STRAIGHT; 2PINS	
6	LED1	-	1	LG N971-KN-1	OSRAM	LG N971-KN-1	DIODE; LED; SMT (1206); PV=2.8V; IF=0.025A; -30 DEGC TO +85 DEGC; GREEN	
7	R1	-	1	CRCW08051M00FK; RC0805FR-071ML	VISHAY DALEYAGEO PHICOMP	1M	RESISTOR; 0805; 1M; 1%; 100PPM; 0.125W; THICK FILM	
8	R3	-	1	RC0805JR-070RL	YAGEO PHYCOMP	0	RESISTOR; 0805; 0 OHM; 5%; JUMPER; 0.125W; THICK FILM	
9	R4	-	1	CRCW0805100KFK; RK73H2ATTD1003; ERJ-6ENF1003V	VISHAY DALEIKOA SPEER/PANASONIC	100K	RESISTOR; 0805; 100K; 1%; 100PPM; 0.125W; THICK FILM	
10	R5	-	1	CRCW08051K00FK; ERJ-6ENF1001V; MCR10EZHF1001; RC0805FR-071KL	VISHAY DALE; PANASONIC; ROHM; YAGEO	1K	RESISTOR; 0805; 1K; 1%; 100PPM; 0.125W; THICK FILM	
11	SU1-SU4	-	4	STC02SYAN	SULLINS ELECTRONICS CORP.	STC02SYAN	TEST POINT; JUMPER; STR; TOTAL LENGTH=0.256IN; BLACK; INSULATION=PBT CONTACT=PHOSPHOR BRONZE; COPPER PLATED TIN OVERALL	
12	TB1, TB2	-	2	393570002	MOLEX	393570002	CONNECTOR; FEMALE; THROUGH HOLE; 0.3MM PITCH BEAU EUROSTYLE FIXED MOUNT PCB TERMINAL BLOCK; RIGHT ANGLE; 2PINS	
13	TP1, TP3, TP8, TP10, TP11	-	5	5010	KEYSTONE	N/A	TESTPOINT WITH 1.80MM HOLE DIA, RED, MULTIPURPOSE;	
14	TP2, TP4, TP9	-	3	5011	KEYSTONE	N/A	TEST POINT; PIN DIA=0.125IN; TOTAL LENGTH=0.445IN; BOARD HOLE=0.063IN; BLACK;	
15	TP5-TP7	-	3	5013	KEYSTONE	N/A	PHOSPHOR BRONZE WIRE SILVER PLATE FINISH; TEST POINT; PIN DIA=0.125IN; TOTAL LENGTH=0.445IN; BOARD HOLE=0.063IN; ORANGE; PHOSPHOR BRONZE WIRE SILVER PLATE FINISH;	
16	U1	-	1	MAX14699EWC+	MAXIM	MAX14699EWC+	EVKIT PART-IC; PROT; HIGH ACCURACY; SURGE-PROTECTED OVERVOLTAGE PROTECTOR; WLP12 1.98X1.28	
17	U2	-	1	LD1086DT33	ST MICROELECTRONICS	LD1086DT33	IC; VREG; 1.5A FIXED LOW DROP POSITIVE VOLTAGE REGULATOR; DPAK	
18	C7	DNP	0	N/A	N/A	OPEN	PACKAGE OUTLINE 0805 NON-POLAR CAPACITOR	
19	R2	DNP	0	N/A	N/A	OPEN	PACKAGE OUTLINE 0805 RESISTOR	
20	PCB	-	1	MAX14699	MAXIM	PCB	PCB Board:MAX14699 EVALUATION KIT	
TOTAL			33					


MAX14699 EV Kit PCB Layout Diagrams

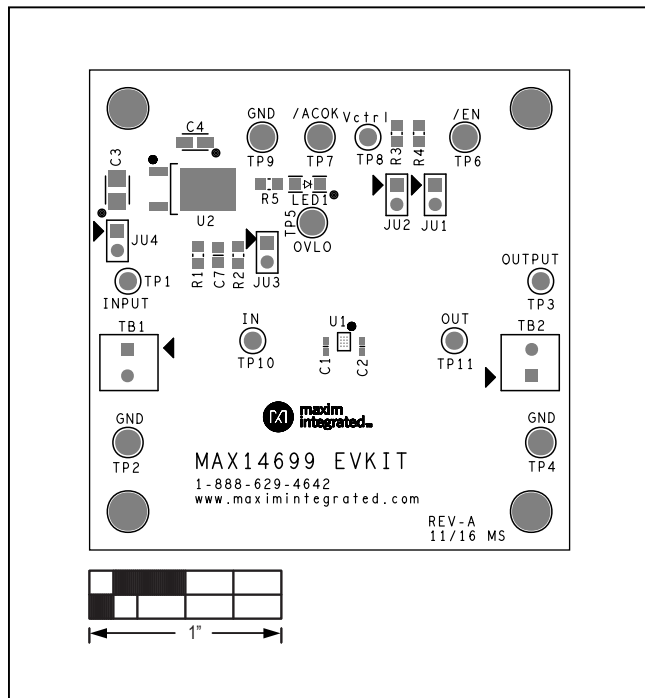

MAX14699 EV Kit—Top Silkscreen

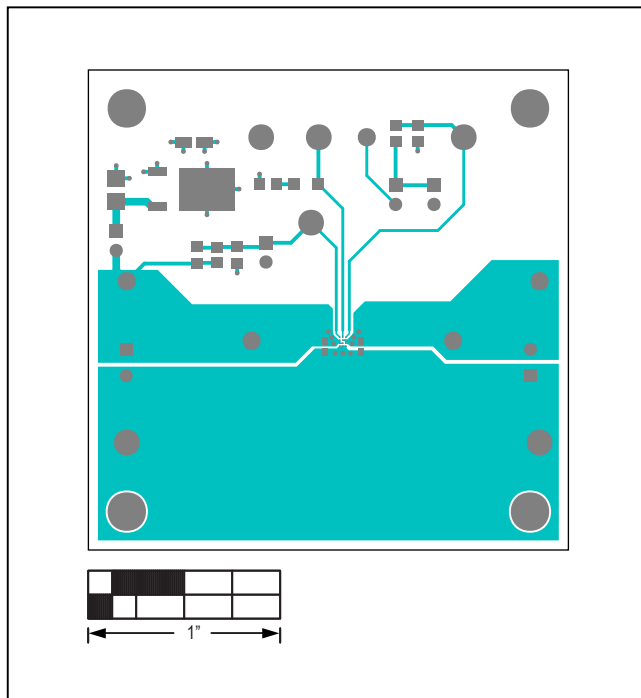


MAX14699 EV Kit—Top

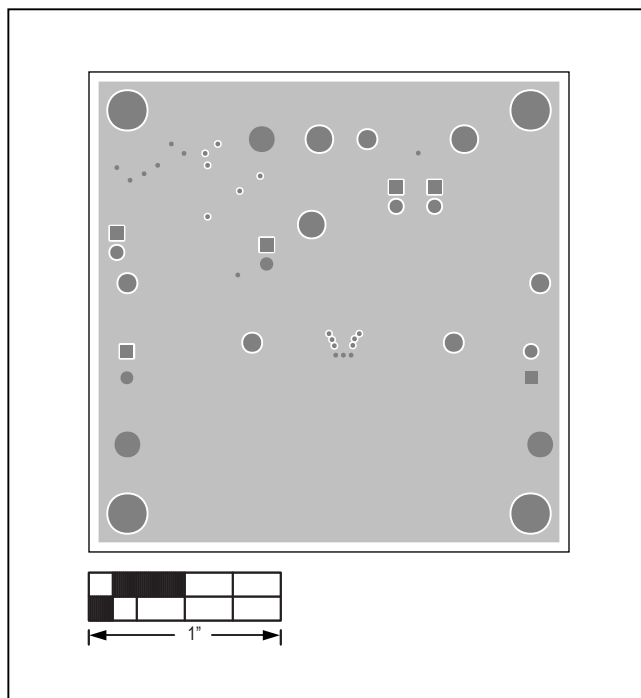


MAX14699 EV Kit—Layer 2 GND

MAX14699 EV Kit PCB Layout Diagrams (continued)

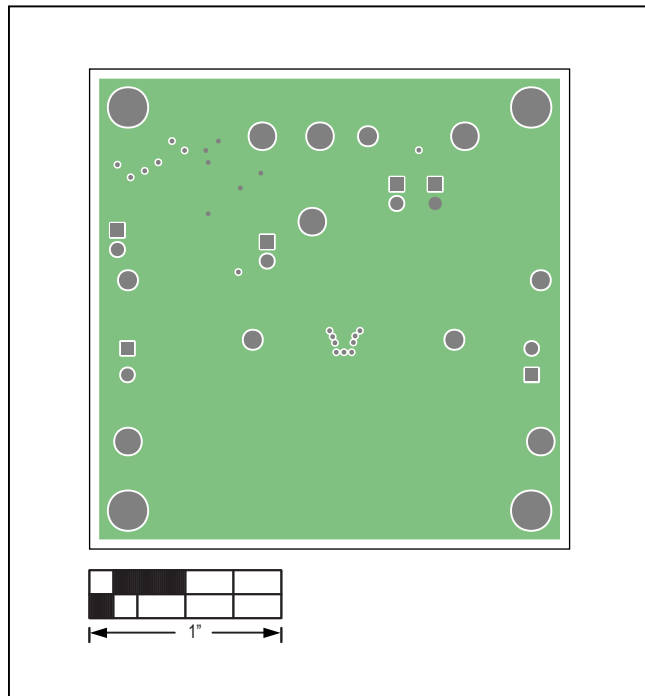

MAX14699 EV Kit—Layer 3 Power

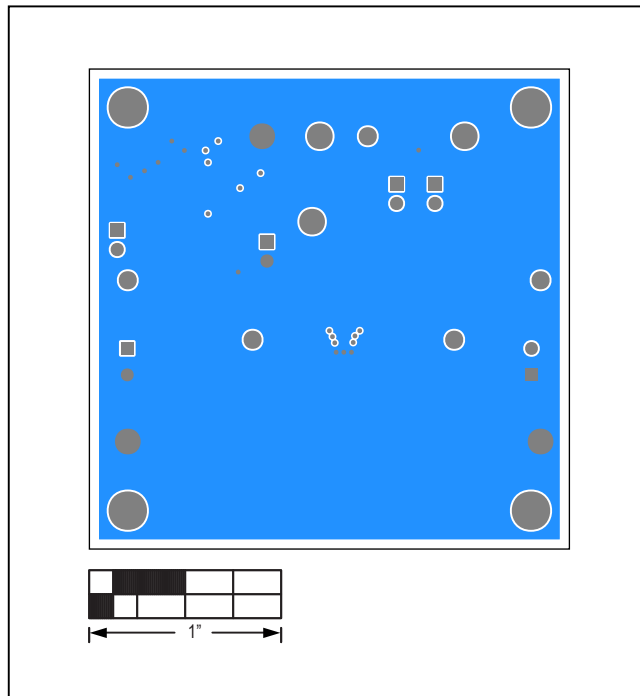

MAX14699 EV Kit—Bottom

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	11/16	Initial release	—

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at www.maximintegrated.com.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9