


G9ED-1-B-AQ

DC Power Relay (150A type)

Capable of Interrupting High-voltage, High-current Loads

- A compact relay (L73 x W36x H67.2mm) capable of switching DC400V, 150A. (Max. 300A can be applied)
- The switching section and driving section are gas-injected and hermetically sealed, allowing these compact relays to interrupt high-current. The sealed construction also achieves no arc space, space saving, and helps to ensure safe applications. In addition, the contacts have a high contact reliability that is unaffected by ambient atmosphere.
- Downsizing of parts and optimum design allow no restrictions on the mounting direction.

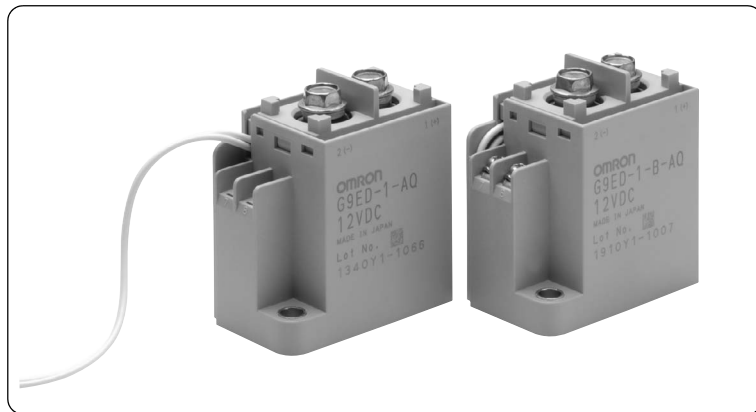

■ Type standard

G9ED-□-□-□-□
① ② ③ ④

	Classification	Symbol	Symbol Meaning of the symbol
①	Number of contact poles	1	1 pole
②	Contact structure	Blank	1a contact
③	Coil terminal form	B	M3.5 screw terminal
		Blank	Lead wires
④	Automotive use	AQ	Available for automotive use

■ Classification

Classification	Terminal form		Contact structure	Rated coil voltage	Type name
	Coil terminals	Contact terminals			
Switching / current conduction type	Screw terminals	Screw terminals	1a	DC12V DC24V	G9ED-1-B-AQ
	Lead wires				G9ED-1-AQ

Note:1. Come with two M6 screws for main terminals(contacts).
2. Come with two M3.5 screws for screw-type coil terminal products.
3. If you are interested in a connector joint for F-coil terminal, please contact our sales representatives.

■ Ratings

● Operation coil

Rated voltage (V)	Rated current (mA)	Coil resistance (Ω)	Operating voltage (V)	Release voltage (V)	Maximum voltage (V)	Power consumption (W)
DC 12	333	36.0	75% or less of rated voltage	8% or more of rated voltage	130% of rated voltage (at 23°C within 10min.)	Approx. 4
DC 24	167	144.0				

Note:1. Values of the rated current and the coil resistance are at coil temperature of +23°C, and have a tolerance of ±10%.
2. The figures for the operating characteristics are at a coil temperature of 23°C.
3. Value of the maximum voltage is the maximum voltage that can be applied to the relay coil.

● Switching area

Item	Resistance load
	G9ED-1(-B)-AQ
Rated load	DC400V 150A
Rated current	150A
Maximum switching voltage	400V
Maximum switching current	150A

Please confirm Omron Safety Precautions for all automotive relays first.
Omron can not guarantee automotive relays before finish making a contract with product specifications.

■ Performance

Item		G9ED-1(-B)-AQ
Contact resistance *1		30 mΩ or less (Typ. 0.2 mΩ)
Contact voltage drop		0.1V or less (at 150A)
Operating time		50 ms or less
Release time		30 ms or less
Insulation resistance*2	Between coil and contacts	1,000 MΩ or more
	Between homopolar contacts	1,000 MΩ or more
Withstand voltage	Between coil and contacts	AC2,500V for 1min.
	Between homopolar contacts	AC2,500V for 1min.
Vibration tolerance	Durability	5 to 200 to 5Hz Single amplitude 0.75mm (Acceleration: 2.94 to 88.9m/s²)
	Malfunction	5 to 200 to 5Hz Single amplitude 0.75mm (Acceleration: 2.94 to 88.9m/s²)
Shock resistance	Durability	490 m/s²
	Malfunction	100 m/s²
Mechanical endurance *3		200,000 times or more
Electrical endurance *4	Resistance load	DC400V 150A 50 times or more
		DC400V 30A 3,000 times or more
Short time carry current		300A (for 3 min)
		180A (for 20 min)
Maximum interruption current		DC300V 750A (10 times)
Overload interruption		DC400V 300A (20 times or more)
Reverse polarity interruption		DC200V -125A (200 times or more)
Minimum load current		1A
Ambient temperature		-40 to +85°C (with no icing or condensation)
Ambient humidity		5% to 85%RH
Weight (including accessories)		Approx. 320g

Note: All values above are in early time under an ambient temperature of +23°C unless stated.


- *1. Measurement condition: By voltage drop method at DC5V 1A.
- *2. Measurement condition: By insulation resistance at DC500V.
- *3. Test condition / Switching frequency: 3,600 times/hour.
- *4. Test condition / Switching frequency: 60 times/hour.

■ Dimensions (Unit: mm)


●Relay with Screw Terminals G9ED-1-B-AQ



Size (mm)	Tolerance (mm)
to 10	±0.3
10 to 50	±0.5
50 to	±1


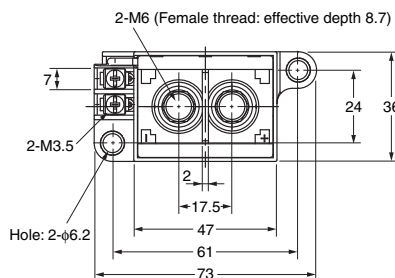


Terminal arrangement / Internal connections (BOTTOM VIEW)



Note: Be sure to connect terminals with the correct polarity. Coils do not have polarity.


Mounting holes (BOTTOM VIEW)

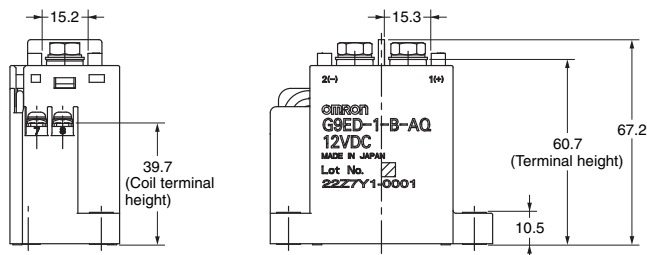


●Relay with Lead Wires G9ED-1-AQ



Size (mm)	Tolerance (mm)
to 10	±0.3
10 to 50	±0.5
50 to	±1


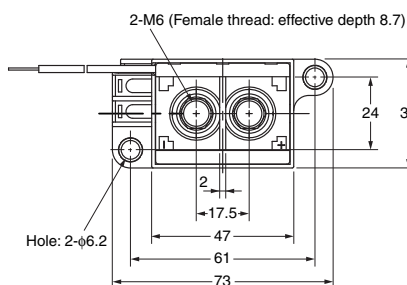


Terminal arrangement / Internal connections (BOTTOM VIEW)



Note: Be sure to connect terminals with the correct polarity. Coils do not have polarity.

Mounting holes (BOTTOM VIEW)

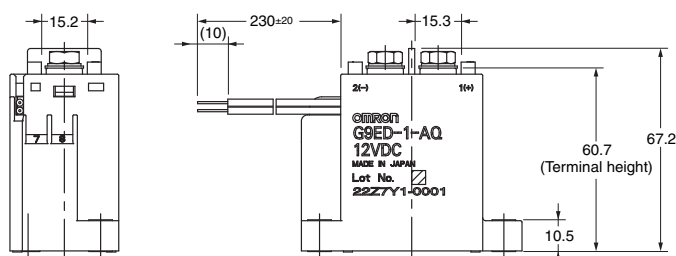

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9