

C&K 3 Series Thumbwheel Switches



Features/Benefits

- Most complete product offering in the industry
- Spacers available to fit most panel cutouts
- Front or rear mounting options

Typical Applications

- Test & measurement equipment
- Industrial equipment
- Computer devices

Specifications

CONTACT RATING:
CARRY: 1 AMP continuous.
SWITCH: 100 mA max.
OPERATING VOLTAGE: 50 mV to 28 V DC or 120 V AC.
ELECTRICAL LIFE: 100,000 actuations.
CONTACT RESISTANCE: Below 100 m Ω typ. initial @
2-4 V DC, 100 mA.
INSULATION RESISTANCE: 10⁹ Ω min.
DIELECTRIC STRENGTH: 500 Vrms min. @ sea level
between common terminal and any output.
OPERATING TEMPERATURE: -10°C to 65°C.

Materials

HOUSING: ABS plastic.
THUMBWHEEL: ABS plastic.
ROTOR CONTACTS: Precious metal on copper alloy.
STATOR CONTACTS: Hard gold over nickel over copper
on epoxy fiberglass.

NOTE: Specifications and materials listed above are for switches with standard options
For information on specific and custom switches, consult Customer Service Center.

* Note: All models listed are RoHS compliant. See Technical Data section of this catalog for
RoHS compliant and compatible definitions and specifications.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and
described on pages N-9 thru N-12. For additional options not shown in catalog, consult Customer Service Center.
Consult factory for illumination availability.

Thumbwheel & Pushwheel

Series	3	Thumbwheel switch
Number of Sections	0	Switch section
	1	1 Switch section
	2	2 Switch sections
	3	3 Switch sections
	4	4 Switch sections
	5	5 Switch sections
	6	6 Switch sections
	7	7 Switch sections
	8	8 Switch sections
	9	More than 8 switch sections
Function Code	11	Decimal, SP, 10 position
	14	Resistor decade
	21	BCD, 10 position
	23	Complement of BCD, 10 position
	27	BCD, 10 position
	31	BCD, 10 position
	71	BCH, 16 position
Mounting Style	00	Snap-in, front mount
	09	Snap-in, front mount*
	10	Rear mount
	19	Rear mount*
	20	Rear mount
	29	Rear mount*
Terminations	0	Type 0
	1	Type 1, extended type 0
	N	Solder pins with .100" spacing**
	P	Solder pins with .156" spacing**
	9	Any combination
Color/Marking/Stops	0	Matte black body, gloss black wheel, white marking
Seal	0	No seal
	1	Sealed contacts
	2	Dust lens
	3	Sealed contacts & dust lens

*X9 mounting styles must be ordered with '0' number of sections.

** Note: Termination option N (RoHS compliant) replaced termination option 3 (Non-RoHS compliant).
Termination option P (RoHS compliant) replaced termination option B (Non-RoHS compliant).




Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change

C&K 3 Series Thumbwheel Switches

SERIES

3 THUMBWHEEL SWITCHES

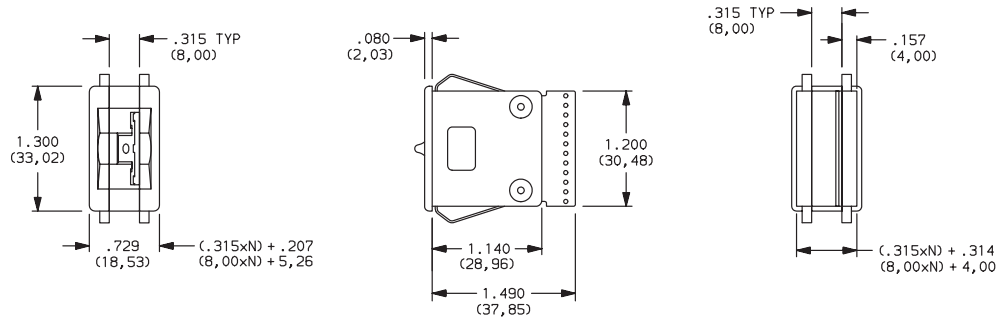

NUMBER OF SECTIONS

- 0** Switch section only, no assembly. Blank bodies are considered sections; endplates are not sections. Must be ordered with 09 or 19 mounting style options, see pages N-10 and N-11.
- 1-8** Number of switch sections in assembly, includes endplates.
- 9** More than 8 switch sections, specify on CONFIGURATION FORM, page N-15 and consult Customer Service Center.

NOTE: Endplates and blank sections available separately, see pages N-13 and N-14.

FUNCTION CODE


- 11** DECIMAL-1 POLE; 10 POSITION
- 14** RESISTOR DECADE; 1-2-2-2-2 CODE (RESISTORS NOT SUPPLIED)
- 21** BCD 1-2-4-8; 10 POSITION

W H E E L	SIGNALS CONNECTED TO COMMON SIGNAL C											C
0	●											●
1		●										●
2			●									●
3				●								●
4					●							●
5						●						●
6							●					●
7								●				●
8									●			●
9										●		●
	2	3	4	5	6	7	8	9	10	11	12	
TERM. LOCATION												

Available Terminations: 0, 1, N
See fig. 1, page N-12.

W H E E L	SWITCH CIRCUIT											
0	●	●	●	●	●	●	●	●	●	●	●	
1	●	●	●	●	●	●	●	●	●	●	●	
2	●	●	●	●	●	●	●	●	●	●	●	
3	●	●	●	●	●	●	●	●	●	●	●	
4	●	●	●	●	●	●	●	●	●	●	●	
5	●	●	●	●	●	●	●	●	●	●	●	
6	●	●	●	●	●	●	●	●	●	●	●	
7	●	●	●	●	●	●	●	●	●	●	●	
8	●	●	●	●	●	●	●	●	●	●	●	
9	●	●	●	●	●	●	●	●	●	●	●	
	11	9	7	5	3	1	2	12				
TERM. LOCATION												

Available Terminations: 1
See fig. 1, page N-12.



W H E E L	SIGNALS CONN. TO COMM. SIG. C					C
0	●					●
1	●					●
2		●				●
3	●		●			●
4				●		●
5	●		●			●
6					●	●
7	●		●			●
8				●		●
9	●					●
	3	5	7	11	9	
TERM. LOCATION						

Available Terminations: 0, 1, N
See fig. 1, page N-12.

NOTE: For terminal location diagram, see page N-12.



Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change

www.ittcannon.com



C&K 3 Series Thumbwheel Switches

FUNCTION CODE

- 23

COMPLEMENT OF BCD 1-2-4-8;
10 POSITION
- 27

BCD 1-2-4-8; 10 POSITION
- 31

BCD 1-2-4-8; 10 POSITION
- 71

BINARY CODED HEXADECIMAL,
16 POSITION

W H E E L	SIGNALS CONN. TO COMM. SIG. C				
	1	2	4	8	C
0	●	●	●	●	●
1	●	●	●	●	●
2	●	●	●	●	●
3	●	●	●	●	●
4	●	●	●	●	●
5	●	●	●	●	●
6	●	●	●	●	●
7	●	●	●	●	●
8	●	●	●	●	●
9	●	●	●	●	●
	3	9	11	5	7
	TERM. LOCATION				

Available Terminations: 0, 1, N
See fig. 1, page N-12.

W H E E L	SIGNALS CONN. TO COMM. SIG. C				
	1	2	4	8	C
0	●				●
1	●				●
2	●	●			●
3	●	●			●
4			●		●
5	●				●
6	●	●			●
7	●	●			●
8				●	●
9	●				●
	4	5	1	2	3
	TERM. LOCATION				

Available Terminations: P
See fig. 2, page N-12.

W H E E L	SIGNALS CONN. TO COMM. SIG. C				
	1	2	4	8	C
0	●				●
1	●				●
2	●	●			●
3	●	●			●
4			●		●
5	●				●
6	●	●			●
7	●	●			●
8				●	●
9	●				●
	2	3	11	9	8
	TERM. LOCATION				

Available Terminations: 0, 1, N
See fig. 1, page N-12.

W H E E L	SIGNALS CONN. TO COMM. SIG. C				
	1	2	4	8	C
0	●				●
1	●				●
2	●	●			●
3	●	●			●
4			●		●
5	●				●
6	●	●			●
7	●	●			●
8	●			●	●
9	●				●
A	●	●			●
B	●	●			●
C			●		●
D	●				●
E	●	●			●
F	●	●			●
	3	5	7	11	9
	TERM. LOCATION				

Available Terminations: 0, 1, N
See fig. 1, page N-12.

NOTE: For terminal location diagram, see page N-12.

MOUNTING STYLE


Type 0 Snap-In Front Mount

MOUNTING STYLE	DIM. 'A'
00	(.315 x N) + .326 (8,00 x N) + (8,28)

N = Number of sections.




Recommended panel thickness:
0.46-.125
(1,16-3,18)

PANEL MOUNTING



- 00

SWITCH ASSEMBLY W/ ENDPLATES--.315 (8,00) SECTION PITCH




N = Number of sections.

- 09

SWITCH SECTION ONLY--UNASSEMBLED WITHOUT ENDPLATES OR SPACERS
(Must be ordered with number of sections option "0", see Page N-9.)

NOTE: Endplates, blank sections, spacers
and assembly hardware available separately, see pages N-13 and N-14.



Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change

www.ittcannon.com



C&K 3 Series Thumbwheel Switches

MOUNTING STYLE


Type 1 Rear Mount

MOUNTING STYLE	DIM. 'A'	DIM. 'B'
10	$(.350 \times N) + .340$ (8,89 x N) + (8,64)	$(.350 \times N) + .560$ (8,89 x N) + (14,22)




N = Number of sections.

Recommended panel thickness:
0.46-.125
(1,16-3,18)

PANEL MOUNTING

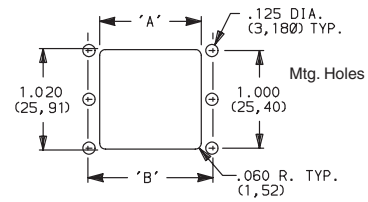

10 SWITCH ASSEMBLY W/ ENDPLATES--.350 (8,89) SECTION PITCH



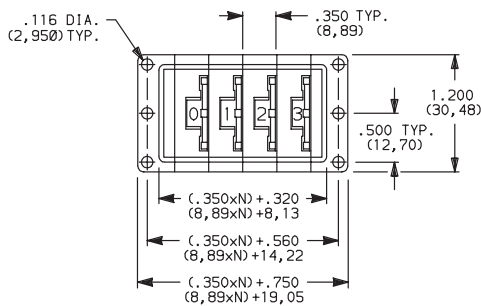


N = Number of sections.

19 SWITCH SECTION ONLY--UNASSEMBLED WITHOUT ENDPLATES OR SPACERS (Must be ordered with number of sections option "0", see Page N-9.)

Type 2 Rear Mount

20 SWITCH ASSEMBLY W/ ENDPLATES--.350 (8,89) SECTION PITCH

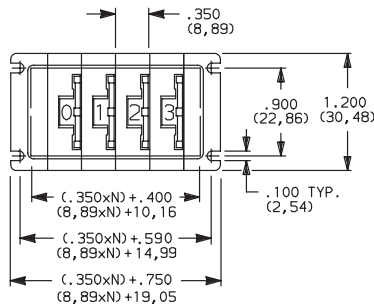

N = Number of sections.

29 SWITCH SECTION ONLY--UNASSEMBLED WITHOUT ENDPLATES OR SPACERS (Must be ordered with number of sections option "0", see Page N-9.)

Thumbwheel & Pushwheel



N





NOTE: Endplates, blank sections, spacers and assembly hardware available separately, see pages N-13 and N-14.



Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change

C&K 3 Series Thumbwheel Switches

TERMINATIONS

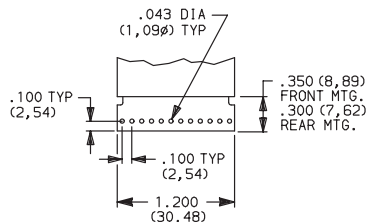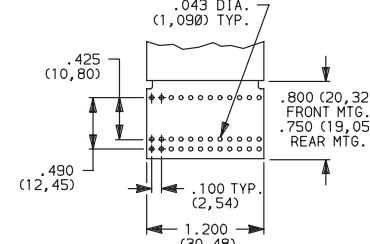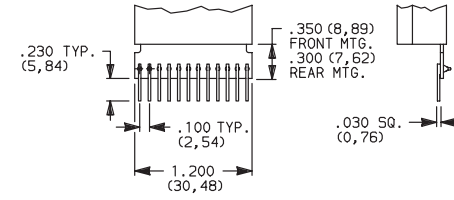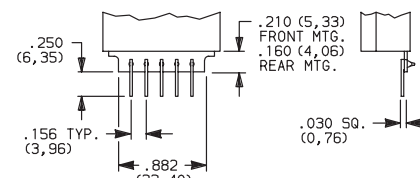- 0** TYPE 0
- 
- 1** TYPE 1, EXTENDED TYPE 0
- 
- Signal traces cut except for common(s).
- N** SOLDER PINS WITH .100" SPACING
- 
- 9** ANY COMBINATION OF TERMINATION CONFIGURATIONS OR SPECIAL TERMINATIONS.
- Specify on configuration form, page N-15 and consult Customer Service Center.
- P** SOLDER PINS WITH .156" SPACING
- 
- PC Board 1/32" (0,79) thick.
- NOTE:** All terminal holes shown may not be present for all function codes, consult Customer Service Center. Terminal connector available for termination options 0 & 1, see page N-14.
- NOTE:** Termination option N (RoHS compliant) replaced termination option 3 (Non-RoHS compliant). Termination option P (RoHS compliant) replaced termination option B (Non-RoHS compliant).

Terminal Location Numbers




FIG. 1





FIG. 2



NOTE: See function codes, pages N-9 and N-10, for signal locations.


COLOR/MARKING/STOPS

- 0** MATTE BLACK HOUSING (Gloss black wheel with white characters; no stops.)


NOTE: Stop pins are available separately, see page N-14.

SEAL

- 0** UNSEALED SWITCHING CONTACTS.
- 1** SEALED SWITCHING CONTACTS. (Sealing is by means of an o-ring rotary seal and a cured-in-place elastomer gasket. Switching contact area is protected from moisture, oil, and airborne contaminants.)
- 2** DUST LENS. (Protects the character face of the wheel from abrasion and dirt.)
- 3** SEALED SWITCHING CONTACTS AND DUST LENS



Dust Lens



Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change

www.ittcannon.com

C&K 3 Series Thumbwheel Switches


AVAILABLE HARDWARE

Blank sections, Type 0, .315 THK.  PART NO. 413602000 W/RIB-BLACK 400502000 W/RIB & W/OUT SPRINGS-BLACK	Blank sections, Front mount, Type 0, .315 THK.  PART NO. 413502000 PLAIN-BLACK 400702000 PLAIN & W/OUT SPRINGS-BLACK	Blank sections, Rear mount, Type 1, .350 THK.  4006 4008 PART NO. 400602000 W/RIB-BLACK 400802000 PLAIN-BLACK
Blank sections, Rear mount, Type 2, .350 THK.  4734 4733 PART NO. 473402000 W/RIB-BLACK 473302000 PLAIN-BLACK	End plates, Front mount, Type 0  PART NO. 413402000 BLACK Two required for complete assembly.	End plates, Rear mount, Type 1  PART NO. 400402000 BLACK Two required for complete assembly.
End plates, Rear mount, Type 2  PART NO. 473202000 BLACK Two required for complete assembly.	Spacers, Front mount, Type 0 & 3, .078 THK. (Makes section pitch 10mm)  PART NO. 410802000 BLACK	Stop pins  PART NO. 402900000

C&K 3 Series Thumbwheel Switches

AVAILABLE HARDWARE

Terminal connector



605A00000



605A02000

PART NO.
605A00000 PC
605A02000 SOLDER LUG

Fits 0 & 1 terminations only.

Screws for field assembly of thumbwheel switches
(2 screws needed per assembly + 403500000 nuts)

SCREW PART NUMBER (0-80 UNF THD. SIZE)	NUMBER OF SECTIONS IN ASSEMBLY	
	FRONT MOUNTING	REAR MOUNTING
	MTG. STYLE - 00	MTG. STYLE - 10
412700000	1-2	1-2
412701000	3-4	3
412702000	5-7	4-6

Nut



Two nuts required per assembly and screws.

PART NO.
403500000

Nut driver (For 403500000 nut)



PART NO.
406100652

Thumbwheel & Pushwheel



N

C&K 3 Series Thumbwheel Switches

Configuration Form

GRAY SHADED AREAS TO BE FILLED IN BY CUSTOMER SERVICE.

CATALOG PART NO.

3

C&K PART NUMBER

C&K PART NUMBER

COMPANY NAME


ADDRESS TEL.#

CUSTOMER CONTACT DATE

ORIGINATED BY SALES REP.

CUSTOMER
PRINT
REVISION:

DETAILS:

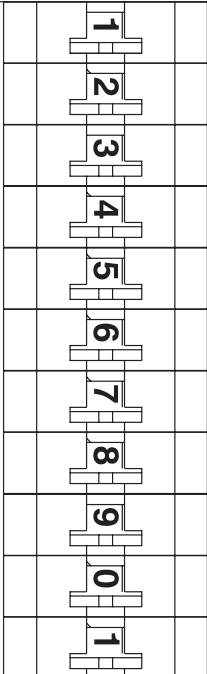THUMBWHEEL SECTIONS	NO. OF SEC.	FUNCTION CODE – TERMINATIONS – COLOR/MARKING/STOPS/SEAL – ILLUMINATION ENTER OPTION CODES IN APPROPRIATE BOXES. FUNCTION CODES INCLUDE BLANK SECTIONS (SEE PAGES M-9 & M-10).	DESCRIBE IN APPROPRIATE ROW
	1	3 - - - - -	
	2	3 - - - - -	
	3	3 - - - - -	
	4	3 - - - - -	
	5	3 - - - - -	
	6	3 - - - - -	
	7	3 - - - - -	
	8	3 - - - - -	
	9	3 - - - - -	
	10	3 - - - - -	
	11	3 - - - - -	

QUALITY CONTROL INSTRUCTIONS

PRODUCTION APPROVAL DATE

Q.C. APPROVAL DATE

REV. INITIALS DATE

FOR SWITCHES WITH MORE THAN 11 SECTIONS, CONTINUE ON ADDITIONAL SHEETS.

SPECIAL INSTRUCTIONS OR SPECIFICATIONS:

SHEET ____ OF ____



Thumbwheel & Pushwheel



Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9