

# PC Board Fuses - Sub Miniature with Leads

## GFA, GLN and GLX Series



**Catalog Symbol:** GFA

**Sub Miniature with Axial Leads**

**Non Time-Delay**

0.145" x 0.300" (3.7mm x 7.6mm)

**Interrupting Rating:** 50 AIC

**Agency Approvals:**

UL Recognized, (½-5A) Guide JDYZ2, File 19180

CSA Certified, (½-5A) File 53787, Class 1425-01

### Electrical Ratings (Catalog Symbol and Amps)

#### 125 Volts AC

| Amps                 | Test Spec. | Color Code (Opp. Ends) |     | Amps                | Test Spec. | Color Code (Opp. Ends) |     |
|----------------------|------------|------------------------|-----|---------------------|------------|------------------------|-----|
| GFA- $\frac{1}{200}$ | A          | Red                    | Blk | GFA- $\frac{3}{10}$ | A          | Grn                    | Grn |
| GFA- $\frac{1}{100}$ | A          | Red                    | Orn | GFA- $\frac{1}{10}$ | A          | Blu                    | Blu |
| GFA- $\frac{1}{64}$  | A          | Red                    | Grn | GFA- $\frac{1}{2}$  | B          | Orn                    | Grn |
| GFA- $\frac{1}{50}$  | A          | Red                    | Wht | GFA- $\frac{1}{10}$ | B          | Orn                    | Blu |
| GFA- $\frac{1}{32}$  | A          | Red                    | Brn | GFA- $\frac{1}{4}$  | B          | Orn                    | Pur |
| GFA- $\frac{1}{20}$  | A          | Yel                    | Yel | GFA-1               | B          | Yel                    | Grn |
| GFA- $\frac{1}{16}$  | A          | Brn                    | Brn | GFA-1 ½             | B          | Yel                    | Pur |
| GFA- $\frac{1}{10}$  | A          | Red                    | Red | GFA-2               | B          | Grn                    | Blu |
| GFA- $\frac{1}{8}$   | A          | Orn                    | Orn | GFA-2 ½             | B          | Grn                    | Brn |
| GFA- $\frac{1}{4}$   | B          | Red                    | Yel | GFA-3               | B          | Blu                    | Pur |
| GFA- $\frac{1}{2}$   | B          | Red                    | Blu | GFA-4               | B          | Pur                    | Brn |
| GFA- $\frac{1}{1}$   | B          | Red                    | Pur | GFA-5               | B          | Brn                    | Blk |

#### 32 Volts AC

| Amps   | Test Spec. | Color Code (Opp. Ends) |     | Amps   | Test Spec. | Color Code (Opp. Ends) |     |
|--------|------------|------------------------|-----|--------|------------|------------------------|-----|
| GFA-7  | A          | Pur                    | Grn | GFA-12 | A          | Blk                    | Blu |
| GFA-8  | A          | Grn                    | Blk | GFA-15 | A          | Blk                    | Pur |
| GFA-10 | A          | Yel                    | Brn | —      |            |                        |     |

### Test Specifications

| Load | Opening Time  |                 | Wire Lead Size |                       |
|------|---------------|-----------------|----------------|-----------------------|
|      | "A"           | "B"             | No.            | Fuse                  |
| 100% | 4 hrs. (min.) | —               | 24             | $\frac{1}{200}$ to 5A |
| 150% | —             | *10 sec. (max.) | 18             | 6 to 12A              |
| 200% | 10 sec.       | —               | 16             | 15A                   |

### Carton Quantity and Weight

| Amp Ratings         | Carton Qty. | Weight* |      |
|---------------------|-------------|---------|------|
|                     |             | Lbs.    | Kg.  |
| $\frac{1}{200}$ —15 | 100         | 0.171   | 52.6 |

\*Weight per carton.

### General Information:

- Glass tube fuses for protection of subminiature devices.
- Tinned wire leads solder into circuit.
- Withstand high-shock and vibration.
- Color-coded for amp rating.
- Axial leads (1 ½") can be fed through wire forming machine.



**Catalog Symbol:** GLN

**Sub Miniature with Radial Leads**

**Non Time-Delay**

0.145" x 0.300" (3.7mm x 7.6mm)

**Interrupting Rating:** 50 AIC

### Electrical Ratings (Catalog Symbol and Amps)

#### 125 Volts AC

| Amps                 | Test Spec. | Color Code (Opp. Ends) |     | Amps                | Test Spec. | Color Code (Opp. Ends) |     |
|----------------------|------------|------------------------|-----|---------------------|------------|------------------------|-----|
| GLN- $\frac{1}{100}$ | A          | Red                    | Orn | GLN- $\frac{1}{10}$ | A          | Red                    | Red |
| GLN- $\frac{1}{32}$  | A          | Red                    | Brn | GLN- $\frac{1}{10}$ | A          | Grn                    | Grn |
| GLN- $\frac{1}{20}$  | A          | Yel                    | Yel | GLN- $\frac{1}{10}$ | A          | Blu                    | Blu |
| GLN- $\frac{1}{16}$  | A          | Brn                    | Brn | —                   |            |                        |     |

#### 32 Volts AC

| Amps  | Test Spec. | Color Code (Opp. Ends) |     | Amps   | Test Spec. | Color Code (Opp. Ends) |     |
|-------|------------|------------------------|-----|--------|------------|------------------------|-----|
| GLN-7 | A          | Pur                    | Grn | GLN-10 | A          | Yel                    | Brn |
| GLN-8 | A          | Grn                    | Blk | —      |            |                        |     |

### Test Specifications

| Load | Opening Time  |                 | Wire Lead Size |                       |
|------|---------------|-----------------|----------------|-----------------------|
|      | "A"           | "B"             | No.            | Fuse                  |
| 110% | 4 hrs. (min.) | —               | 24             | $\frac{1}{200}$ to 5A |
| 150% | —             | *10 sec. (max.) | 18             | 6A to 10A             |
| 200% | *10 sec.      | —               | —              | —                     |

\*Maximum time.

### Carton Quantity and Weight

| Amp Ratings         | Carton Qty. | Weight* |      |
|---------------------|-------------|---------|------|
|                     |             | Lbs.    | Kg.  |
| $\frac{1}{100}$ —10 | 100         | 0.171   | 52.6 |

\*Weight per carton.

### General Information:

- Glass tube fuses for protection of subminiature devices.
- Tinned radial leads spaced for easy assembly on printed circuit chassis.
- Withstand high-shock and vibration.
- Color-coded for amp rating.
- Radial leads (1 ½") can be fed through wire forming machine.

# PC Board Fuses - Sub Miniature with Leads

## GFA, GLN and GLX Series



**Catalog Symbol:** GLX

**Sub Miniature with Radial Leads**

**Non-Time-Delay**

0.145" x 0.300" (3.7mm x 7.6mm)

**Interrupting Rating:** 50 AIC

### Electrical Ratings (Catalog Symbol and Amps)

#### 125 Volts AC

| Amps      | Test Spec. | Color Code (Opp. Ends) | Amps  | Test Spec. | Color Code (Opp. Ends) |
|-----------|------------|------------------------|-------|------------|------------------------|
| GLX-1/4   | B          | Red Pur                | GLX-2 | B          | Grn Blu                |
| GLX-1/2   | B          | Orn Grn                | GLX-3 | B          | Blu Pur                |
| GLX-3/4   | B          | Orn Pur                | GLX-4 | B          | Pur Brn                |
| GLX-1     | B          | Yel Grn                | GLX-5 | B          | Brn Blk                |
| GLX-1 1/2 | B          | Yel Pur                | —     | —          | —                      |

### Wire Lead Size

| No. | Fuse        |
|-----|-------------|
| 24  | 1/100 to 5A |

### Carton Quantity and Weight


| Amp Ratings | Carton Qty. | Weight* |      |
|-------------|-------------|---------|------|
|             |             | Lbs.    | Kg.  |
| 1/4-5       | 100         | 0.171   | 52.6 |

\*Weight per carton.

### General Information:

- Glass tube fuses for protection of subminiature devices.
- Tinned radial leads spaced for easy assembly on printed circuit chassis.
- Withstand high-shock and vibration.
- Color-coded for ampere rating.
- Radial leads (1 1/2") can be fed through wire forming machine.

### Time-Current Characteristics-Total Clear

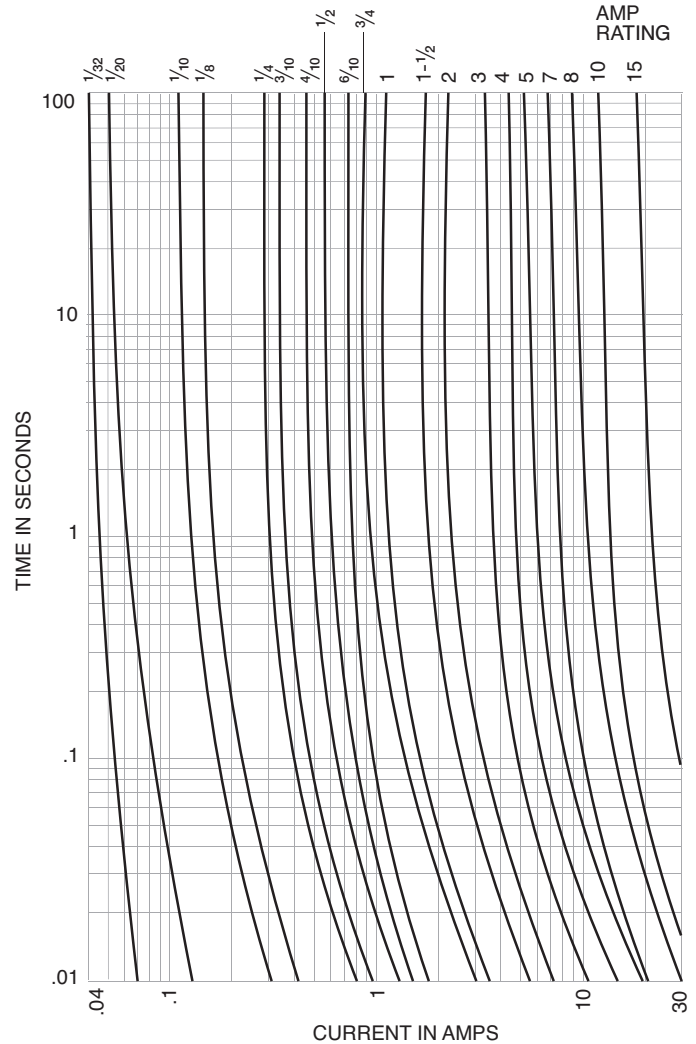

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9