

---

### USB HIGH-SIDE POWER SWITCH

---

NO.EA-091-130827

#### OUTLINE

The R5520H is CMOS-based high-side MOSFET switch IC for Universal Serial Bus (USB) applications. Low ON Resistance (Typ.100mΩ) and low supply current (Typ.20μA at active mode) are realized in this IC.

An over-current limit circuit, thermal shutdown circuit, and an under voltage lockout circuit are built-in as protection circuits. Further, a delay circuit for flag signal after detecting over-current, is embedded to prevent miss-operation of error flag because of inrush current. The R5520H is ideal for applications of protection for USB power supply.


#### FEATURES

- Built-in P-channel MOSFET Switch
- Supply Current .....Typ. 20μA (at Active Mode)
- Switch ON Resistance .....Typ. 100mΩ
- Output Current.....Min. 500mA
- Flag Delay Time .....Typ. 10ms.
- Over- Current Limit / Short Circuit Protection
- Built-in Under Voltage Lockout (UVLO) Function
- Built-in Thermal Shutdown Protection
- Built-in Soft-start Function
- Package .....SOT-89-5

#### APPLICATIONS

- USB Peripherals
- Notebook PCs

BLOCK DIAGRAMS

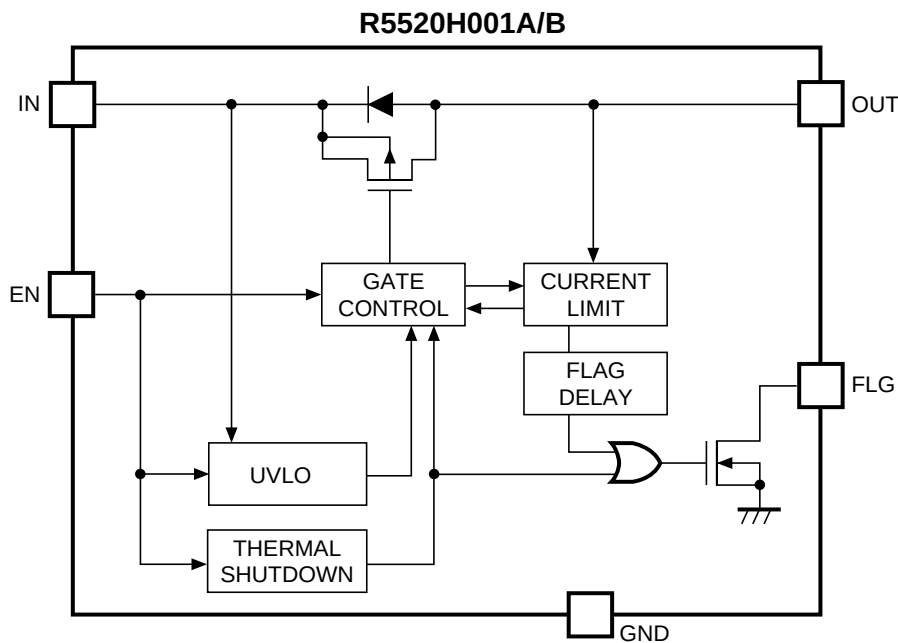


SELECTION GUIDE

The logic of the enable pin for the ICs can be selected at the user's request.

| Product Name                                                                        | Package  | Quantity per Reel | Pb Free | Halogen Free |
|-------------------------------------------------------------------------------------|----------|-------------------|---------|--------------|
| R5520H001*-T1-FE                                                                    | SOT-89-5 | 1,000 pcs         | Yes     | Yes          |
| * : Designation of the logic of the enable pin.<br>(A) "L" active<br>(B) "H" active |          |                   |         |              |

## PIN DESCRIPTIONS

### • SOT-89-5



| Pin No | Symbol | Pin Description             |
|--------|--------|-----------------------------|
| 1      | EN     | Enable Pin                  |
| 2      | GND    | Ground Pin                  |
| 3      | FLG    | FLG pin (Open Drain Output) |
| 4      | IN     | Power Supply Pin            |
| 5      | OUT    | Output Pin                  |

## ABSOLUTE MAXIMUM RATINGS

| Symbol    | Item                                       | Rating               | Unit |
|-----------|--------------------------------------------|----------------------|------|
| $V_{IN}$  | Input Voltage                              | 6.0                  | V    |
| $V_{EN}$  | Enable Pin Input Voltage                   | -0.3 to $V_{IN}+0.3$ | V    |
| $V_{FLG}$ | Flag Voltage                               | -0.3 to 6.0          | V    |
| $I_{FLG}$ | Flag Current                               | 14                   | mA   |
| $V_{OUT}$ | Output Voltage                             | -0.3 to $V_{IN}+0.3$ | V    |
| $I_{OUT}$ | Output Current                             | Internal Limited     |      |
| $P_D$     | Power Dissipation <sup>*1</sup> (SOT-89-5) | 900                  | mW   |
| $T_a$     | Operating Temperature Range                | -40 to 85            | °C   |
| $T_{stg}$ | Storage Temperature Range                  | -55 to 125           | °C   |

<sup>\*1</sup> For Power Dissipation, please refer to PACKAGE INFORMATION.

### ABSOLUTE MAXIMUM RATINGS

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause the permanent damages and may degrade the life time and safety for both device and system using the device in the field. The functional operation at or over these absolute maximum ratings is not assured.

## ELECTRICAL CHARACTERISTICS

## • R5520H001A/B

Ta=25°C

| Symbol            | Item                                   | Conditions                                   | Min. | Typ. | Max. | Unit |
|-------------------|----------------------------------------|----------------------------------------------|------|------|------|------|
| V <sub>IN</sub>   | Input Voltage                          |                                              | 4.0  |      | 5.5  | V    |
| I <sub>DD1</sub>  | Supply Current 1                       | Active <sup>*1</sup> , OUT=open              |      | 20   | 60   | μA   |
| I <sub>DD2</sub>  | Supply Current 2                       | OFF <sup>*2</sup> , OUT=open                 |      | 0.5  | 5.0  | μA   |
| R <sub>ON</sub>   | Switch On Resistance                   | V <sub>IN</sub> =5V, I <sub>OUT</sub> =500mA |      | 100  | 140  | mΩ   |
|                   |                                        | V <sub>IN</sub> =4V, I <sub>OUT</sub> =500mA |      | 110  | 150  | mΩ   |
| t <sub>ON</sub>   | Output Turn-on Delay                   | R <sub>L</sub> =10Ω                          |      | 2    | 12   | ms   |
| t <sub>OFF</sub>  | Output Turn-off Delay                  | R <sub>L</sub> =10Ω                          |      | 5    | 20   | μs   |
| V <sub>UVLO</sub> | UVLO Threshold                         | V <sub>IN</sub> =increasing                  | 2.1  | 2.4  | 2.7  | V    |
|                   |                                        | V <sub>IN</sub> =decreasing                  |      | 2.2  |      | V    |
| I <sub>TH</sub>   | Current Limit Threshold                | Ramped Load                                  |      | 1.2  | 2.0  | A    |
| I <sub>LIM</sub>  | Short Current Limit                    | V <sub>OUT</sub> =0V                         | 0.50 | 0.75 | 1.00 | A    |
| t <sub>FD</sub>   | Over Current Flag Delay                | From Over Current to FLG="L"                 | 5    | 10   | 20   | ms   |
| T <sub>TS</sub>   | Thermal Shutdown Temperature Threshold | T <sub>j</sub> =increasing                   |      | 135  |      | °C   |
|                   |                                        | T <sub>j</sub> =decreasing                   |      | 125  |      |      |
| I <sub>EN</sub>   | Enable Pin Input Current               |                                              |      | 0.01 | 1.00 | μA   |
| V <sub>EN1</sub>  | Enable Pin Input Voltage 1             | V <sub>EN</sub> =increasing                  | 2.4  |      |      | V    |
| V <sub>EN2</sub>  | Enable Pin Input Voltage 2             | V <sub>EN</sub> =decreasing                  |      |      | 0.8  | V    |
| I <sub>LO</sub>   | Output Leakage Current                 |                                              |      | 1    | 10   | μA   |
| V <sub>LF</sub>   | Flag "L" Output Voltage                | I <sub>SINK</sub> =1mA                       |      |      | 0.4  | V    |
| I <sub>FOF</sub>  | Flag Off Current                       | V <sub>FLAG</sub> =5.5V                      |      | 0.05 | 2.00 | μA   |

<sup>\*1</sup> EN=L (R5520H001A), EN=H (R5520H001B)

<sup>\*2</sup> EN=H (R5520H001A), EN=L (R5520H001B)

## RECOMMENDED OPERATING CONDITIONS (ELECTRICAL CHARACTERISTICS)


All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if when they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

## OPERATION


This explanation is based on the typical application.

- (1) There is a parasitic diode between source and drain of the switch transistor. (Refer to the block diagram.) Because of this, in both cases of enable and disable, if the voltage of OUT pin is higher than IN pin, current flows from OUT to IN.
- (2) In case that OUT pin and GND is short, if over-current would continue, the temperature of the IC would increase drastically. If the temperature of the IC is beyond 135°C, the switch transistor turns off and the FLG pin level becomes "L". Then, when the temperature of the IC decreases equal or lower than 125°C, the switch transistor turns on and FLG becomes "H". Unless the abnormal situation of OUT pin is removed, the switch transistor repeats on and off.  
Refer to the 21) over-current protection operation in the typical characteristics.
- (3) Over-current level is set internally in the IC. There are three types of response against over-current:
  - ① Under the condition that OUT pin is short or large capacity is loaded, if the IC is enabled, the IC becomes constant current state. After the flag delay time passes, FLG becomes "L", that means over current state. Refer to the 20) current limit transient response of typical characteristics.
  - ② While the switch transistor is on, if OUT pin is short or large capacity is loaded, until the current limit circuit responds, large transient current flows. After the transient current is beyond the over-current de-tector threshold and delay time of the flag passes, FLG becomes "L", that means over current state.  
Refer to the 22), 23) over-current limit transient response of typical characteristics.
  - ③ In the case that load current gradually increases, the IC is not into the constant current state until the current is beyond over current limit. Once the level is beyond the over current detector threshold, load current is limited into over current limit level. Note that load current continuously flows until the load current is beyond the over-current detector threshold.
- (4) FLG pin is Nch Open drain output. If the over-current or over-temperature is detected, FLG becomes "L". If over-current is detected, FLG becomes "L" after the flag delay time  $t_{FD}$  passes. Therefore flag signal is not out with inrush current.
- (5) UVLO circuit prevents that the switch transistor turns on until the input voltage is beyond 2.4V. UVLO circuit can operate when the IC is enabled.


## TEST CIRCUIT

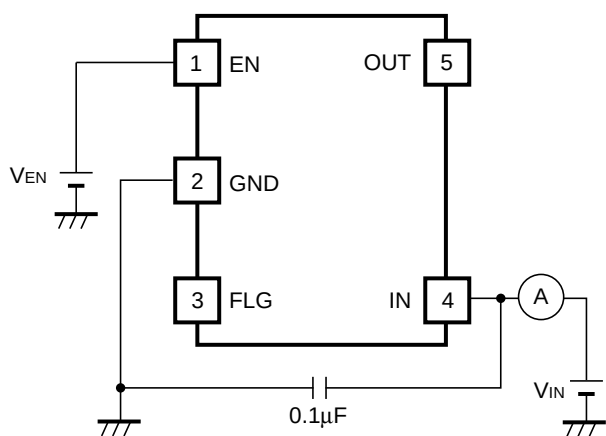


Supply Current Test Circuit

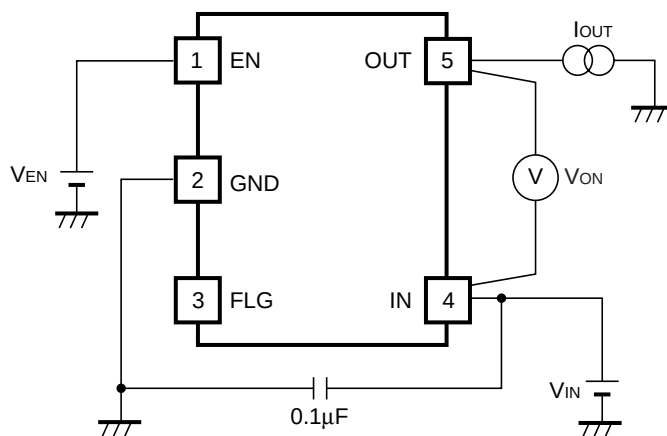


Switch On Resistance Test Circuit

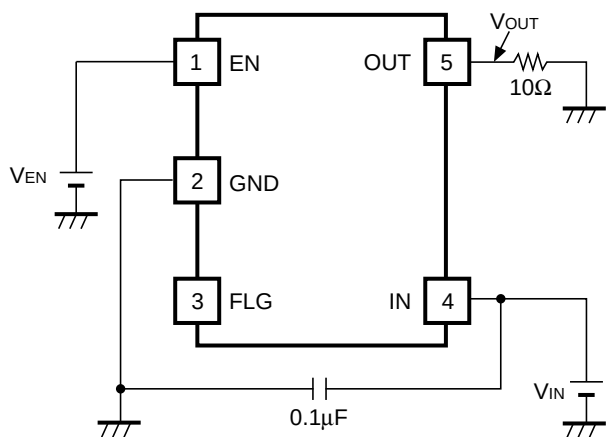


Output On Time Test Circuit

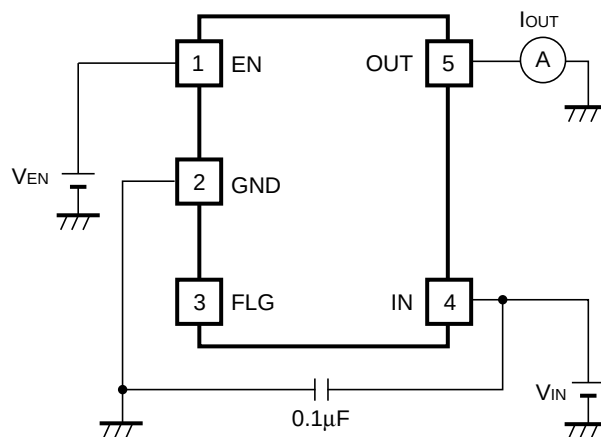


Over-current Limit Test Circuit

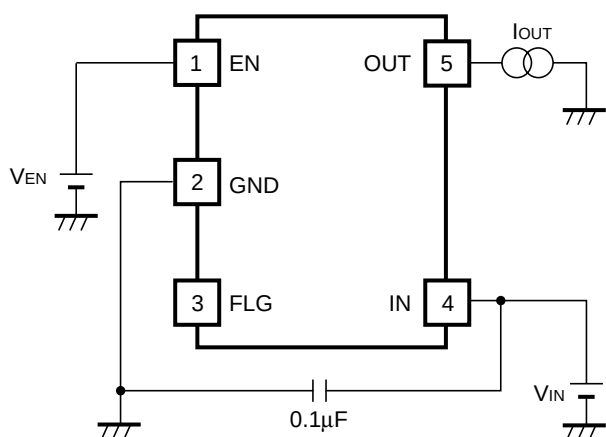


Over-current Threshold Test Circuit

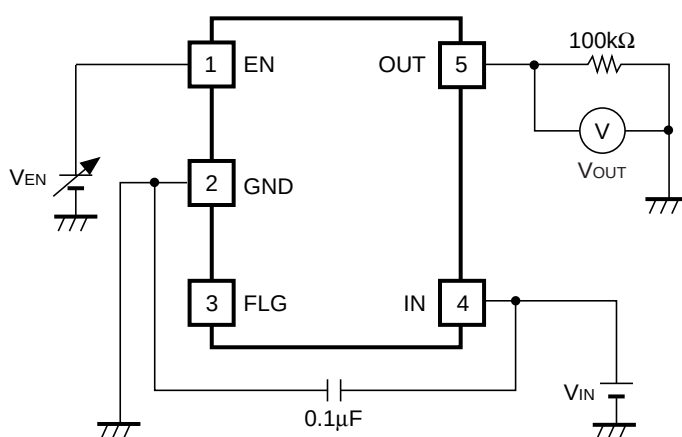

Enable Input Voltage Test Circuit

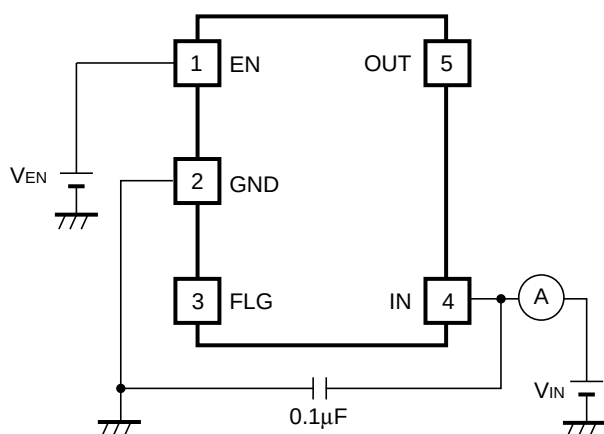


Flag Output Delay Time Test Circuit

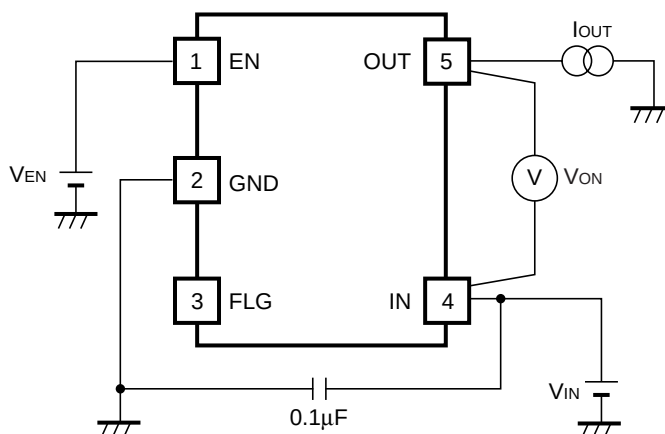

UVLO Threshold Test Circuit

## TYPICAL APPLICATION

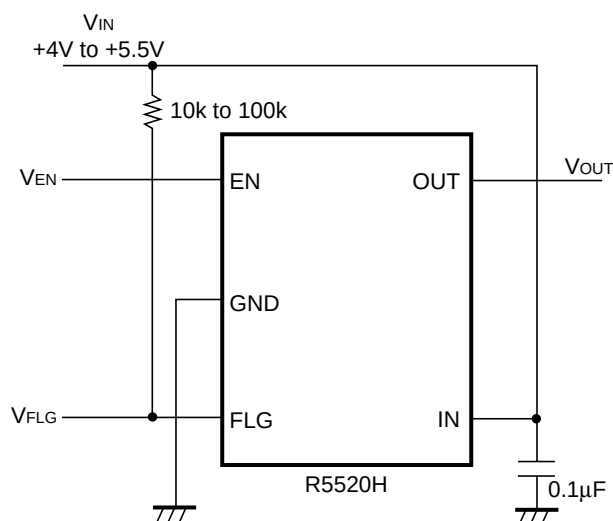


R5520H001A/B

## TECHNICAL NOTES


- Put a capacitance range from  $0.1\mu\text{F}$  to  $1\mu\text{F}$  bypass capacitor between IN pin and GND pin of the IC. Without a bypass capacitor, in case of output short, because of the high side inductance of IN pin, ringing may be generated and it might be a cause of an unstable operation.
- Recommended pull-up resistance value range of flag pin is from  $10\text{k}\Omega$  to  $100\text{k}\Omega$ .

**TIMING CHART**

• **R5520H001A**

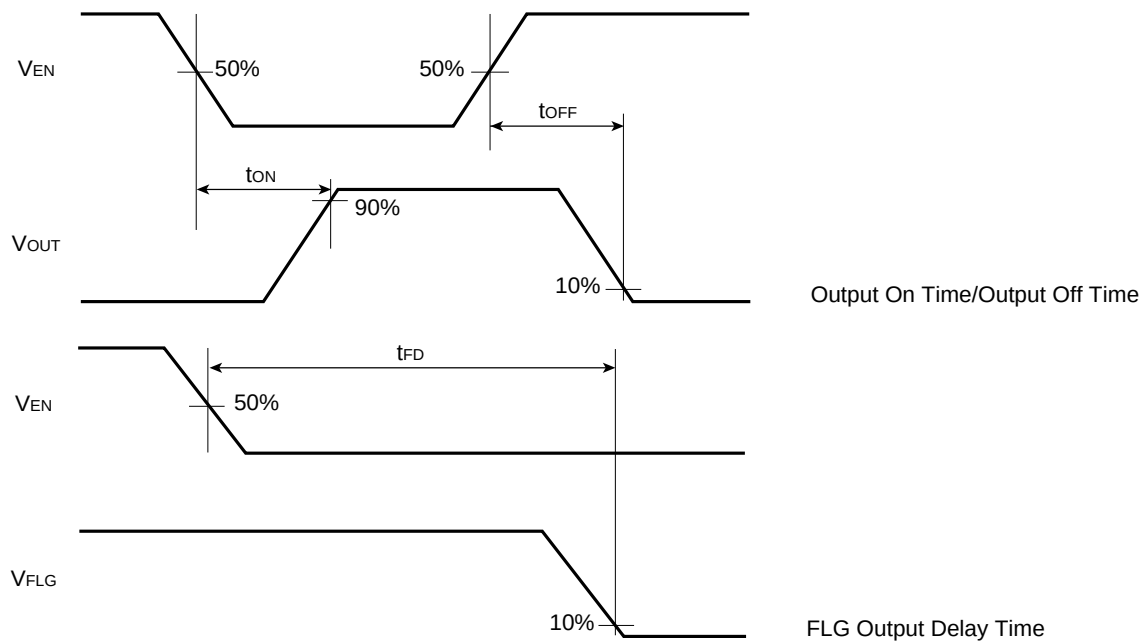

• **R5520H001B**

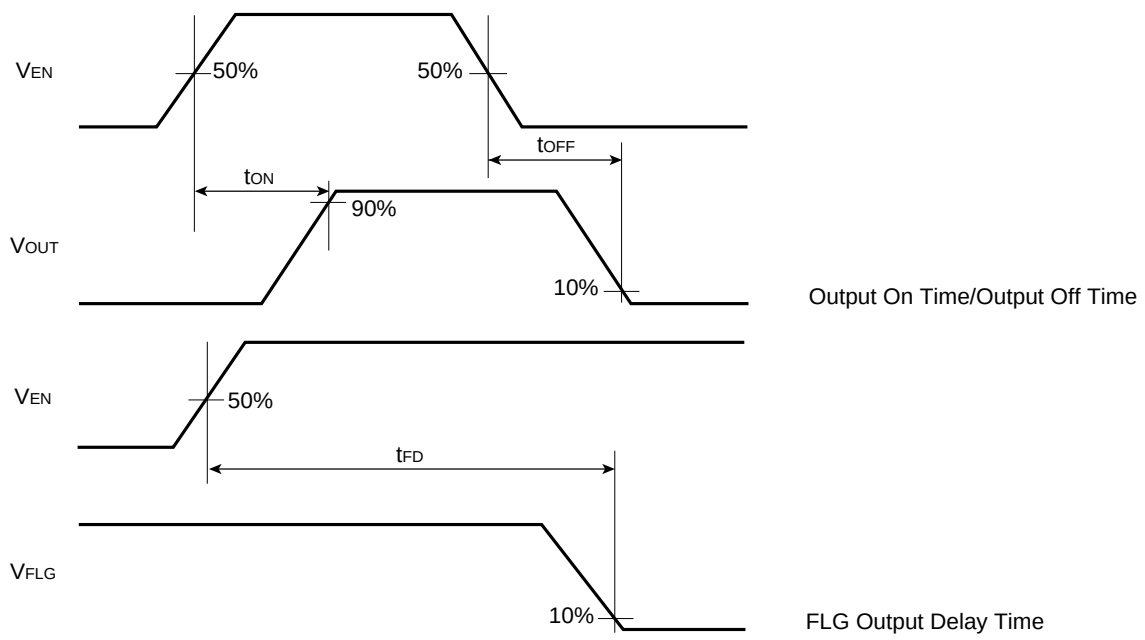



## PACKAGE INFORMATION

### POWER DISSIPATION (SOT-89-5)

Power Dissipation ( $P_D$ ) depends on conditions of mounting on board. This specification is based on the measurement at the condition below:


#### Measurement Conditions

|                  | High Wattage Land Pattern                            | Standard Land Pattern                                |
|------------------|------------------------------------------------------|------------------------------------------------------|
| Environment      | Mounting on Board (Wind velocity=0m/s)               | Mounting on Board (Wind velocity=0m/s)               |
| Board Material   | Glass cloth epoxy plastic (Double sided)             | Glass cloth epoxy plastic (Double sided)             |
| Board Dimensions | 30mm × 30mm × 1.6mm                                  | 50mm × 50mm × 1.6mm                                  |
| Copper Ratio     | Top side : Approx. 20% ,<br>Back side : Approx. 100% | Top side : Approx. 10% ,<br>Back side : Approx. 100% |
| Through-hole     | φ0.85mm × 10pcs                                      | -                                                    |


#### Measurement Result

( $T_a=25^{\circ}\text{C}$ ,  $T_{j\text{max}}=125^{\circ}\text{C}$ )

|                    | High Wattage Land Pattern | Standard Land Pattern | Free Air |
|--------------------|---------------------------|-----------------------|----------|
| Power Dissipation  | 1300mW                    | 900mW                 | 500mW    |
| Thermal Resistance | 77°C/W                    | 111°C/W               | 200°C/W  |

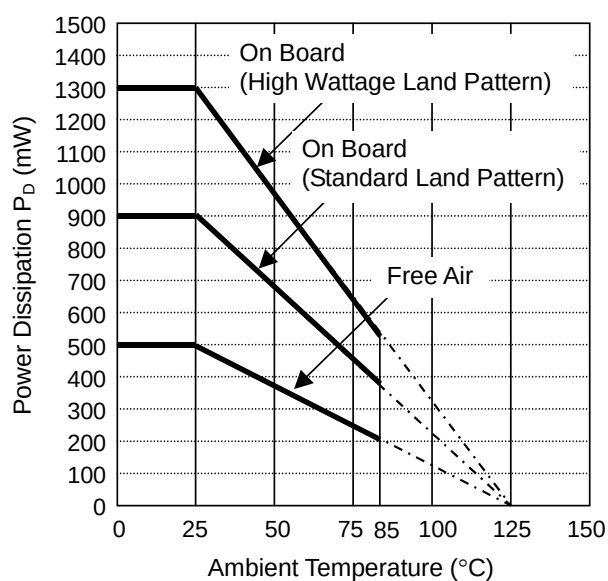


Power Dissipation

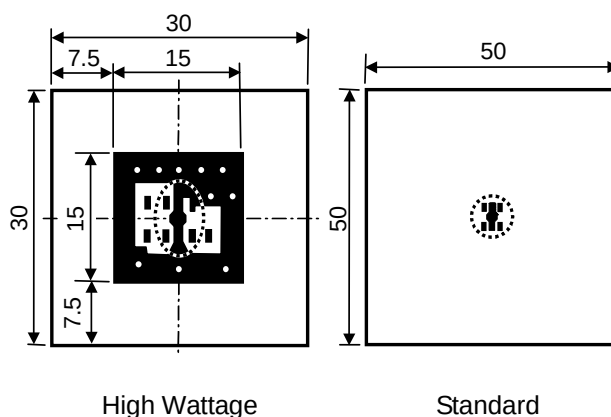


Measurement Board Pattern

○ IC Mount Area (Unit : mm)

## PACKAGE DIMENSIONS (SOT-89-5)

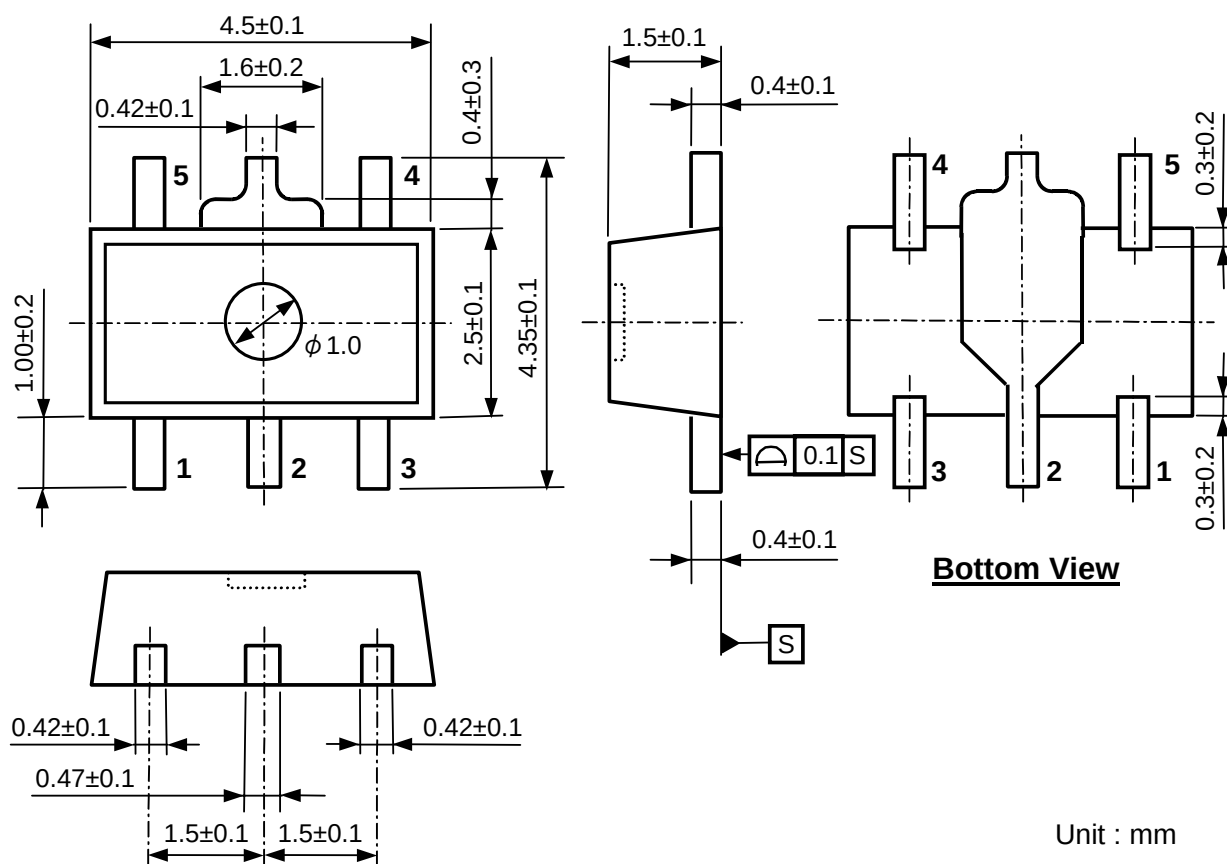

## MARK SPECIFICATION (SOT-89-5)



① ② ③ ④ : Product Code ...

**Refer to MARK SPECIFICATION TABLE (SOT-89-5)**


⑤ ⑥ : Lot Number ... Alphanumeric Serial Number

## MARK SPECIFICATION TABLE (SOT-89-5)


| Product Name | ① ② ③ ④ |
|--------------|---------|
| R5520H001A   | F 0 1 A |
| R5520H001B   | F 0 1 B |

## TYPICAL CHARACTERISTICS


1) Supply Current vs. Temperature

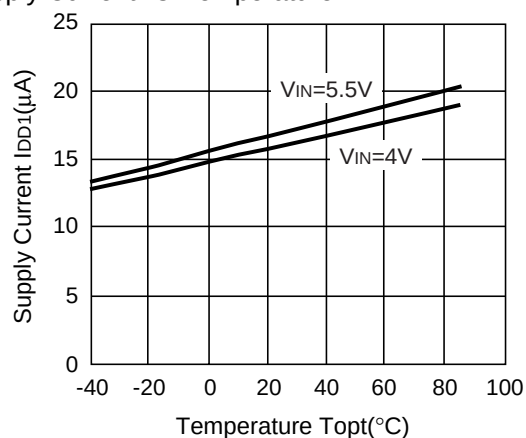


2) Supply Current vs. Input Voltage

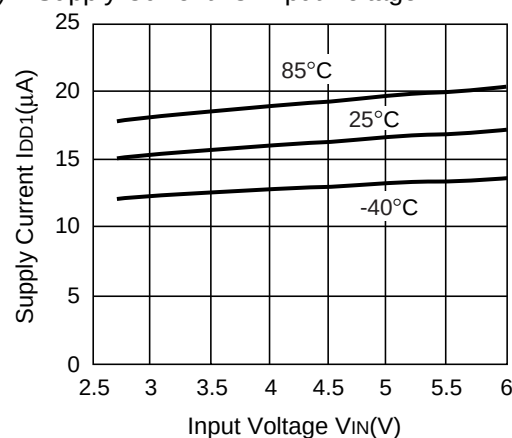


3) On Resistance vs. Temperature

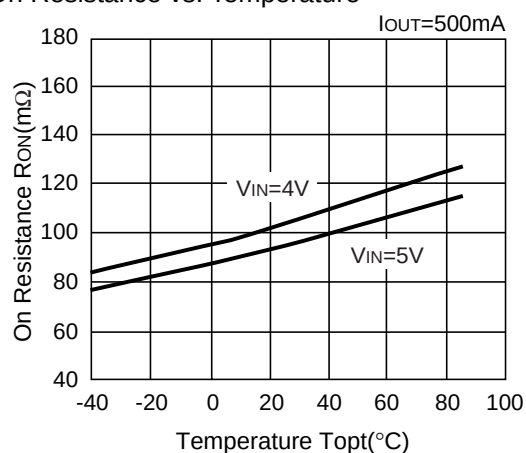


4) On Resistance vs. Input Voltage

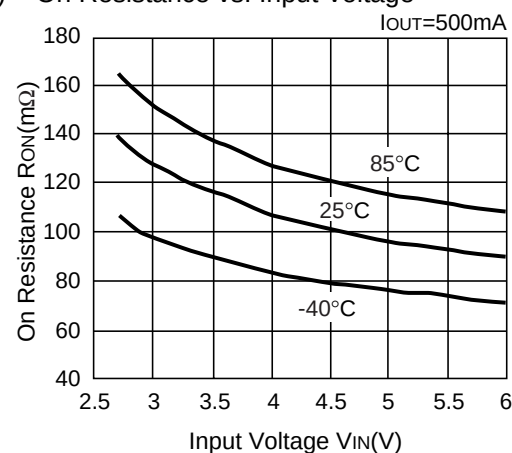


5) Output On Time vs. Temperature

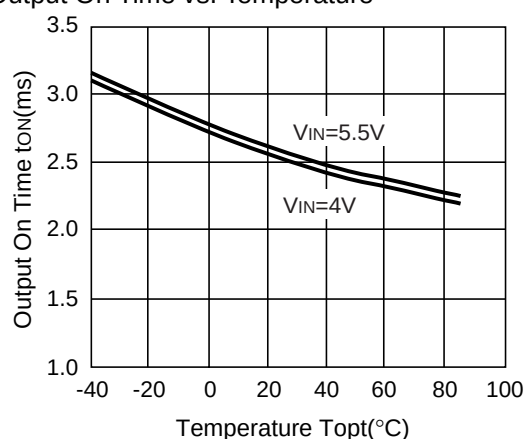


6) Output On Time vs. Input Voltage

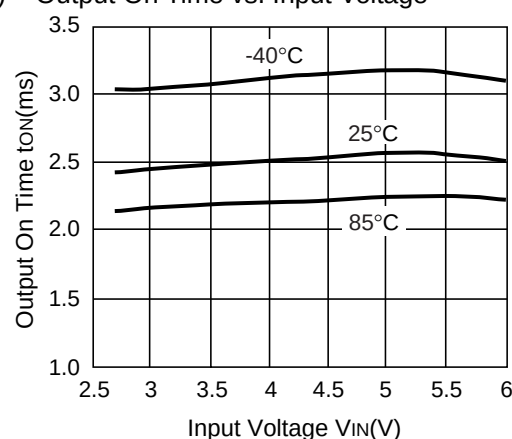


7) Over-current limit vs. Temperature

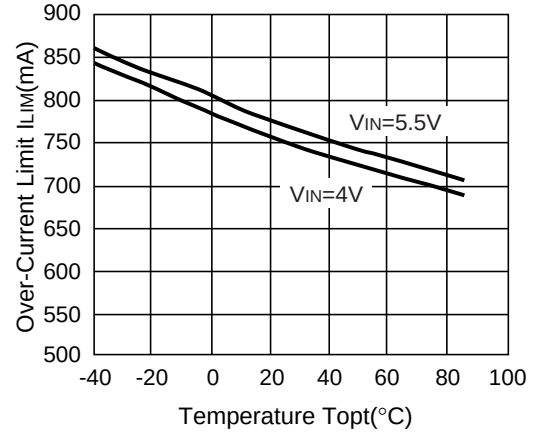


8) Over-current limit vs. Input Voltage

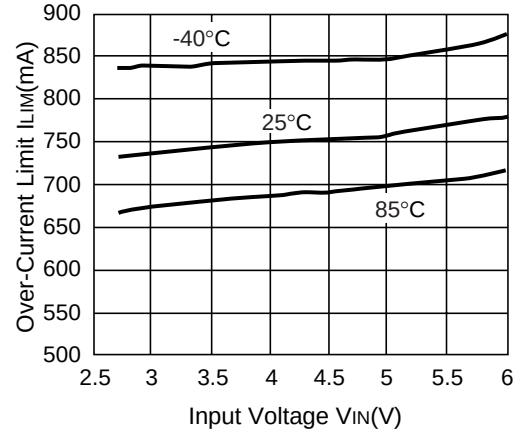


9) Over-current Detector Threshold vs. Temperature

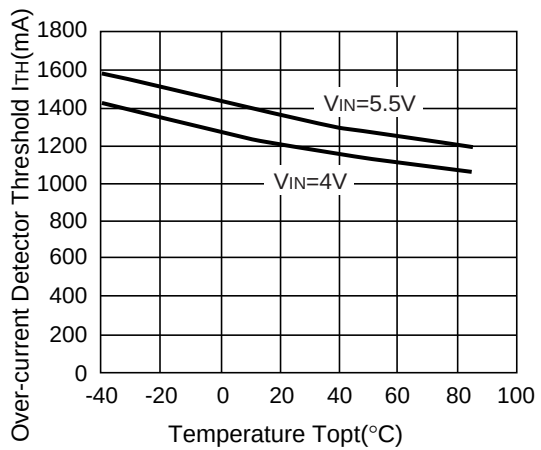


10) Over-current Detector Threshold vs. Input Voltage

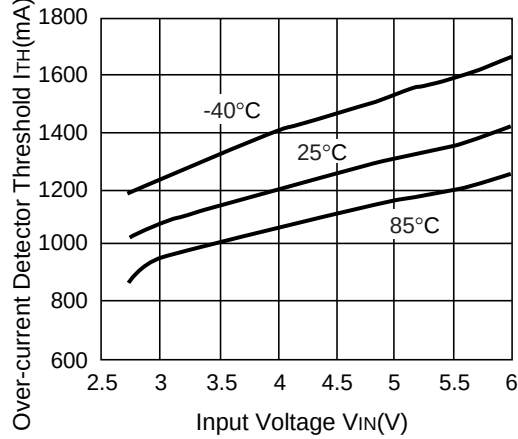


11) Enable Input Voltage vs. Temperature

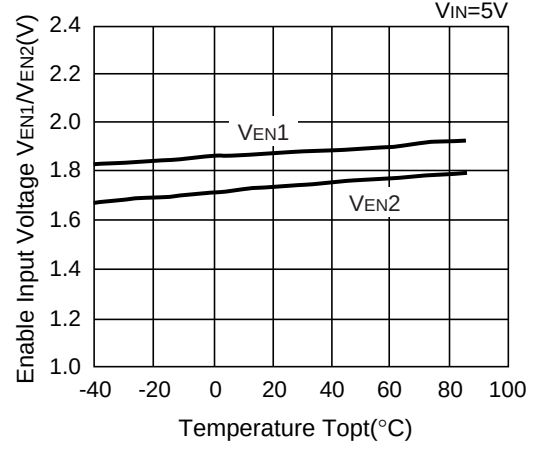


12) Enable Input Voltage vs. Input Voltage

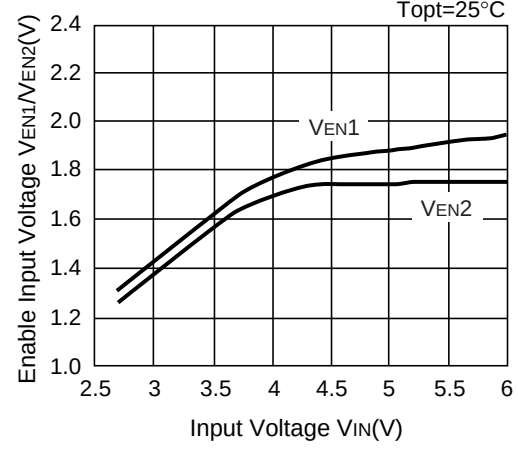



13) Flag Output Delay Time vs. Temperature

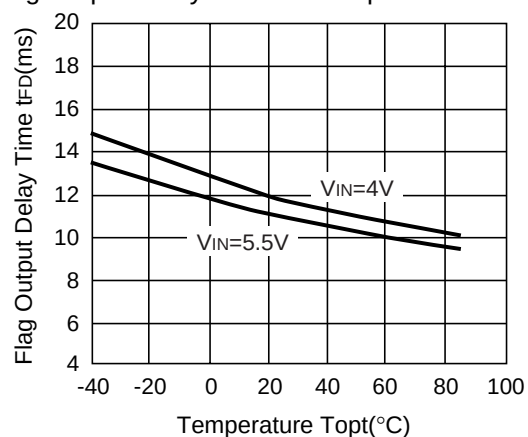


14) Flag Output Delay Time vs. Input Voltage

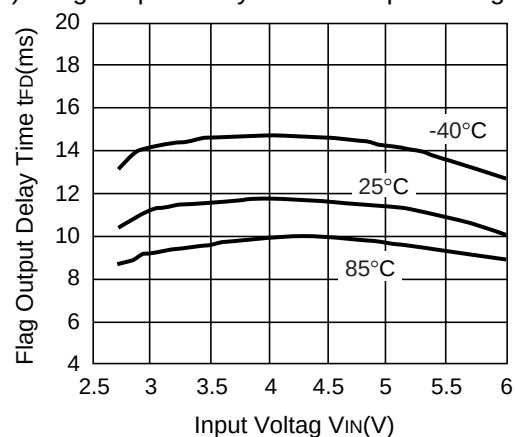


15) UVLO Threshold vs. Temperature

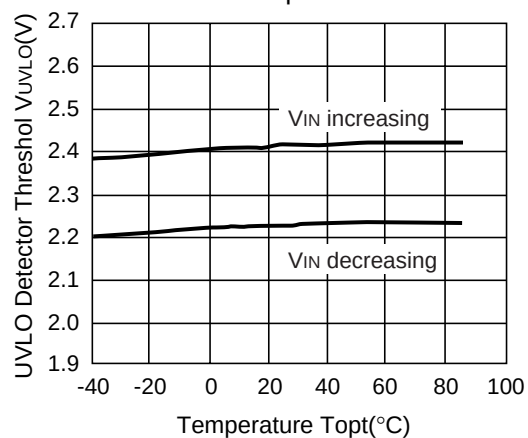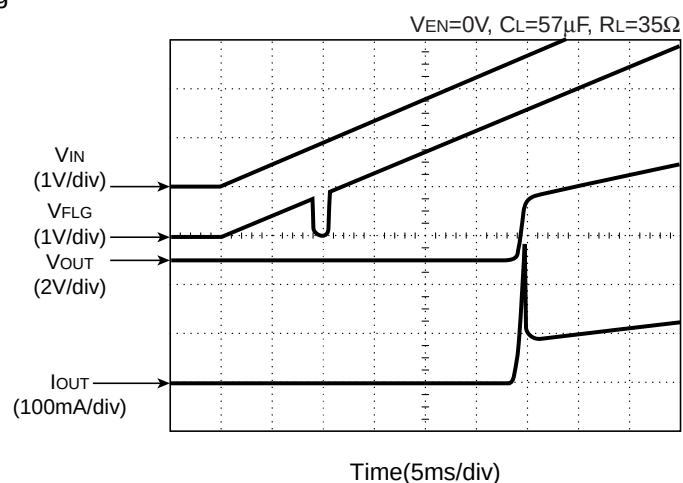16) UVLO at  $V_{IN}$  increasing


## 17) Turn-on response

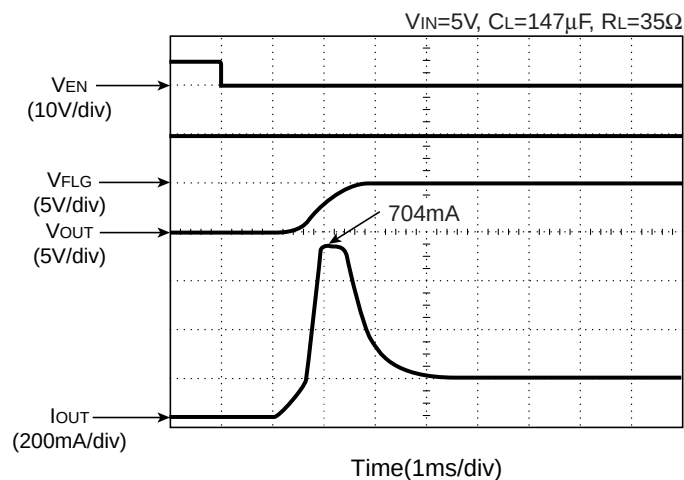


## 18) Turn off Response

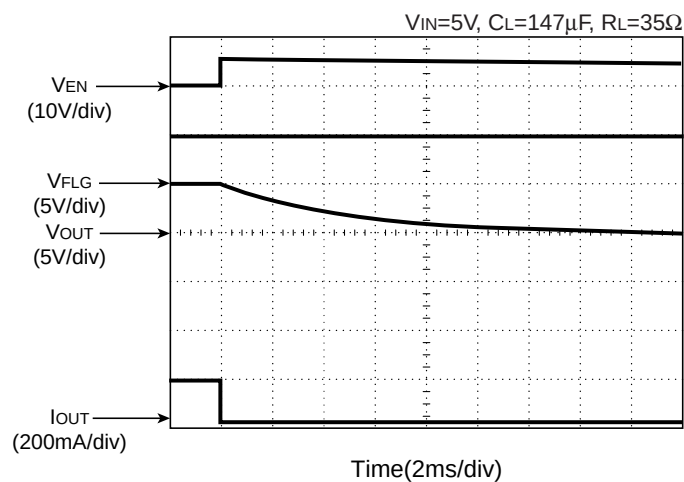


## 19) Inrush current

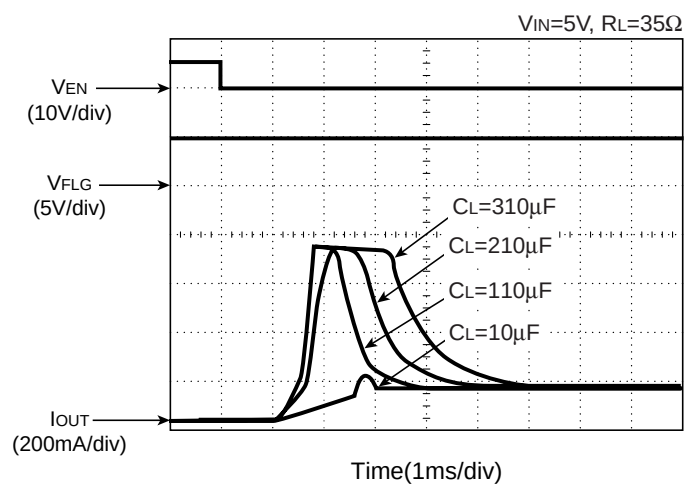


20) Current Limit Transient Response  
(Case: Enable to Short)

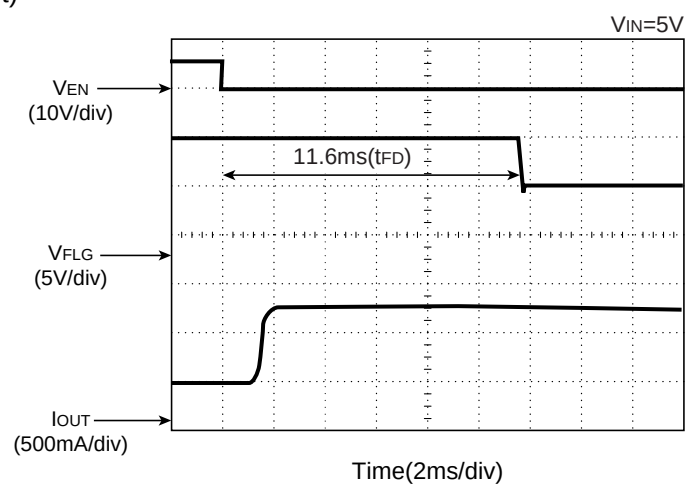


21) Thermal Shutdown

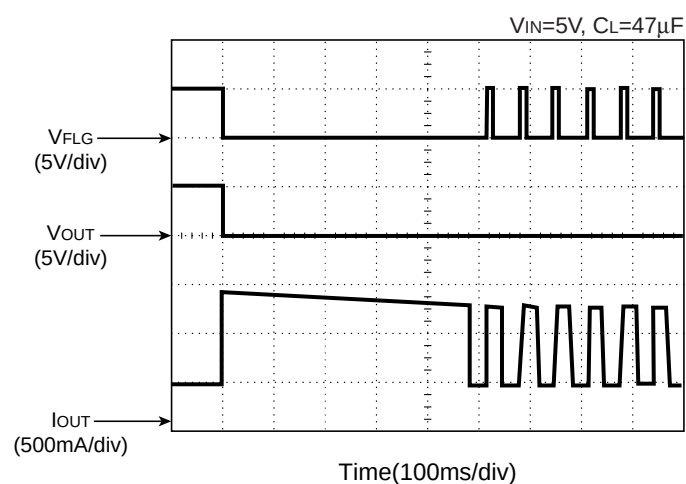

22) Current Limit Transient Response  
(Case: Output short during enable)

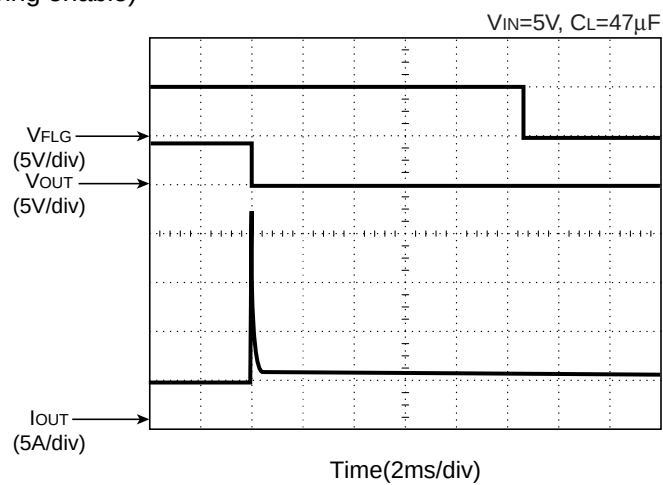

23) Zoomed in 22)

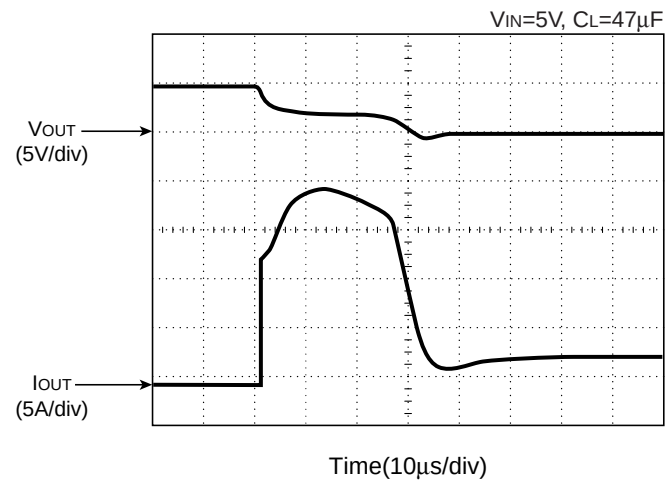





1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system, traffic control system, automotive and transportation equipment, combustion equipment, safety devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, fire containment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.



**Ricoh is committed to reducing the environmental loading materials in electrical devices with a view to contributing to the protection of human health and the environment.**

Ricoh has been providing RoHS compliant products since April 1, 2006 and Halogen-free products since April 1, 2012.

**RICOH** RICOH ELECTRONIC DEVICES CO., LTD.

<http://www.e-devices.ricoh.co.jp/en/>

#### Sales & Support Offices

##### **RICOH ELECTRONIC DEVICES CO., LTD.**

##### **Higashi-Shinagawa Office (International Sales)**

3-32-3, Higashi-Shinagawa, Shinagawa-ku, Tokyo 140-8655, Japan  
Phone: +81-3-5479-2857 Fax: +81-3-5479-0502

##### **RICOH EUROPE (NETHERLANDS) B.V.**

##### **Semiconductor Support Centre**

Prof. W.H. Keesomlaan 1, 1183 DJ Amstelveen, The Netherlands  
Phone: +31-20-5474-309

##### **RICOH ELECTRONIC DEVICES KOREA CO., LTD.**

3F, Haesung Bldg. 504, Teheran-ro, Gangnam-gu, Seoul, 135-725, Korea  
Phone: +82-2-2135-5700 Fax: +82-2-2051-5713

##### **RICOH ELECTRONIC DEVICES SHANGHAI CO., LTD.**

Room 403, No.2 Building, No.690 Bilbo Road, Pu Dong New District, Shanghai 201203,  
People's Republic of China  
Phone: +86-21-5027-3200 Fax: +86-21-5027-3299

##### **RICOH ELECTRONIC DEVICES CO., LTD.**

##### **Taipei office**

Room 109, 10F-1, No.51, Hengyang Rd., Taipei City, Taiwan (R.O.C.)  
Phone: +886-2-2313-1621/1622 Fax: +886-2-2313-1623

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ricoch Electronics:](#)

[R5520H001B-T1-FE](#) [R5520H001A-T1-FE](#)

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9