


RO3075

**345.0 MHz
SAW
Resonator**

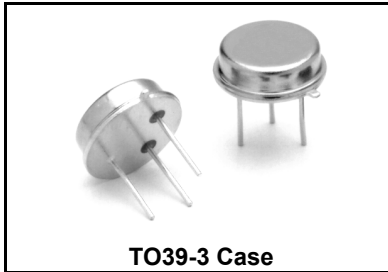

- **Ideal for 345.0 MHz Transmitters**
- **Very Low Series Resistance**
- **Quartz Stability**
- **Rugged, Hermetic, TO39-3 Package**

The RO3075 is a true one-port, surface-acoustic-wave (SAW) resonator in TO39-3 case. It provides reliable, fundamental-mode, quartz frequency stabilization of fixed-frequency transmitters operating at 345.0 MHz.

Absolute Maximum Ratings

| Rating | Value | Units |
|-----------------------------------------------------------|------------|-------|
| CW RF Power Dissipation | +5 | dBm |
| DC Voltage Between Any Two Pins (Observe ESD Precautions) | ±30 | VDC |
| Case Temperature | -40 to +85 | °C |
| Soldering Temperature (10 seconds / 5 cycles max.) | 260 | °C |

Electrical Characteristics

| Characteristic | | Sym | Notes | Minimum | Typical | Maximum | Units | | | | |
|----------------------------------------------------|--------------------------------------|--------------|------------|---------|------------|---------|--------|--|-----------|------|---------------------|
| Center Frequency at +25 °C | Absolute Frequency | f_C | 2, 3, 4, 5 | 344.930 | | 345.070 | MHz | | | | |
| | Tolerance from 345.0 MHz | Δf_C | | | | | | | ±70 | ±100 | kHz |
| Insertion Loss | | IL | 2, 5, 6 | | 0.9 | 1.8 | dB | | | | |
| Quality Factor | Unloaded Q | Q_U | 5, 6, 7 | | 7900 | | | | | | |
| | 50 Ω Loaded Q | Q_L | | | | | | | 750 | | |
| Temperature Stability | Turnover Temperature | T_O | 6, 7, 8 | 10 | 25 | 40 | °C | | | | |
| | Turnover Frequency | f_O | | | | | | | $f_C - 5$ | | kHz |
| | Frequency Temperature Coefficient | FTC | | | | | | | 0.037 | | ppm/°C ² |
| Frequency Aging | Absolute Value during the First Year | fA | 1 | | ≤10 | | ppm/yr | | | | |
| DC Insulation Resistance between Any Two Terminals | | | 5 | 1.0 | | | MΩ | | | | |
| RF Equivalent RLC Model | Motional Resistance | R_M | 5, 7, 9 | | 10.5 | | Ω | | | | |
| | Motional Inductance | L_M | | | | | | | 38 | | μH |
| | Motional Capacitance | C_M | | | | | | | 5.6 | | fF |
| | Pin 1 to Pin 2 Static Capacitance | C_O | 5, 6, 9 | | 4.2 | | pF | | | | |
| | Transducer Static Capacitance | C_P | 5, 6, 7, 9 | | 4.0 | | pF | | | | |
| Test Fixture Shunt Inductance | | L_{TEST} | 2, 7 | | 50.7 | | nH | | | | |
| Lid Symbolization | | | | | RFM / 3075 | | | | | | |

CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.

NOTES:


1. Lifetime (10 year) frequency aging.
2. The center frequency, f_C , is measured at the minimum insertion loss point, IL_{MIN} , with the resonator in the 50 Ω test system (VSWR ≤ 1.2:1). The shunt inductance, L_{TEST} , is tuned for parallel resonance with C_O at f_C .
3. One or more of the following United States patents apply: 4,454,488 and 4,616,197.
4. Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
5. Unless noted otherwise, case temperature $T_C = +25°C \pm 2°C$.
6. The design, manufacturing process, and specifications of this device are subject to change without notice.
7. Derived mathematically from one or more of the following directly measured parameters: f_C , IL, 3 dB bandwidth, f_C versus T_C , and C_O .
8. Turnover temperature, T_O , is the temperature of maximum (or turnover) frequency, f_O . The nominal frequency at any case temperature, T_C , may be calculated from: $f = f_O [1 - FTC (T_O - T_C)^2]$.
9. This equivalent RLC model approximates resonator performance near the resonant frequency and is provided for reference only. The capacitance C_O is the static (nonmotional) capacitance between the two terminals measured at low frequency (10 MHz) with a capacitance meter. The measurement includes parasitic capacitance with a floating case. Case parasitic capacitance is approximately 0.25pF. Transducer parallel capacitance can be calculated as: $C_P \approx C_O - 0.25pF$.

Discontinued

Electrical Connections

This one-port, two-terminal SAW resonator is bidirectional. The terminals are interchangeable with the exception of circuit board layout.


| Pin | Connection |
|-----|-------------|
| 1 | Terminal 1 |
| 2 | Terminal 2 |
| 3 | Case Ground |




Typical Test Circuit

The test circuit inductor, L_{TEST} , is tuned to resonate with the static capacitance, C_O at F_C .

Electrical Test:

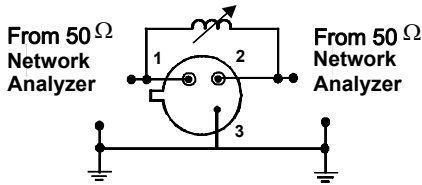


Power Test:

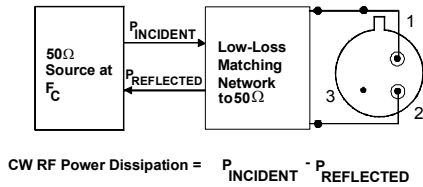


Typical Application Circuits

Typical Low-Power Transmitter Application:

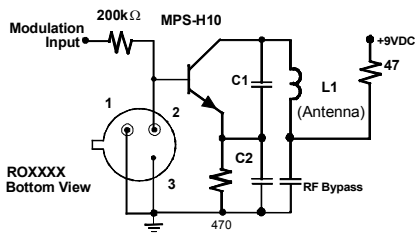


Typical Local Oscillator Application:

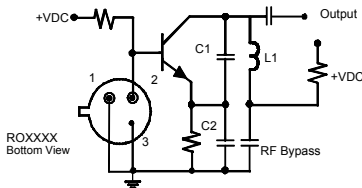


Temperature Characteristics

The curve shown on the right accounts for resonator contribution only and does not include oscillator temperature characteristics.

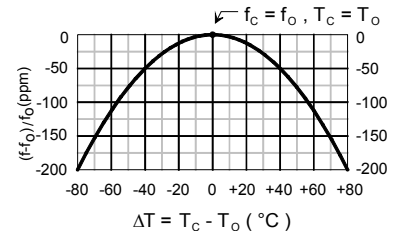


Equivalent LC Model

The following equivalent LC model is valid near resonance:

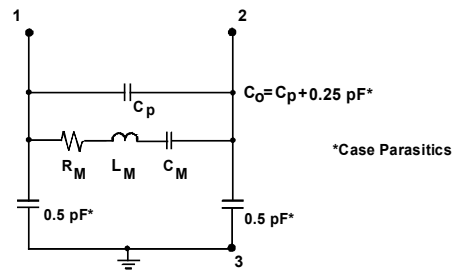

Case Design

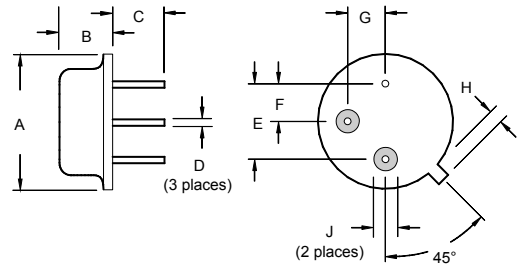

| Dimensions | Millimeters | | Inches | |
|------------|--------------|------|---------------|-------|
| | Min | Max | Min | Max |
| A | | 9.30 | | 0.366 |
| B | | 3.18 | | 0.125 |
| C | 2.50 | 3.50 | 0.098 | 0.138 |
| D | 0.46 Nominal | | 0.018 Nominal | |
| E | 5.08 Nominal | | 0.200 Nominal | |
| F | 2.54 Nominal | | 0.100 Nominal | |
| G | 2.54 Nominal | | 0.100 Nominal | |
| H | | 1.02 | | 0.040 |
| J | 1.40 | | 0.055 | |

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9