

MOSFETs Silicon P-Channel MOS (U-MOSVI)

SSM6J414TU

1. Applications

• Power Management Switches

2. Features


- (1) 1.5-V gate drive voltage.
- (2) Low drain-source on-resistance
 - $: R_{DS(ON)} = 54 \text{ m}\Omega \text{ (max) } (@V_{GS} = -1.5 \text{ V})$

 $R_{DS(ON)} = 36 \text{ m}\Omega \text{ (max) (@V_{GS} = -1.8 V)}$

 $R_{\mathrm{DS(ON)}}$ = 26 m Ω (max) (@V_{GS} = -2.5 V)

 $R_{DS(ON)}$ = 22.5 m Ω (max) (@V_{GS} = -4.5 V)

3. Packaging and Pin Configuration

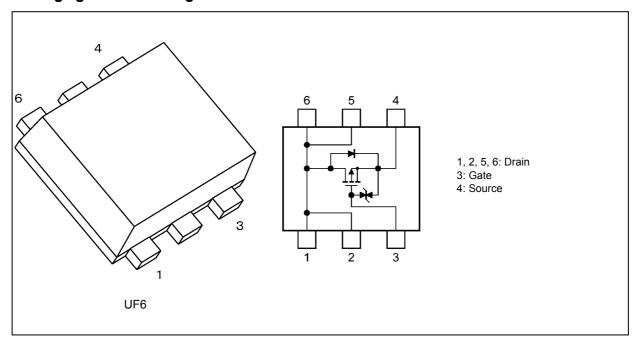



4. Absolute Maximum Ratings (Note) (Unless otherwise specified, Ta = 25°C)

Characteristics				Rating	Unit
Drain-source voltage			V_{DSS}	-20	V
Gate-source voltage			V_{GSS}	±8	
Drain current (DC)			I_D	-6	Α
Drain current (pulsed)		(Note 1)	I _{DP}	-14	
Power dissipation		(Note 2)	P_{D}	1	W
Channel temperature			T _{ch}	150	°C
Storage temperature			T _{stg}	-55 to 150	

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings.

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

Note 1: Pulse width (PW) \leq 10 ms, duty \leq 1%

Note 2: Device mounted on a FR4 board.(25.4 mm × 25.4 mm × 1.6 mm, Cu Pad: 645 mm²)

Note: The MOSFETs in this device are sensitive to electrostatic discharge. When handling this device, the worktables, operators, soldering irons and other objects should be protected against anti-static discharge.

Note: The channel-to-ambient thermal resistance, $R_{th(ch-a)}$, and the power dissipation, P_D , vary according to the board material, board area, board thickness and pad area. When using this device, be sure to take heat dissipation fully into account.

5. Electrical Characteristics

5.1. Static Characteristics (T_a = 25°C unless otherwise specified)

Characteristics		Symbol	Test Condition	Min	Тур.	Max	Unit
Gate leakage current		I _{GSS}	$V_{GS} = \pm 8 \text{ V}, V_{DS} = 0 \text{ V}$	_	_	±1	μΑ
Drain cut-off current		I _{DSS}	V _{DS} = -20 V, V _{GS} = 0 V	_	_	-1	
Drain-source breakdown voltage		V _{(BR)DSS}	$I_D = -1 \text{ mA}, V_{GS} = 0 \text{ V}$	-20			V
Drain-source breakdown voltage	(Note 1)	V _{(BR)DSX}	$I_D = -1 \text{ mA}, V_{GS} = 5 \text{ V}$	-15			
Gate threshold voltage	(Note 2)	V_{th}	$V_{DS} = -3 \text{ V}, I_{D} = -1 \text{ mA}$	-0.3	_	-1.0	
Drain-source on-resistance	(Note 3)	R _{DS(ON)}	$I_D = -6.0 \text{ A}, V_{GS} = -4.5 \text{ V}$	_	18	22.5	mΩ
			$I_D = -5.5 \text{ A}, V_{GS} = -2.5 \text{ V}$	_	21	26	
			$I_D = -3.0 \text{ A}, V_{GS} = -1.8 \text{ V}$	_	25	36	
			I _D = -1.5 A, V _{GS} = -1.5 V	_	29	54	
Forward transfer admittance	(Note 3)	Y _{fs}	$V_{DS} = -3 \text{ V}, I_{D} = -2.0 \text{ A}$	9.1	18.2		S

Note 1: If a reverse bias is applied between gate and source, this device enters $V_{(BR)DSX}$ mode. Note that the drain-source breakdown voltage is lowered in this mode.

Note 2: Let V_{th} be the voltage applied between gate and source that causes the drain current (I_D) to below (-1 mA for this device). Then, for normal switching operation, $V_{GS(ON)}$ must be higher than V_{th} , and $V_{GS(OFF)}$ must be lower than V_{th} . This relationship can be expressed as: $V_{GS(OFF)} < V_{th} < V_{GS(ON)}$.


Take this into consideration when using the device.

Note 3: Pulse measurement.

5.2. Dynamic Characteristics (T_a = 25°C unless otherwise specified)

Characteristics	Symbol	Test Condition	Min	Тур.	Max	Unit
Input capacitance	C _{iss}	$V_{DS} = -10 \text{ V}, V_{GS} = 0 \text{ V},$	_	1650	_	pF
Reverse transfer capacitance	C _{rss}	f = 1 MHz	1	90	_	
Output capacitance	Coss		1	220	_	
Switching time (turn-on time)		V_{DD} = -10 V, I_{D} = -2.0 A V_{GS} = 0 to -2.5 V, R_{G} = 4.7 Ω ,		77	_	ns
Switching time (turn-off time)	t _{off}	Duty \leq 1%, Input: t_r , t_f < 5 ns Common source, See Chapter 5.3		206		

5.3. Switching Time Test Circuit






Fig. 5.3.1 Test Circuit of Switching Time

Fig. 5.3.2 Input Waveform/Output Waveform



5.4. Gate Charge Characteristics ($T_a = 25^{\circ}$ C unless otherwise specified)

Characteristics	Symbol	Test Condition	Min	Тур.	Max	Unit
Total gate charge (gate-source plus gate-drain)	Q_g	V _{DD} = -10 V, V _{GS} = -4.5 V,	_	23.1	_	nC
Gate-source charge 1	Q _{gs1}	$I_D = -6.0 \text{ A}$	_	3.8	_	
Gate-drain charge	Q _{gd}		_	4.1	_	

5.5. Source-Drain Characteristics ($T_a = 25$ °C unless otherwise specified)

Characteristics		Symbol	Test Condition	Min	Тур.	Max	Unit
Diode forward voltage	(Note 1)	V _{DSF}	I _D = 6.0 A, V _{GS} = 0 V	_	0.74	1.2	V

Note 1: Pulse measurement.

6. Marking




Fig. 6.1 Marking

7. Characteristics Curves (Note)




Fig. 7.1 I_D - V_{DS}




Fig. 7.3 R_{DS(ON)} - V_{GS}




Fig. 7.5 R_{DS(ON)} - T_a




Fig. 7.2 I_D - V_{GS}




Fig. 7.4 R_{DS(ON)} - I_D




Fig. 7.6 V_{th} - T_a




Fig. 7.7 |Yfs| - ID




Fig. 7.8 IDR - VDS




Fig. 7.9 C - V_{DS}




Fig. 7.10 t-I_D




Fig. 7.11 Dynamic Input/Output Characteristics





Fig. 7.12 rth - tw






Fig. 7.13 P_D - T_a


Fig. 7.14 Safe Operating Area

Note: The above characteristics curves are presented for reference only and not guaranteed by production test, unless otherwise noted.



Package Dimensions

Unit: mm

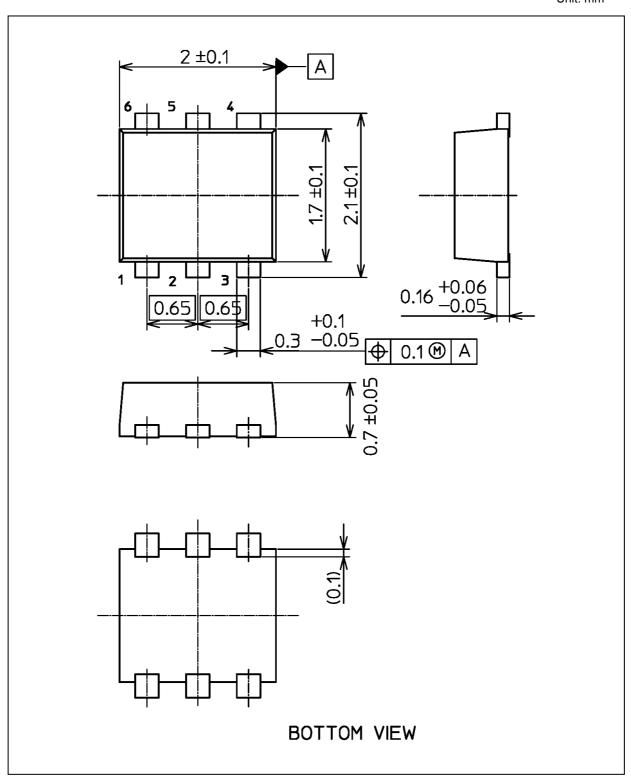

Weight: 7.0 mg (typ.)

Package Name(s)
TOSHIBA: 2-2T1S
Nickname: UF6



RESTRICTIONS ON PRODUCT USE

- Toshiba Corporation, and its subsidiaries and affiliates (collectively "TOSHIBA"), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively "Product") without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's
 written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications.
 TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.
- PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE
 EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY
 CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT
 ("UNINTENDED USE"). Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation,
 equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles,
 trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices,
 elevators and escalators, devices related to electric power, and equipment used in finance-related fields. IF YOU USE PRODUCT FOR
 UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT. For details, please contact your TOSHIBA sales
 representative.
- · Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any
 infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any
 intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE
 FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER,
 INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING
 WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND
 (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT,
 OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR
 PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product.
 Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Toshiba:

SSM6J414TU,LF

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru_4 moschip.ru_9