

## 26 GHz, DIVIDE-BY-8 WITH RESET & PROGRAMMABLE OUTPUT VOLTAGE

### Typical Applications

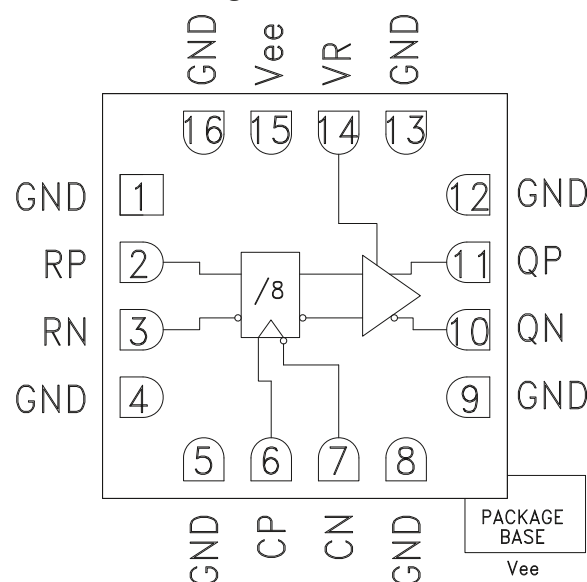
The HMC859LC3 is ideal for:

- High Speed Frequency Divider (up to 26 GHz)
- Clock Synthesis
- Phase Locked Loops
- Broadband Test & Measurement

### Features

Supports Clock Frequencies up to 26 GHz  
Differential or Single-Ended Operation  
Fast Rise and Fall Times: 19 / 17 ps  
Low Power Consumption: 320 mW typ.  
Programmable Differential  
Output Voltage Swing: 800 - 1900 mVp-p  
Propagation Delay: 146 ps  
Single Supply: -3.3 V  
16 Lead Ceramic 3x3 mm SMT Package: 9 mm<sup>2</sup>

### Functional Diagram



### General Description

The HMC859LC3 is a Divide-by-8 w/Reset designed to support clock frequencies as high as 26 GHz. During normal operation, with the reset pin not asserted, the output toggles from its prior state on the positive edge of the clock. Asserting the reset pin forces the Q output low regardless of the clock edge state (asynchronous reset assertion). Reversing the clock inputs allows for negative-edge triggered applications.

All differential inputs to the HMC859LC3 are CML and terminated on-chip with 50 Ohms to the positive supply, GND, and may be DC or AC coupled. Outputs can be connected directly to a 50 Ohm ground-terminated system or drive devices with CML logic input. The HMC859LC3 also features an output level control pin, VR, which allows for loss compensation or signal level optimization. The HMC859LC3 operates from a single -3.3 V supply and is available in ROHS-compliant 3x3 mm SMT package.

### Electrical Specifications, $T_A = +25^\circ\text{C}$ $V_{ee} = -3.3\text{ V}$ , $VR = 0\text{ V}$

| Parameter                | Conditions                 | Min. | Typ. | Max  | Units |
|--------------------------|----------------------------|------|------|------|-------|
| Power Supply Voltage     |                            | -3.6 | -3.3 | -3.0 | V     |
| Power Supply Current     |                            |      | 97   |      | mA    |
| Maximum Clock Rate       |                            |      | 26   |      | GHz   |
| Input Voltage Range      |                            | -1.5 |      | 0.5  | V     |
| Input Differential Range |                            | 0.1  |      | 2.0  | Vp-p  |
| Input Return Loss        | Frequency <25 GHz          |      | 10   |      | dB    |
| Output Amplitude         | Single-Ended, peak-to-peak |      | 825  |      | mVp-p |
|                          | Differential, peak-to-peak |      | 1650 |      | mVp-p |
| Output High Voltage      |                            |      | -15  |      | mV    |
| Output Low Voltage       |                            |      | -840 |      | mV    |

For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at [www.hittite.com](http://www.hittite.com)

Application Support: Phone: 978-250-3343 or [apps@hittite.com](mailto:apps@hittite.com)

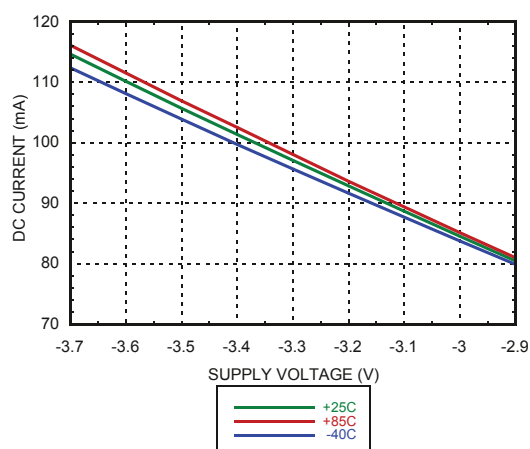
**26 GHz, DIVIDE-BY-8 WITH RESET & PROGRAMMABLE OUTPUT VOLTAGE**

**Electrical Specifications** (continued)


| Parameter                                     | Conditions              | Min. | Typ.    | Max  | Units  |
|-----------------------------------------------|-------------------------|------|---------|------|--------|
| Output Rise / Fall Time                       | Differential, 20% - 80% |      | 19 / 17 |      | ps     |
| Output Return Loss                            | Frequency <14 GHz       |      | 10      |      | dB     |
| Random Jitter Jr                              | rms <sup>[1]</sup>      |      | 0.09    | 0.13 | ps rms |
| Propagation Delay Clock to Q, t <sub>cd</sub> |                         |      | 146     |      | ps     |
| Propagation Delay Reset to Q, t <sub>dr</sub> |                         |      | 158     |      | ps     |
| VR Pin Current                                | VR = 0.0 V              |      | 3       |      | mA     |
| VR Pin Current                                | VR = 0.4 V              |      |         | 4.25 | mA     |

[1] Added jitter calculated by de-embedding the clock source jitter.


**DC Current vs. Supply Voltage** <sup>[1][2]</sup>




**DC Current vs. VR** <sup>[2][3]</sup>

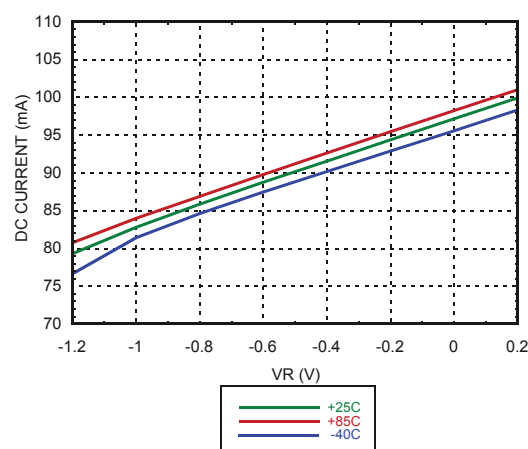

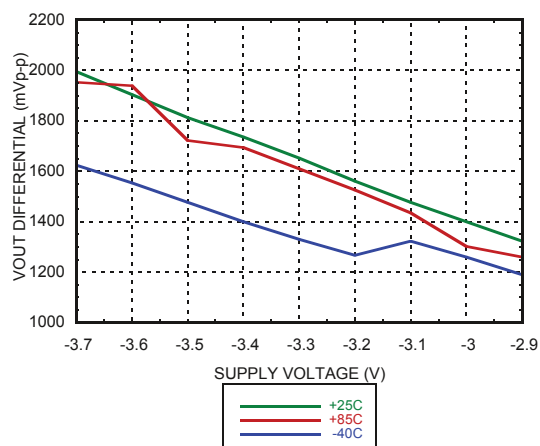**Output Differential Voltage vs. Supply Voltage** <sup>[1][2]</sup>







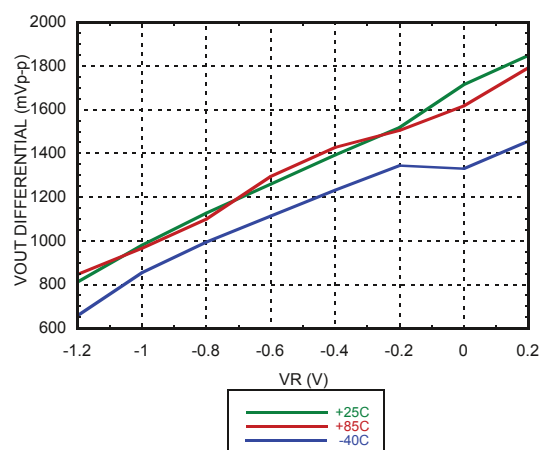
**Output Differential Voltage vs. VR** <sup>[2][3]</sup>



[1] VR = 0.0 V

[2] Frequency = 28 GHz

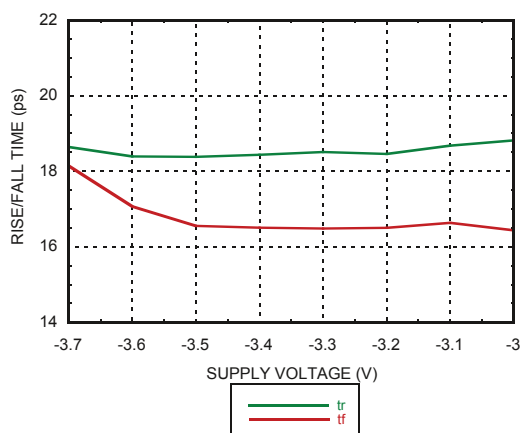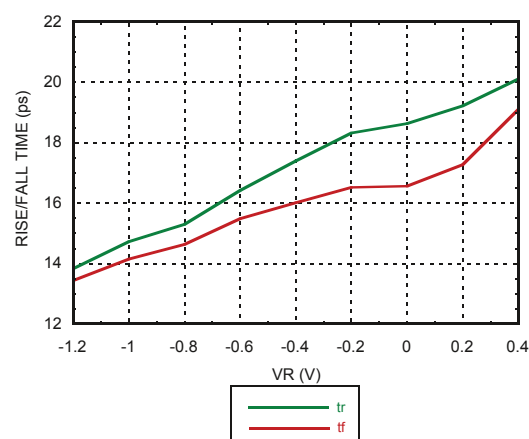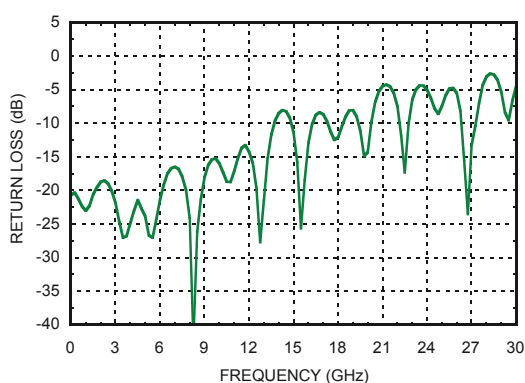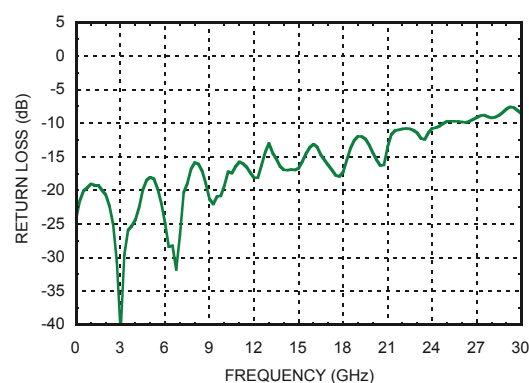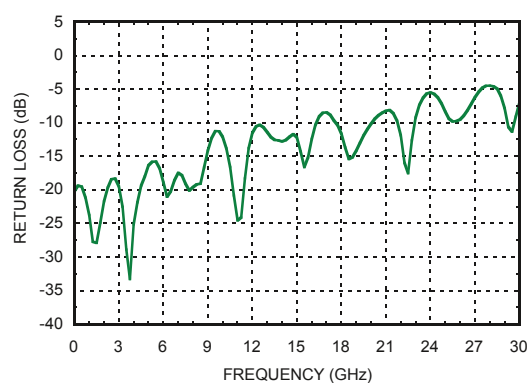[3] V<sub>ee</sub> = -3.3 V


**26 GHz, DIVIDE-BY-8 WITH RESET &  
PROGRAMMABLE OUTPUT VOLTAGE**
**Rise / Fall Time vs. Supply Voltage [1][2]**

**Rise / Fall Time vs. VR [2][3]**

**Clock Output Return Loss [1][2][3][4]**

**Clock Input Return Loss [1][2][3][4]**

**Reset Input Return Loss [1][2][3][4]**


[1] VR = 0.0 V

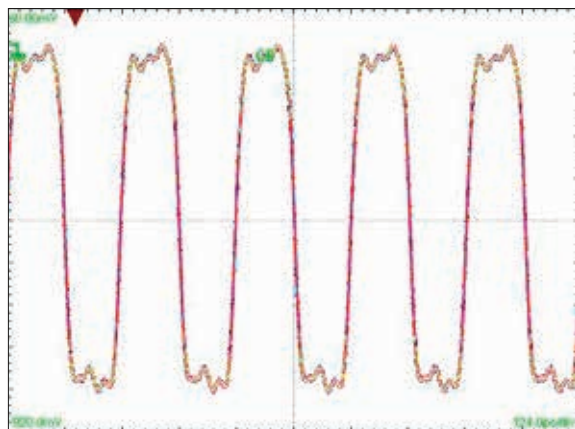
[2] Frequency = 28 GHz

[3] Vee = -3.3 V

[4] Device measured on evaluation board with gating

**26 GHz, DIVIDE-BY-8 WITH RESET &  
 PROGRAMMABLE OUTPUT VOLTAGE**


**Output Waveform**



[1] Test Conditions:


Waveform generated with a CW signal source input at 28 GHz.  
 Diagram data presented on a Tektronix CSA 8000.

**Timing Diagram**

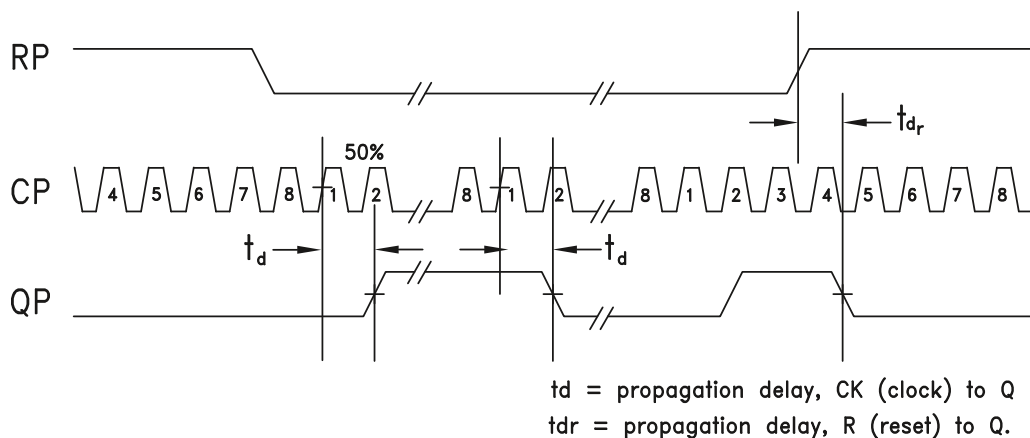


**26 GHz, DIVIDE-BY-8 WITH RESET &  
PROGRAMMABLE OUTPUT VOLTAGE**
**Absolute Maximum Ratings**

|                                                                                    |                   |
|------------------------------------------------------------------------------------|-------------------|
| Power Supply Voltage (Vee)                                                         | -3.75 V to +0.5 V |
| Input Signals                                                                      | -2 V to +0.5 V    |
| Output Signals                                                                     | -1.5 V to +1 V    |
| Continuous P <sub>diss</sub> (T = 85 °C)<br>(derate 17 mW/°C above 85 °C)          | 0.68 W            |
| Thermal Resistance (R <sub>th-j-p</sub> ) Worst<br>Case Junction to Package Paddle | 59 °C/W           |
| Storage Temperature                                                                | -65 °C to +150 °C |
| Operating Temperature                                                              | -40 °C to +85 °C  |
| Maximum Junction Temperature                                                       | 125 °C            |
| ESD Sensitivity (HBM)                                                              | Class 1B          |

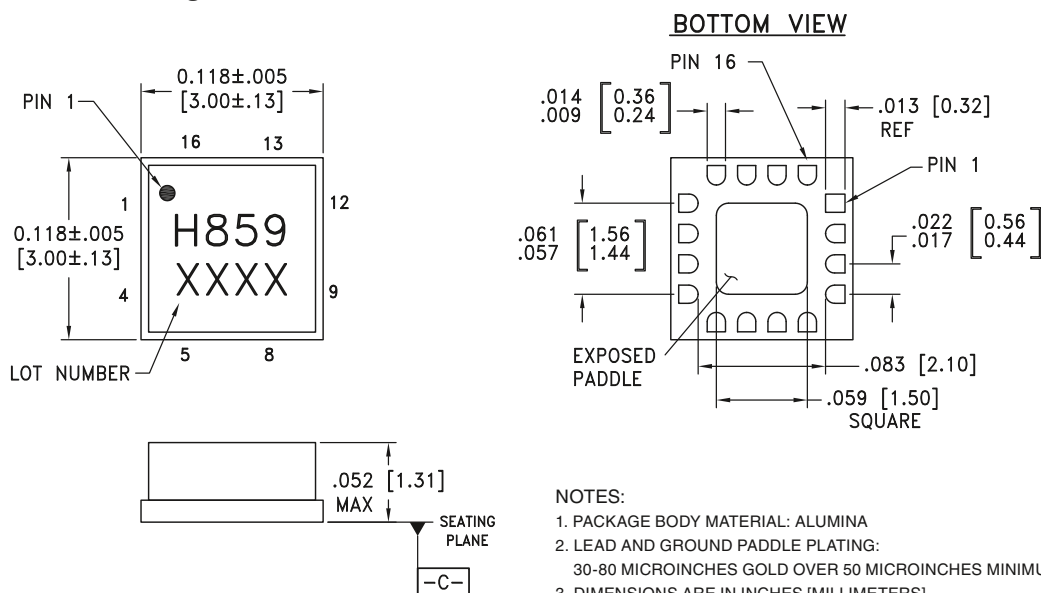
**ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS**
**Outline Drawing**

**Package Information**

| Part Number | Package Body Material | Lead Finish      | MSL Rating          | Package Marking <sup>[2]</sup> |
|-------------|-----------------------|------------------|---------------------|--------------------------------|
| HMC859LC3   | Alumina, White        | Gold over Nickel | MSL3 <sup>[1]</sup> | H859<br>XXXX                   |

[1] Max peak reflow temperature of 260 °C

[2] 4-Digit lot number XXXX





For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at [www.hittite.com](http://www.hittite.com)

Application Support: Phone: 978-250-3343 or [apps@hittite.com](mailto:apps@hittite.com)


**26 GHz, DIVIDE-BY-8 WITH RESET &  
PROGRAMMABLE OUTPUT VOLTAGE**

**Pin Descriptions**

| Pin Number        | Function | Description                                                                                                                         | Interface Schematic                                                                   |
|-------------------|----------|-------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 1, 4, 5, 8, 9, 12 | GND      | Signal Grounds                                                                                                                      |    |
| 2, 3              | RP, RN   | Differential Reset Inputs: Current Mode Logic (CML) referenced to positive supply.                                                  |    |
| 6, 7              | CP, CN   | Differential Clock Inputs: Current Mode Logic (CML) referenced to positive supply.                                                  |    |
| 10, 11            | QN, QP   | Differential Clock Outputs: Current Mode Logic (CML) referenced to positive supply.                                                 |   |
| 13, 16            | GND      | Supply Ground                                                                                                                       |  |
| 14                | VR       | Output level control. Output level may be increased or decreased by applying a voltage to VR per "Output Differential vs. VR" plot. |  |
| 15, Package Base  | Vee      | This pin and the exposed paddle must be connected to the negative voltage supply.                                                   |                                                                                       |

## 26 GHz, DIVIDE-BY-8 WITH RESET & PROGRAMMABLE OUTPUT VOLTAGE
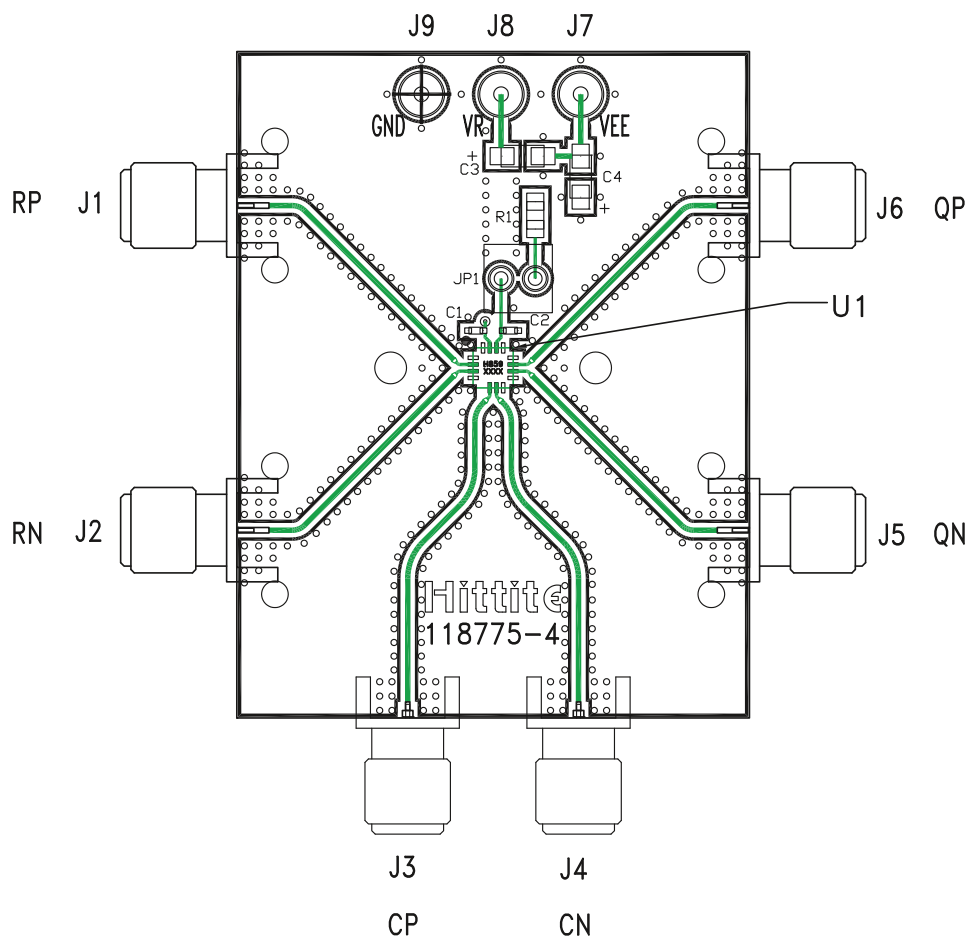
### Evaluation PCB



### List of Materials for Evaluation PCB 123585 <sup>[1]</sup>

| Item               | Description                     |
|--------------------|---------------------------------|
| J1, J2, J5, J6     | PCB Mount SMA RF Connectors     |
| J3, J4             | PCB Mount 2.92mm RF Connectors  |
| J7 - J9            | DC Pin                          |
| JP1                | 2-Position Header with Shunt    |
| C1 - C2            | 100 pF Capacitor, 0402 Pkg.     |
| C3 - C4            | 4.7 $\mu$ F Capacitor, Tantalum |
| R1                 | 10 Ohm Resistor, 0603 Pkg.      |
| U1                 | HMC859LC3 Clock Divider         |
| PCB <sup>[2]</sup> | 118775 Evaluation Board         |

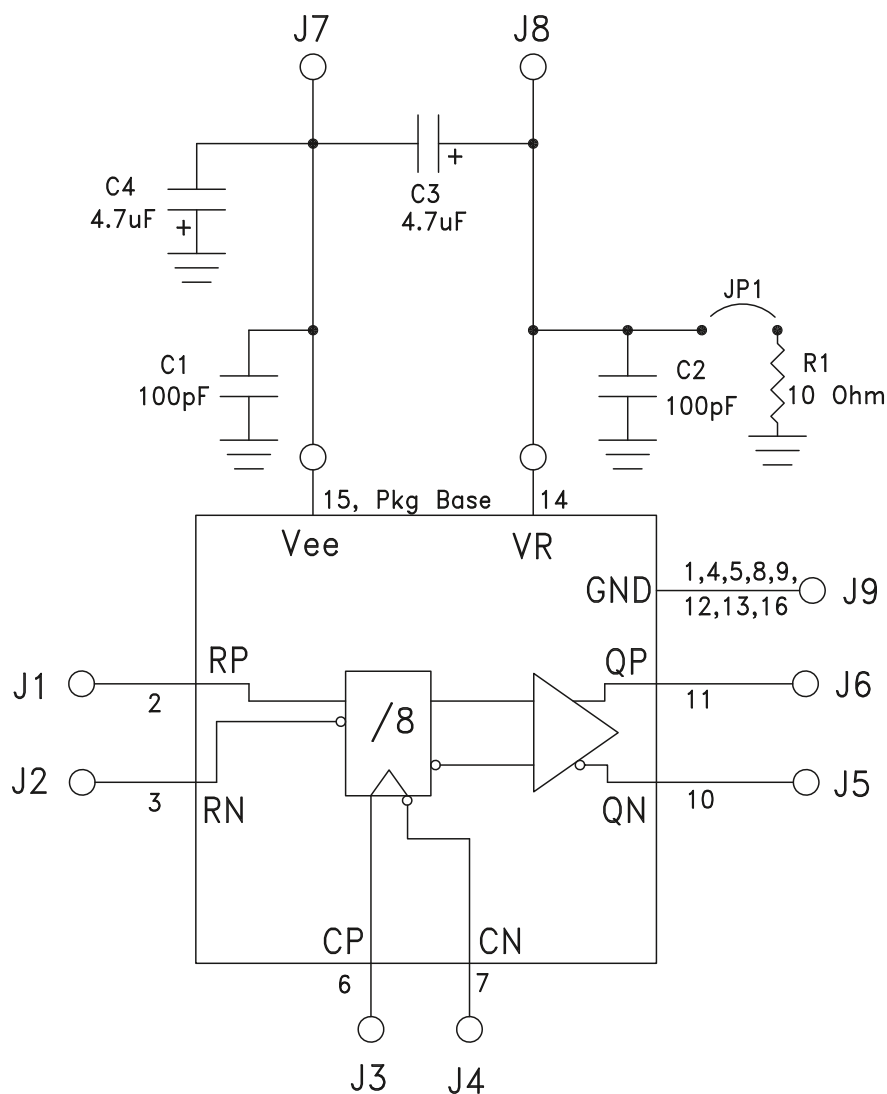
[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Arlon 25FR or Rogers 4350

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads should be connected directly to the ground plane similar to that shown. The exposed packaged base should be connected to Vee. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request. Install jumper on JP1 to short VR to GND for normal operation.

**26 GHz, DIVIDE-BY-8 WITH RESET &  
PROGRAMMABLE OUTPUT VOLTAGE**

**Application Circuit**



## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9