
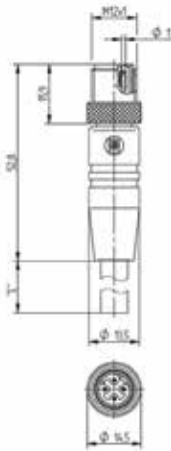
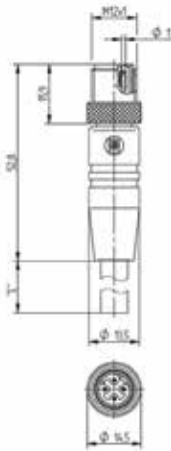


Ethernet Single-Ended and Double-End Cord Sets for Railway Applications

CAT5e (PROFINET), Shielded, 4-Poles, D coding

Type	0985 508 120	0985 508 121																										
																												
Product description	Cordset single-ended, M12, Industrial Ethernet data cable, Cat 5 (ProfiNet), single-ended molded with M12 male connector, 4 poles, D coding, PUR jacket, halogen-free, black, 1M, 2M, 5M, 10M, and 15M cable lengths.	Cord set, double-ended, M12-M12, Industrial Ethernet data cable, Cat 5 (ProfiNet), double-ended molded with M12 male connectors, 4 poles, D coding, PUR jacket, halogen-free, black, 2M, 5M, 10M and 15M cable lengths.																										
Note	Cat 5 and Cat 5e transmission properties according to ISO IEC 11801 and TIA/EIA-568-B.2. The application of these products in harsh environments should always be checked before use.																											
Color of housing	black																											
Number of contacts	4																											
Product characteristics	Oil resistance, EMC resistance, UV resistance, Drag chains suitable																											
Ordering information	<table><tr><th>Part number</th><th>Order number</th><th>Part number</th><th>Order number</th></tr><tr><td>0985 508 120/1 M</td><td>934 688-015</td><td>–</td><td>–</td></tr><tr><td>0985 508 120/2 M</td><td>934 688-011</td><td>0985 508 121/2 M</td><td>934 688-007</td></tr><tr><td>0985 508 120/5 M</td><td>934 688-012</td><td>0985 508 121/5 M</td><td>934 688-008</td></tr><tr><td>0985 508 120/10 M</td><td>934 688-013</td><td>0985 508 121/10 M</td><td>934 688-009</td></tr><tr><td>0985 508 120/15 M</td><td>934 688-014</td><td>0985 508 121/15 M</td><td>934 688-010</td></tr></table>				Part number	Order number	Part number	Order number	0985 508 120/1 M	934 688-015	–	–	0985 508 120/2 M	934 688-011	0985 508 121/2 M	934 688-007	0985 508 120/5 M	934 688-012	0985 508 121/5 M	934 688-008	0985 508 120/10 M	934 688-013	0985 508 121/10 M	934 688-009	0985 508 120/15 M	934 688-014	0985 508 121/15 M	934 688-010
Part number	Order number	Part number	Order number																									
0985 508 120/1 M	934 688-015	–	–																									
0985 508 120/2 M	934 688-011	0985 508 121/2 M	934 688-007																									
0985 508 120/5 M	934 688-012	0985 508 121/5 M	934 688-008																									
0985 508 120/10 M	934 688-013	0985 508 121/10 M	934 688-009																									
0985 508 120/15 M	934 688-014	0985 508 121/15 M	934 688-010																									
Technical illustration	<table><tr><th>M12</th><th>M12 to M12</th></tr><tr><td></td><td></td></tr></table>		M12	M12 to M12																								
M12	M12 to M12																											
																												
Face views / Wiring	<table><tr><td></td><td>1 = Yellow 2 = White 3 = Orange 4 = Blue</td></tr></table>			1 = Yellow 2 = White 3 = Orange 4 = Blue																								
	1 = Yellow 2 = White 3 = Orange 4 = Blue																											

Be Certain with Belden

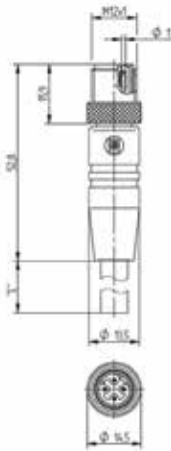

Ethernet Single-Ended and Double-Ende Cord Sets for Railway Applications

CAT5e (PROFINET), Shielded, 4-Poles, D coding

Environmental conditions	0985 508 120	0985 508 121
Environmental temperature	IP 67	
Degree of protection (IP), mounted	-40°C to +85°C	
Pollution degree	3	
Classifications		
Belden class	Industrial Ethernet Railway Connectors	
Belden brand	Lumberg Automation	
Mechanical data		
Type of plug-in contact	Male	Male to Male
Design of housing	Striaight	Straight to Striaight
Thread	M12	M12 to M12
Coding	D	
Materials		
Housing material / Molded body	PA	
Contact bearer material	PBT	
Contact material	CuSn	
Contact material / Surface refinement	gold-plated	
Knurled screw / nut material	CuZn, nickel-plated	
Approvals		
Approvals	EN 50155, IEC 61373, DIN CLC/TS 50467, DIN CEN/TS 45545, DIN 5510	
RoHS 2002/95 EG compliant	yes	
Cable specifications		
Cable jacket	PUR	
Color	Black	
Gauge	26 AWG	
Overall diameter	6.5 mm	
Conductor	8	
Insulation	PE	
Foil shield	yes	
Braided shield	yes	
Electrical data		
Contact resistance	≤ 5 mΩ	
Rated current In	4 A at 40°C	
Nominal voltage	60 V	
Rated voltage	250 V	
Test voltage	2 kV eff./60 s	
Insulation resistance	> 1 GΩ	

The application of these products in harsh environments should always be checked before use.
Specifications subject to alteration.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9