

Keysight E363xA Series Programmable DC Power Supplies

Data Sheet



Clean and Stable Power with Programmability at an Affordable Price

Affordable programmable power supplies to meet your needs

The Keysight Technologies, Inc. E363xA Series of programmable DC power supplies gives you the performance of the system power supplies at a decent price. All models provide clean power, excellent regulation and a fast transient response with built-in GPIB and RS-232 interfaces. The E363xA Series is designed to meet the requirements of the most demanding applications in R&D design verifications, production testing, and QA verifications with traditional quality and reliability which you can count on.

Excellent performance you can trust

With the 0.01% load and line regulation, the E363xA Series can maintain a steady output when power line and load changes occur. The power supplies specify both normal mode voltage/current noise and common mode current noise. The low normal mode noise specification assures clean power for precision circuitry applications, and the low common mode current provides isolation from power line current injection.

Remote interface

If you have an IEEE-488 card or RS-232 in a PC, these power supplies will work for you. Every model comes equipped with both GPIB and RS-232 as standard. All programming is done in easy-to-use SCPI (Standard Commands for Programmable Instruments). The user's guide describes the process for the first-time programmers.

Front panel operation

A knob and self-guiding keypads allow you to set the output at your desired resolution quickly and easily. You can store and recall for up to three complete setups using the internal non-volatile memory. The output on/off button sets the output to zero.

E3631A triple-output power supply

This famous 80-watt triple output supply offers three independent outputs: 0 to 6 V/5A, 0 to +25V/1A and 0 to -25V/1A. The 6 V output is electrically isolated from the ± 25 V supply to minimize any interference between circuits under test. The ± 25 V outputs can be set to track each other.

E3632A/33A/34A single-output dual range power supplies

These single output power supplies give you the flexibility to select from a dual output range. The output load is protected against overvoltage and overcurrent, which are easily monitored and adjusted from the front panel and remote interface. Remote sensing is available to eliminate the errors caused by voltage drops on the load leads. The E3633A/34A offer front and rear output terminals for easy wiring.



Reliable Power, Repeatable Results

- Single and triple output
- 80 W to 200 W output power
- Dual range output (except E3631A)
- Low noise and excellent regulation
- Remote sensing (except E3631A)
- Front and rear output terminals (E3633A/34A only)
- GPIB and RS-232 standard
- Save and recall functions
- Overvoltage protection, overcurrent protection (except E3631A)

E3631A/32A/33A/34A Programmable DC Power Supply Specifications

| Model Number | E3631A | | | E3632A | E3633A | E3634A |
|---|--|-------------------------|-------------------------|------------------------------------|------------------------------------|------------------------------------|
| | 1 | 2 | 3 | | | |
| DC output Rating (0 to 40 °C) | 0 to +6 V, 0 to 5 A | 0 to +25 V, 0 to 1 A | 0 to -25 V, 0 to 1 A | 0 to 15 V/7 A or 0 to 30 V/4 A | 0 to 8 V/20 A or 0 to 20 V/10 A | 0 to 25 V/7 A or 0 to 50 V/ 4 A |
| Load regulation ± (% of output + offset) | | | | < 0.01% + 2 mV < 0.01% + 250 µA | | |
| Line regulation ± (% of output + offset) | | | | < 0.01% + 2 mV < 0.01% + 250 µA | | |
| Ripple and noise (20 Hz to 20 MHz) | | | | | | |
| Normal mode voltage | < 350 µVrms/2 mVpp | | | < 350 µVrms/3 mVpp | < 500 µVrms/ 3 mVpp | |
| Normal mode current | < 2 mArms | < 500 µArms | | < 2 mArms | | |
| Accuracy¹ 12 months (25 °C + 5 °C), ± (% output + offset) | | | | | | |
| Programming | | | | | | |
| Voltage | 0.1% + 5 mV | 0.05% + 20 mV | | 0.05% + 10 mV | | |
| Current | 0.2% + 10 mA | 0.15% + 4 mA | | 0.2% + 10 mA | | |
| Readback ² | | | | | | |
| Voltage | 0.1% + 5 mV | 0.05% + 10 mV | | 0.05% + 5 mV | | |
| Current | 0.2% + 10 mA | 0.15% + 4 mA | | 0.15% + 5 mA | | |
| Transient response | Less than 50 µsec for output to recover to within 15 mV following a change in output current from full load to half load or vice versa | | | | | |

Supplemental Characteristics

| Model Number | E3631A | | | E3632A | E3633A | E3634A |
|--|--|----------------|--------------|--|-----------------------------------|---------------|
| | 1 | 2 | 3 | | | |
| AC input (47 Hz - 63 Hz) | 100 Vac ±10% (Opt 0E9)/115 Vac ±10% (Std)/230 Vac ±10% (0E3) | | | | | |
| Dimensions | 213 x mm W x 133 mm H x 348 mm D (8.4 x 5.2 x 13.7 in) | | | | | |
| Weight | 8.2 kg (18 lbs) net, 11 kg (24 lbs) shipping | | | 9.5 kg (21 lbs) net, 12 kg (26 lbs) shipping | | |
| Warranty | Three years for E363xA series power supplies Three months for standard shipped accessories | | | | | |
| Product regulation | Certified to CSA 22.2 No. 231 (for E3631A), No. 1010.1 (for E3632A/33A/34A); conforms to IEC 1010-1; carries CE marks; complies with CISPR-11, Group 1, Class A | | | | | |
| Common mode current | < 1.5 µArms | | | | | |
| Resolution | | | | | | |
| Program | 0.5 mV/0.5 mA | 1.5 mV/0.1 mA | | 1 mV/0.5 mA | 1 mV/1 mA | 3 mV/0.5 mA |
| Readback | 0.5 mV/0.5 mA | 1.5 mV/0.1 mA | | 0.5 mV/0.1 mA | 0.5 mV/1 mA | 1.5 mV/0.5 mA |
| Meter | 1 mV/1 mA | 10 mV/1 mA | | 1 mV/1 mA | 1 mV/1 mA (< 10A), 10 mA (≥ 10 A) | |
| Command processing time³ | < 50 msec | | | < 100 msec | | |
| OVP/OCP | | | | | | |
| Accuracy ± (% output + offset) | N/A | | | 0.5% + 0.5 V/0.5% + 0.5 A | | |
| Activation time | N/A | | | 1.5 msec, OVP ≥3 V/< 10 msec, OVP < 3 V and OCP <10 msec | | |
| Temperature coefficient per °C (% output + offset) | | | | | | |
| Voltage | 0.01% + 2 mV | | 0.01% + 3 mV | | | |
| Current | 0.02% + 3 mA | 0.02% + 0.5 mA | | 0.02% + 3 mA | | |
| Stability , constant load & temperature ± (% of output + offset), 8 hrs | | | | | | |
| Voltage | 0.03% + 1 mV | 0.02% + 2 mV | | 0.02% + 1 mV | | |
| Current | 0.1% + 3 mA | 0.05% + 1 mA | | 0.1% + 1 mA | | |
| Remote Sense (max. voltage in each load lead) | N/A | | | 1 V | 0.7 V | |
| Voltage programming speed , to within 1% of total excursion | | | | | | |
| Up | Full load | 11 msec | 50 msec | 50 msec | 95 msec | 80 msec |
| | No load | 10 msec | 20 msec | 20 msec | 45 msec | 100 msec |
| Down | Full load | 13 msec | 45 msec | 45 msec | 30 msec | 30 msec |
| | No load | 200 msec | 400 msec | 400 msec | 450 msec | 450 msec |

- Accuracy specifications are valid after a 1-hour warm-up and calibration at 25 °C.
- Accuracy refers to readback over GPIB and RS-232 or front panel with respect to actual output.
- Maximum time for output to change after receipt of commands.

Ordering Information

E3630 Series Power Supplies
E3631A 80-Watt Triple Power Supply
E3632A 120-Watt Single Power Supply
E3633A/34A 200-Watt Single Power Supply

Standard Shipped Accessories

User's & Service guide, Product
Reference CD, AC power cord

Power Options

Opt. 0E3 230 Vac \pm 10%
Opt. 0EM 115 Vac \pm 10%
Opt. 0E9 100 Vac \pm 10%

Other Options

Opt. 0L2 Extra manual sets
Opt. 1CM Rackmount kit*
Opt. UK6 Commercial calibration with test result data
E3600A-100 Test lead kit

Rackmount Kits*


Keysight E3631A/32A/33A/34A
To rackmount two instruments side-by-side
 Lock-link Kit (P/N 5061-9694)
 Flange Kit (P/N 5063-9214)
To rackmount one or two instruments in a sliding support shelf
 Support Shelf (P/N 5063-9256)
 Slide Kit (P/N 1494-0015) required for support shelf

* Rackmounting with 1CM or lock-link/flange kit requires Keysight or customer support rails Keysight Support Rails-E3663AC

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

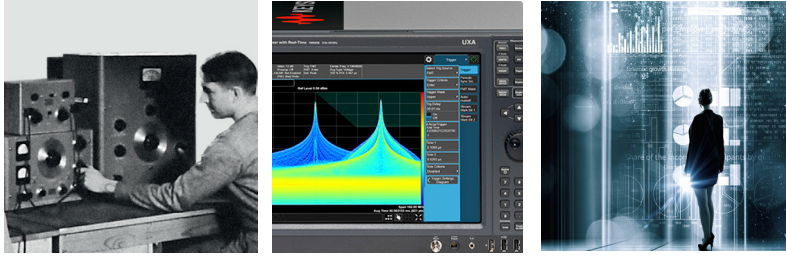

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

| | |
|---------------|------------------|
| Canada | (877) 894 4414 |
| Brazil | 55 11 3351 7010 |
| Mexico | 001 800 254 2440 |
| United States | (800) 829 4444 |

Asia Pacific

| | |
|--------------------|----------------|
| Australia | 1 800 629 485 |
| China | 800 810 0189 |
| Hong Kong | 800 938 693 |
| India | 1 800 11 2626 |
| Japan | 0120 (421) 345 |
| Korea | 080 769 0800 |
| Malaysia | 1 800 888 848 |
| Singapore | 1 800 375 8100 |
| Taiwan | 0800 047 866 |
| Other AP Countries | (65) 6375 8100 |

Europe & Middle East

| | |
|----------------|---------------|
| Austria | 0800 001122 |
| Belgium | 0800 58580 |
| Finland | 0800 523252 |
| France | 0805 980333 |
| Germany | 0800 6270999 |
| Ireland | 1800 832700 |
| Israel | 1 809 343051 |
| Italy | 800 599100 |
| Luxembourg | +32 800 58580 |
| Netherlands | 0800 0233200 |
| Russia | 8800 5009286 |
| Spain | 800 000154 |
| Sweden | 0200 882255 |
| Switzerland | 0800 805353 |
| | Opt. 1 (DE) |
| | Opt. 2 (FR) |
| | Opt. 3 (IT) |
| United Kingdom | 0800 0260637 |

For other unlisted countries: www.keysight.com/find/contactus (BP-9-7-17)

DEKRA Certified
ISO 9001 Quality Management System

www.keysight.com/go/quality
Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2015
Quality Management System

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.

KEYSIGHT SERVICES

Accelerate Technology Adoption.
Lower costs.

Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.



This information is subject to change without notice.
© Keysight Technologies, 2010-2018
Published in USA, May 8, 2018
5968-9726EN
www.keysight.com

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9