


"Auto" - Hard Wired (170 Series)

Line




HARD WIRED LINE AUTOTRANSFORMERS


- Single winding, does not provide isolation, for use where equipment is already isolated and only voltage change is required.
- Flexible world wide applications, 50 or 60 Hz. operation, step down (230VAC to 115 VAC) or step up (115VAC to 230VAC).
- Connection by flexible leads, 8" minimum length.
- Models 170A, 170B, 170C & 170D are CSA certified (# LR 3902).
- **Remember** - These units do NOT convert line frequency.

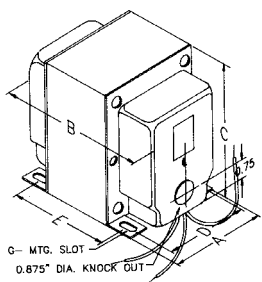

| Part No. | Capacity VA | Dimensions (Inches) | | | | | Wt. Lbs. |
|----------|-------------|---------------------|------|------|------|------|----------|
| | | A | B | C | D | E | |
| 170 | 50 | 2.19 | 2.63 | 2.63 | 1.75 | 1.56 | 2 |
| 170A | 100 | 2.50 | 3.00 | 3.06 | 2.00 | 1.94 | 3 |
| 170B | 200 | 3.13 | 3.50 | 3.81 | 2.50 | 2.19 | 4.5 |
| 170C | 300 | 3.13 | 4.00 | 3.81 | 2.50 | 2.69 | 6 |
| 170D | 500 | 3.75 | 4.50 | 4.56 | 3.00 | 3.31 | 10 |
| 170E | 750 | 3.75 | 5.50 | 4.56 | 3.00 | 4.31 | 14 |
| 170F | 1000 | 3.75 | 5.50 | 4.56 | 3.00 | 4.31 | 14.5 |
| 170G | 1500 | 4.38 | 6.63 | 5.30 | 3.50 | 5.10 | 22 |
| 170J | 2000 | 4.38 | 6.63 | 5.25 | 3.50 | 5.10 | 23 |




HARD WIRED LINE AUTOTRANSFORMERS

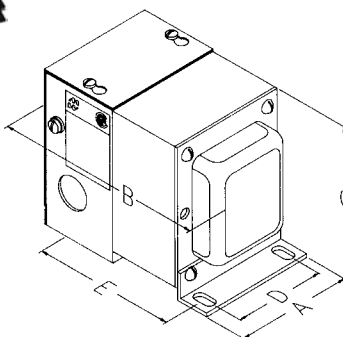

- Single winding, does not provide isolation, for use where equipment is already isolated and only voltage change is required.
- Flexible world wide applications, 50 or 60 Hz. operation, step down (230VAC to 115 VAC) or step up (115VAC to 230VAC).
- Totally enclosed rear case, includes handy internal grounding bolt.
- Extra vacuum varnish for use in high humidity.
- Includes a rear mounted (but not wired), standard 115VAC, 3-wire receptacle.
- Enclosed case with convenient knockouts and includes two cable clamps allowing for easy wire connections.
- Models 170SE, 170AE, 170BE, 170CE & 170DE are CSA certified (# LR3902)
- Connection by flexible leads, 8" minimum length
- **Remember** - These units do NOT convert line frequency.

| Part No. | Capacity VA | Dimensions (Inches) | | | | | Wt. Lbs. |
|----------|-------------|---------------------|------|------|------|------|----------|
| | | A | B | C | D | E | |
| 170SE | 50 | 3.13 | 4.00 | 4.13 | 2.25 | 3.13 | 3.5 |
| 170AE | 100 | 3.13 | 4.00 | 4.13 | 2.25 | 3.13 | 4 |
| 170BE | 200 | 3.13 | 4.25 | 4.13 | 2.25 | 3.38 | 5 |
| 170CE | 300 | 3.13 | 4.75 | 4.13 | 2.25 | 3.88 | 6.5 |
| 170DE | 500 | 3.75 | 5.00 | 4.88 | 2.75 | 4.13 | 10 |
| 170EE | 750 | 3.75 | 6.00 | 4.88 | 2.75 | 5.13 | 15 |
| 170FE | 1000 | 3.75 | 6.00 | 4.88 | 2.75 | 5.13 | 15.5 |
| 170GE | 1500 | 4.38 | 7.00 | 5.50 | 3.25 | 5.88 | 23.5 |
| 170JE | 2000 | 4.38 | 7.00 | 5.50 | 3.25 | 5.88 | 24.0 |



CANADA
Guelph, Ontario (519) 822-2960
St. Laurent, Quebec (514) 343-9010
USA
Cheektowaga, NY (716) 630-7030

www.hammondmfg.com



EUROPE
Basingstoke, UK 01256 812812

AUSTRALIA
Queenstown, Australia 61-8-8240-2244

"Auto" - Hard Wired (168 Series)




HARD WIRED LINE AUTOTRANSFORMERS

Line

- Single winding, does not provide isolation, for use where equipment is already isolated and only voltage change is required.
- Flexible world wide applications, 50 or 60 Hz. operation, 115VAC input.
- Output taps @ 85, 95, 105, 110, 115 and 125VAC.
- Ideal for manual line voltage adjustment for electronic equipment or small appliance operation.
- Models 168B, 168C & 168D are CSA certified (# LR3902)
- Connection by flexible leads, 8" minimum length.
- **Remember** - These units do NOT convert line frequency.

| Part No. | Capacity VA | Dimensions (Inches) | | | | | Wt. Lbs. |
|----------|-------------|---------------------|------|------|------|------|----------|
| | | A | B | C | D | E | |
| 168B | 200 | 3.13 | 3.25 | 3.81 | 2.50 | 1.94 | 4.3 |
| 168C | 350 | 3.13 | 4.00 | 3.81 | 2.50 | 2.69 | 6.5 |
| 168D | 500 | 3.75 | 4.00 | 4.56 | 3.00 | 2.81 | 8 |
| 168E | 750 | 3.75 | 4.50 | 4.56 | 3.00 | 3.31 | 10 |
| 168F | 1000 | 3.75 | 5.50 | 4.56 | 3.00 | 4.31 | 14 |
| 168H | 1500 | 4.38 | 6.13 | 5.25 | 3.50 | 4.50 | 20 |
| 168J | 2000 | 4.38 | 6.63 | 5.25 | 3.50 | 5.10 | 23 |

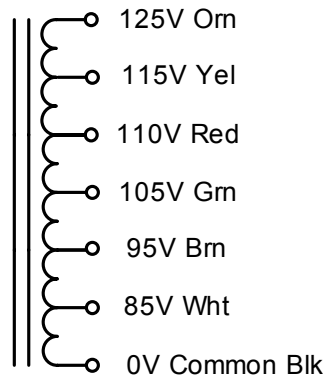

EUROPE

Basingstoke, UK 01256 812812

AUSTRALIA

Queenstown, Australia 61-8-8240-2244

www.hammondmfg.com



CANADA

Guelph, Ontario (519) 822-2960
St. Laurent, Quebec (514) 343-9010

USA

Cheektowaga, NY (716) 630-7030



Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9