


Receptacles

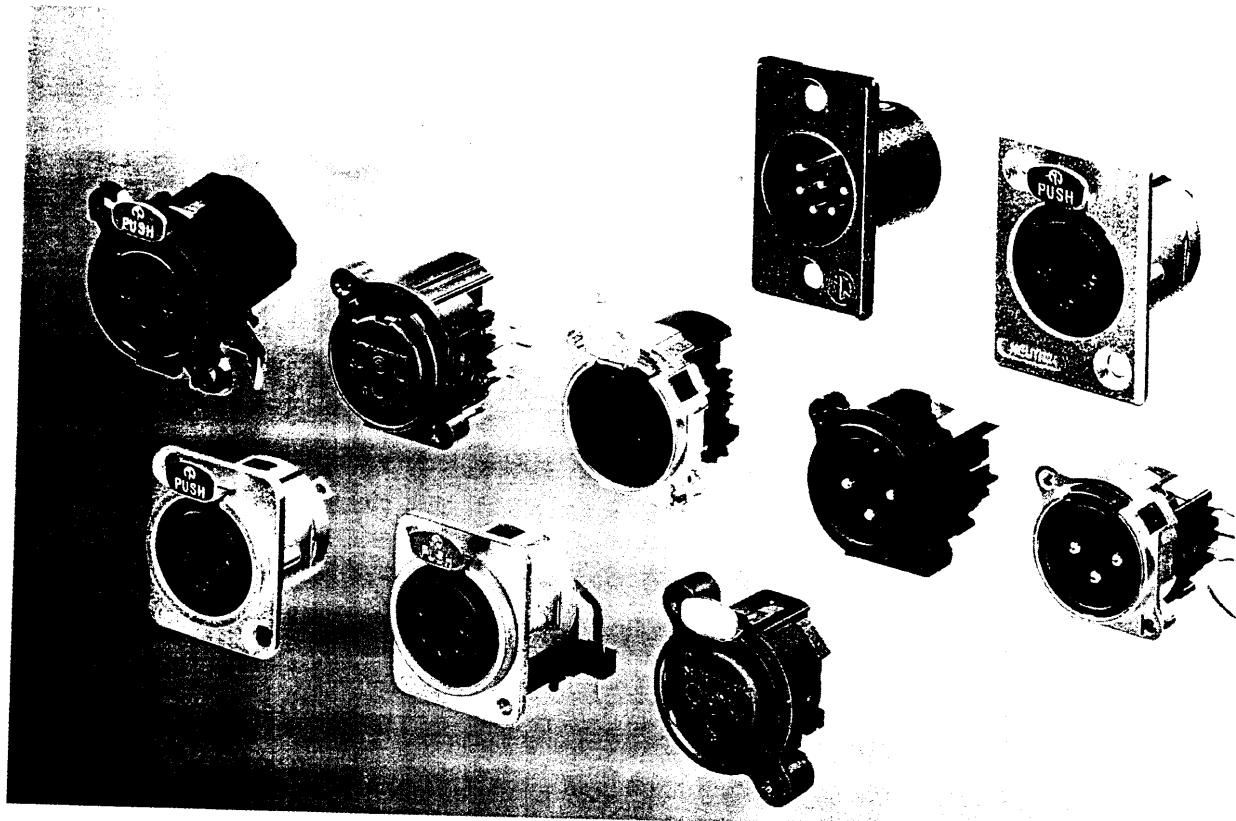

WE ARE SETTING STANDARDS

- *Eight different series to cover all conceivable applications*
- *From the world largest and most innovative XLR-manufacturer*
- *Easy to assemble, simple to use*
- *Reliable, robust with a worldwide reputation*


PRODUCT FEATURES

DIMENSIONAL DRAWINGS



(PCB layouts and dimensional drawings on request)

P Series


Smallest available hard wiring "CLASSICS"
Large solder cups.



NC3FP




NC3MP





DL Series


Unified metal shell for male and female. RF-protected.
Solder cups, or PCB terminations (4 & 5 pole only).





NC3FDL



NC*FDM3-H



NC3MDL




NC*MDM3-H



* = 4-5 pole

D Series


Unified metal shell for male and female. Insert premounted to PCB, shell to enclosure, front locked / unlocked.
RF-protected.





NC3FD-V



NC3FD-H




NC3MD-V





NC3MD-H

K Series


Extremely versatile and cost effective concept.
Metal brackets secure the socket to the PCB, machine insertable.
M3-thread screw holes with panel-ground contacts.





NC3FK-V



NC3FK-H




NC3MK-V





NC3MK-H

R Series


Small size, low cost.
XLR-sockets without ground contact, available with or without latch. Gold contacts on female.



NC3FPR-H




NC3MPR-H





E Series



Minimum weight, direct to the PCB, right angle sockets.
Escutcheon available. Gold contacts on female.



NC3FE




NC3ME





NHE

A and B Series


The new "State of the Art" receptacle.
Smallest size / highest packing density.
New designed contacts with polished contact areas and hard gold plating. TF-contacts.
Variety of shell and chassis grounding facilities, direct "Pin 1" to chassis ground connection available.
Special B series version with additional ground contacts for better RF-protection available.





NC3F*V



NC3F*H



NC3M*V





NC3M*H

* = A or B

Assembly distances
for

H, V and Y


HL and HR



Type Nr. CODING				SPECIAL VERSIONS/ REMARKS	SPECIFICATIONS																									
SHELL	CONT.	FEMALE	MALE		TYPE SPECIFIC	COMMON																								
Nickel	Silver	NC*FP	NC**MP	Compatibility: Switchcraft* DxM, DxF Cannon XLRx31, XLRx32 Dimensionally with D series *: 6-pole version with Switch- craft contact arrangement (6 FS/MS) available: contact factory	ELECTRICAL Number of contacts: 3-7 (except MP: 3-6) Rated current: see chart under common specs. MATERIALS Shell: ZnAlCu1, gal Ni or black chromium (Cr) plating Contacts - female (4-7 pole) & male: CuZn39Pb3 Contact surface: gal 2 µm Ag or gal 0.3 µm Au hard alloy over 2 µm Ni	ELECTRICAL Rated voltage: 250 V ac Dielectric strength: 1500 V dc Contact resistance: ≤ 5 mΩ Insulation resistance (Initial): >2·10 ⁹ Ω Insulation resistance after damp heat test: >1·10 ⁹ Ω																								
Black Cr	Gold	NC*FP-B	NC**MP-B																											
	Silver	NC3FP-BAG	NC3MP-BAG																											
* = 3-7 pole ** = 3-6 pole				PCB versions (4 & 5 pole): horizontal PCB mounting, fastening by chassis mounting holes with M3 threads or by self tapping PT® screws with thread 2.9x1.06 (tri-rondular) direct to PCB		P-, DL-Series: <table><tr><th>x</th><th>I (A)</th><th>□ (mm²/ AWG)</th><th>C (pF)</th></tr><tr><td>3</td><td>16</td><td>2.5/14</td><td>≤ 4</td></tr><tr><td>4</td><td>10</td><td>1.5/16</td><td>≤ 7</td></tr><tr><td>5</td><td>7.5</td><td>1.0/18</td><td>≤ 7</td></tr><tr><td>6</td><td>7.5</td><td>1.0/18</td><td>≤ 7</td></tr><tr><td>7</td><td>5</td><td>1.0/18</td><td>≤ 9</td></tr></table> x ... No. of contacts I ... Rated current per contact □ ... Max. wire size C ... Capacitance between contacts	x	I (A)	□ (mm²/ AWG)	C (pF)	3	16	2.5/14	≤ 4	4	10	1.5/16	≤ 7	5	7.5	1.0/18	≤ 7	6	7.5	1.0/18	≤ 7	7	5	1.0/18	≤ 9
x	I (A)	□ (mm²/ AWG)	C (pF)																											
3	16	2.5/14	≤ 4																											
4	10	1.5/16	≤ 7																											
5	7.5	1.0/18	≤ 7																											
6	7.5	1.0/18	≤ 7																											
7	5	1.0/18	≤ 9																											
Nickel	Silver	NC*FDL	NC*MDL																											
Black Cr	Gold	NC*FDL-B	NC*MDL-B																											
	Silver	NC*FDL-BAG	NC*MDL-BAG																											
Nickel	Silver	NC+MDM3-H	NC+MDM3-H																											
Black Cr	Silver	NC+MDM3-H-BAG	NC+MDM3-H-BAG																											
+ = 4 or 5 pole				Mounting holes with M3 threads: add suffix "-M3" Females: Retention spring instead of latch: add suffix "-0"	ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell: ZnAl4Cu1, gal Ni or black Cr plating Contacts: - male: CuZn39Pb3 Contact surface: gal 2 µm Ag or gal 0.3 µm Au hard alloy over 2 µm Ni	MECHANICAL Insertion / withdrawal force: ≤ 20 N / ≤ 10 N Retention method: - standard: latch lock - "-0" version: retention spring Separating force: ≥ 20 N																								
Nickel	Silver	NC3FD-V	NC3MD-V																											
Black Cr	Gold	NC3FD-V-B	NC3MD-V-B																											
	Silver	NC3FD-V-BAG	NC3MD-V-BAG																											
Nickel	Silver	NC3FD-H	NC3MD-H																											
Black Cr	Gold	NC3FD-H-B	NC3MD-H-B																											
	Silver	NC3FD-H-BAG	NC3MD-H-BAG																											
PA 6.6 GR	Silver	-	NC3MK-V																											
	Gold	NC3FK-V	-																											
	Silver	-	NC3MK-H																											
	Gold	NC3FK-H	-																											
PA 6.6 GR	Silver	-	NC3MPR-H																											
	Gold	NC3FPR-H	-																											
PA 6.6 GR	Silver	-	NC3ME-H																											
	Gold	NC3FE-H	-																											
Accessory: Snap on escutcheon NHE with mounting holes for selftapping screws PT-K30 Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	ENVIRONMENTAL Temperature range: -30°C to +80°C Flammability: UL 94HB Solderability: complies with IEC 68-2-20																									
Vertical versions: contact factory																														
Females: Retention spring instead of latch: add suffix "-0" no ground contact				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	MATERIALS Insert: PA 6.6 30% GR (glass reinforced) Contacts: - female (3-pole): CuSn6 Latch lock & spring: CK 67 steel, treated																									
Accessories: Snap on escutcheon NHE with mounting holes for selftapping screws PT-K30 Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	REMARKS Version with IDC wiring: Applicable wire size AWG 24 and 26 Special version for B series with addition- al ground contacts: add suffix "E" Special non quoted versions available on request. Fastening: A-series: self tapping PT® screws with thread 2.9x1.06 and tri-rondular confi- guration B-series: TAPTITE® screws M2.5 (tri-ron- dular)																									
Compatibility: Switchcraft RAPC series																														
Compatibility: Switchcraft RAPC series				ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZ																										

CONTACT ARRANGEMENTS

FEMALE: Mating side
MALE: Wiring side

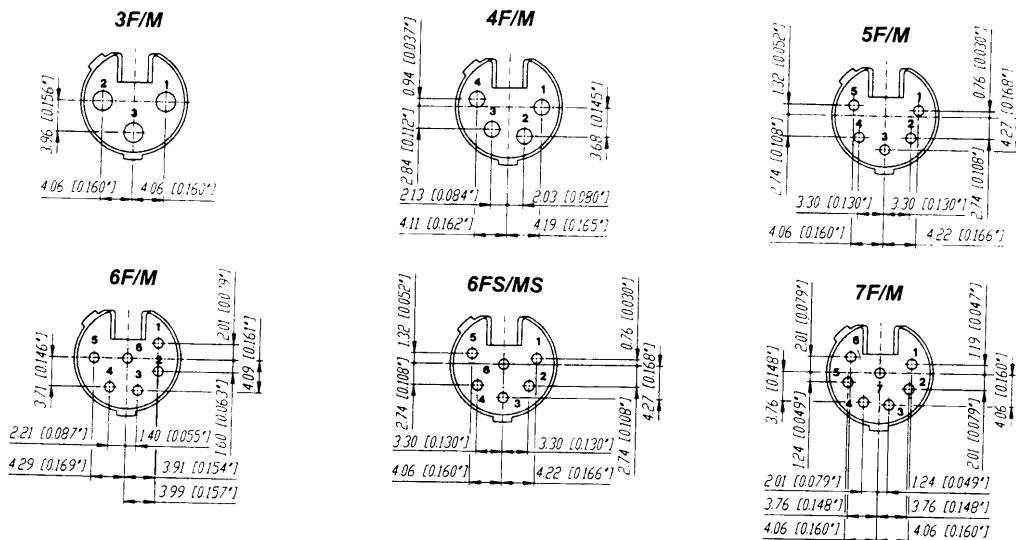

NEUTRIK "THE CONNECTOR INNOVATORS"

The "Chuck Principle" Strain Relief
The Helicon® Contact
The first Unified Male-Female XLR Receptacle
The first Rear Mount XLR Receptacle
The first direct to PCB XLR Receptacle
The Screwless Cable Connector
The Smallest Cable Connector
The first Locking Phone Jack
The first Fully Modular Connecting System
The first Die-Cast Phone Plug
The first Heavy Duty Waterproof XLR Connector
The first Safety-Proof & AVC-Proof Speaker-Amplifier Connecting System
The first Fully Crimped 1/4" Plug
The first "Ground Before Signal" Phono Plug
The Smallest XLR Socket
The first 1/4" Jack with separated retention
The first Bantam Plug with separated retention and gold contacts
The first combined Jack-XLR Receptacle
The smallest and most universal XLR Receptacle

(C Series et al.)	1975
(D Series)	1975
(D Series)	1980
(D Series)	1980
(D Series)	1980
(X Series)	1981
(X Series)	1981
(J Series)	1981
(NEUTRICON®)	1982
(P Series)	1983
(HD Series)	1986
(SPEAKON®)	1987
(KIK)	1988
(PROFI)	1989
(R Series)	1990
(J Series)	1990
(TT Series)	1991
(Combo)	1992
(A/B Series)	1995


REPRESENTED AND SERVICED BY:

Neutrik AG
Liechtenstein
Tel.: 075/237 24 24
Fax.: 075/232 53 93

Neutrik USA INC.
USA
Tel.: 908/901 9488
Fax.: 908/901 9608

Neutrik UK
Great Britain
Tel.: 019 83/811 441
Fax.: 019 83/811 439

Neutrik Zürich AG
Switzerland
Tel.: 01/734 0400
Fax.: 01/734 3891

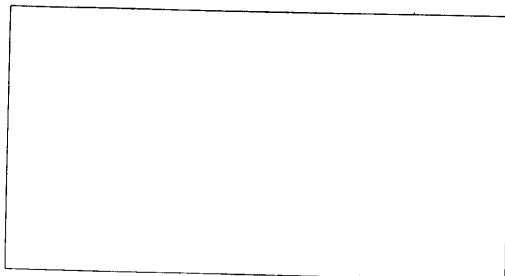

NEUTRIK
CONNECTING THE WORLD

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9