



MPL4700 - MPL4703
CONTROL DEVICES - MMSM PIN
AND LIMITER DIODES
RoHS Compliant

GENERAL DESCRIPTION

This series of surface mount PIN and Limiter diodes utilize new and unique monolithic MMSM technology. The technology is a package/device integration accomplished at the wafer fabrication level. Since the cathode and anode interconnections utilize precision photolithographic techniques rather than wire bonds, parasitic package inductance is tightly controlled. The package parasitics provide smooth non-resonant functionality through X Band. This series of devices meets RoHS requirements per EU Directive 2002/95/EC.

APPLICATIONS

The MPL4700 series of Limiter diodes are design for low to medium power receiver protection. The typical leakage output power for the MPL4701 is +20 dbm versus +24 dbm for the MPL4700. The MPL4702 is optimized for MRI surface coil applications.

Receiver protection circuitry frequently requires the antiparallel installation of 2 diodes. Microsemi added antiparallel versions (-406 style) of our standard (-206 style) configurations. GC4702 and GC4703 – 406.

KEY FEATURES

- Up to 10W incident RF power handling
- Antiparallel configuration available
- Low parasitics
- $L_P = 0.02\text{nH}$ Typical
- $C_P = 0.04\text{pF}$ Typical
- Broadband Performance through X-Band
- Available on Tape & Reel or on Film Frame for pick & place
- Small, SOD 323 Footprint
- RoHS Compliant ¹

1- These devices are supplied with gold terminations.

APPLICATION/BENEFITS

- Receiver protection circuits
- Broadband Switching
- Economy Switching
- RF Attenuators
- MRI

ABSOLUTE MAXIMUM RATINGS @ 25°C

Rating	Symbol	Value	Unit
Maximum Leakage Current @80% of minimum Rated V_B	I_R	0.5	μA
Operating Temperature	T_{OP}	-55 to +150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-65 to +150	$^{\circ}\text{C}$

For the most current data, consult MICROSEMI's website: www.MICROSEMI.com
 Specifications are subject to change, consult the RFIS factory at (978) 442-5600 for the latest information.



MPL4700 - MPL4703
 CONTROL DEVICES - MMSM PIN
 AND LIMITER DIODES
 RoHS Compliant

DEVICE ELECTRICAL PARAMETERS AT 25°C

Model Number	Package Style	V_B (V) $I_R=10\mu A$ (Min)	C_T (pF) ¹ @ -10V (Max)	R_S (Ω) ² @ 1mA (Typ)	R_S (Ω) ² @ 10mA (Max)	V_F $I_f = 100\mu A$ (Min)
MPL4700	206	25	0.15	4	2.0 ^a	-
MPL4701	206	15	0.20	6	2.5 ^a	-
MPL4702	406	50 ^b	3.0 ^c	12	2.0 ^a	0.45
MPL4703	406	25 ^b	0.3 ^c	6	3.0 ^a	0.73

Model Number	Package Style	V_F $I_f = 100mA$ (Max)	T_L (Typ)	Application
MPL4700	206	-	20	Receiver Protection
MPL4701	206	-	10	Receiver Protection
MPL4702	406	1.0	30	Anti-parallel Pair MRI Surface Coil Detune
MPL4703	406	1.2	20	Receiver Protection

Notes:

- 1- Capacitance is measured at $f = 1$ MHz.
- 2- Series Resistance (R_S) is measured at $f = 100$ MHz. Devices are mounted in a package suitable for testing.
 - a. R_S is measured at 1 GHz for the MPL series devices.
 - b. Not measured in anti-parallel configuration.
 - c. $V_r = 0V$. This value is the sum of two junctions.

For the most current data, consult MICROSEMI's website: www.MICROSEMI.com
 Specifications are subject to change, consult the RFIS factory at (978) 442-5600 for the latest information.



MPL4700 - MPL4703
CONTROL DEVICES - MMSM PIN
AND LIMITER DIODES
 RoHS Compliant

PACKAGE STYLE 206

OPTIONAL (NOTE 1)
CATHODE INDICATOR

CATHODE INDICATOR

GLASS

SILICON

A

B

C

D
2 PLCS

E

G

F

GOLD PADS
2 PLCS

NOTES
1. AT THE DESCRETION OF THE SUPPLIER.


DIM	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.038	0.048	0.965	1.219
B	0.011	0.021	0.279	0.533
C	0.018	0.028	0.457	0.711
D	0.014	0.024	0.356	0.610
E	0.006	0.016	0.152	0.406
F	0.007	0.017	0.178	0.432
G	0.011	0.021	0.279	0.533

For the most current data, consult MICROSEMI's website: www.MICROSEMI.com
 Specifications are subject to change, consult the RFIS factory at (978) 442-5600 for the latest information.



MPL4700 - MPL4703
CONTROL DEVICES - MMSM PIN
AND LIMITER DIODES
 RoHS Compliant

PACKAGE STYLE 406

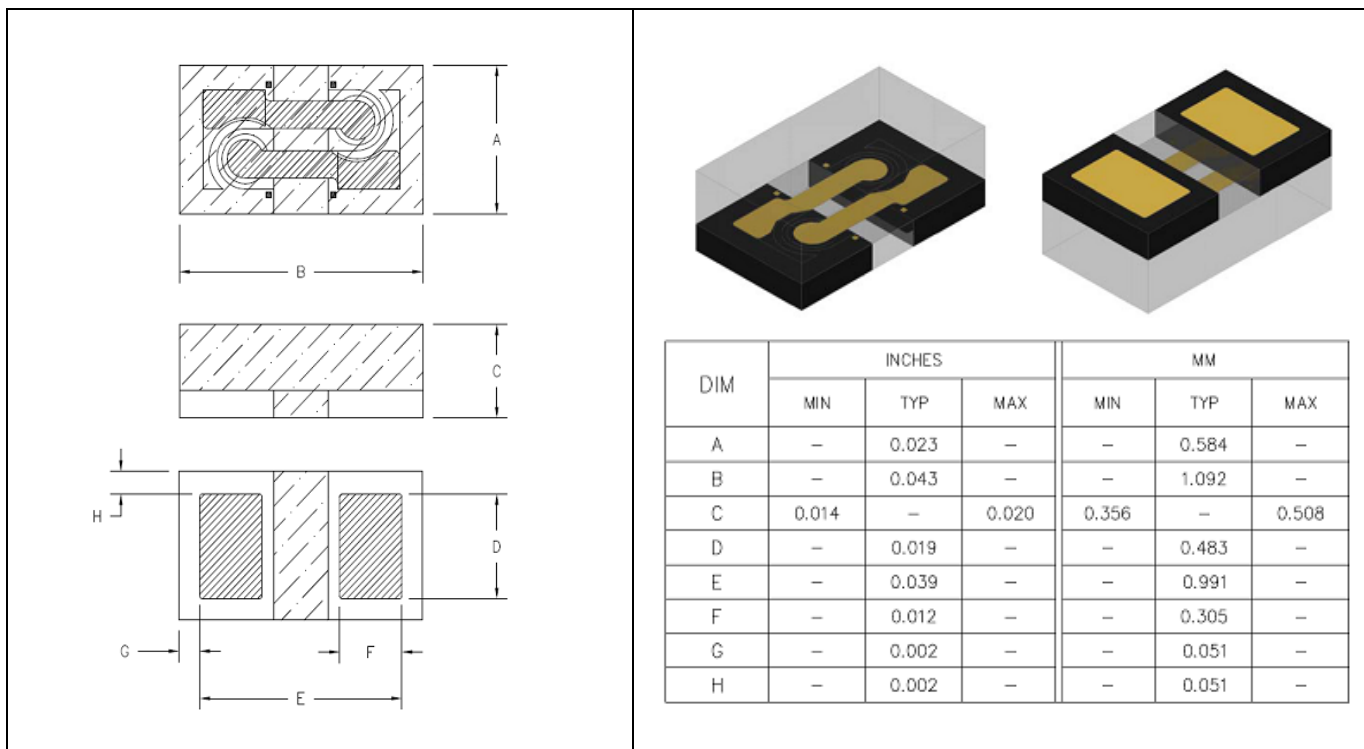

Revision History

Revision Level / Date	Para. Affected	Description
1 / 21 October 2013	-	Initial Release
2 / 17 November 2014	A	Add Part# MPL4703 and Application notes

For the most current data, consult MICROSEMI's website: www.MICROSEMI.com
 Specifications are subject to change, consult the RFIS factory at (978) 442-5600 for the latest information.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9