



# 3V to 5.5V, up to 250kbps True RS-232 Transceiver with 4 $\mu$ A AutoShutdown Plus and Power-On Reset

## General Description


The MAX3320 combines a microprocessor ( $\mu$ P) supervisory circuit with an RS-232 transceiver. The power-on reset performs a single function: it asserts a reset signal whenever the  $V_{CC}$  supply voltage declines below a preset threshold, staying asserted for at least 100ms after  $V_{CC}$  rises above the reset threshold. The MAX3320 has an active-low  $\overline{\text{RESET}}$  output, which is guaranteed to be in the correct state for  $V_{CC}$  down to 1V. The reset comparator is designed to ignore fast transients on  $V_{CC}$ . Reset thresholds suitable for operation with a variety of supply voltages are available.

The MAX3320 transceivers have a proprietary low-dropout transmitter output stage, enabling true RS-232 performance with a dual charge pump powered from a +3V to +5.5V supply. The device requires only four small 0.1 $\mu$ F external charge-pump capacitors, and is guaranteed to run at data rates of up to 250kbps. It comes in the space-saving 20-pin SSOP package.

## Applications

Palmtop Computers  
Portable/Battery-Powered Equipment  
Hand-Held Equipment  
Peripherals  
Printers

## Pin Configuration

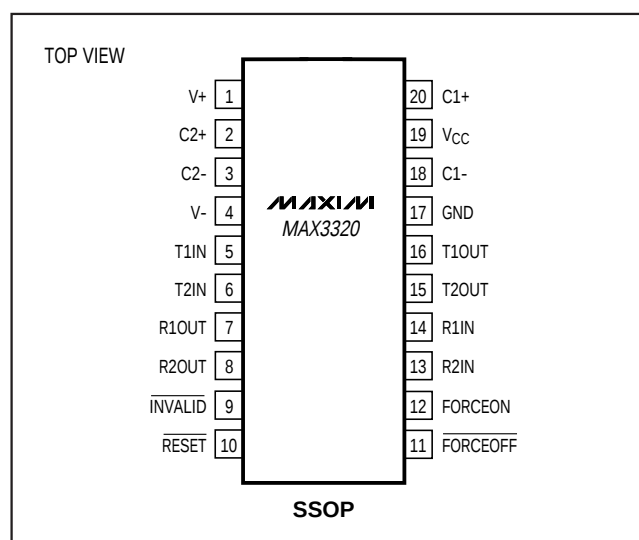

## Features

- ◆ Precise Monitoring of 5V and 3.3V Power-Supply Voltages:
  - 100ms (min) Power-On  $\overline{\text{RESET}}$  Pulse Width
  - Power-Supply Transient Immunity
  - Guaranteed  $\overline{\text{RESET}}$  Valid to  $V_{CC} = 1V$
- ◆ 4 $\mu$ A Supply Current Achieved with AutoShutdown Plus
- ◆ Receivers Always Active
- ◆ Power-On Reset Always Active
- ◆ 4 $\mu$ A Low-Power Shutdown
- ◆ 250kbps Guaranteed Data Rate

## Ordering Information

| PART*       | TEMP. RANGE    | PIN-PACKAGE |
|-------------|----------------|-------------|
| MAX3320_CAP | 0°C to +70°C   | 20 SSOP     |
| MAX3320_EAP | -40°C to +85°C | 20 SSOP     |

\* This part offers a choice of reset threshold voltage. From the table below, select the suffix corresponding to the desired threshold and insert it into the blank to complete the part number.

| SUFFIX | RESET THRESHOLD (V) |
|--------|---------------------|
| A      | 4.25                |
| B      | 2.85                |
| L      | 4.63                |
| T      | 3.08                |

Typical Operating Circuit appears at end of data sheet.

AutoShutdown Plus is a trademark of Maxim Integrated Products.



Maxim Integrated Products 1

For free samples & the latest literature: <http://www.maxim-ic.com>, or phone 1-800-998-8800.  
For small orders, phone 408-737-7600 ext. 3468.

MAX3320A/B/L/T

# 3V to 5.5V, up to 250kbps True RS-232 Transceiver with 4 $\mu$ A AutoShutdown Plus and Power-On Reset

## ABSOLUTE MAXIMUM RATINGS

|                                                   |                                   |                                                       |                 |
|---------------------------------------------------|-----------------------------------|-------------------------------------------------------|-----------------|
| V <sub>CC</sub> .....                             | -0.3V to 6V                       | Short-Circuit Duration                                |                 |
| V <sub>+</sub> (Note 1) .....                     | -0.3V to 7V                       | T <sub>OUT</sub> .....                                | Continuous      |
| V <sub>-</sub> (Note 1) .....                     | 0.3V to -7V                       | Continuous Power Dissipation (T <sub>A</sub> = +70°C) |                 |
| V <sub>+</sub> +  V <sub>-</sub>   (Note 1) ..... | 13V                               | SSOP (derate 8.00mW/°C above +70°C) .....             | 640mW           |
| Input Voltages                                    |                                   | Operating Temperature Ranges                          |                 |
| T <sub>IN</sub> , FORCEOFF, FORCEON .....         | -0.3V to 6V                       | MAX3320_CAP .....                                     | 0°C to +70°C    |
| R <sub>IN</sub> .....                             | ±25V                              | MAX3320_EAP .....                                     | -40°C to +85°C  |
| Output Voltages                                   |                                   | Storage Temperature Range .....                       | -65°C to +160°C |
| T <sub>OUT</sub> .....                            | ±13.2V                            | Lead Temperature (soldering, 10sec) .....             | +300°C          |
| R <sub>OUT</sub> , INVALID, RESET .....           | -0.3V to (V <sub>CC</sub> + 0.3V) |                                                       |                 |

**Note 1:** V<sub>+</sub> and V<sub>-</sub> can have a magnitude of +7V (max), but their absolute difference cannot exceed +13V.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS

(V<sub>CC</sub> = 3V to 5.5V, C1–C4 = 0.1 $\mu$ F (tested at 3.3V  $\pm$ 10%), C1 = 0.047 $\mu$ F, C2–C4 = 0.33 $\mu$ F (tested at 5V  $\pm$ 10%), T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.)

| PARAMETER                                       | CONDITIONS                                                                                                                                        | MIN                    | TYP                   | MAX  | UNITS      |
|-------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|-----------------------|------|------------|
| <b>DC CHARACTERISTICS</b>                       |                                                                                                                                                   |                        |                       |      |            |
| Power-Supply Current                            | No load, V <sub>CC</sub> = 3.3V or 5V, T <sub>A</sub> = +25°C                                                                                     |                        | 0.45                  | 1.0  | mA         |
| Shutdown Supply Current                         | FORCEOFF = GND, T <sub>A</sub> = +25°C                                                                                                            |                        | 4.0                   | 10   | $\mu$ A    |
| AutoShutdown Plus Supply Current                | All R <sub>IN</sub> unconnected, FORCEON = GND, FORCEOFF = V <sub>CC</sub> , all T <sub>IN</sub> = V <sub>CC</sub> or GND, T <sub>A</sub> = +25°C |                        | 4.0                   | 10   | $\mu$ A    |
| <b>LOGIC INPUTS AND RECEIVER OUTPUTS</b>        |                                                                                                                                                   |                        |                       |      |            |
| Input Logic Threshold Low                       | T <sub>IN</sub> , FORCEON, FORCEOFF                                                                                                               |                        |                       | 0.8  | V          |
| Input Logic Threshold High                      | T <sub>IN</sub> , FORCEON, FORCEOFF                                                                                                               | V <sub>CC</sub> = 3.3V | 2.0                   |      | V          |
|                                                 |                                                                                                                                                   | V <sub>CC</sub> = 5V   | 2.4                   |      |            |
| Input Leakage Current                           | T <sub>IN</sub> , FORCEON, FORCEOFF                                                                                                               |                        | ±0.01                 | ±1.0 | $\mu$ A    |
| Input Hysteresis                                | T <sub>IN</sub> , FORCEON, FORCEOFF                                                                                                               |                        | 250                   |      | mV         |
| Output Voltage Low                              | I <sub>OUT</sub> = 1.6mA                                                                                                                          |                        |                       | 0.4  | V          |
| Output Voltage High                             | I <sub>OUT</sub> = -1mA                                                                                                                           | V <sub>CC</sub> - 0.6  | V <sub>CC</sub> - 0.1 |      | V          |
| <b>RECEIVER INPUTS</b>                          |                                                                                                                                                   |                        |                       |      |            |
| Input Voltage Range                             |                                                                                                                                                   | -25                    |                       | 25   | V          |
| Input Threshold Low                             | V <sub>CC</sub> = 3.3V                                                                                                                            | 0.6                    | 1.2                   |      | V          |
|                                                 | V <sub>CC</sub> = 5V                                                                                                                              | 0.8                    | 1.5                   |      |            |
| Input Threshold High                            | V <sub>CC</sub> = 3.3V                                                                                                                            |                        | 1.5                   | 2.4  | V          |
|                                                 | V <sub>CC</sub> = 5V                                                                                                                              |                        | 1.8                   | 2.4  |            |
| Input Hysteresis                                |                                                                                                                                                   |                        | 0.3                   |      | V          |
| Input Resistance                                | T <sub>A</sub> = +25°C                                                                                                                            | 3                      | 5                     | 7    | k $\Omega$ |
| <b>INVALID OUTPUT</b>                           |                                                                                                                                                   |                        |                       |      |            |
| Receiver Input Threshold to INVALID Output High | Figure 3, positive threshold                                                                                                                      |                        |                       | 2.7  | V          |
|                                                 | Figure 3, negative threshold                                                                                                                      | -2.7                   |                       |      |            |
| Receiver Input Threshold to INVALID Output Low  | Figure 3                                                                                                                                          | -0.3                   |                       | 0.3  | V          |
| INVALID Output Voltage Low                      | I <sub>OUT</sub> = 1.6mA                                                                                                                          |                        |                       | 0.4  | V          |

# 3V to 5.5V, up to 250kbps True RS-232 Transceiver with 4μA AutoShutdown Plus and Power-On Reset

MAX3320A/B/L/T

## ELECTRICAL CHARACTERISTICS (continued)

(V<sub>CC</sub> = 3V to 5.5V, C1–C4 = 0.1μF (tested at 3.3V ±10%), C1 = 0.047μF, C2–C4 = 0.33μF (tested at 5V ±10%), T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.)

| PARAMETER                                                                   | CONDITIONS                                                                        | MIN                   | TYP  | MAX  | UNITS |
|-----------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------|------|------|-------|
| $\overline{\text{INVALID}}$ Output Voltage High                             | I <sub>OUT</sub> = -1mA                                                           | V <sub>CC</sub> - 0.6 |      |      | V     |
| Receiver Positive or Negative Threshold to $\overline{\text{INVALID}}$ High | Figure 3                                                                          | 0.1                   |      |      | μs    |
| Receiver Positive or Negative Threshold to $\overline{\text{INVALID}}$ Low  | Figure 3                                                                          | 90                    |      |      | μs    |
| AUTOSHUTDOWN PLUS (FORCEON = GND, FORCEOFF = V <sub>CC</sub> )              |                                                                                   |                       |      |      |       |
| Receiver or Transmitter Edge to Transmitters Enabled                        | Figure 5                                                                          | 25                    |      |      | μs    |
| Receiver or Transmitter Edge to Shutdown                                    | Figure 3                                                                          | 15                    | 30   | 60   | sec   |
| TRANSMITTER OUTPUTS                                                         |                                                                                   |                       |      |      |       |
| Output Voltage Swing                                                        | All transmitter outputs loaded with 3kΩ to ground                                 | ±5.0                  | ±5.4 |      | V     |
| Output Resistance                                                           | V <sub>CC</sub> = V <sub>+</sub> = V <sub>-</sub> = GND, V <sub>T_OUT</sub> = ±2V | 300                   | 10M  |      | Ω     |
| Output Short-Circuit Current                                                | T <sub>OUT</sub> = GND, T <sub>IN</sub> = V <sub>CC</sub> or GND                  | ±35                   |      | ±60  | mA    |
| Output Leakage Current                                                      | V <sub>T_OUT</sub> = ±12V, V <sub>CC</sub> = 0 to 5.5V, transmitters disabled     |                       |      | ±25  | μA    |
| RESET OUTPUT                                                                |                                                                                   |                       |      |      |       |
| $\overline{\text{RESET}}$ Operating Voltage Range                           | MAX3320_C                                                                         | 1.0                   | 5.5  |      | V     |
|                                                                             | MAX3320_E                                                                         | 1.2                   | 5.5  |      |       |
| $\overline{\text{RESET}}$ Threshold                                         | MAX3320A                                                                          | 4.00                  | 4.25 | 4.50 | V     |
|                                                                             | MAX3320B                                                                          | 2.70                  | 2.85 | 3.00 |       |
|                                                                             | MAX3320L                                                                          | 4.50                  | 4.63 | 4.75 |       |
|                                                                             | MAX3320T                                                                          | 3.00                  | 3.08 | 3.15 |       |
| $\overline{\text{RESET}}$ Output Voltage                                    | I <sub>SINK</sub> = 1.2mA, V <sub>CC</sub> = reset threshold, MAX3320B/T          | 0.3                   |      |      | V     |
|                                                                             | I <sub>SINK</sub> = 3.2mA, V <sub>CC</sub> = reset threshold, MAX3320A/L          | 0.4                   |      |      |       |
|                                                                             | I <sub>SINK</sub> = 50μA, V <sub>CC</sub> > 1V, MAX3320_C                         | 0.3                   |      |      |       |
|                                                                             | I <sub>SINK</sub> = 100μA, V <sub>CC</sub> > 1.2V, MAX3320_E                      | 0.4                   |      |      |       |

# 3V to 5.5V, up to 250kbps True RS-232 Transceiver with 4 $\mu$ A AutoShutdown Plus and Power-On Reset




## TIMING CHARACTERISTICS

( $V_{CC} = 3V$  to  $5.5V$ ,  $C_1$ – $C_4 = 0.1\mu F$ ,  $C_1$ – $C_4 = 0.1\mu F$  (for  $3.3V \pm 10\%$ ),  $C_1 = 0.047\mu F$ ,  $C_2$ – $C_4 = 0.33\mu F$  (tested at  $5V \pm 10\%$ ),  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .)

| PARAMETER                                | CONDITIONS                                                                                                              | MIN                       | TYP | MAX | UNITS     |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|---------------------------|-----|-----|-----------|
| Maximum Data Rate                        | $R_L = 3k\Omega$ , $C_L = 1000pF$ , one transmitter switching                                                           | 250                       |     |     | kbps      |
| Receiver Propagation Delay               | $R_{IN}$ to $R_{OUT}$ , $C_L = 150pF$                                                                                   | $t_{PHL}$                 |     | 0.3 | $\mu s$   |
|                                          |                                                                                                                         | $t_{PLH}$                 |     | 0.3 |           |
| Transmitter Skew                         | $ t_{PHL} - t_{PLH} $                                                                                                   |                           | 100 |     | ns        |
| Receiver Skew                            | $ t_{PHL} - t_{PLH} $                                                                                                   |                           | 200 |     | ns        |
| Transition-Region Slew Rate              | $V_{CC} = 3.3V$ , $R_L = 3k\Omega$ to $7k\Omega$ , measured from $+3V$ to $-3V$ or $-3V$ to $+3V$ , $T_A = +25^\circ C$ | $C_L = 150pF$ to $1000pF$ |     | 6   | $V/\mu s$ |
|                                          |                                                                                                                         | $C_L = 150pF$ to $2500pF$ |     | 4   |           |
| $V_{CC}$ to $\overline{RESET}$ Delay     | 100mV overdrive from reset threshold                                                                                    |                           | 40  |     | $\mu s$   |
| $\overline{RESET}$ Active Timeout Period | $V_{CC} =$ reset threshold                                                                                              | 100                       |     | 280 | ms        |

## Typical Operating Characteristics

( $V_{CC} = 3.3V$ , 250kbps data rate,  $C_1$ – $C_4 = 0.1\mu F$ , all transmitters loaded with  $3k\Omega$ . Typical values are at  $T_A = +25^\circ C$ , unless otherwise noted.)

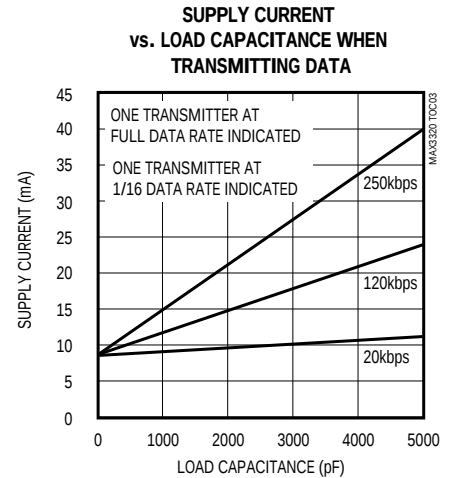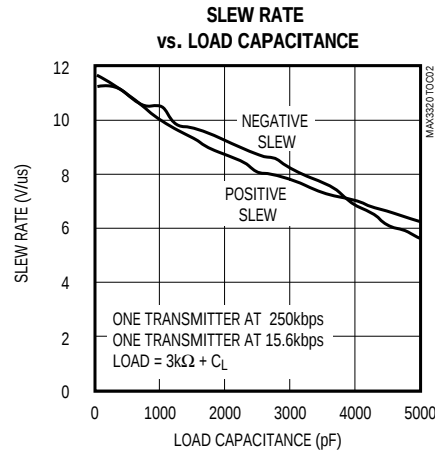
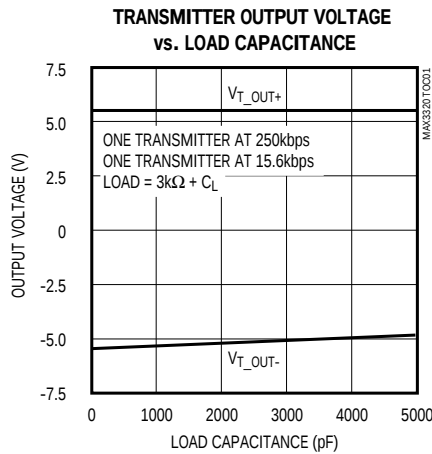


# 3V to 5.5V, up to 250kbps True RS-232 Transceiver with 4 $\mu$ A AutoShutdown Plus and Power-On Reset

MAX3320A/B/L/T

## Typical Operating Characteristics (continued)

(V<sub>CC</sub> = 3.3V, 250kbps data rate, C1–C4 = 0.1 $\mu$ F, all transmitters loaded with 3k $\Omega$ . Typical values are at T<sub>A</sub> = +25°C, unless otherwise noted.)

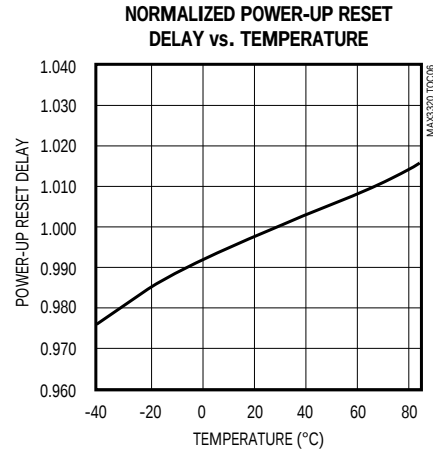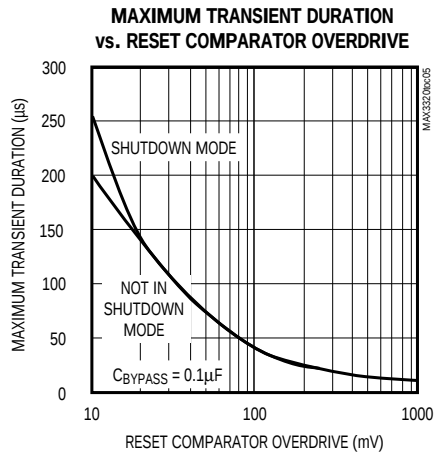

## Pin Description

| PIN    | NAME            | FUNCTION                                                                                                                                                       |
|--------|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1      | V+              | 5.5V generated by the charge pump                                                                                                                              |
| 2      | C2+             | Positive terminal of inverting charge-pump capacitor                                                                                                           |
| 3      | C2-             | Negative terminal of inverting charge-pump capacitor                                                                                                           |
| 4      | V-              | -5.5V generated by the charge pump                                                                                                                             |
| 5, 6   | T_IN            | TTL/CMOS Transmitter Inputs (T1IN and T2IN)                                                                                                                    |
| 7, 8   | R_OUT           | TTL/CMOS Receiver Outputs (R1OUT and R2OUT)                                                                                                                    |
| 9      | INVALID         | Output of the Valid Signal Detector. Asserts when no valid RS-232 levels are present on any of the receiver inputs for 90 $\mu$ s.                             |
| 10     | RESET           | RESET Output. RESET remains low while V <sub>CC</sub> is below the reset threshold, and for 280ms (max) after V <sub>CC</sub> rises above the reset threshold. |
| 11     | FORCEOFF        | Force-Off Input. Drive FORCEOFF low to shut down transmitters and on-board power supply. This overrides AutoShutdown Plus and FORCEON (Table 1).               |
| 12     | FORCEON         | Force-On Input. Drive FORCEON high to override AutoShutdown Plus, keeping transmitters on (FORCEOFF must be high) (Table 1).                                   |
| 13, 14 | R_IN            | RS-232 Receiver Inputs (R2IN and R1IN)                                                                                                                         |
| 15, 16 | T_OUT           | RS-232 Transmitter Outputs (T2OUT and T1OUT)                                                                                                                   |
| 17     | GND             | Ground                                                                                                                                                         |
| 18     | C1-             | Negative terminal of voltage-doubler charge-pump capacitor                                                                                                     |
| 19     | V <sub>CC</sub> | +3V to +5.5V Supply Voltage                                                                                                                                    |
| 20     | C1+             | Positive terminal of voltage-doubler charge-pump capacitor                                                                                                     |

# 3V to 5.5V, up to 250kbps True RS-232 Transceiver with 4 $\mu$ A AutoShutdown Plus and Power-On Reset

**Table 1. MAX3320 Output Control Truth Table**

| FORCEON | $\overline{\text{FORCEOFF}}$ | AUTOSHUTDOWN PLUS* | OPERATION STATUS                     | T_OUT  | R_OUT  |
|---------|------------------------------|--------------------|--------------------------------------|--------|--------|
| X       | 0                            | X                  | Shutdown (forced off)                | High-Z | Active |
| 1       | 1                            | X                  | Normal operation (forced on)         | Active | Active |
| 0       | 1                            | <30sec*            | Normal operation (AutoShutdown Plus) | Active | Active |
| 0       | 1                            | >30sec*            | Shutdown (AutoShutdown Plus)         | High-Z | Active |

X = Don't Care

\*Time since last receiver or transmitter input activity

## Detailed Description

### Dual Charge-Pump Voltage Converter

The MAX3320's internal power supply consists of a regulated dual charge pump that provides output voltages of +5.5V (doubling charge pump) and -5.5V (inverting charge pump) while V<sub>CC</sub> remains in the 3V to 5.5V range. The charge pumps operate in discontinuous mode; they are enabled if the output voltages are less than 5.5V, and disabled if output voltages exceed 5.5V. Each charge pump requires a flying capacitor (C1, C2) and a reservoir capacitor (C3, C4) to generate the V+ and V- supplies.

### RS-232 Transmitters

The transmitters are inverting level translators that convert CMOS-logic levels to 5V EIA/TIA-232 levels. The MAX3320 transmitters guarantee a 250kbps data rate with worst-case loads of 3k $\Omega$  in parallel with 1000pF, providing compatibility with PC-to-PC communication software (such as LapLink™). Transmitters can be paralleled to drive multiple receivers. Figure 1 shows a complete system connection.

When  $\overline{\text{FORCEOFF}}$  is driven to ground, the transmitter's outputs become high impedance. When the AutoShutdown Plus circuitry senses that all receiver and transmitter inputs are inactive for more than 30sec, the transmitters turn off and the outputs go into a high-impedance state, but the receivers remain active. When the power is off or the MAX3320 is shut down, outputs may be driven up to  $\pm 12V$ .

**The transmitter inputs do not have pull-up resistors. Connect unused inputs to GND or V<sub>CC</sub>.**

Laplink is a trademark of Traveling Software.

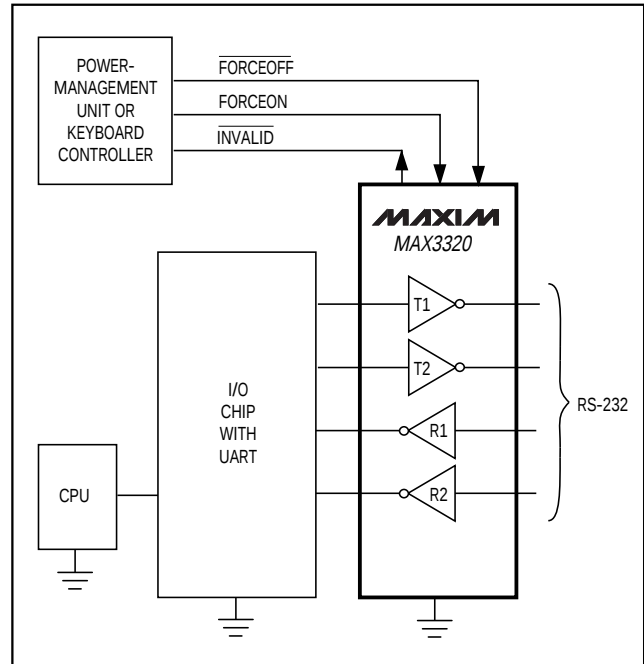


Figure 1. Interface Under Control of PMU

### RS-232 Receivers

The receivers convert RS-232 signals to CMOS-logic output levels. All receivers have inverting outputs and are active in shutdown  $\overline{\text{FORCEOFF}}$  (Table 1).

### AutoShutdown Plus Mode

Maxim's AutoShutdown Plus feature, which operates when  $\overline{\text{FORCEOFF}}$  is high and FORCEON is low, achieves a 4 $\mu$ A supply current. When the MAX3320 senses no valid signal levels on all receiver and transmitter inputs for 30sec, the on-board power supply and drivers shut off,

## MAX3320A/B/L/T

# 3V to 5.5V, up to 250kbps True RS-232 Transceiver with 4 $\mu$ A AutoShutdown Plus and Power-On Reset

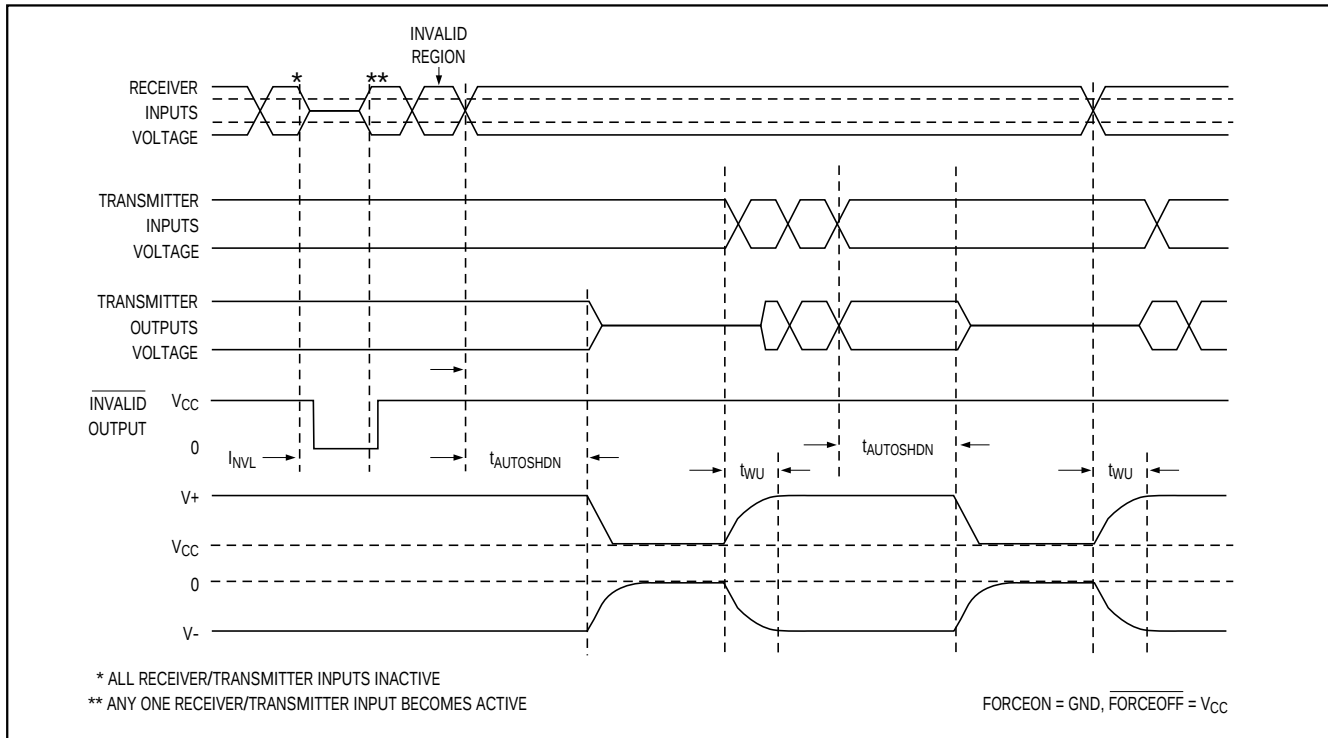


Figure 3a. AutoShutdown Plus and  $\overline{\text{INVALID}}$  Timing Diagram

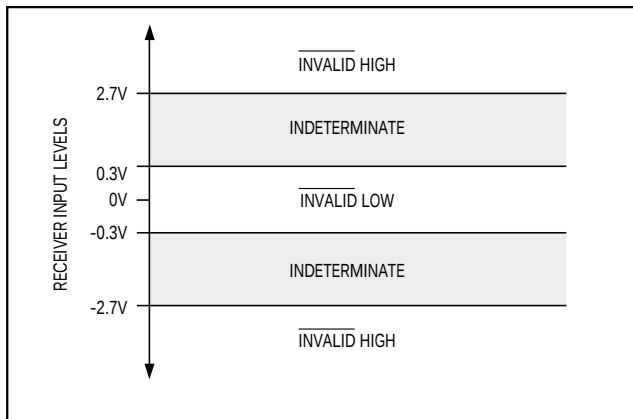


Figure 3b. Receiver Positive/Negative Thresholds for  $\overline{\text{INVALID}}$

## Applications Information

### Ensuring a Valid Reset Output Down to VCC = 0V

When VCC falls below 1V,  $\overline{\text{RESET}}$  no longer sinks current: it becomes an open circuit. Therefore, high-impedance CMOS logic inputs connected to  $\overline{\text{RESET}}$

can drift to undefined voltages. This presents no problem in most applications, since most  $\mu$ Ps and other circuitry is inoperative with VCC below 1V. However, in applications where  $\overline{\text{RESET}}$  must be valid down to 0V, add a pull-down resistor to ground, holding  $\overline{\text{RESET}}$  low (Figure 4). R1's value is not critical; 100k $\Omega$  is large enough not to load  $\overline{\text{RESET}}$ , and small enough to pull it to ground.

### Capacitor Selection

The capacitor type used for C1–C4 is not critical for proper operation; use either polarized or nonpolarized capacitors. The charge pump requires 0.1 $\mu$ F capacitors for 3.3V operation. For other supply voltages, refer to Table 3 for required capacitor values. Do not use values smaller than those listed in Table 3. Increasing the capacitor values (e.g., by a factor of 2) reduces ripple on the transmitter outputs and slightly reduces power consumption. C2, C3, and C4 can be increased without changing C1's value. **However, do not increase C1 without also increasing the values of C2, C3, C4, and CBYPASS, to maintain the proper ratios (C1 to the other capacitors).**

# 3V to 5.5V, up to 250kbps True RS-232 Transceiver with 4μA AutoShutdown Plus and Power-On Reset

MAX3320A/B/L/T

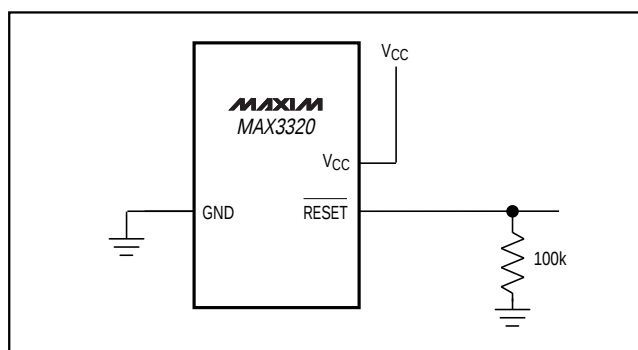


Figure 4. Ensuring  $\overline{\text{RESET}}$  Valid to  $V_{CC} = 0V$

When using the minimum required capacitor values, make sure the capacitor value does not degrade excessively with temperatures outside the  $0^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$  range. If in doubt, use capacitors with a larger nominal value. The capacitor's equivalent series resistance (ESR), which usually rises at low temperatures, influences the amount of ripple on  $V+$  and  $V-$ .

## Transmitter Outputs when Exiting Shutdown

Figure 5 shows two transmitter outputs when exiting shutdown mode. As they become active, the two transmitter outputs go to opposite RS-232 levels (one transmitter input is high; the other is low). Each transmitter is loaded with  $3k\Omega$  in parallel with  $2500pF$ . The transmitter outputs display no ringing or undesirable transients as they exit shutdown. Note that the transmitters are enabled only when the magnitude of  $V-$  exceeds approximately  $3V$ .

## High Data Rates

The MAX3320 maintains the RS-232  $\pm 5V$  minimum transmitter output voltage even at high data rates. Figure 6 shows a transmitter loop-back test circuit. Figure 7 shows a loop-back test result at 120kbps, and Figure 8 shows the same test at 250kbps. For Figure 7, both transmitters were driven simultaneously at 120kbps into RS-232 loads in parallel with  $1000pF$ . For Figure 8, a single transmitter was driven at 250kbps, and both transmitters were loaded with an RS-232 receiver in parallel with  $1000pF$ .

## Interconnection with 3V and 5V Logic

The MAX3320 can directly interface with various 5V logic families, including ACT and HCT CMOS. See Table 4 for more information on possible combinations of interconnections.

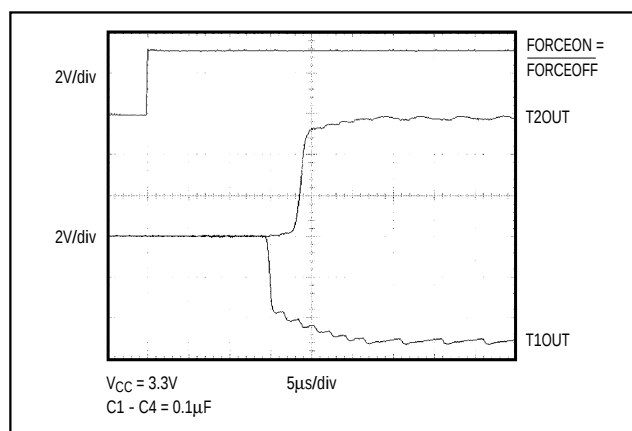


Figure 5. Transmitter Outputs when Exiting Shutdown or Powering Up

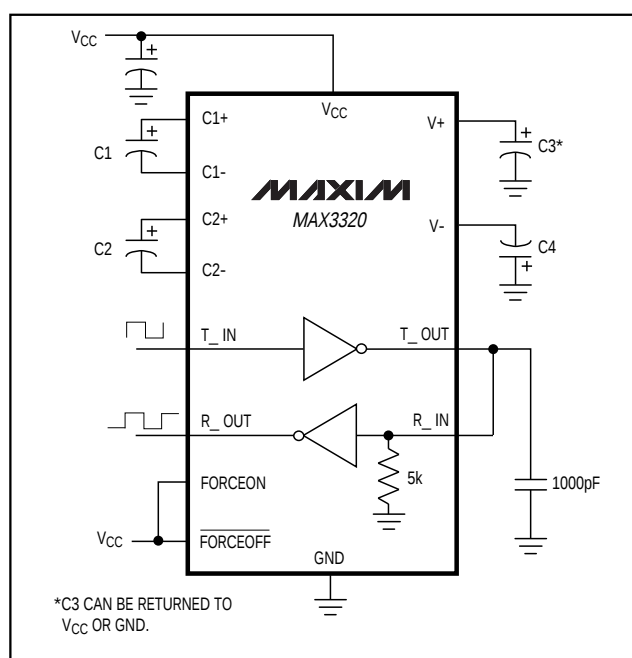


Figure 6. Loop-Back Test Circuit

**Table 3. Required Minimum Capacitance Values**

| $V_{CC}$ (V) | C1 (μF) | C2, C3, C4, CBYPASS (μF) |
|--------------|---------|--------------------------|
| 3 to 3.6     | 0.1     | 0.1                      |
| 4.5 to 5.5   | 0.047   | 0.33                     |
| 3 to 5.5     | 0.1     | 0.47                     |

# 3V to 5.5V, up to 250kbps True RS-232 Transceiver with 4μA AutoShutdown Plus and Power-On Reset

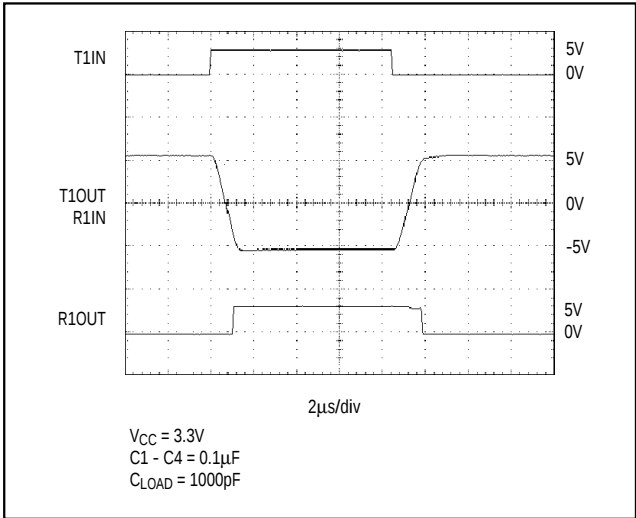


Figure 7. Loop-Back Test Result at 120kbps

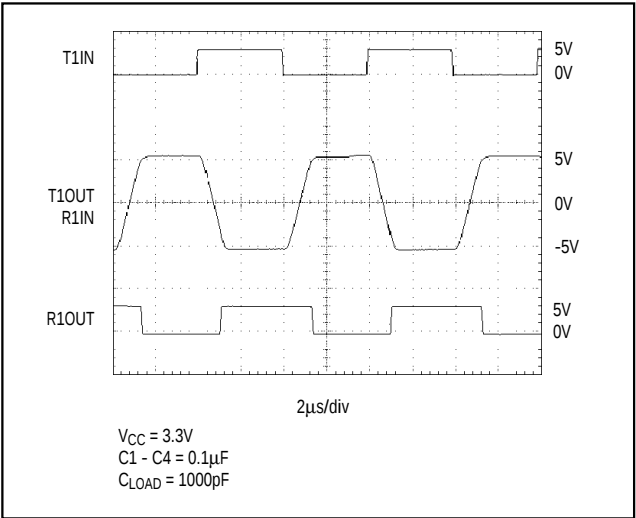


Figure 8. Loop-Back Test Result at 250kbps

Table 4. Logic-Family Compatibility with Various Supply Voltages


| SYSTEM POWER-SUPPLY VOLTAGE (V) | VCC SUPPLY VOLTAGE (V) | COMPATIBILITY                                                     |
|---------------------------------|------------------------|-------------------------------------------------------------------|
| 3.3                             | 3.3                    | Compatible with all CMOS families                                 |
| 5                               | 5                      | Compatible with all TTL and CMOS families                         |
| 5                               | 3.3                    | Compatible with ACT and HCT CMOS, and with AC, HC, or CD4000 CMOS |

Chip Information  
TRANSISTOR COUNT: 1577

# 3V to 5.5V, up to 250kbps True RS-232 Transceiver with 4 $\mu$ A AutoShutdown Plus and Power-On Reset


Typical Operating Circuit

MAX3320A/B/L/T

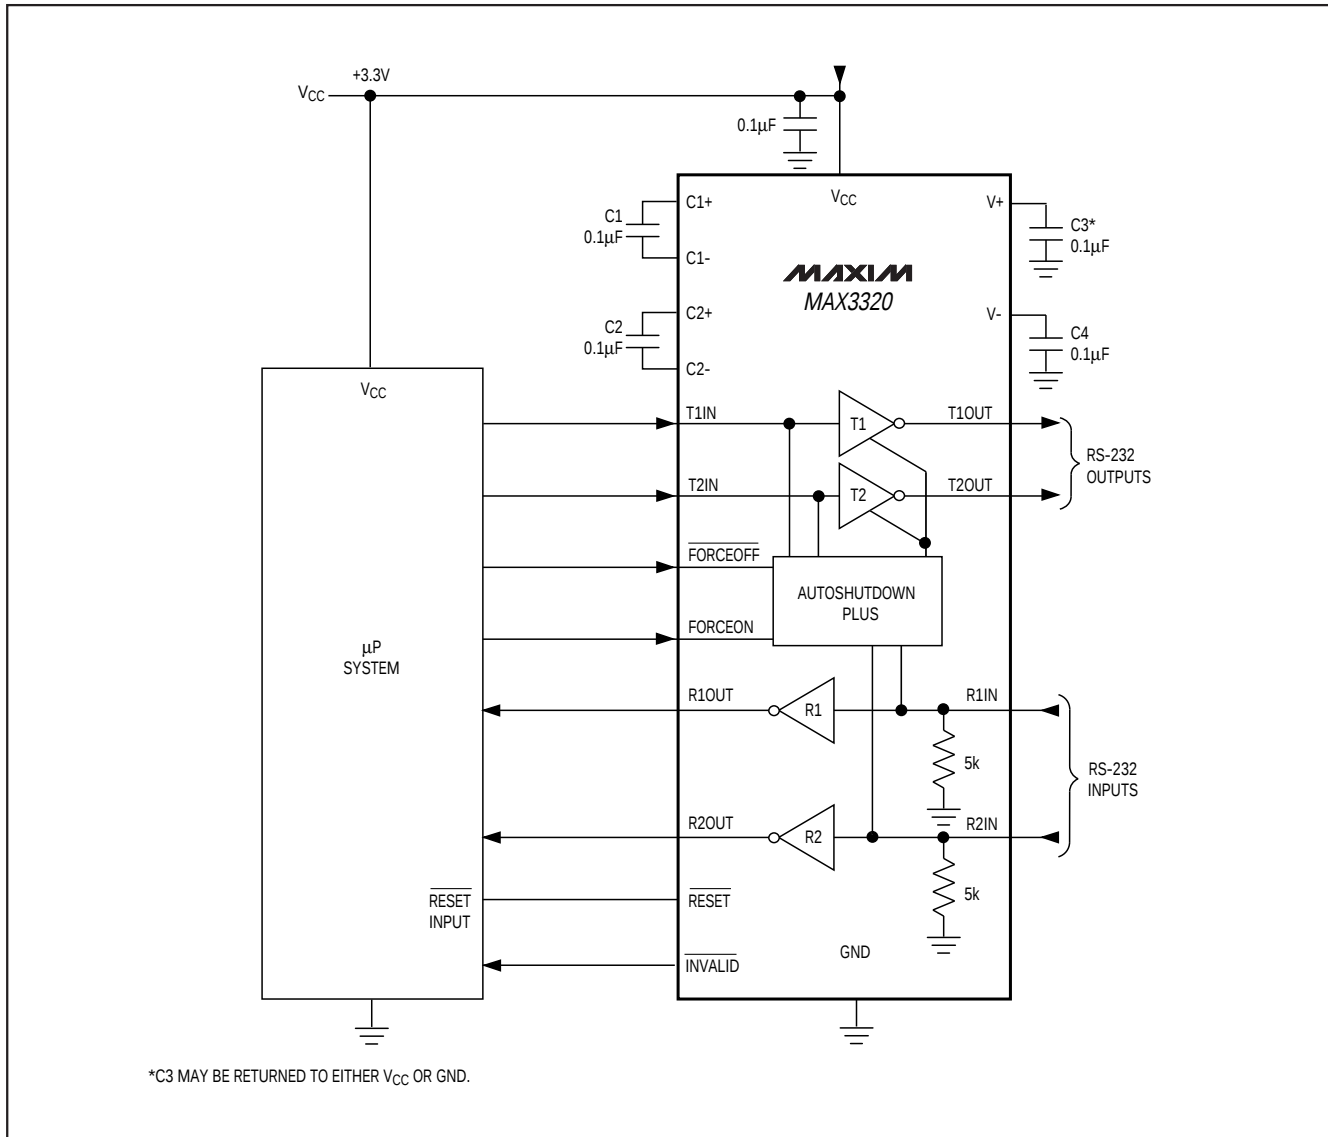

# 3V to 5.5V, up to 250kbps True RS-232 Transceiver with 4 $\mu$ A AutoShutdown Plus and Power-On Reset

## Package Information

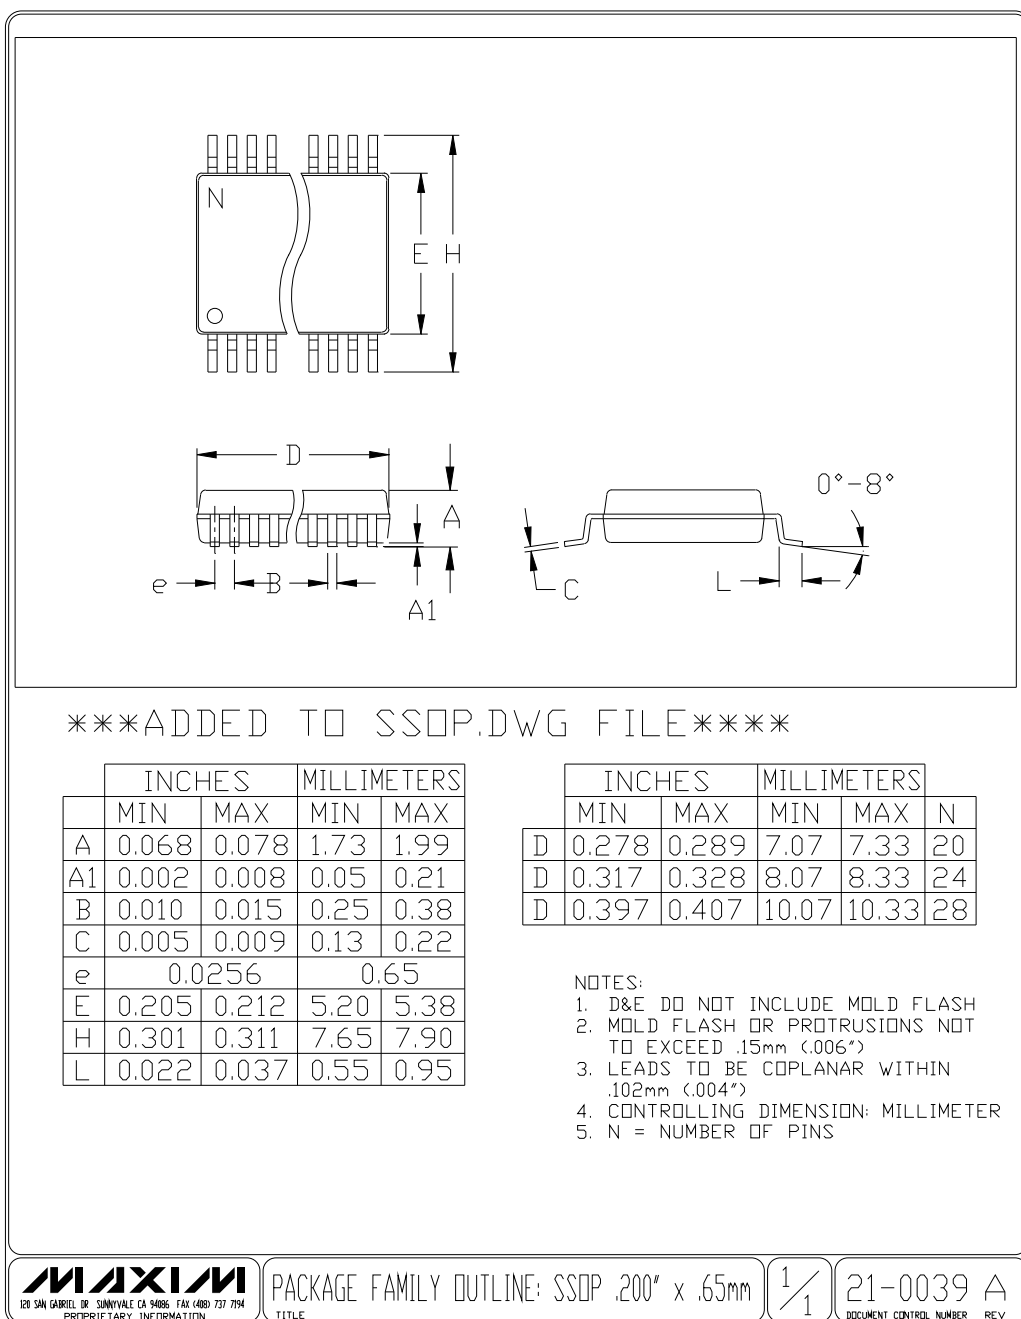

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

12 \_\_\_\_\_ Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9