



GaAs MULTI-CHIP MODULE

MC-7833

870 MHz CATV 25 dB PUSH-PULL AMPLIFIER

DESCRIPTION

The MC-7833 is a GaAs Multi-chip Module designed for use in CATV applications up to 870 MHz. This unit has low distortion, low noise figure and return loss across the entire frequency band.

Reliability and performance uniformity are assured by our stringent quality and control procedures.

FEATURES

- Low distortion
- High linear gain $G_L = 25.0 \text{ dB MIN. @ } f = 870 \text{ MHz}$
- Low return loss

ORDERING INFORMATION

<R>

Part Number	Order Number	Package	Supplying Form
MC-7833	MC-7833-AZ	7-pin special with heatsink (Pb-Free)	25 pcs MAX./Tray

Remark To order evaluation samples, contact your nearby sales office.

Part number for sample order: MC-7833-AZ

ABSOLUTE MAXIMUM RATINGS ($T_A = +25^\circ\text{C}$)

Parameter	Symbol	Ratings	Unit
Supply Voltage	V_{DD}	30	V
Input Voltage ^{Note}	V_i	65.0	dBmV
Operating Case Temperature	T_c	-30 to +100	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to +100	$^\circ\text{C}$

Note In case of single tone

Caution: Observe precautions when handling because these devices are sensitive to electrostatic discharge

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.

RECOMMENDED OPERATING CONDITIONS ($Z_S = Z_L = 75 \Omega$)


Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Supply Voltage	V_{DD}		23.5	24.0	24.5	V
Input Voltage	V_i	110 channel, Flat	–	19.0	25.5	dBmV
Operating Case Temperature	T_C		–30	+25	+85	°C

ELECTRICAL CHARACTERISTICS ($T_C = 30 \pm 5^\circ\text{C}$, $V_{DD} = 24 \text{ V}$, $Z_S = Z_L = 75 \Omega$)


Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Linear Gain	G_L	$f = 870 \text{ MHz}$	25.0	–	26.0	dB
Gain Slope	G_{slope}	$f = 40 \text{ to } 870 \text{ MHz}$	1.0	–	1.8	dB
Gain Flatness	G_{Flatness}	$f = 40 \text{ to } 870 \text{ MHz}$, Peak to valley	–	–	0.7	dB
Noise Figure 1	NF1	$f = 50 \text{ MHz}$	–	–	5.5	dB
Noise Figure 2	NF2	$f = 870 \text{ MHz}$	–	–	6.0	dB
Operating Current	I_{DD}	$P_{in} = \text{None}$	180	–	240	mA
Composite Triple Beat	CTB	110 channel, $V_o = 44 \text{ dBmV}$, Flat	–	–	–57	dBc
Cross Modulation	XM		–	–	–50	dBc
Composite 2nd Order Beat	CSO		–	–	–57	dBc
Input / Output Return Loss 1	RL1	$f = 40 \text{ to } 160 \text{ MHz}$	20	–	–	dB
Input / Output Return Loss 2	RL2	$f = 160 \text{ to } 320 \text{ MHz}$	19	–	–	dB
Input / Output Return Loss 3	RL3	$f = 320 \text{ to } 640 \text{ MHz}$	17.5	–	–	dB
Input / Output Return Loss 4	RL4	$f = 640 \text{ to } 870 \text{ MHz}$	16	–	–	dB

PACKAGE DIMENSIONS

7-PIN SPECIAL WITH HEATSINK (UNIT: mm)

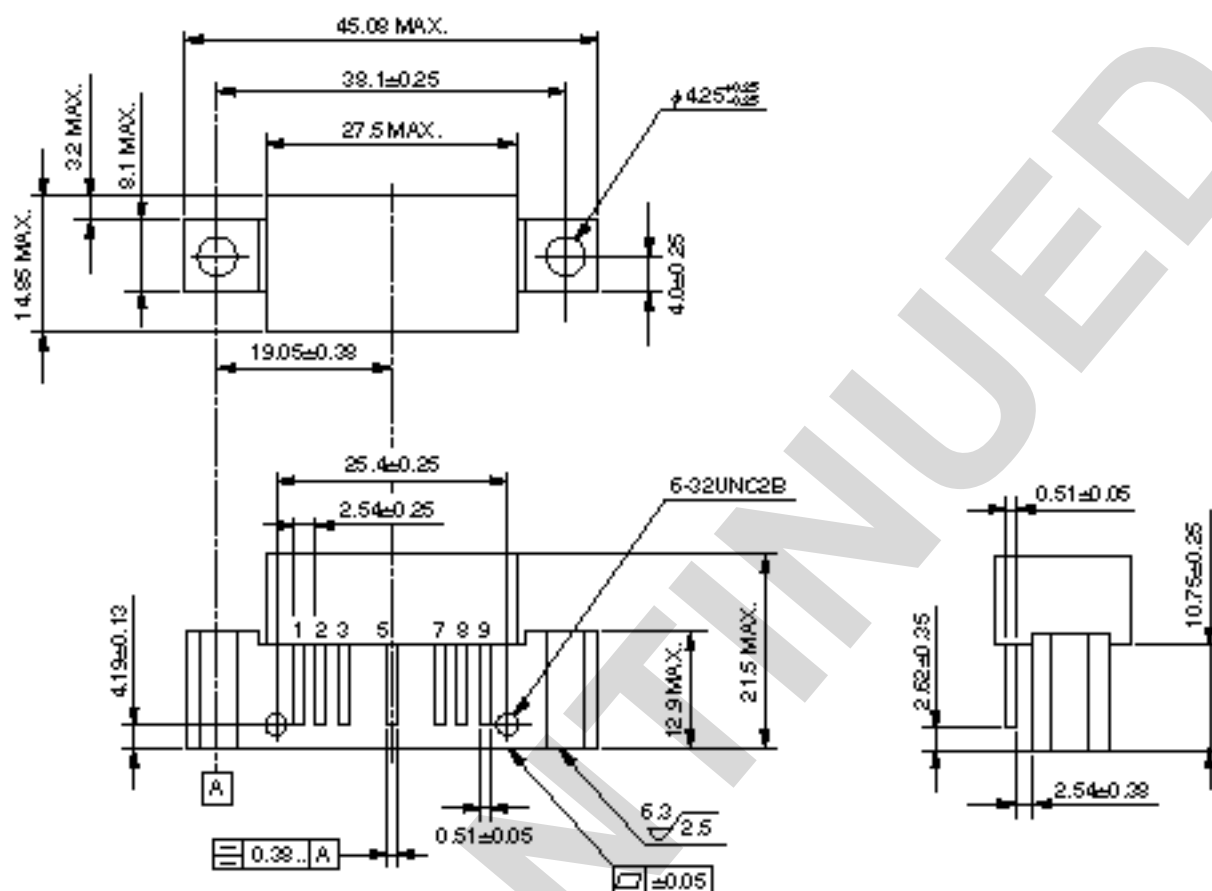

PIN CONNECTION

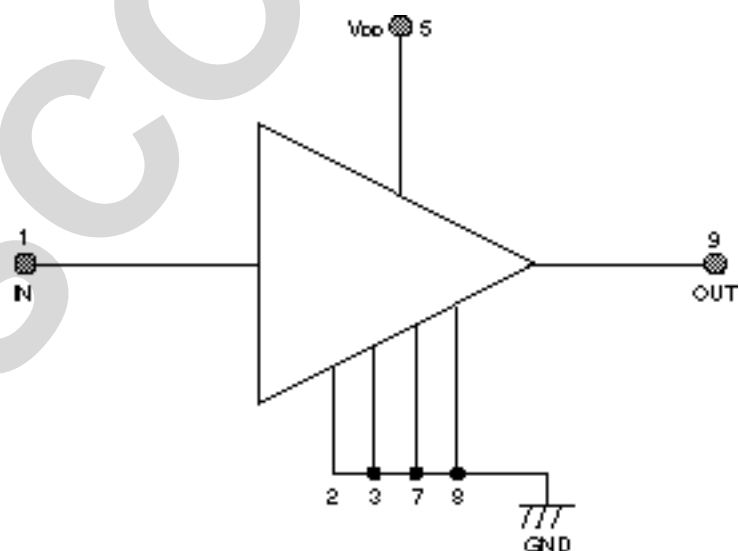

NOTES ON CORRECT USE

- (1) The space between PC board and root of the lead should be kept more than 1 mm to prevent undesired stress to the lead and also should be kept less than 4 mm to prevent undesired parasitic inductance.
Recommended that space is 2.0 to 3.0 mm typical.
- (2) Recommended torque strength of the screw is 59 to 78 Ncm.
- (3) Form the ground pattern as wide as possible to minimize ground impedance.
(to prevent undesired oscillation)
All the ground pins must be connected together with wide ground pattern to decrease impedance difference.

RECOMMENDED SOLDERING CONDITIONS

This product should be soldered and mounted under the following recommended conditions. For soldering methods and conditions other than those recommended below, contact your nearby sales office.

Soldering Method	Soldering Conditions	Recommended Condition Symbol
Partial Heating	Peak temperature (pin temperature) : 350°C or below ^{Note} Soldering time (per pin of device) : 3 seconds or less	—

Note The point of pin part heating must be kept more than 1.2 mm distance from the root of lead.

Caution

GaAs Products

This product uses gallium arsenide (GaAs).

GaAs vapor and powder are hazardous to human health if inhaled or ingested, so please observe the following points.

- Follow related laws and ordinances when disposing of the product. If there are no applicable laws and/or ordinances, dispose of the product as recommended below.
 1. Commission a disposal company able to (with a license to) collect, transport and dispose of materials that contain arsenic and other such industrial waste materials.
 2. Exclude the product from general industrial waste and household garbage, and ensure that the product is controlled (as industrial waste subject to special control) up until final disposal.
- Do not burn, destroy, cut, crush, or chemically dissolve the product.
- Do not lick the product or in any way allow it to enter the mouth.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CEL:

[MC7833-AZ](#) [MC-7891-AZ](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9