

ISL43120, ISL43121, ISL43122

Low-Voltage, Single Supply, Dual SPST Analog Switches

FN6033 Rev 7.00 Aug 17, 2015

The Intersil ISL43120, ISL43121 and ISL43122 devices are precision, bidirectional, dual analog SPST switches designed to operate from a single +2.7V to +12V supply. Targeted applications include battery powered equipment that benefit from the devices' low power consumption (5 μ W), low leakage currents (100pA max) and fast switching speeds (t_{ON} = 28ns, t_{OFF} = 20ns). Cell phones, for example, often face ASIC functionality limitations. The number of analog input or GPIO pins may be limited and digital geometries are not well suited to analog switch performance. This family of parts may be used to "mux-in" additional functionality while reducing ASIC design risk. Some of the smallest packages are available, alleviating board space limitations and making Intersil's newest line of low-voltage switches an ideal solution.

The ISL43120, ISL43121, ISL43122 are dual single-pole/single-throw (SPST) devices. The ISL43120 has two normally open (NO) switches; the ISL43121 has two normally closed (NC) switches; the ISL43122 has one NO and one NC switch and can be used as an SPDT.

TABLE 1. FEATURES AT A GLANCE

| | ISL43120 | ISL43121 | ISL43122 | |
|--|-------------|-----------|-----------|--|
| SW 1/SW 2 | NO/NO | NC/NC | NO/NC | |
| 3.3V r _{ON} | 32Ω | 32Ω | 32Ω | |
| 3.3V t _{ON} /t _{OFF} | 40ns/20ns | 40ns/20ns | 40ns/20ns | |
| 5V r _{ON} | 19Ω | 19Ω | 19Ω | |
| 5V t _{ON} /t _{OFF} | 28ns/20ns | 28ns/20ns | 28ns/20ns | |
| 12V r _{ON} | 11Ω | 11Ω | 11Ω | |
| 12V t _{ON} /t _{OFF} | 25ns/17ns | 25ns/17ns | 25ns/17ns | |
| Packages | 8 Ld S0T-23 | | | |

Related Literature

- TB363 "Guidelines for Handling and Processing Moisture Sensitive Surface Mount Devices (SMDs)"
- AN557"Recommended Test Procedures for Analog Switches"
- TB401"Using the ISL43120 SPST Switch in a Multi-Phase PWM Power Application"

Features

- Fully specified at 12V, 5V, and 3.3V supplies for 10% tolerances
- Guaranteed break-before-make (ISL43122 only)
- · Minimum 2000V ESD protection per method 3015.7
- TTL, CMOS compatible
- · Available in SOT-23 packaging
- Pb-free (RoHS Compliant)

Applications

- · Battery-powered, handheld and portable equipment
 - Cellular/mobile phones
 - Pagers
 - Laptops, notebooks, palmtops
- · Communications systems
 - Radios, ADSL Modems
 - PBX, PABX
- Test and measurement equipment
 - Ultrasound
 - Computerized Tomography (CT) Scanner
- Magnetic Resonance Image (MRI)
- Position Emission Tomography (PET) Scanner
- Electrocardiograph
- · Heads-up displays
- · Audio and video switching
- Various circuits
 - +3V/+5V DACs and ADCs
 - Sample and hold circuits
 - Digital filters
 - Operational amplifier gain switching networks
 - High frequency analog switching
- High speed multiplexing
- Integrator reset circuits


Ordering Information


| PART NUMBER (Notes 1, 2, 3) | PART MARKING | TEMP. RANGE (°C) | PACKAGE (RoHS Compliant) | PKG. DWG. # |
|---|------------------------|------------------|-----------------------------|----------------|
| ISL43120IHZ-T | 120Z (<u>Note 4</u>) | -40 to +85 | 8 Ld S0T-23 | P8.064 |
| ISL43121IHZ-T (No longer available, recommended replacement: ISL43120IHZ-T) | 121Z (<u>Note 4</u>) | -40 to +85 | 8 Ld S0T-23 | P8.064 |
| ISL43122IHZ-T (No longer available, recommended replacement: ISL43120IHZ-T) | 122Z (<u>Note 4</u>) | -40 to +85 | 8 Ld SOT-23 | P8.064 |


NOTES:

- 1. Please refer to TB347 for details on reel specifications.
- These Intersil Pb-free plastic packaged products employ special Pb-free material sets, molding compounds/die attach materials, and 100% matte
 tin plate plus anneal (e3 termination finish, which is RoHS compliant and compatible with both SnPb and Pb-free soldering operations). Intersil
 Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.
- 3. For Moisture Sensitivity Level (MSL), please see product information page for <u>ISL43120</u>, <u>ISL43121</u>, <u>ISL43122</u>. For more information on MSL, please see tech brief <u>TB363</u>.
- 4. The part marking is located on the bottom of the part.

Pin Configurations (Note 5)







NOTE:

5. Switches Shown for Logic "0" Input.

Truth Table

| | | ISL43120 | | ISL43121 | | ISL4: | 3122 |
|-----|-----|----------|-----|----------|-----|-------|------|
| IN1 | IN2 | NO1 | NO2 | NC1 | NC2 | NO1 | NC2 |
| 0 | 0 | OFF | OFF | ON | ON | OFF | ON |
| 0 | 1 | OFF | ON | ON | OFF | OFF | OFF |
| 1 | 0 | ON | OFF | OFF | ON | ON | ON |
| 1 | 1 | ON | ON | OFF | OFF | ON | OFF |

NOTE: Logic "0" \leq 0.8V. Logic "1" \geq 2.4V.

Pin Descriptions

| ISL43120 PIN NUMBER | ISL43121 PIN NUMBER | ISL43122 PIN NUMBER | PIN NAME | FUNCTION |
|------------------------|------------------------|------------------------|----------|---|
| 2 | 2 | 2 | V+ | System Power Supply Input (+2.7V to +12V) |
| 6 | 6 | 6 | GND | Ground Connection |
| 3, 7 | 3, 7 | 3, 7 | INx | Digital Control Input |
| 4, 8 | 4, 8 | 4, 8 | COMx | Analog Switch Common Pin |
| 1, 5 | | 1 | NOx | Analog Switch Normally Open Pin |
| | 1, 6 | 5 | NCx | Analog Switch Normally Closed Pin |

Absolute Maximum Ratings

| V+ to GND0.3V to 15V |
|--|
| Input Voltages |
| IN (<u>Note 6</u>)0.3V to ((V+) + 0.3V) |
| NO, NC (Note 6)0.3V to ((V+) + 0.3V) |
| Output Voltages |
| COM (<u>Note 6</u>) |
| Continuous Current (Any Terminal) |
| Peak Current NO, NC, or COM |
| (Pulsed 1ms, 10% Duty Cycle, Max) 40mA |
| ESD Rating |
| Human Body Model (Per MIL-STD-883 Method 3015) > 2kV |

Thermal Information

| Thermal Resistance (Typical, Note 7) | $\theta_{JA}(^{\circ}C/W)$ |
|--|----------------------------|
| 8 Ld SOT-23 Package | 215 |
| Maximum Junction Temperature (Plastic Package) | +150°C |
| Maximum Storage Temperature Range | 65°C to +150°C |
| Pb-free Reflow Profile | see <u>TB493</u> |

Recommended Operating Conditions

CAUTION: Do not operate at or near the maximum ratings listed for extended periods of time. Exposure to such conditions may adversely impact product reliability and result in failures not covered by warranty.

NOTES

- 6. Signals on NC, NO, COM, or IN exceeding V+ or GND are clamped by internal diodes. Limit forward diode current to maximum current ratings.
- 7. θ_{JA} is measured with the component mounted on a low effective thermal conductivity test board in free air. See Tech Brief TB379 for details.

Electrical Specifications - 5V Supply V+ = +4.5V to +5.5V, GND = 0V, $V_{INH} = 2.4V$, $V_{INL} = 0.8V$ (Note 8), unless otherwise specified. Boldface limits apply across the operating temperature range, -40° C to $+85^{\circ}$ C.

| PARAMETER | TEST CONDITIONS | TEMP (°C) | MIN (Notes 9, 10) | TYP | MAX (Notes 9, 10) | UNIT |
|--|---|--------------|----------------------|------|----------------------|------|
| ANALOG SWITCH CHARACTERISTICS | | (- / | ,, | | ,, | |
| Analog Signal Range, V _{ANALOG} | | Full | 0 | - | V+ | ٧ |
| ON-resistance, r _{ON} | V+ = 4.5V, I _{COM} = 1.0mA, V _{NO} or V _{NC} = 3.5V | 25 | - | 19 | 30 | Ω |
| | (see <u>Figure 5</u>) | Full | - | 23 | 40 | Ω |
| r _{ON} Matching Between Channels, | /+ = 5V, I _{COM} = 1.0mA, V _{NO} or V _{NC} = 3.5V | 25 | - | 0.8 | 2 | Ω |
| $\Delta r_{	extsf{ON}}$ | | Full | - | 1 | 4 | Ω |
| r _{ON} Flatness, r _{FLAT(ON)} | V+ = 5V, I _{COM} = 1.0mA, V _{NO} or V _{NC} = 1V, 2V, 3V | Full | - | 7 | 8 | Ω |
| NO or NC OFF Leakage Current, | V+ = 5.5V, V _{COM} = 1V, 4.5V, V _{NO} or V _{NC} = 4.5V, 1V | 25 | -0.1 | 0.01 | 0.1 | nA |
| I _{NO(OFF)} or I _{NC(OFF)} | | Full | -5 | - | 5 | nA |
| COM OFF Leakage Current, I _{COM(OFF)} | V+ = 5.5V, V _{COM} = 4.5V, 1V, V _{NO} or V _{NC} = 1V, 4.5V | 25 | -0.1 | - | 0.1 | nA |
| , | | Full | -5 | - | 5 | nA |
| COM ON Leakage Current, I _{COM(ON)} | $V_{+} = 5.5V$, $V_{COM} = 1V$, 4.5V, or V_{NO} or $V_{NC} = 1V$, 4.5V, or Floating | 25 | -0.2 | - | 0.2 | nA |
| , , | | Full | -10 | - | 10 | nA |
| DYNAMIC CHARACTERISTICS | | | | | | Ш |
| Turn-ON Time, t _{ON} | V_{NO} or $V_{NC} = 3V$, $R_L = 1k\Omega$, $C_L = 35pF$, $V_{IN} = 0V$ to $3V$ | 25 | - | 28 | 75 | ns |
| | (see <u>Figure 1</u> , <u>Note 11</u>) | Full | - | 40 | 150 | ns |
| Turn-OFF Time, t _{OFF} | V_{NO} or V_{NC} = 3V, R_L =1k Ω , C_L = 35pF, V_{IN} = 0V to 3V | 25 | - | 20 | 50 | ns |
| | (see <u>Figure 1</u> , <u>Note 11</u>) | Full | - | 30 | 100 | ns |
| Break-Before-Make Time Delay (ISL43122 only), t _D | $R_L = 300\Omega$, $C_L = 35pF$, $V_{NO} = V_{NC} = 3V$, $V_{IN} = 0V$ to $3V$ (see Figure 3, Note 11) | Full | 3 | 10 | - | ns |
| Charge Injection, Q | $C_L = 1.0$ nF, $V_G = 0$ V, $R_G = 0$ Ω (see <u>Figure 2</u> , <u>Note 11</u>) | 25 | - | 3 | 5 | pC |
| OFF Isolation | $R_L = 50\Omega$, $C_L = 5pF$, $f = 1MHz$ (see Figure 4) | 25 | - | 76 | - | dB |
| Crosstalk (Channel-to-Channel) | $R_L = 50\Omega$, $C_L = 5pF$, $f = 1MHz$ (see Figure 6) | 25 | - | -105 | - | dB |
| Power Supply Rejection Ratio | $R_L = 50\Omega$, $C_L = 5pF$, $f = 1MHz$ | 25 | - | 60 | - | dB |
| NO or NC OFF Capacitance, COFF | f = 1MHz, V _{NO} or V _{NC} = V _{COM} = 0V (see <u>Figure 7</u>) | 25 | - | 8 | - | pF |
| COM OFF Capacitance, C _{COM(OFF)} | f = 1MHz, V _{NO} or V _{NC} = V _{COM} = 0V (see <u>Figure 7</u>) | 25 | - | 8 | - | pF |
| COM ON Capacitance, C _{COM(ON)} | f = 1MHz, V _{NO} or V _{NC} = V _{COM} = 0V (see <u>Figure 7</u>) | 25 | - | 21 | - | pF |



Electrical Specifications - 5V Supply V+=+4.5V to +5.5V, GND = 0V, $V_{INH}=2.4V$, $V_{INL}=0.8V$ (Note 8), unless otherwise specified. Boldface limits apply across the operating temperature range, -40°C to +85°C. (Continued)

| | | TEMP | MIN | | MAX | |
|--|---|------|--------------------------------|--------|--------------------------------|------|
| PARAMETER | TEST CONDITIONS | (°C) | (<u>Notes 9</u> , <u>10</u>) | TYP | (<u>Notes 9</u> , <u>10</u>) | UNIT |
| POWER SUPPLY CHARACTERISTIC | 6 | | | | | |
| Power Supply Range | | Full | 2.7 | - | 12 | V |
| Positive Supply Current, I+ | V+ = 5.5V, V _{IN} = 0V or V+, all channels on or off | Full | -1 | 0.0001 | 1 | μΑ |
| DIGITAL INPUT CHARACTERISTICS | · | | • | | • | |
| Input Voltage Low, V _{INL} | | Full | - | - | 0.8 | V |
| Input Voltage High, V _{INH} | | Full | 2.4 | - | - | ٧ |
| Input Current, I _{INH} , I _{INL} | V+ = 5.5V, V _{IN} = 0V or V+ | Full | -1 | - | 1 | μΑ |

Electrical Specifications - 3.3V Supply V+ = +3.0V to +3.6V, GND = 0V, $V_{INH} = 2.4V$, $V_{INL} = 0.8V$ (Note 8), unless otherwise specified. **Boldface limits apply across the operating temperature range, -40°C to +85°C.**

| PARAMETER | TEST CONDITIONS | TEMP (°C) | MIN (<u>Notes 9</u> , <u>10</u>) | TYP | MAX (Notes 9, 10) | UNIT |
|--|---|--------------|---------------------------------------|----------|----------------------|------|
| ANALOG SWITCH CHARACTERISTICS | | | | | | 1 |
| Analog Signal Range, V _{ANALOG} | | Full | 0 | - | V+ | V |
| ON-resistance, r _{ON} | V+ = 3V, I _{COM} = 1.0mA, V _{NO} or V _{NC} = 1.5V | 25 | - | 32 | 50 | Ω |
| N-resistance, ION | | Full | - | 40 | 60 | Ω |
| r _{ON} Matching Between Channels, | V+ = 3.3V, I _{COM} = 1.0mA, V _{NO} or V _{NC} = 1.5V | 25 | - | 0.8 | 2 | Ω |
| $\Delta r_{	extsf{ON}}$ | | Full | - | 1 | 4 | Ω |
| r _{ON} Flatness, r _{FLAT(ON)} | V+ = 3.3V, I _{COM} = 1.0mA, V _{NO} or V _{NC} = 0.5V, 1V, 1.5V | 25 | - | 6 | 8 | Ω |
| | | Full | - | 7 | 12 | Ω |
| NO or NC OFF Leakage Current, | V+ = 3.6V, V _{COM} = 1V, 3V, V _{NO} or V _{NC} = 3V, 1V | 25 | -0.1 | 0.01 | 0.1 | nA |
| I _{NO(OFF)} or I _{NC(OFF)} | | Full | -5 | - | 5 | nA |
| COM OFF Leakage Current, I _{COM(OFF)} | V+ = 3.6V, V _{COM} = 3V, 1V, V _{NO} or V _{NC} = 1V, 3V | 25 | -0.1 | 0.01 | 0.1 | nA |
| 35(e) | | Full | -5 | - | 5 | nA |
| COM ON Leakage Current, I _{COM(ON)} | V_{+} = 3.6V, V_{COM} = 1V, 3V, or V_{NO} or V_{NC} = 1V, 3V, or floating | 25 | -0.2 | - | 0.2 | nA |
| 2011(011) | | Full | -10 | - | 10 | nA |
| DYNAMIC CHARACTERISTICS | | | | | | |
| Turn-ON Time, t _{ON} | V_{NO} or V_{NC} = 1.5V, R_L = 1k Ω , C_L = 35pF, V_{IN} = 0V to 3V (Note 11) | 25 | - | 40 | 120 | ns |
| | | Full | - | 60 | 200 | ns |
| Turn-OFF Time, t _{OFF} | V_{NO} or $V_{NC} = 1.5V$, $R_L = 1k\Omega$, $C_L = 35pF$, | 25 | - | 20 | 50 | ns |
| | V _{IN} = 0V to 3V (<u>Note 11</u>) | Full | - | 30 | 120 | ns |
| Break-before-make Time Delay (ISL43122 only), t _D | $R_L = 300\Omega$, $C_L = 35pF$, V_{NO} or $V_{NC} = 1.5V$, $V_{IN} = 0V$ to $3V$ (Note 11) | Full | 3 | 20 | - | ns |
| Charge Injection, Q | $C_L = 1.0 \text{nF}, V_G = 0 \text{V}, R_G = 0 \Omega (\frac{\text{Note } 11}{\text{Note } 11})$ | 25 | - | 1 | 5 | рC |
| OFF-isolation | $R_L = 50\Omega$, $C_L = 5pF$, $f = 1MHz$ | 25 | - | 76 | - | dB |
| Crosstalk (Channel-to-channel) | $R_L = 50\Omega$, $C_L = 5pF$, $f = 1MHz$ | 25 | - | -105 | - | dB |
| Power Supply Rejection Ratio | $R_L = 50\Omega$, $C_L = 5pF$, $f = 1MHz$ | 25 | - | 56 | - | dB |
| NO or NC OFF Capacitance, COFF | f = 1MHz, V _{NO} or V _{NC} = V _{COM} = 0V | 25 | - | 8 | - | pF |
| COM OFF Capacitance, C _{COM(OFF)} | f = 1MHz, V _{NO} or V _{NC} = V _{COM} = 0V | 25 | - | 8 | - | pF |
| COM ON Capacitance, C _{COM(ON)} | f = 1MHz, V _{NO} or V _{NC} = V _{COM} = 0V (See <u>Figure 7</u>) | 25 | - | 21 | - | pF |
| POWER SUPPLY CHARACTERISTICS | 1 2300 | | I | <u> </u> | Ī | |
| Positive Supply Current, I+ | V+ = 3.6V, V _{IN} = 0V or V+, all channels on or off | Full | -1 | - | 1 | μA |

Electrical Specifications - 3.3V Supply V+ = +3.0V to +3.6V, GND = 0V, $V_{INH} = 2.4V$, $V_{INL} = 0.8V$ (Note 8), unless otherwise specified. Boldface limits apply across the operating temperature range, -40°C to +85°C. (Continued)

| PARAMETER | TEST CONDITIONS | TEMP (°C) | MIN (<u>Notes 9, 10</u>) | TYP | MAX (<u>Notes 9, 10</u>) | UNIT |
|--|---------------------------------------|--------------|-------------------------------|-----|-------------------------------|------|
| DIGITAL INPUT CHARACTERISTICS | | | | | | |
| Input Voltage Low, V _{INL} | | Full | - | - | 0.8 | V |
| Input Voltage High, V _{INH} | | Full | 2.4 | - | - | V |
| Input Current, I _{INH} , I _{INL} | V+ = 3.6V, V _{IN} = 0V or V+ | Full | -1 | - | 1 | μΑ |

Electrical Specifications - 12V Supply V+=+10.8V to +13V, GND=0V, $V_{INH}=2.4V$, $V_{INL}=0.8V$ (Note 8), unless otherwise specified. Boldface limits apply across the operating temperature range, -40° C to $+85^{\circ}$ C.

| PARAMETER | TEST CONDITIONS | TEMP (°C) | MIN (Notes 9, 10) | ТҮР | MAX (Notes 9, 10) | UNIT |
|---|---|--------------|----------------------|------|----------------------|------------|
| ANALOG SWITCH CHARACTERISTICS | l | | | | | <u>.</u> L |
| Analog Signal Range, V _{ANALOG} | | Full | 0 | - | V+ | ٧ |
| ON-resistance, r _{ON} | V+ = 10.8V, I _{COM} = 1.0mA, V _{NO} or V _{NC} = 10V | 25 | - | 11 | 20 | Ω |
| | | Full | - | 15 | 25 | Ω |
| $r_{\mbox{ON}}$ Matching Between Channels, $\Delta r_{\mbox{ON}}$ | V+ = 12V, I _{COM} = 1.0mA, V _{NO} or V _{NC} = 10V | 25 | - | 0.8 | 2 | Ω |
| | | Full | - | 1 | 4 | Ω |
| r _{ON} Flatness, r _{FLAT(ON)} | V+ = 12V, I _{COM} = 1.0mA, V _{NO} or V _{NC} = 3V, 6V, 9V | 25 | - | 1 | 4 | Ω |
| | | Full | - | - | 6 | Ω |
| NO or NC OFF Leakage Current, | V+ = 13V, V _{COM} = 1V, 12V, V _{NO} or V _{NC} = 12V, 1V | 25 | -0.1 | 0.01 | 0.1 | nA |
| INO(OFF) or INC(OFF) | | Full | -5 | - | 5 | nA |
| COM OFF Leakage Current, I _{COM(OFF)} | V+ = 13V, V _{COM} = 12V, 1V, V _{NO} or V _{NC} = 1V, 12V | 25 | -0.1 | 0.01 | 0.1 | nA |
| , , | | Full | -5 | - | 5 | nA |
| COM ON Leakage Current, I _{COM(ON)} | $V+$ = 13V, V_{COM} = 1V, 12V, or V_{NO} or V_{NC} = 1V, 12V, or floating | 25 | -0.2 | - | 0.2 | nA |
| | | Full | -10 | - | 10 | nA |
| DYNAMIC CHARACTERISTICS | | 1 | 1 | | 1 | J |
| Turn-ON Time, t _{ON} | V_{NO} or V_{NC} = 10V, R_L = 1k Ω , C_L = 35pF, V_{IN} = 0V to 4V | 25 | - | 25 | 35 | ns |
| | (<u>Note 11</u>) | Full | - | 35 | 55 | ns |
| Turn-OFF Time, t _{OFF} | V_{NO} or V_{NC} = 10V, R_L = 1k Ω , C_L = 35pF, V_{IN} = 0V to 4V | 25 | - | 17 | 30 | ns |
| | (<u>Note 11</u>) | Full | - | 26 | 50 | ns |
| Break-before-make Time Delay (ISL43122 only), t _D | $R_L = 300\Omega$, $C_L = 35pF$, V_{NO} or $V_{NC} = 10V$, $V_{IN} = 0$ to 4V | Full | 0 | 2 | | ns |
| Charge Injection, Q | $C_L = 1.0$ nF, $V_G = 0$ V, $R_G = 0$ $\Omega (Note 11)$ | 25 | - | 5 | 15 | рC |
| OFF-isolation | $R_L = 50\Omega$, $C_L = 5pF$, $f = 1MHz$ | 25 | - | 76 | - | dB |
| Crosstalk (Channel-to-channel) | $R_L = 50\Omega$, $C_L = 5pF$, $f = 1MHz$ | 25 | - | -105 | - | dB |
| Power Supply Rejection Ratio | $R_L = 50\Omega$, $C_L = 5pF$, $f = 1MHz$ | 25 | - | 63 | - | dB |
| NO or NC OFF Capacitance, C _{OFF} | f = 1MHz, V _{NO} or V _{NC} = V _{COM} = 0V | 25 | - | 8 | - | pF |
| COM OFF Capacitance, C _{COM(OFF)} | f = 1MHz, V _{NO} or V _{NC} = V _{COM} = 0V | 25 | - | 8 | - | pF |
| COM ON Capacitance, C _{COM(ON)} | f = 1MHz, V _{NO} or V _{NC} = V _{COM} = 0V (see <u>Figure 7</u>) | 25 | - | 21 | - | pF |
| POWER SUPPLY CHARACTERISTICS | 1 | 1 | I | 1 | I | 1 |
| Positive Supply Current, I+ | V+ = 13V, V _{IN} = 0V or V+, all channels on or off | Full | -1 | - | 1 | μΑ |
| | 1 | | | | | |


Electrical Specifications - 12V Supply V+=+10.8V to +13V, GND=0V, $V_{INH}=2.4V$, $V_{INL}=0.8V$ (Note 8), unless otherwise specified. Boldface limits apply across the operating temperature range, -40° C to $+85^{\circ}$ C. (Continued)

| PARAMETER | TEST CONDITIONS | TEMP (°C) | MIN (<u>Notes 9, 10</u>) | TYP | MAX (<u>Notes 9, 10</u>) | UNIT |
|--|--------------------------------------|--------------|-------------------------------|-----|-------------------------------|------|
| DIGITAL INPUT CHARACTERISTICS | | | | | | |
| Input Voltage Low, V _{INL} | | Full | - | - | 0.8 | ٧ |
| Input Voltage High, V _{INH} | | Full | 4 | - | - | ٧ |
| Input Current, I _{INH} , I _{INL} | V+ = 13V, V _{IN} = 0V or V+ | Full | -1 | - | 1 | μΑ |


NOTES:

- 8. V_{IN} = input voltage to perform proper function.
- 9. The algebraic convention, whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
- 10. Compliance to datasheet limits is assured by one or more methods: production test, characterization and/or design.
- 11. Limits established by characterization and are not production tested.

Test Circuits and Waveforms



Logic input waveform is inverted for switches that have the opposite logic sense.



Repeat test for all switches. C_L includes fixture and stray capacitance.

$$V_{OUT} = V_{(NO \text{ or NC})} \frac{R_L}{R_L + r_{ON}}$$
FIGURE 1B. TEST CIRCUIT

FIGURE 1A. MEASUREMENT POINTS

FIGURE 1. SWITCHING TIMES




FIGURE 2A. MEASUREMENT POINTS

FIGURE 2B. TEST CIRCUIT

FIGURE 2. CHARGE INJECTION

Test Circuits and Waveforms (Continued)




FIGURE 3A. MEASUREMENT POINTS (ISL43122 ONLY)

C_L includes fixture and stray capacitance. FIGURE 3B. TEST CIRCUIT (ISL43122 ONLY)

FIGURE 3. BREAK-BEFORE-MAKE TIME




FIGURE 4. OFF-ISOLATION TEST CIRCUIT




FIGURE 5. r_{ON} TEST CIRCUIT




FIGURE 6. CROSSTALK TEST CIRCUIT




FIGURE 7. CAPACITANCE TEST CIRCUIT

Detailed Description

The ISL43120, ISL43121, ISL43122 bidirectional dual SPST analog switches offer precise switching capability from a single 2.7V to 12V supply with low ON-resistance (19 Ω) and high speed operation (t_{ON} = 28ns, t_{OFF} = 20ns). The devices are especially well suited to portable battery-powered equipment thanks to the low operating supply voltage (2.7V), low power consumption (5 μ W), low leakage currents (100pA max), and the tiny SOT-23 packaging. High frequency applications also benefit from the wide bandwidth, and the very high off-isolation and crosstalk rejection.

Supply Sequencing and Overvoltage Protection

With any CMOS device, proper power supply sequencing is required to protect the device from excessive input currents, which might permanently damage the IC. All I/O pins contain ESD protection diodes from the pin to V+ and GND (see Figure 8). To prevent forward biasing these diodes, V+ must be applied before any input signals, and input signal voltages must remain between V+ and GND. If these conditions cannot be guaranteed, then one of the following two protection methods should be employed.

Logic inputs can easily be protected by adding a $1 k\Omega$ resistor in series with the input (see Figure 8). The resistor limits the input current below the threshold that produces permanent damage, and the sub-microamp input current produces an insignificant voltage drop during normal operation.

Adding a series resistor to the switch input defeats the purpose of using a low ron switch, so two small signal diodes can be added in series with the supply pins to provide overvoltage protection for all pins (see Figure 8). These additional diodes limit the analog signal from 1V below V+ to 1V above GND. The low leakage current performance is unaffected by this approach, but the switch resistance may increase, especially at low supply voltages.




FIGURE 8. OVERVOLTAGE PROTECTION

Power-Supply Considerations

The ISL43120, ISL43121, ISL43122 construction is typical of most CMOS analog switches, except that they have only two supply pins: V+ and GND. V+ and GND drive the internal CMOS switches and set their analog voltage limits. Unlike switches with a 13V maximum supply voltage, the ISL43120, ISL43121, ISL43122 15V maximum supply voltage provides plenty of room for the 10% tolerance of 12V supplies, as well as room for overshoot and noise spikes.

The minimum recommended supply voltage is 2.7V. It is important to note that the input signal range, switching times, and ON-resistance degrade at lower supply voltages. Refer to the "Electrical Specifications" tables starting on page 3 and "Typical Performance Curves" (starting on page 9) for details.

V+ and GND also power the internal logic and level shifter. The level shifter convert the input logic levels to switched V+ and GND signals to drive the analog switch gate terminals.

This family of switches cannot be operated with bipolar supplies, because the input switching point becomes negative in this configuration.

Logic-level Thresholds

This switch family is TTL compatible (0.8V and 2.4V) over a supply range of 3V to 11V (see <u>Figure 15</u>). At 12V the V_{IH} level is about 2.5V. This is still below the TTL guaranteed high output minimum level of 2.8V, but noise margin is reduced. For best results with a 12V supply, use a logic family the provides a V_{OH} greater than 3V.

The digital input stages draw supply current whenever the digital input voltage is not at one of the supply rails. Driving the digital input signals from GND to V+ with a fast transition time minimizes power dissipation.

High-frequency Performance

In 50Ω systems, signal response is reasonably flat even past 300 MHz (see <u>Figure 16</u>). Figure 16 also illustrates that the frequency response is very consistent over a wide V+ range, and for varying analog signal levels.

An OFF switch acts like a capacitor and passes higher frequencies with less attenuation, resulting in signal feedthrough from a switch's input to its output. Off-isolation is the resistance to this feedthrough, while crosstalk indicates the amount of feedthrough from one switch to another. Figure 17 details the high off-isolation and crosstalk rejection provided by this family. At 10MHz, off isolation is about 50dB in 50Ω systems, decreasing approximately 20dB per decade as frequency increases. Higher load impedances decrease off isolation and crosstalk rejection due to the voltage divider action of the switch OFF impedance and the load impedance.



Leakage Considerations

Reverse ESD protection diodes are internally connected between each analog-signal pin and both V+ and GND. One of these diodes conducts if any analog signal exceeds V+ or GND.

Virtually all the analog leakage current comes from the ESD diodes to V+ or GND. Although the ESD diodes on a given signal pin are identical and therefore fairly well balanced, they are reverse biased differently. Each is biased by either V+ or GND and the analog signal. This means their leakages will vary as the

signal varies. The difference in the two diode leakages to the V+ and GND pins constitutes the analog-signal-path leakage current. All analog leakage current flows between each pin and one of the supply terminals, not to the other switch terminal. This is why both sides of a given switch can show leakage currents of the same or opposite polarity. There is no connection between the analog signal paths and V+ or GND.

Typical Performance Curves T_A = +25 °C, unless otherwise specified.




FIGURE 9. ON-RESISTANCE vs SUPPLY VOLTAGE




FIGURE 10. ON-RESISTANCE vs SWITCH VOLTAGE




FIGURE 11. ron MATCH vs SWITCH VOLTAGE




FIGURE 12. CHARGE INJECTION vs SWITCH VOLTAGE

Typical Performance Curves τ_A = +25°C, unless otherwise specified. (Continued)




FIGURE 13. TURN-ON TIME vs SUPPLY VOLTAGE




FIGURE 14. TURN-OFF TIME vs SUPPLY VOLTAGE




FIGURE 15. DIGITAL SWITCHING POINT vs SUPPLY VOLTAGE





FIGURE 16. FREQUENCY RESPONSE

Typical Performance Curves τ_A = +25°C, unless otherwise specified. (Continued)








FIGURE 18. ±PSRR vs FREQUENCY

Die Characteristics

SUBSTRATE POTENTIAL (POWERED UP):

GND

TRANSISTOR COUNT:

ISL43120: 66 ISL43121: 66 ISL43122: 66

PROCESS:

Si Gate CMOS

Revision History

The revision history provided is for informational purposes only and is believed to be accurate, but not warranted. Please go to the web to make sure that you have the latest revision.

| DATE | REVISION | CHANGE |
|-----------------|----------|---|
| August 17, 2015 | FN6033.7 | Updated Ordering Information table on page 2. |
| May 28, 2015 | FN6033.6 | Added Rev History beginning with Rev 6. Updated entire datasheet applying Intersil's new standards. Updated Ordering information by removing obsolete parts, adding MSL and part marking notes. |

About Intersil

Intersil Corporation is a leading provider of innovative power management and precision analog solutions. The company's products address some of the largest markets within the industrial and infrastructure, mobile computing and high-end consumer markets.

For the most updated datasheet, application notes, related documentation and related parts, please see the respective product information page found at www.intersil.com.

You may report errors or suggestions for improving this datasheet by visiting www.intersil.com/ask.

Reliability reports are also available from our website at www.intersil.com/support

© Copyright Intersil Americas LLC 2003-2015. All Rights Reserved. All trademarks and registered trademarks are the property of their respective owners.

For additional products, see www.intersil.com/en/products.html


Intersil products are manufactured, assembled and tested utilizing ISO9001 quality systems as noted in the quality certifications found at www.intersil.com/en/support/qualandreliability.html

Intersil products are sold by description only. Intersil may modify the circuit design and/or specifications of products at any time without notice, provided that such modification does not, in Intersil's sole judgment, affect the form, fit or function of the product. Accordingly, the reader is cautioned to verify that datasheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com



Small Outline Transistor Plastic Packages (SOT23-8)

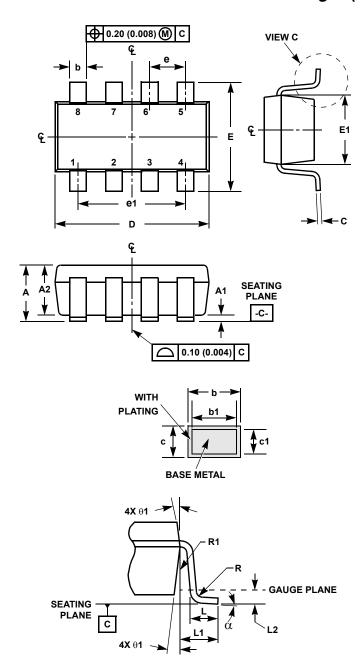

VIEW C

P8.064
8 LEAD SMALL OUTLINE TRANSISTOR PLASTIC PACKAGE

| | INC | HES | MILLIMETERS | | |
|-----------|-------|--------|-------------|------|-------|
| SYMBOL | MIN | MAX | MIN | MAX | NOTES |
| Α | 0.036 | 0.057 | 0.90 | 1.45 | - |
| A1 | 0.000 | 0.0059 | 0.00 | 0.15 | - |
| A2 | 0.036 | 0.051 | 0.90 | 1.30 | - |
| b | 0.009 | 0.015 | 0.22 | 0.38 | - |
| b1 | 0.009 | 0.013 | 0.22 | 0.33 | |
| С | 0.003 | 0.009 | 0.08 | 0.22 | 6 |
| c1 | 0.003 | 0.008 | 0.08 | 0.20 | 6 |
| D | 0.111 | 0.118 | 2.80 | 3.00 | 3 |
| E | 0.103 | 0.118 | 2.60 | 3.00 | - |
| E1 | 0.060 | 0.067 | 1.50 | 1.70 | 3 |
| е | 0.025 | 66 Ref | 0.65 Ref | | - |
| e1 | 0.076 | 8 Ref | 1.95 Ref | | - |
| L | 0.014 | 0.022 | 0.35 | 0.55 | 4 |
| L1 | 0.024 | 4 Ref. | 0.60 Ref. | | |
| L2 | 0.010 | Ref. | 0.25 Ref. | | |
| N | 8 | 3 | 8 | | 5 |
| R | 0.004 | - | 0.10 | - | |
| R1 | 0.004 | 0.010 | 0.10 | 0.25 | |
| α | 0° | 8º | 0° | 8° | - |

Rev. 2 9/03

NOTES:

- 1. Dimensioning and tolerance per ASME Y14.5M-1994.
- 2. Package conforms to EIAJ SC-74 and JEDEC MO178BA.
- 3. Dimensions D and E1 are exclusive of mold flash, protrusions, or gate burrs.
- 4. Footlength L measured at reference to gauge plane.
- 5. "N" is the number of terminal positions.
- 6. These Dimensions apply to the flat section of the lead between 0.08mm and 0.15mm from the lead tip.
- 7. Controlling dimension: MILLIMETER. Converted inch dimensions are for reference only

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru_4 moschip.ru_9