

Aluminum Capacitors Axial Miniature High Voltage for E.L.B.


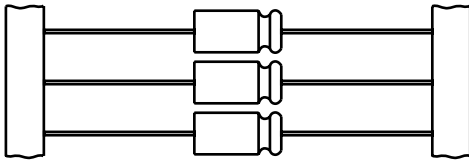


Fig.1 Component outlines



QUICK REFERENCE DATA	
DESCRIPTION	VALUE
Nominal case sizes (Ø D x L in mm)	12.5 x 30 to 18 x 38
Rated capacitance range, C _R	6.8 to 33 µF
Tolerance on C _R	- 10 to + 50 %
Rated voltage, U _R	450 V
Category temperature range	- 25 to + 85 °C
Endurance test at 85 °C	8000 hours
Useful life at 85 °C	20 000 hours
Useful life at 70 °C, I _R applied	100 000 hours
Shelf life at 0 V, 85 °C	500 hours
Based on sectional specification	IEC 60384-4/EN130300
Climatic category IEC 60068	25/085/56

FEATURES

- Polarized aluminum electrolytic capacitors, non-solid electrolyte
- Axial leads, cylindrical aluminum case, insulated with a blue sleeve
- Taped versions up to case Ø 15 x 30 mm available for automatic insertion
- Useful life: 20 000 hours
- Stable under overvoltage conditions: 550 V for 24 hours at 85 °C
- High ripple current capability
- Smallest dimensions
- Lead (Pb)-free versions are RoHS compliant



RoHS*
COMPLIANT

APPLICATIONS


- Electronic lighting ballast, power supply
- Smoothing, filtering, buffering at high voltages
- Boards with restricted mounting height, vibration and shock resistant

MARKING

The capacitors are marked (where possible) with the following information:


- Rated capacitance (in µF)
- Tolerance on rated capacitance, code letter in accordance with IEC 60062 (T for - 10 to + 50 %)
- Rated voltage (in V)
- Upper category temperature (85 °C)
- Date code in accordance with IEC 60062
- Code for factory of origin
- Name of manufacturer
- Band to indicate the negative terminal
- '+' sign to identify the positive terminal
- Series number (042 or 043)

DIMENSIONS in millimeters AND AVAILABLE FORMS

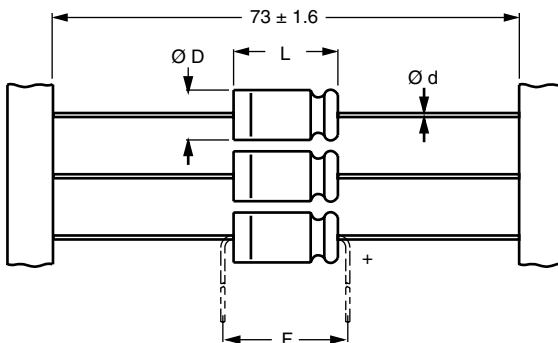

Form BR: Taped on reel
case Ø D x L = 6.5 x 18 to 15 x 30 mm

Fig.2 Form BR

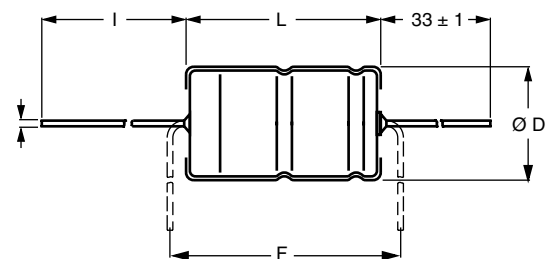

Form AA: Axial in box
case Ø D x L = 10 x 30 to 21 x 38 mm

Fig.3 Form AA

Table 1

AXIAL; DIMENSIONS in millimeters, MASS AND PACKAGING QUANTITIES									
NOMINAL CASE SIZE Ø D x L (mm)	CASE CODE	AXIAL: FORM AA and BR					MASS (g)	PACKAGING QUANTITIES	
		Ø d	l	Ø D _{max.}	L _{max.}	F _{min.}		FORM AA	FORM BR
12.5 x 30	01	0.8	55 ± 1	13.0	30.5	35	≈ 6.1	260	400
15 x 30	02	0.8	55 ± 1	15.5	30.5	35	≈ 8.3	200	250
18 x 30	03	0.8	55 ± 1	18.5	30.5	35	≈ 11.6	120	-
18 x 38	04	0.8	34 ± 1	18.5	39.5	44	≈ 16.0	125	-

Note

Detailed tape dimensions see section 'PACKAGING'.

ELECTRICAL DATA	
SYMBOL	DESCRIPTION
C _R	rated capacitance at 100 Hz, tolerance - 10/+ 50 %
I _R	rated RMS ripple current at 10 kHz, 85 °C
I _{L5}	max. leakage current after 5 minutes at U _R
ESR	typ/max. equivalent series resistance at 100 Hz
Z	typ/max. impedance at 10 kHz

ORDERING EXAMPLE

Electrolytic capacitor 042 series

10 µF/450 V; - 10/+ 50 %

Nominal case size: Ø 12.5 x 30 mm; Form BR

Ordering code: MAL204282109E3

Former 12NC: 2222 042 82109

Note

Unless otherwise specified, all electrical values in table 2 apply at
T_{amb} = 20 °C, P = 86 to 106 kPa, RH = 45 to 75 %.

Table 2

ELECTRICAL DATA AND ORDERING INFORMATION										
U _R (V)	C _R 100 Hz (µF)	NOMINAL CASE SIZE Ø D x L (mm)	I _R 10 kHz 85 °C (mA)	I _{L5} 5 min (µA)	ESR TYP. 100 Hz (Ω)	ESR MAX. 100 Hz (Ω)	Z TYP. 10 kHz (Ω)	Z MAX. 10 kHz (Ω)	ORDERING CODE MAL2.....	
									AXIAL	
									IN BOX FORM AA	TAPED ON REEL FORM BR
450	6.8	12.5 x 30	540	106	3.8	8.3	2.8	4.8	04281688E3	04282688E3
	10	12.5 x 30	710	110	2.6	5.6	1.8	3.1	04281109E3	04282109E3
	15	15 x 30	910	115	1.7	3.7	1.2	2.1	04281159E3	04282159E3
	22	18 x 30	1190	120	1.1	2.4	0.9	1.4	04281229E3	-
	33	18 x 38	1610	130	0.8	1.7	0.6	1.0	04381339E3	-

ADDITIONAL ELECTRICAL DATA		
PARAMETER	CONDITIONS	VALUE
Voltage		
Surge voltage	U _R = 450 V	U _s ≤ 550 V
Overvoltage test	24 hours at 85 °C	550 V ⁽¹⁾
Reverse voltage		U _{rev} ≤ 1 V
Current		
Leakage current	After 1 minute	I _{L1} ≤ 0.009 x C _R x U _R + 200 µA
	After 5 minutes	I _{L5} ≤ 0.002 x C _R x U _R + 100 µA
Inductance		
Equivalent series inductance	Case Ø D x L in mm:	
	12.5 x 30	
	15 x 30	
	18 x 30	
	18 x 38	
		typ. 46 nH typ. 48 nH typ. 50 nH typ. 54 nH

Note⁽¹⁾Test conditions on request.



CAPACITANCE (C)


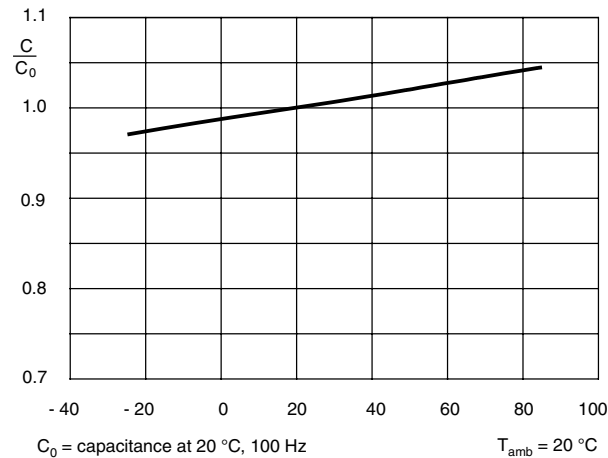



Fig.8 Typical multiplier of capacitance as a function of ambient temperature

EQUIVALENT SERIES RESISTANCE (ESR)

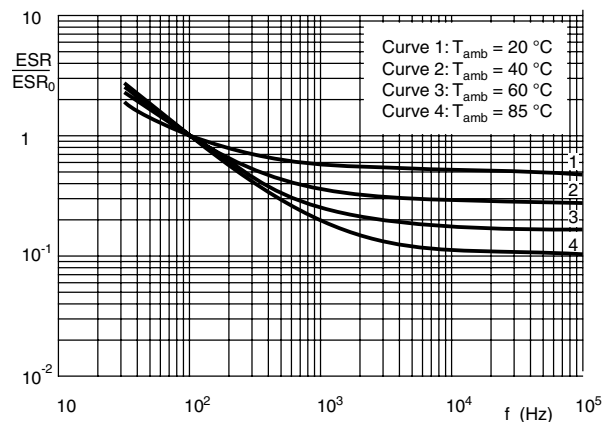

ESR_0 = typical at 20 °C, 100 Hz

Fig.6 Typical multiplier of ESR as a function of frequency at different ambient temperatures

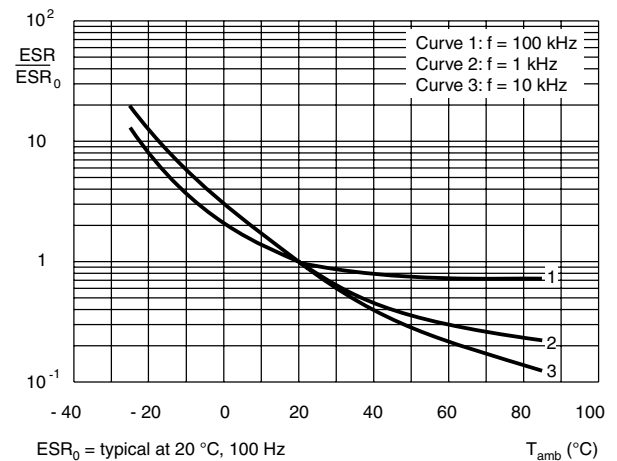

ESR_0 = typical at 20 °C, 100 Hz

Fig.5 Typical multiplier of ESR as a function of ambient temperature at different frequencies

IMPEDANCE (Z)

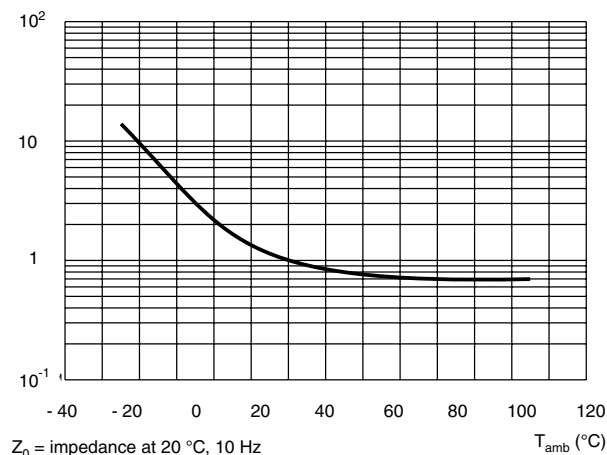


Fig.7 Typical multiplier of impedance as a function of ambient temperature

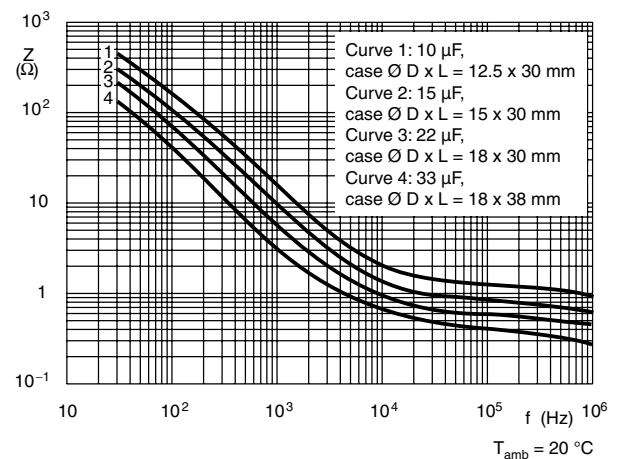


Fig.8 Typical impedance as a function of frequency

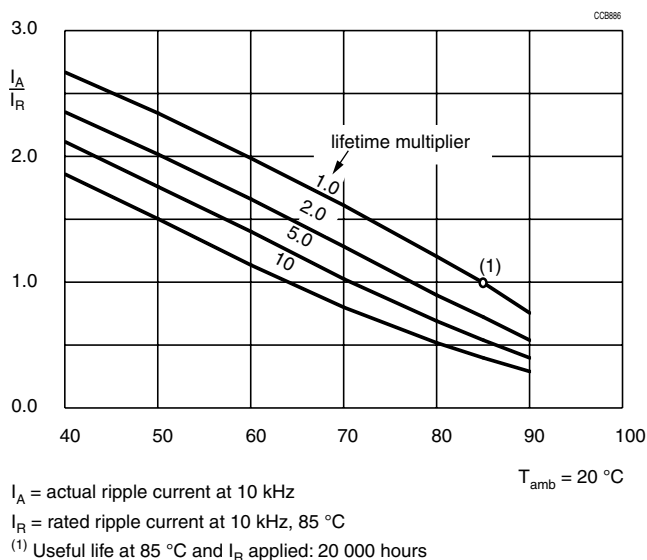
RIPPLE CURRENT AND USEFUL LIFE

Fig.9 Multiplier of useful life as a function of ambient temperature and ripple current load

Table 3

MULTIPLIER OF RIPPLE CURRENT (I_R) AS A FUNCTION OF FREQUENCY	
FREQUENCY (Hz)	I_R MULTIPLIER
50	0.22
100	0.30
300	0.49
1000	0.72
3000	0.89
≥ 10 000	1.00

Note

Formula (1) should be used to calculate the actual ripple current at 10 kHz (see Fig. 9) when multiple frequencies are present. For an example of the values 100 Hz and 50 kHz:

$$(1) \quad I_A = \sqrt{\left(\frac{I(100 \text{ Hz})}{0.30}\right)^2 + \left(\frac{I(50 \text{ kHz})}{1.0}\right)^2}$$

Aluminum Capacitors
Axial Miniature High Voltage for E.L.B.

Vishay BCcomponents

Table 4

TEST PROCEDURES AND REQUIREMENTS			
TEST		PROCEDURE (quick reference)	REQUIREMENTS
NAME OF TEST	REFERENCE		
Endurance	IEC 60384-4/ EN130300 subclause 4.13	$T_{amb} = 85\text{ }^{\circ}\text{C}$; U_R applied; 8000 hours	$\Delta C/C: \pm 10\%$ $\tan \delta \leq 1.3 \times \text{spec. limit}$ $Z \leq 2 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$
Useful life	CECC 30301 subclause 1.8.1	$T_{amb} = 85\text{ }^{\circ}\text{C}$; U_R and I_R applied; 20 000 hours	$\Delta C/C: \pm 30\%$ $\tan \delta \leq 3 \times \text{spec. limit}$ $Z \leq 3 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$ no short or open circuit total failure percentage: $\leq 3\%$
Shelf life (storage at high temperature)	IEC 60384-4/ EN130300 subclause 4.17	$T_{amb} = 85\text{ }^{\circ}\text{C}$; no voltage applied; 500 hours after test: U_R to be applied for 30 minutes, 24 to 48 hours before measurement	$\Delta C/C$, $\tan \delta$, Z : for requirements see 'Endurance test' above $I_{L5} \leq 2 \times \text{spec. limit}$



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9