

## Specification For Approval

Customer

Description            Open Type Air Ultrasonic Ceramic Transducers

Part Number            400PT10P

Issued Date            May 25 2015

Quantity

Version

Customer Ref. No.

| Customer Approval Signature/Chop |
|----------------------------------|
|                                  |

| Approved By | Checked By | Prepared By |
|-------------|------------|-------------|
|             |            |             |

**1 Scope**

The Pulse/Tone Burst transducer is designed for echo ranging systems requiring a shorter ringing characteristic when comparing to our standard type transducers.

**2 Part Number**

400PT10P Open Type Air Ultrasonic Ceramic Transducer

**3 Dimension**

As per Figure 1

**4 Specification**

(rated at temperature  $25\pm 3^{\circ}\text{C}$ , 45 to 60% RH, unless otherwise noted)

|      | Items                 | Specification                      | Remarks  |
|------|-----------------------|------------------------------------|--|
| 4-1  | Center Frequency      | 40.0 $\pm$ 1.0KHz                  |  |
| 4-2  | Ringing (max.)        | 60mV                               | At 1.7ms, detail see attached Figure 2   |
| 4-3  | Sound Pressure Level  | 110dB (min)                        | At resonant frequency;<br>0dB re 0.0002 $\mu$ bar per 10Vrms at 30cm<br>10Vrms Sine Wave input<br>Detail see attached Figure 3 |
| 4-4  | Sensitivity           | -69dB (min)                        | At resonant frequency;<br>0dB re 1Volt/ $\mu$ bar<br>Detail see attached Figure 4  |
| 4-5  | Bandwidth             | 1.5KHz (min)                       | -6dB   |
| 4-6  | Capacitance           | 1800 $\pm$ 20%pF                   | Measured at 1KHz   |
| 4-7  | Total Beam Angle      | 55 $^{\circ}$ $\pm$ 10 $^{\circ}$  | -6dB   |
| 4-8  | Max. Driving Voltage  | 100Vp-p                            | 20 bursts maximum, 25ms repetition rate  |
| 4-9  | Operation Temperature | -30 $^{\circ}$ to +70 $^{\circ}$ C |  |
| 4-10 | Storage Temperature   | -40 $^{\circ}$ to +80 $^{\circ}$ C |  |

## **5 Environmental Characteristics**

- 5-1** Overall echo sensitivity shall not change by more than  $\pm 3\text{dB}$  in the temperature range of  $-30^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ , at a relative humidity of  $\pm 50\%$
- 5-2** Overall echo sensitivity shall not change by more than  $\pm 3\text{dB}$  in the humidity range of 10% to 90% at the temperature of  $25^{\circ}\text{C}$
- 5-3** Overall echo sensitivity shall be within  $\pm 3\text{dB}$  of the specified values after the device is subjected to any or all of the belows
  - 5-3-1** Operation at 90% relative humidity and  $40^{\circ}\text{C}$  for 100 hours, followed by a normalization period of 24 hours at 30% and  $25^{\circ}\text{C}$
  - 5-3-2** Storage at  $-40^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$  for 24 hours followed by a normalization period of an hour at  $25^{\circ}\text{C}$
  - 5-3-3** Vibration at 10 to 55Hz, 1.5mm amplitude. 1 minute sweep. X, Y, Z, 3 each axis for 3 hours.
  - 5-3-4** Shock: After impact of 50G is applied following. X, Y, Z, 3 axis /3 cycle / each direction.
  - 5-3-5** Drop: After free drop from 1 meter height onto concrete floor, 3 times

## **6 Mechanical Characteristics**

Lead strength

To pull longitudinally 1.0 kgf min.

To push longitudinally 1.0 kgf min.

## **7 Warranty**

- 7-1** Warranty period is one year after delivery
- 7-2** Defective transducers attributable to manufacturer's responsibility shall be replaced for free, during the warranty period. However, following cases are out of the this replacement.
  - 7-2-1** Unsuitable handling or misuse by user.
  - 7-2-2** Modification or repair by user.
  - 7-2-3** Any other cases not responsible for manufacturer such as natural calamity, accident, etc.

**This warranty covers only replacement. Any loss derived from failure or malfunction of the transducer, or cost to replace is excluded from this warranty.**

Dimensions: unit mm

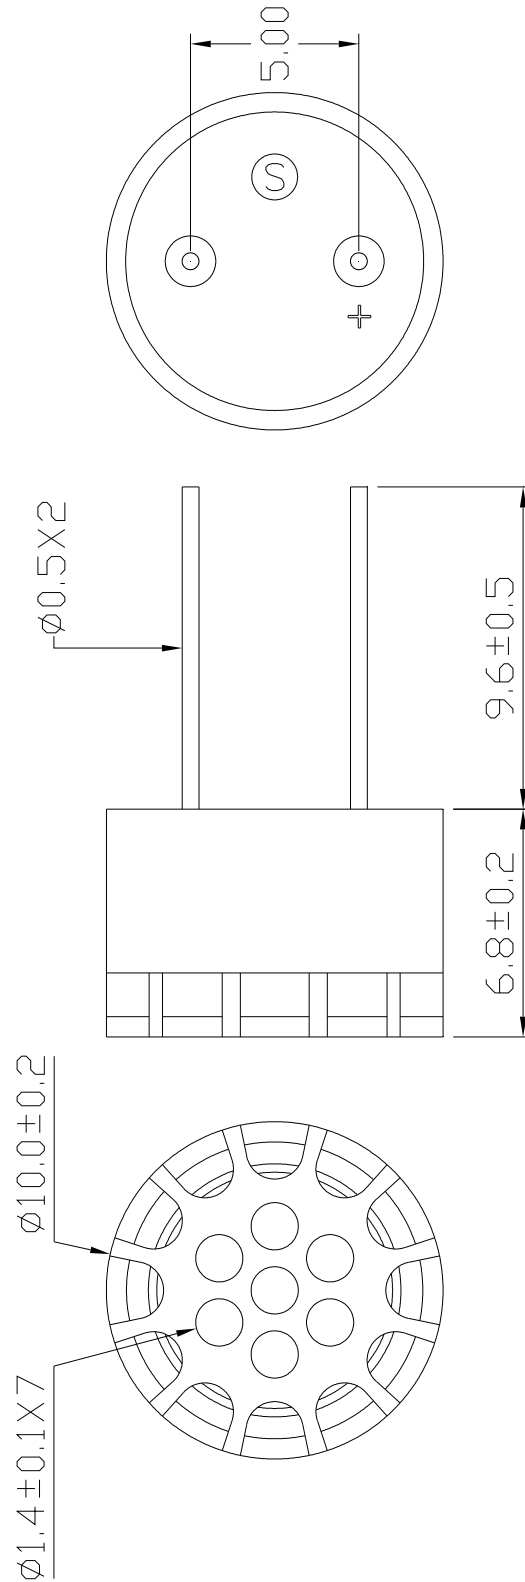


Figure 1

Test Circuit:

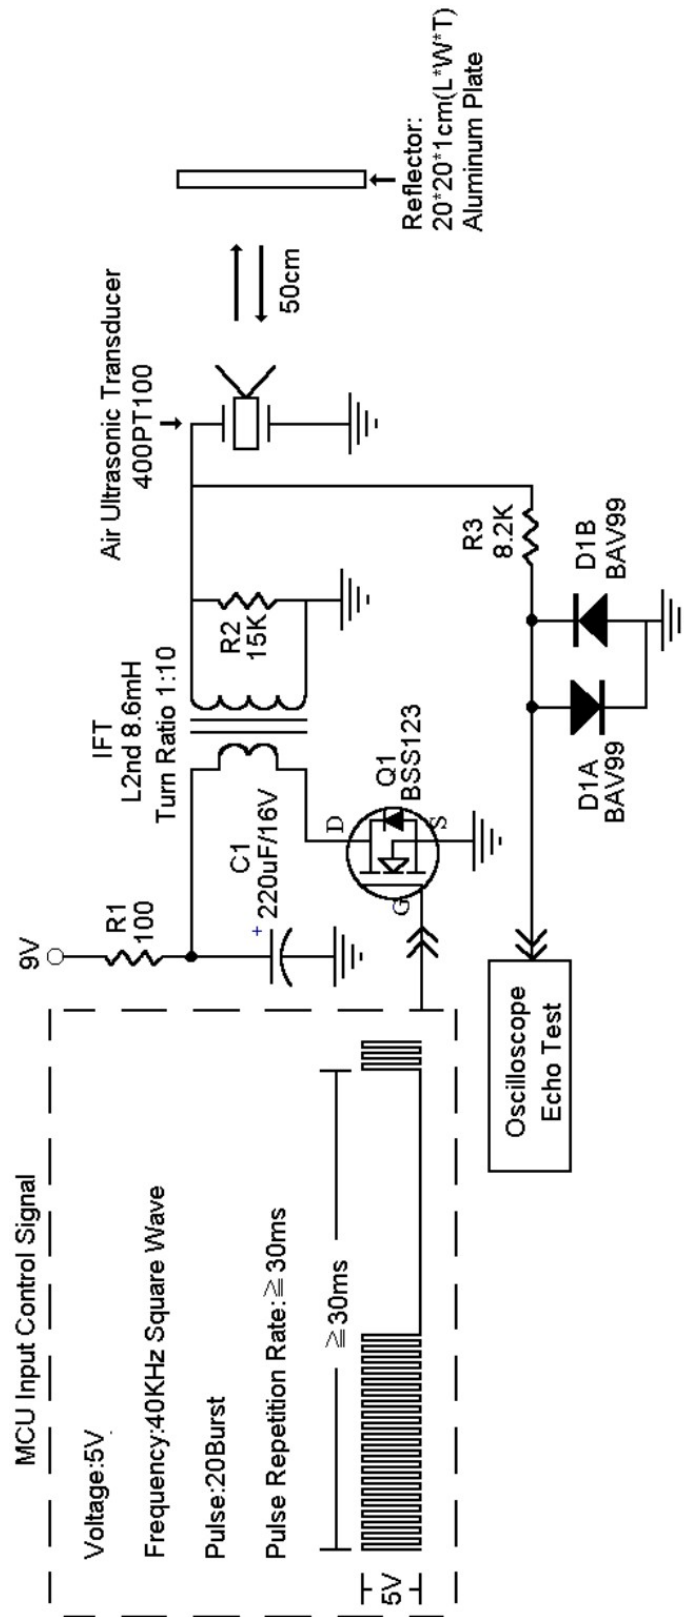


Figure 2

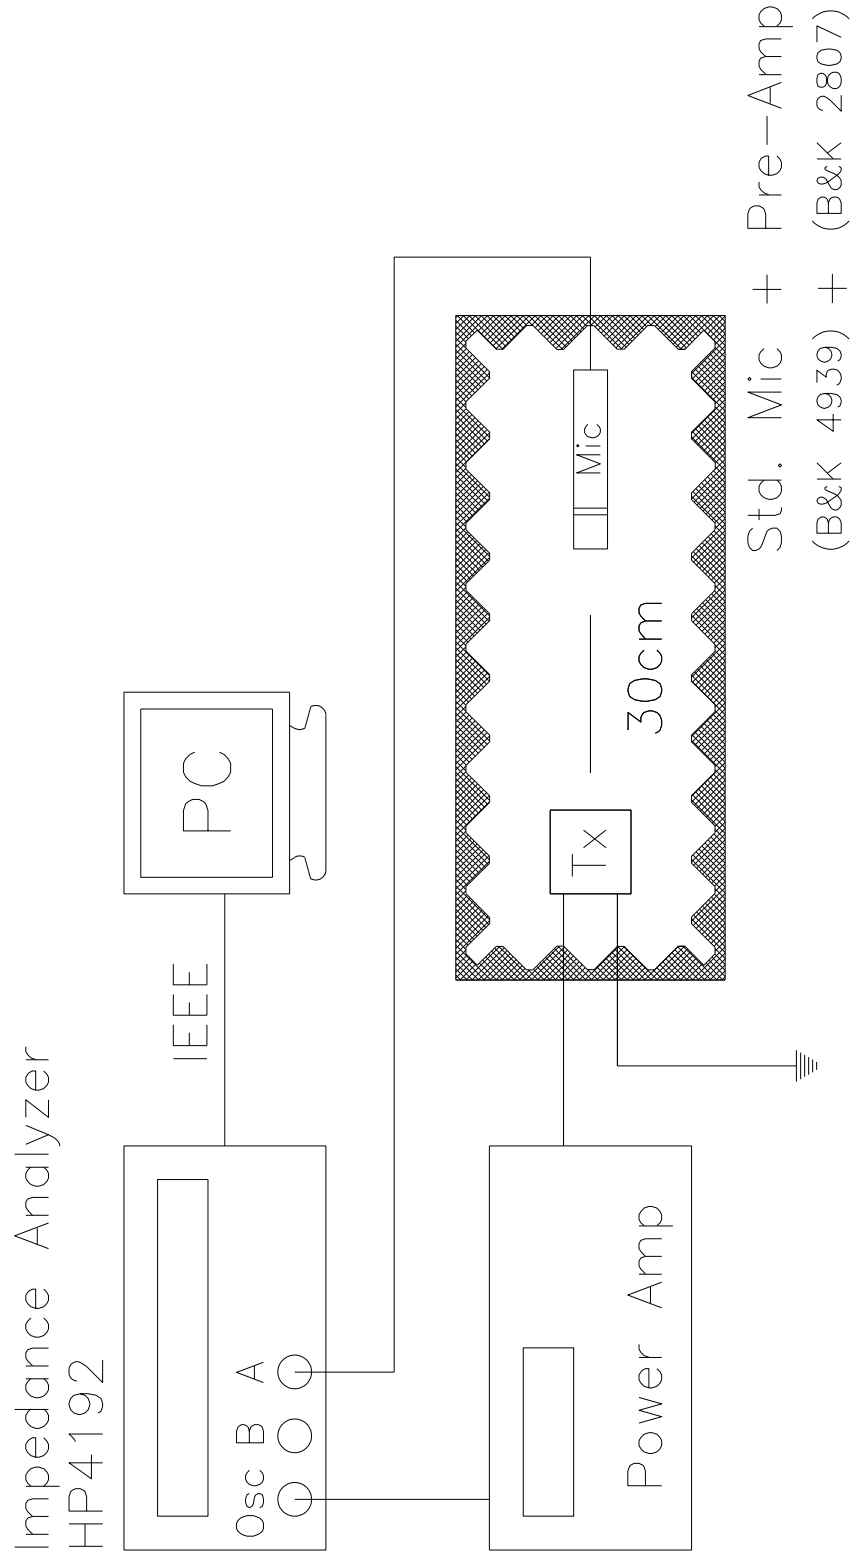


Figure 3

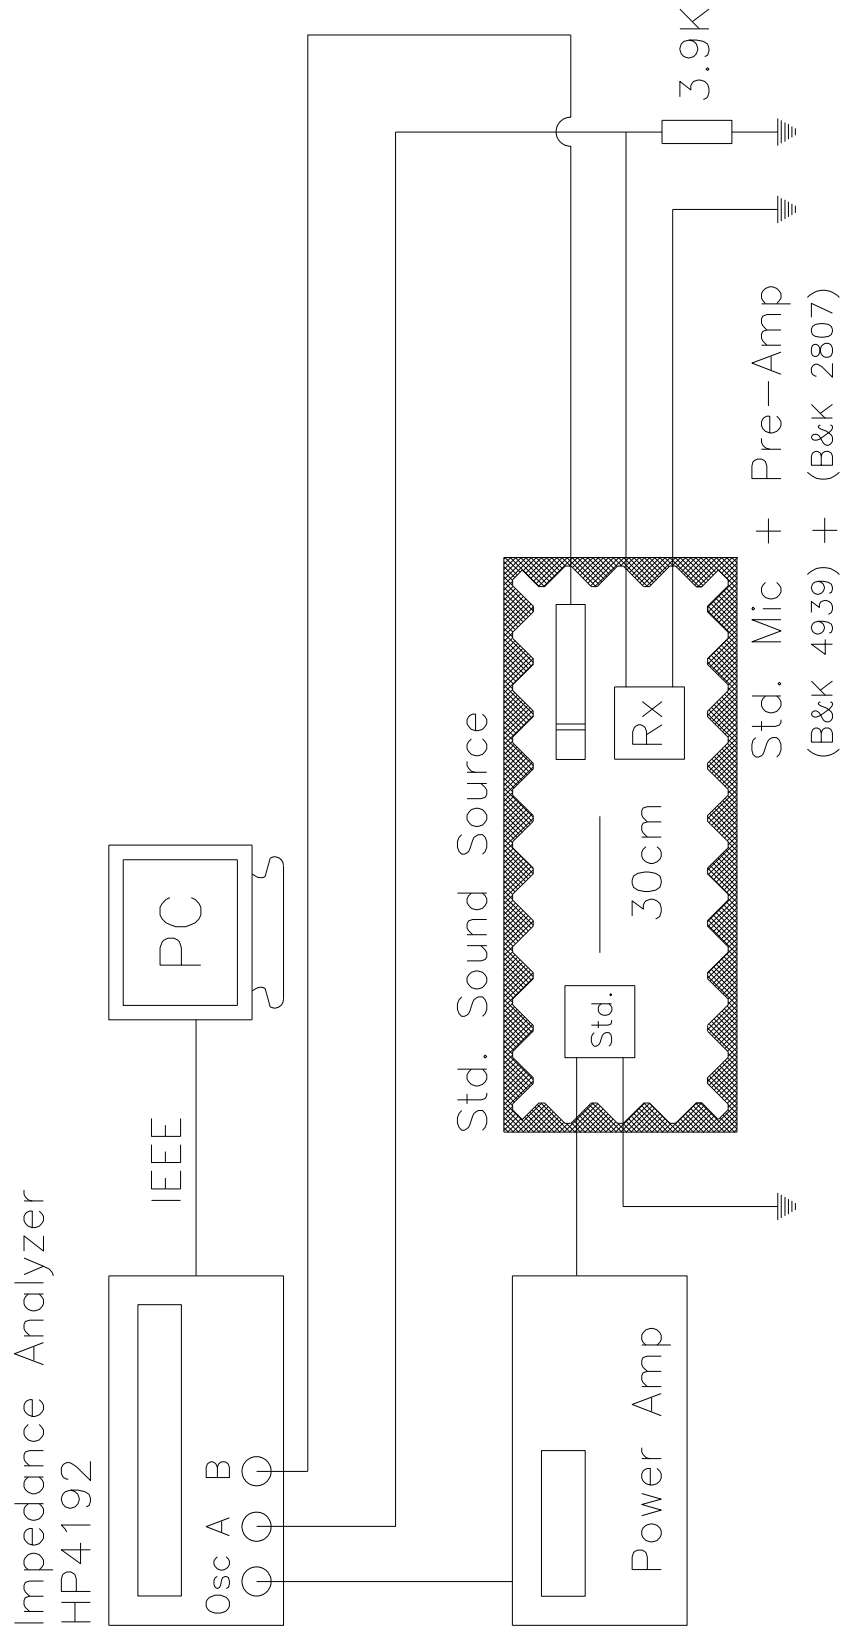


Figure 4

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9