

PE CUTOUT


PM CUTOUT

NOTE: FOR SWAP-IN APPLICATIONS, THE A SIDES MUST HAVE A .020 R. ON INSTALLATION SIDE.








RECOMMENDED PANEL CUTOUTS

STYLE	DIMENSION 'A'		DIMENSION B
	UNSHIELDED	SHIELDED	
PS	1.06	1.12	2.201 *
PSL	1.12		2.201 *
PE	1.12	1.12	2.201 *
PM	1.06	1.12	2.13
PSC	1.06	1.12	2.52
PSJ	1.06	1.12	2.6

* FOR PANEL THICKNESS OF 0.031" - 0.079" ONLY. USE 2.213 FOR PANEL THICKNESS OF 0.083" - 0.114"

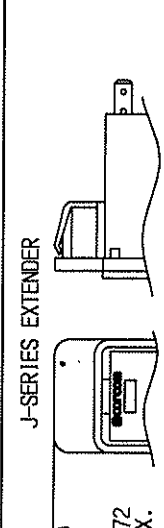

CURRENT RATING	MINIMUM INSERTION LOSS IN dB LINE TO GROUND IN 50 OHM CIRCUIT			MINIMUM INSERTION LOSS IN dB LINE TO LINE IN 50 OHM CIRCUIT		
	FREQUENCY MHz			FREQUENCY MHz		
3 AMP	0.15	0.5	1	0.15	0.5	1
	H MODELS			H MODELS		
	21	27	30	29	26	23
6 AMP	11	15	17	19	18	16
	S MODELS			S MODELS		
	21	27	33	40	44	50
10 AMP	5	10	13	23	27	35
	H MODELS			H MODELS		
	21	27	30	29	26	23

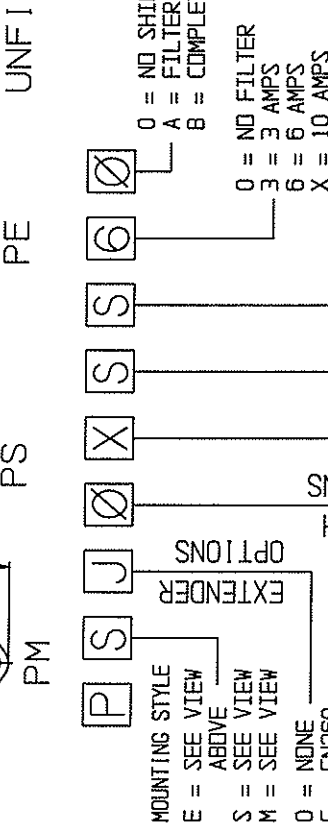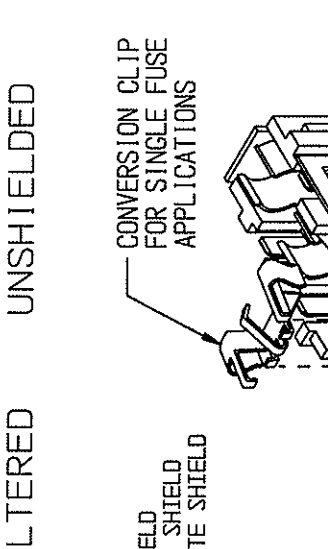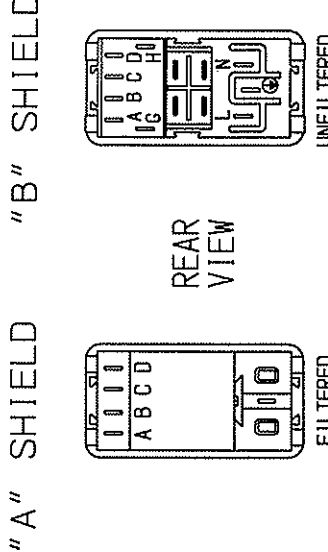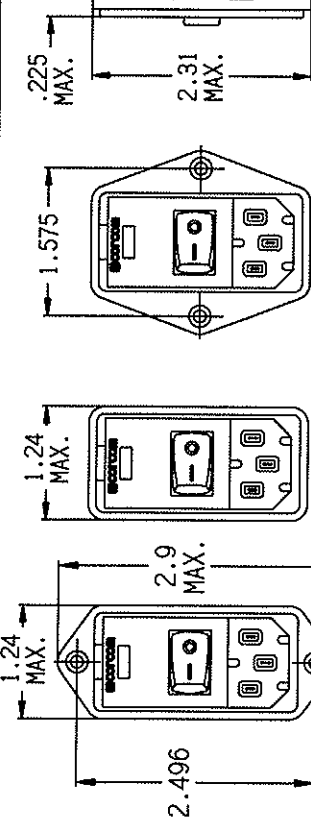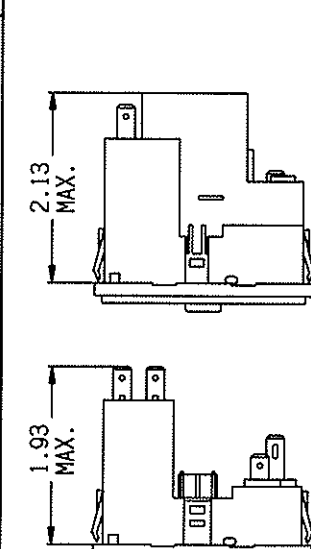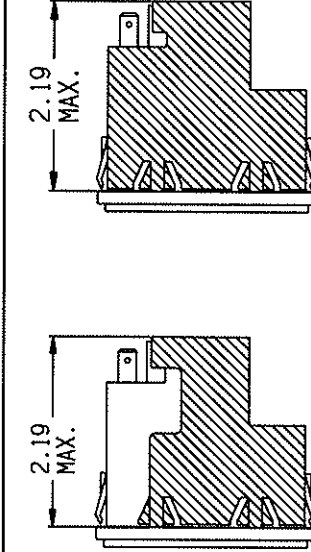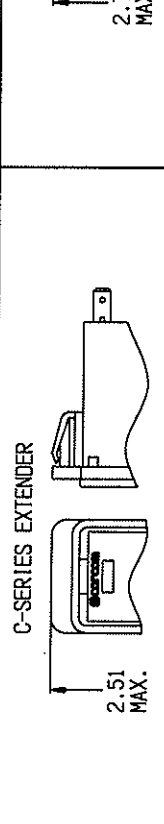

Tyco Electronics
 CUSTOMER DRAWING
 P-SERIES

CORDON PRODUCTS, 620 S. BUTTERFIELD RD., HUNDELEIN IL 60060

TYCO ELECTRONICS PART NO.

SCALE: 1:2 DATE: 2-4-97
 DRW. BY: LJD DRIG: MAC

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE OTHER THAN TYCO ELECTRONICS PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA USA.

MOUNTING STYLE
 E = SEE VIEW ABOVE
 S = SEE VIEW
 M = SEE VIEW
 D = NONE
 C = FN260
 J = J SERIES
 L = L SERIES

OPTIONS
 O = BLANK
 S = DOUBLE POLE SINGLE THROW
 O = SINGLE VOLTAGE
 S = DUAL VOLT., SELECT (SMPS)
 X = DUAL VOLT., SELECT (SERIES/PARALLEL)

LEGEND
 0 = NO SHIELD
 A = FILTER SHIELD
 B = COMPLETE SHIELD

FUSE TYPES
 0 = NO FILTER
 3 = 3 AMPS
 6 = 6 AMPS
 X = 10 AMPS

FUSE TYPES
 0 = NO FILTER
 B = INTERCONNECTION BLOCK
 H = MEDICAL FILTER
 S = GENERAL PURPOSE

FUSE TYPES
 D = DUAL FUSE
 S = SINGLE FUSE

SHIELD TYPES
 UNSHIELDED
 UNFILTERED
 "A" SHIELD
 "B" SHIELD

CONVERSION CLIP FOR SINGLE FUSE APPLICATIONS

SPECIFICATIONS - NONFILTERED MODELS

HIPOT RATING (ONE MINUTE)
 LINE TO GROUND: 1500 VAC
 LINE TO LINE: 1450 VDC
 OPERATING FREQUENCY: 50/60 Hz
 RATED VOLTAGE: 120/250 VAC
 RATED CURRENT: 10A @ 120 VAC
 10A @ 250 VAC



OPERATING VOLTAGES:
 SELECTABLE OR FIXED: 115/230 VAC
 FUSEHOLDER: ACCEPTS 1 OR 2 FUSES
 1/4" x 1-1/4" OR 5 x 20mm

SPECIFICATIONS - FILTERED MODELS

MAXIMUM LEAKAGE CURRENT, EACH LINE TO GROUND
 @ 120 VAC 60Hz: H MODELS 2µA
 S MODELS 0.25mA
 @ 250 VAC 50Hz: H MODELS 5µA
 S MODELS 0.50mA

HIPOT RATING (ONE MINUTE)
 LINE TO GROUND: 1500 VAC
 LINE TO LINE: 1450 VDC
 OPERATING FREQUENCY: 50/60 Hz
 RATED VOLTAGE: 120/250 VAC
 RATED CURRENT: 3, 6 & 10 AMP
 MODELS AVAILABLE

OPERATING VOLTAGES:
 SELECTABLE OR FIXED: 115/230 VAC
 FUSEHOLDER: ACCEPTS 1 OR 2 FUSES
 1/4" x 1-1/4" OR 5 x 20mm

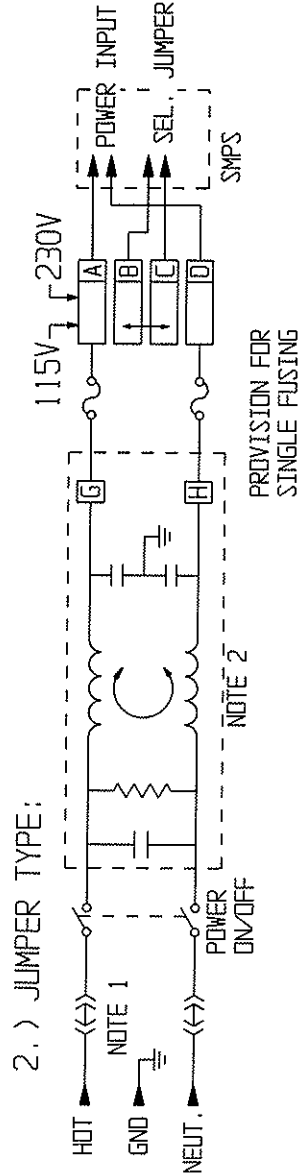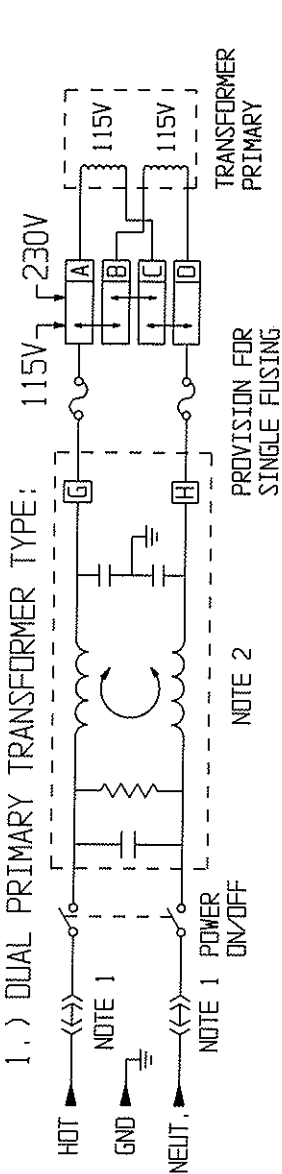

NOTE 1: JUMPERS ARE REQUIRED IF A FILTER OR INTERCONNECTION MODULE IS NOT USED.
 NOTE 2: LOCATION OF OPTIONAL FILTER, JUMPERS ARE REQUIRED IF A FILTER OR INTERCONNECTION MODULE IS NOT USED.


GENERAL NOTES:
 CONVERSION CLIP PROVIDED ON FUSEHOLDER FOR SINGLE FUSE MODELS.
 SWITCH: DOUBLE INSULATED RATED FOR 10,000 OPERATIONS AT FULL LOAD.
 51 AMP INRUSH CAPABILITY.
 TERMINALS: 0.187" x 0.032" FASTON TABS

SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:



UL RECOGNIZED
 CSA CERTIFIED
 VDE APPROVED

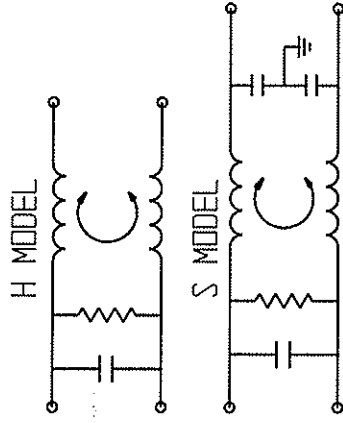

CORCOR PRODUCTS, 620 S. BUTTERFIELD RD. MUNDELEIN IL 60060

CUSTOMER DRAWING
P-SERIES

TYCO ELECTRONICS PART NO.

SCALE: NA	DATE: 2/4/97	DRAWING NUMBER: P-SERIES	REV. A
DRW. BY: LJD	DRG: MAC		

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE OTHER THAN TYCO ELECTRONICS PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA USA.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9