

### FEATURES

Single-supply operation: 3.3 V to 6.5 V

High output current: 300 mA

Low supply current: 6 mA

Stable with 1000 pF loads

Pin-compatible with LMC6009

Pin-compatible with CL-FP6131

48-lead, Pb-free, TSSOP package

### APPLICATION

LCD line inversion gamma references

### FUNCTIONAL BLOCK DIAGRAM

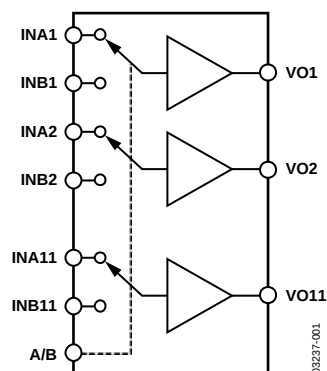


Figure 1.

### GENERAL DESCRIPTION

The AD8509 and AD8511 are 9-channel and 11-channel LCD reference buffers, respectively, designed to drive 64 gray scale column drivers. Each buffer has an A/B input to select between two voltages for LCD displays. These buffers drive the resistor ladders of LCD column drivers for gamma correction. These LCD drivers have higher slew rates and higher output drive currents than similar competitive parts. This increases the stability of the reference ladder, resulting in better gray scale and visual performance.

The AD8509 and AD8511 are specified over the  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  temperature range. They are available in 48-lead, thin shrink small outline (TSSOP), surface-mount, Pb-free packages in tape and reel.

### PIN CONFIGURATIONS

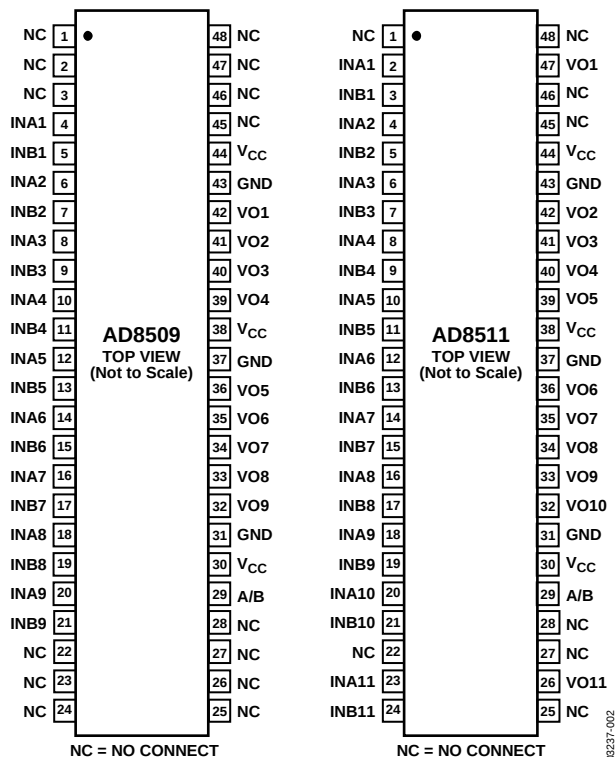


Figure 2. AD8509 and AD8511 48-Lead TSSOP (RU Suffix)

### Rev. B

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

TABLE OF CONTENTS

Specifications..... 3

    Electrical Characteristics..... 3

Absolute Maximum Ratings..... 4

    ESD Caution..... 4

Typical Performance Characteristics ..... 5

Applications..... 7

Outline Dimensions ..... 8

    Ordering Guide..... 8

REVISION HISTORY

**1/05—Rev. A to Rev. B**

Changed Maximum Operating Voltage..... Universal

Change to Features List..... 1

Changes to Specifications Table..... 3

Changes to Ordering Guide ..... 8

**9/04—Rev. 0 to Rev. A**

Format Updated..... Universal

Added Pb-Free Part..... Universal

Changed Temperature Range..... Universal

Changed Applications Section..... 1

Changes to Ordering Guide ..... 8

**10/97—Revision 0: Initial Version**

## SPECIFICATIONS

### ELECTRICAL CHARACTERISTICS

$V_S = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$ , unless otherwise noted.

Table 1.

| Parameter                    | Symbol   | Conditions                                                           | Min   | Typ | Max | Unit             |
|------------------------------|----------|----------------------------------------------------------------------|-------|-----|-----|------------------|
| INPUT CHARACTERISTICS        |          |                                                                      |       |     |     |                  |
| Offset Voltage               | $V_{OS}$ |                                                                      |       |     | 20  | mV               |
| Input Bias Current           | $I_B$    |                                                                      |       |     | 50  | nA               |
| Voltage Gain                 | $A_{VO}$ |                                                                      | 0.985 |     |     | V/V              |
| OUTPUT CHARACTERISTICS       |          |                                                                      |       |     |     |                  |
| Output Voltage High          | $V_{OH}$ | $I_{LOAD} = +20\text{ mA}$                                           | 4.8   |     |     | V                |
| Output Voltage Low           | $V_{OL}$ | $I_{LOAD} = -20\text{ mA}$                                           |       |     | 200 | mV               |
| Output Short-Circuit Current | $I_{SC}$ |                                                                      | 120   | 350 |     | mA               |
| POWER SUPPLY                 |          |                                                                      |       |     |     |                  |
| Load Regulation              |          | $V_{IN} = 0.5\text{ V} - 4.5\text{ V}$ , $I_{SOURCE} = 20\text{ mA}$ |       | 7   |     | mV               |
|                              |          | $V_{IN} = 0.5\text{ V} - 4.5\text{ V}$ , $I_{SINK} = 20\text{ mA}$   |       | 7   |     | mV               |
| Supply Current               | $I_{SY}$ | AD8509, $V_{IN} = 2.5\text{ V}$                                      |       |     | 8.5 | mA               |
|                              | $I_{SY}$ | AD8511, $V_{IN} = 2.5\text{ V}$                                      |       |     | 10  | mA               |
| Supply Voltage Range         | $V_S$    |                                                                      | 3.3   |     | 6.5 | V                |
| DYNAMIC PERFORMANCE          |          |                                                                      |       |     |     |                  |
| Slew Rate                    |          | $C_L = 15\text{ pF}$                                                 |       | 7   |     | V/ $\mu\text{s}$ |
|                              |          | $R_L = 250\ \Omega$                                                  |       | 6.2 |     | V/ $\mu\text{s}$ |
| Settling Time                | $t_S$    | IDC = 13 mA (sink/source)                                            |       | 3   | 6   | $\mu\text{s}$    |
| LOGIC INPUT CHARACTERISTICS  |          |                                                                      |       |     |     |                  |
| Input Current Low            | $I_{IL}$ |                                                                      |       |     | 1.0 | $\mu\text{A}$    |
| Input Current High           | $I_{IH}$ |                                                                      |       |     | 1.5 | $\mu\text{A}$    |
| Input Voltage Low            | $V_{IL}$ |                                                                      |       |     | 0.8 | V                |
| Input Voltage High           | $V_{IH}$ |                                                                      | 2.0   |     |     | V                |

## ABSOLUTE MAXIMUM RATINGS

Table 2.

| Parameter                                     | Rating          |
|-----------------------------------------------|-----------------|
| Supply Voltage                                | 7 V             |
| Input Voltage                                 | GND to $V_S$    |
| Storage Temperature Range                     |                 |
| RU Package                                    | –65°C to +150°C |
| Operating Temperature Range                   | –40°C to +85°C  |
| Junction Temperature Range                    |                 |
| RU Package                                    | –65°C to +150°C |
| Lead Temperature Range<br>(Soldering, 60 sec) | 300°C           |

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; the functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Table 3.

| Package Type               | $\theta_{JA}$ <sup>1</sup> | $\theta_{JC}$ | Unit |
|----------------------------|----------------------------|---------------|------|
| 48-lead Pb-free TSSOP (RU) | 115                        | 42            | °C/W |

<sup>1</sup>  $\theta_{JA}$  is specified for the worst-case conditions, that is,  $\theta_{JA}$  is specified for devices soldered in circuit boards for surface-mount packages.

Table 4. MUX Function

| A/B Select (Pin 29) | Input |
|---------------------|-------|
| Logic High          | INAx  |
| Logic Low           | INBx  |

## ESD CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although this product features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.



## TYPICAL PERFORMANCE CHARACTERISTICS

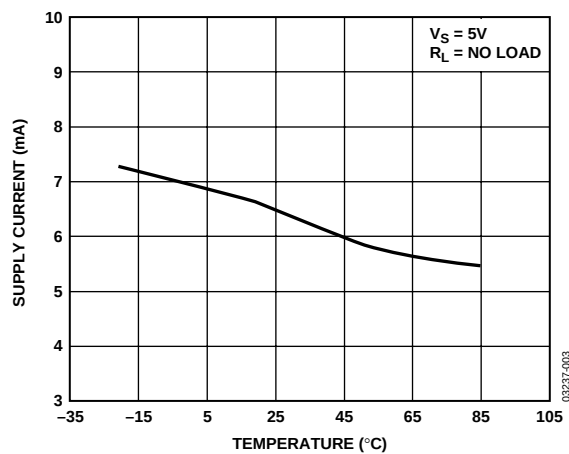


Figure 3. Supply Current vs. Temperature

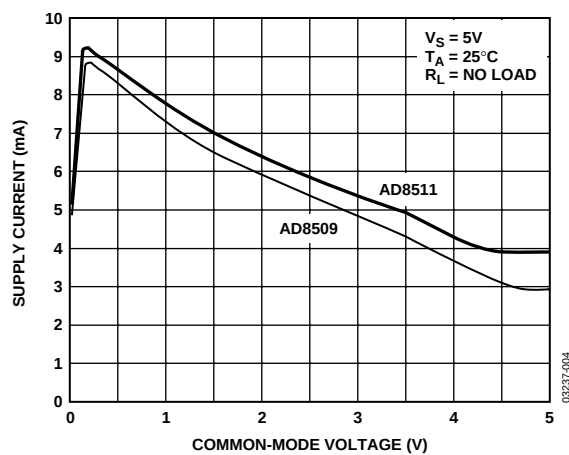


Figure 4. Supply Current vs. Common-Mode Voltage

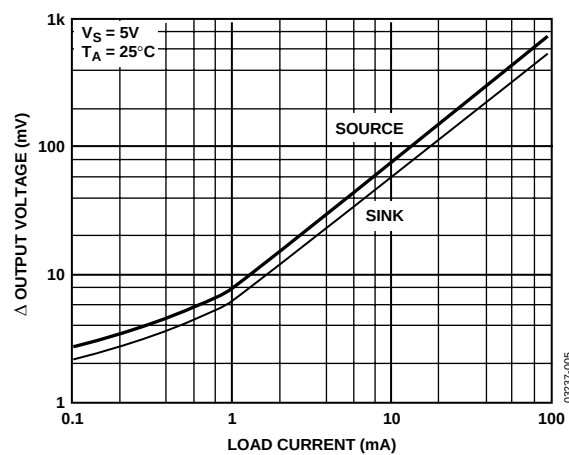


Figure 5. Output Voltage to Supply Rail vs. Load Current

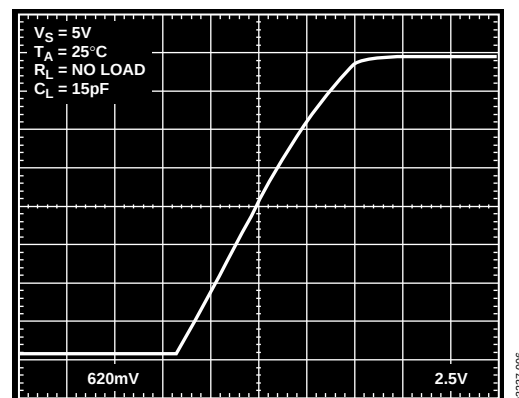


Figure 6. Large Signal Transient Response—Rising

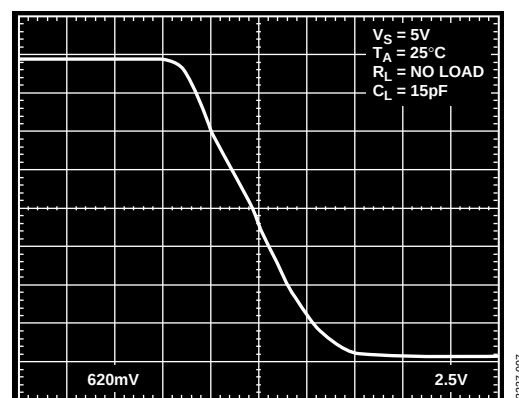


Figure 7. Large Signal Transient Response—Falling

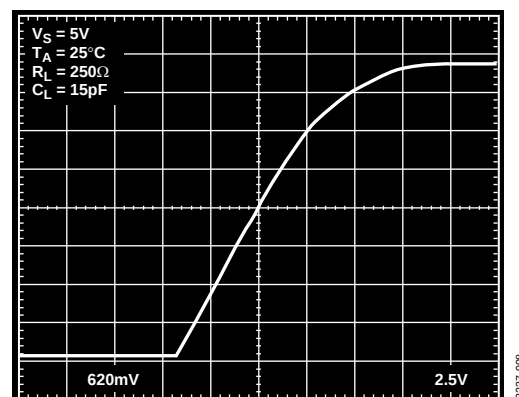


Figure 8. Large Signal Transient Response—Rising

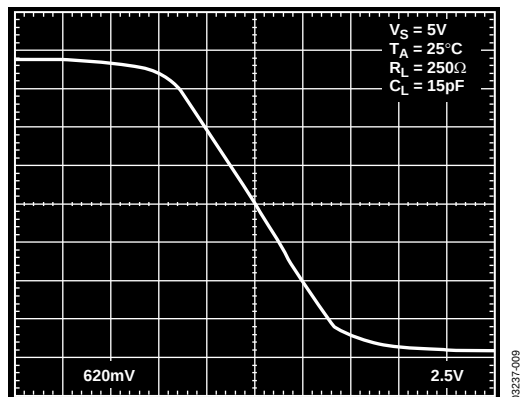


Figure 9. Large Signal Transient Response—Falling

## APPLICATIONS


The AD8509 and AD8511 are CMOS buffers with A/B inputs, which are used to select between two different reference voltages set up by an external resistor ladder. Input bias currents are orders of magnitude less than competitive parts. This allows very large resistor ladders to be used to save supply current. A guaranteed value of 50 nA is much higher than actual values and is limited by leakage in the test system.

Buffer outputs are designed to drive resistive loads. They are also stable with capacitive loads, so no resistors should be used in series with these outputs to attain the best display performance. Outputs have high slew rates and 6  $\mu$ s settling times. Each output can deliver a minimum of 120 mA, assuring fast response to varying loads.

The AD8509 is a 9-channel buffer and is similar to the LMC6009 in functionality. The AD8511 is an 11-channel buffer similar to the CL-FP6131. However, the control to select either 9- or 11-channel operation, the EN\_11 pin of the CL-FP6131, is not available on the AD8511. If 9-channel operation is desired, use the AD8509.

Power supply pins on the AD8509 and AD8511 have multiple ground and  $V_{CC}$  connections. Because of the high peak currents that these buffers can deliver, it is strongly recommended that all of the ground and  $V_{CC}$  pins be connected, and that the  $V_{CC}$  pins be suitably bypassed.

OUTLINE DIMENSIONS

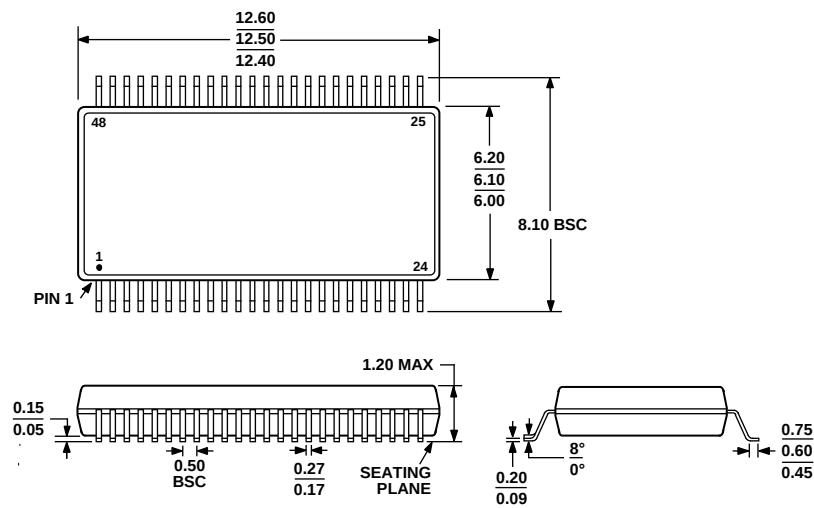

COMPLIANT TO JEDEC STANDARDS MO-153ED

Figure 10. 48-Lead Thin Shrink Small Outline Package [TSSOP]  
(RU-48)  
Dimensions shown in millimeters

ORDERING GUIDE

| Model <sup>1</sup>           | Temperature Range | Package Description                       | Package Option |
|------------------------------|-------------------|-------------------------------------------|----------------|
| AD8509ARU-REEL               | −40°C to +85°C    | 48-Lead Thin Shrink Small Outline Package | RU-48          |
| AD8509ARUZ-REEL <sup>2</sup> | −40°C to +85°C    | 48-Lead Thin Shrink Small Outline Package | RU-48          |
| AD8511ARU-REEL               | −40°C to +85°C    | 48-Lead Thin Shrink Small Outline Package | RU-48          |
| AD8511ARUZ-REEL <sup>2</sup> | −40°C to +85°C    | 48-Lead Thin Shrink Small Outline Package | RU-48          |

<sup>1</sup> All models only available in 2,500-piece reels.  
<sup>2</sup> Z = Pb-free part.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9