

# 74AXP1G58

## Low-power configurable multiple function gate

Rev. 3 — 16 September 2015

Product data sheet

### 1. General description

---

The 74AXP1G58 is a configurable multiple function gate with Schmitt-trigger inputs. The device can be configured as any of the following logic functions AND, OR, NAND, NOR, XOR, inverter and buffer. All inputs can be connected directly to  $V_{CC}$  or GND.

This device ensures very low static and dynamic power consumption across the entire  $V_{CC}$  range from 0.7 V to 2.75 V. This device is fully specified for partial power-down applications using  $I_{OFF}$ . The  $I_{OFF}$  circuitry disables the output, preventing the potentially damaging backflow current through the device when it is powered down.

### 2. Features and benefits

---

- Wide supply voltage range from 0.7 V to 2.75 V
- Low input capacitance;  $C_I = 0.5$  pF (typical)
- Low output capacitance;  $C_O = 1.0$  pF (typical)
- Low dynamic power consumption;  $C_{PD} = 2.7$  pF at  $V_{CC} = 1.2$  V (typical)
- Low static power consumption;  $I_{CC} = 0.6$   $\mu$ A (85 °C maximum)
- High noise immunity
- Complies with JEDEC standard:
  - ◆ JESD8-12A.01 (1.1 V to 1.3 V)
  - ◆ JESD8-11A.01 (1.4 V to 1.6 V)
  - ◆ JESD8-7A (1.65 V to 1.95 V)
  - ◆ JESD8-5A.01 (2.3 V to 2.7 V)
- ESD protection:
  - ◆ HBM ANSI/ESDA/JEDEC JS-001 Class 2 exceeds 2 kV
  - ◆ CDM JESD22-C101E exceeds 1000 V
- Latch-up performance exceeds 100 mA per JESD 78 Class II
- Inputs accept voltages up to 2.75 V
- Low noise overshoot and undershoot < 10% of  $V_{CC}$
- $I_{OFF}$  circuitry provides partial power-down mode operation
- Multiple package options
- Specified from -40 °C to +85 °C

3. Ordering information

Table 1. Ordering information

| Type number | Package           |        |   |         |
|-------------|-------------------|--------|---|---------|
|             | Temperature range | Name   | Description   | Version |
| 74AXP1G58GM | −40 °C to +85 °C  | XSON6  | plastic extremely thin small outline package; no leads; 6 terminals; body 1 × 1.45 × 0.5 mm         | SOT886  |
| 74AXP1G58GN | −40 °C to +85 °C  | XSON6  | extremely thin small outline package; no leads; 6 terminals; body 0.9 × 1.0 × 0.35 mm               | SOT1115 |
| 74AXP1G58GS | −40 °C to +85 °C  | XSON6  | extremely thin small outline package; no leads; 6 terminals; body 1.0 × 1.0 × 0.35 mm               | SOT1202 |
| 74AXP1G58GX | −40 °C to +85 °C  | X2SON6 | plastic thermal extremely thin small outline package; no leads; 6 terminals; body 1 × 0.8 × 0.35 mm | SOT1255 |


4. Marking

Table 2. Marking codes

| Type number | Marking code <sup>[1]</sup> |
|-------------|-----------------------------|
| 74AXP1G58GM | RK                          |
| 74AXP1G58GN | RK                          |
| 74AXP1G58GS | RK                          |
| 74AXP1G58GX | RK                          |

[1] The pin 1 indicator is located on the lower left corner of the device, below the marking code.

5. Functional diagram

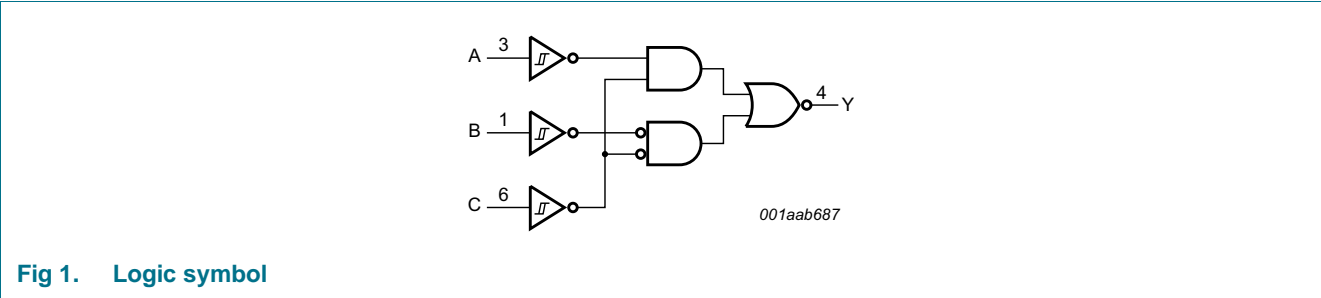

6. Pinning information

6.1 Pinning

Transparent top view

Fig 2. Pin configuration SOT886

Transparent top view

Fig 3. Pin configuration SOT1115 and SOT1202

Transparent top view

Fig 4. Pin configuration SOT1255 (X2SON6)

6.2 Pin description

Table 3. Pin description

| Symbol          | Pin | Description    |
|-----------------|-----|----------------|
| B               | 1   | data input     |
| GND             | 2   | ground (0 V)   |
| A               | 3   | data input     |
| Y               | 4   | data output    |
| V <sub>CC</sub> | 5   | supply voltage |
| C               | 6   | data input     |

7. Functional description

Table 4. Function table<sup>[1]</sup>

| Input |   |   | Output |
|-------|---|---|--------|
| C     | B | A | Y      |
| L     | L | L | L      |
| L     | L | H | H      |
| L     | H | L | L      |
| L     | H | H | H      |
| H     | L | L | H      |
| H     | L | H | H      |
| H     | H | L | L      |
| H     | H | H | L      |

[1] H = HIGH voltage level; L = LOW voltage level.

7.1 Logic configurations

Table 5. Function selection table

| Logic function                         | Figure  |
|--|---|
| 2-input NAND                           | see <a href="#">Figure 5</a>                              |
| 2-input NAND with both inputs inverted | see <a href="#">Figure 8</a>                              |
| 2-input AND with inverted input        | see <a href="#">Figure 6</a> and <a href="#">Figure 7</a> |
| 2-input NOR with inverted input        | see <a href="#">Figure 6</a> and <a href="#">Figure 7</a> |
| 2-input OR                             | see <a href="#">Figure 8</a>                              |
| 2-input OR with both inputs inverted   | see <a href="#">Figure 5</a>                              |
| 2-input XOR                            | see <a href="#">Figure 9</a>                              |
| Buffer                                 | see <a href="#">Figure 10</a>                             |
| Inverter                               | see <a href="#">Figure 11</a>                             |

**Fig 5. 2-input NAND gate or 2-input OR gate with both inputs inverted**

**Fig 6. 2-input AND gate with inverted B input or 2-input NOR gate with inverted C input**

**Fig 7. 2-input AND gate with inverted C input or 2-input NOR gate with inverted A input**

**Fig 8. 2-input OR gate or 2-input NAND gate with both inputs inverted**

**Fig 9. 2-input XOR gate**

**Fig 10. Buffer**

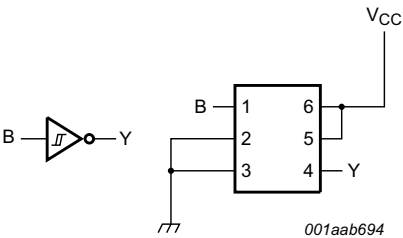


Fig 11. Inverter

8. Limiting values

Table 6. Limiting values  
In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

| Symbol           | Parameter               | Conditions                              | Min  | Max  | Unit |
|------------------|-------------------------|---|------|------|------|
| V <sub>CC</sub>  | supply voltage          |   | −0.5 | +3.3 | V    |
| I <sub>IK</sub>  | input clamping current  | V <sub>I</sub> < 0 V                    | −50  | -    | mA   |
| V <sub>I</sub>   | input voltage           | [1]                                     | −0.5 | +3.3 | V    |
| I <sub>OK</sub>  | output clamping current | V <sub>O</sub> < 0 V                    | −50  | -    | mA   |
| V <sub>O</sub>   | output voltage          | [1]                                     | −0.5 | +3.3 | V    |
| I <sub>O</sub>   | output current          | V <sub>O</sub> = 0 V to V <sub>CC</sub> | -    | ±20  | mA   |
| I <sub>CC</sub>  | supply current          |   | -    | 50   | mA   |
| I <sub>GND</sub> | ground current          |   | −50  | -    | mA   |
| T <sub>stg</sub> | storage temperature     |   | −65  | +150 | °C   |
| P <sub>tot</sub> | total power dissipation | T <sub>amb</sub> = −40 °C to +85 °C     | -    | 250  | mW   |

[1] The minimum input and output voltage ratings may be exceeded if the input and output current ratings are observed.

9. Recommended operating conditions

Table 7. Recommended operating conditions  
Voltages are referenced to GND (ground = 0 V).

| Symbol           | Parameter           | Conditions                             | Min | Max             | Unit |
|------------------|---------------------|--|-----|-----------------|------|
| V <sub>CC</sub>  | supply voltage      |  | 0.7 | 2.75            | V    |
| V <sub>I</sub>   | input voltage       |  | 0   | 2.75            | V    |
| V <sub>O</sub>   | output voltage      | active mode                            | 0   | V <sub>CC</sub> | V    |
|                  |                     | power-down mode; V <sub>CC</sub> = 0 V | 0   | 2.75            | V    |
| T <sub>amb</sub> | ambient temperature |  | −40 | +85             | °C   |

## 10. Static characteristics

**Table 8. Static characteristics**

At recommended operating conditions, unless otherwise specified; voltages are referenced to GND (ground = 0 V).

| Symbol           | Parameter                            | Conditions   | $T_{amb} = -40\text{ °C to }+85\text{ °C}$ |           |             |             | Unit          |
|------------------|--------------------------------------|--|--|-----------|-------------|-------------|---------------|
|                  |                                      |  | Min  | Typ 25 °C | Max 25 °C   | Max 85 °C   |               |
| $V_{T+}$         | positive-going threshold voltage     | see <a href="#">Figure 12</a> and <a href="#">Figure 13</a>  |  |           |             |             |               |
|                  |                                      | $V_{CC} = 0.75\text{ V to }0.85\text{ V}$  | $0.3V_{CC}$                                | -         | $0.8V_{CC}$ | $0.8V_{CC}$ | V             |
|                  |                                      | $V_{CC} = 1.1\text{ V to }1.95\text{ V}$   | $0.4V_{CC}$                                | -         | $0.7V_{CC}$ | $0.7V_{CC}$ | V             |
|                  |                                      | $V_{CC} = 2.3\text{ V to }2.7\text{ V}$  | 0.9  | -         | 1.7         | 1.7         | V             |
| $V_{T-}$         | negative-going threshold voltage     | see <a href="#">Figure 12</a> and <a href="#">Figure 13</a>  |  |           |             |             |               |
|                  |                                      | $V_{CC} = 0.75\text{ V to }0.85\text{ V}$  | $0.2V_{CC}$                                | -         | $0.7V_{CC}$ | $0.7V_{CC}$ | V             |
|                  |                                      | $V_{CC} = 1.1\text{ V to }1.95\text{ V}$   | $0.3V_{CC}$                                | -         | $0.6V_{CC}$ | $0.6V_{CC}$ | V             |
|                  |                                      | $V_{CC} = 2.3\text{ V to }2.7\text{ V}$  | 0.7  | -         | 1.5         | 1.5         | V             |
| $V_H$            | hysteresis voltage                   | see <a href="#">Figure 12</a> and <a href="#">Figure 13</a>  |  |           |             |             |               |
|                  |                                      | $V_{CC} = 0.75\text{ V to }0.85\text{ V}$  | $0.06V_{CC}$                               | -         | $0.5V_{CC}$ | $0.5V_{CC}$ | V             |
|                  |                                      | $V_{CC} = 1.1\text{ V to }1.95\text{ V}$   | $0.1V_{CC}$                                | -         | $0.4V_{CC}$ | $0.4V_{CC}$ | V             |
|                  |                                      | $V_{CC} = 2.3\text{ V to }2.7\text{ V}$  | 0.2  | -         | 1.0         | 1.0         | V             |
| $V_{OH}$         | HIGH-level output voltage            | $I_O = -20\text{ }\mu\text{A}; V_{CC} = 0.7\text{ V}$  | -  | 0.69      | -           | -           | V             |
|                  |                                      | $I_O = -100\text{ }\mu\text{A}; V_{CC} = 0.75\text{ V}$  | 0.65                                       | -         | -           | -           | V             |
|                  |                                      | $I_O = -2\text{ mA}; V_{CC} = 1.1\text{ V}$  | 0.825                                      | -         | -           | -           | V             |
|                  |                                      | $I_O = -3\text{ mA}; V_{CC} = 1.4\text{ V}$  | 1.05                                       | -         | -           | -           | V             |
|                  |                                      | $I_O = -4.5\text{ mA}; V_{CC} = 1.65\text{ V}$   | 1.2  | -         | -           | -           | V             |
|                  |                                      | $I_O = -8\text{ mA}; V_{CC} = 2.3\text{ V}$  | 1.7  | -         | -           | -           | V             |
| $V_{OL}$         | LOW-level output voltage             | $I_O = 20\text{ }\mu\text{A}; V_{CC} = 0.7\text{ V}$   | -  | 0.01      | -           | -           | V             |
|                  |                                      | $I_O = 100\text{ }\mu\text{A}; V_{CC} = 0.75\text{ V}$   | -  | -         | 0.1         | 0.1         | V             |
|                  |                                      | $I_O = 2\text{ mA}; V_{CC} = 1.1\text{ V}$   | -  | -         | 0.275       | 0.275       | V             |
|                  |                                      | $I_O = 3\text{ mA}; V_{CC} = 1.4\text{ V}$   | -  | -         | 0.35        | 0.35        | V             |
|                  |                                      | $I_O = 4.5\text{ mA}; V_{CC} = 1.65\text{ V}$  | -  | -         | 0.45        | 0.45        | V             |
|                  |                                      | $I_O = 8\text{ mA}; V_{CC} = 2.3\text{ V}$   | -  | -         | 0.7         | 0.7         | V             |
| $I_I$            | input leakage current                | $V_I = 0\text{ V to }2.75\text{ V};$<br>$V_{CC} = 0\text{ V to }2.75\text{ V}$ <a href="#">[1]</a>         | -  | 0.001     | $\pm 0.1$   | $\pm 0.5$   | $\mu\text{A}$ |
| $I_{OFF}$        | power-off leakage current            | $V_I$ or $V_O = 0\text{ V to }2.75\text{ V};$<br>$V_{CC} = 0\text{ V}$ <a href="#">[1]</a>                 | -  | 0.01      | $\pm 0.1$   | $\pm 0.5$   | $\mu\text{A}$ |
| $\Delta I_{OFF}$ | additional power-off leakage current | $V_I$ or $V_O = 0\text{ V or }2.75\text{ V};$<br>$V_{CC} = 0\text{ V to }0.1\text{ V}$ <a href="#">[1]</a> | -  | 0.02      | $\pm 0.1$   | $\pm 0.5$   | $\mu\text{A}$ |
| $I_{CC}$         | supply current                       | $V_I = 0\text{ V or }V_{CC}; I_O = 0\text{ A}$ <a href="#">[1]</a>   | -  | 0.01      | 0.3         | 0.6         | $\mu\text{A}$ |
| $\Delta I_{CC}$  | additional supply current            | $V_I = V_{CC} - 0.5\text{ V}; I_O = 0\text{ A};$<br>$V_{CC} = 2.5\text{ V}$                                | -  | 2         | 100         | 150         | $\mu\text{A}$ |

[1] Typical values are measured at  $V_{CC} = 1.2\text{ V}$ .

## 10.1 Waveform transfer characteristics

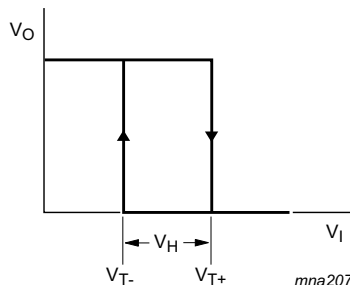
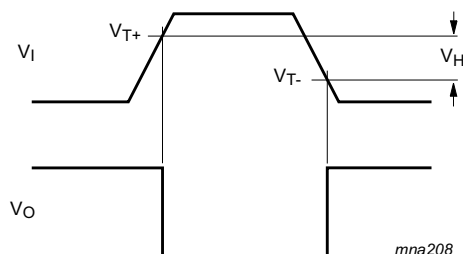


Fig 12. Transfer characteristic

Fig 13. Definition of  $V_{T+}$ ,  $V_{T-}$  and  $V_H$ 

## 11. Dynamic characteristics

Table 9. Dynamic characteristics

Voltages are referenced to GND (ground = 0 V); for test circuit, see [Figure 20](#).

| Symbol   | Parameter                     | Conditions   | $T_{amb} = 25\text{ °C}$ |                    |     | $T_{amb} = -40\text{ °C to }+85\text{ °C}$ |     | Unit |
|----------|-------------------------------|--|--------------------------|--------------------|-----|--|-----|------|
|          |                               |  | Min                      | Typ <sup>[1]</sup> | Max | Min  | Max |      |
| $t_{pd}$ | propagation delay             | A, B and C to Y; see <a href="#">Figure 14</a> <sup>[2][3]</sup>       |                          |                    |     |  |     |      |
|          |                               | $V_{CC} = 0.75\text{ V to }0.85\text{ V}$                              | 3.0                      | 14                 | 46  | 1  | 152 | ns   |
|          |                               | $V_{CC} = 1.1\text{ V to }1.3\text{ V}$                                | 2.3                      | 5.0                | 8.3 | 2.1  | 8.7 | ns   |
|          |                               | $V_{CC} = 1.4\text{ V to }1.6\text{ V}$                                | 1.9                      | 3.7                | 5.6 | 1.7  | 6.0 | ns   |
|          |                               | $V_{CC} = 1.65\text{ V to }1.95\text{ V}$                              | 1.6                      | 3.1                | 4.7 | 1.4  | 5.1 | ns   |
|          |                               | $V_{CC} = 2.3\text{ V to }2.7\text{ V}$                                | 1.3                      | 2.4                | 3.5 | 1.1  | 3.9 | ns   |
| $t_t$    | transition time               | $V_{CC} = 2.7\text{ V}$ ; see <a href="#">Figure 14</a> <sup>[4]</sup> | -                        | -                  | -   | 1.0  | -   | ns   |
| $C_I$    | input capacitance             | $V_I = 0\text{ V or }V_{CC}$ ; $V_{CC} = 0\text{ V to }2.75\text{ V}$  | -                        | 0.5                | -   | -  | -   | pF   |
| $C_O$    | output capacitance            | $V_O = 0\text{ V}$ ; $V_{CC} = 0\text{ V}$                             | -                        | 1.0                | -   | -  | -   | pF   |
| $C_{PD}$ | power dissipation capacitance | $f_i = 1\text{ MHz}$ ; $V_I = 0\text{ V to }V_{CC}$ <sup>[5]</sup>     |                          |                    |     |  |     |      |
|          |                               | $V_{CC} = 0.75\text{ V to }0.85\text{ V}$                              | -                        | 2.5                | -   | -  | -   | pF   |
|          |                               | $V_{CC} = 1.1\text{ V to }1.3\text{ V}$                                | -                        | 2.6                | -   | -  | -   | pF   |
|          |                               | $V_{CC} = 1.4\text{ V to }1.6\text{ V}$                                | -                        | 2.7                | -   | -  | -   | pF   |
|          |                               | $V_{CC} = 1.65\text{ V to }1.95\text{ V}$                              | -                        | 2.9                | -   | -  | -   | pF   |
|          |                               | $V_{CC} = 2.3\text{ V to }2.7\text{ V}$                                | -                        | 3.3                | -   | -  | -   | pF   |

[1] All typical values are measured at nominal  $V_{CC}$ .

[2]  $t_{pd}$  is the same as  $t_{PLH}$  and  $t_{PHL}$ .

[3] For additional propagation delay values at different load capacitances, see [Figure 15](#) to [Figure 19](#).

[4]  $t_t$  is the same as  $t_{THL}$  and  $t_{TLH}$ .

[5]  $C_{PD}$  is used to determine the dynamic power dissipation ( $P_D$  in  $\mu\text{W}$ ).

$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + C_L \times V_{CC}^2 \times f_o$  where:

$f_i$  = input frequency in MHz;

$f_o$  = output frequency in MHz;

$C_L$  = output load capacitance in pF;

$V_{CC}$  = supply voltage in V;

$N$  = number of inputs switching.

11.1 Waveforms and graphs




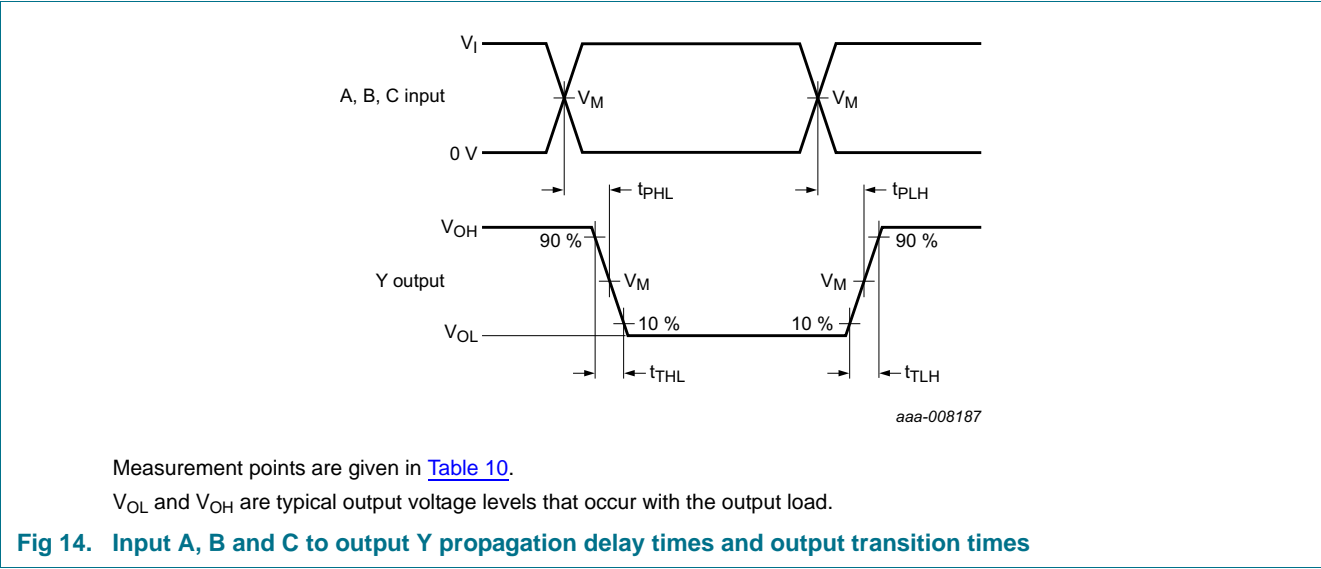


Table 10. Measurement points

| Supply voltage  | Output      | Input       |          |               |
|-----------------|-------------|-------------|----------|---------------|
| $V_{CC}$        | $V_M$       | $V_M$       | $V_I$    | $t_r = t_f$   |
| 0.75 V to 2.7 V | $0.5V_{CC}$ | $0.5V_{CC}$ | $V_{CC}$ | $\leq 3.0$ ns |

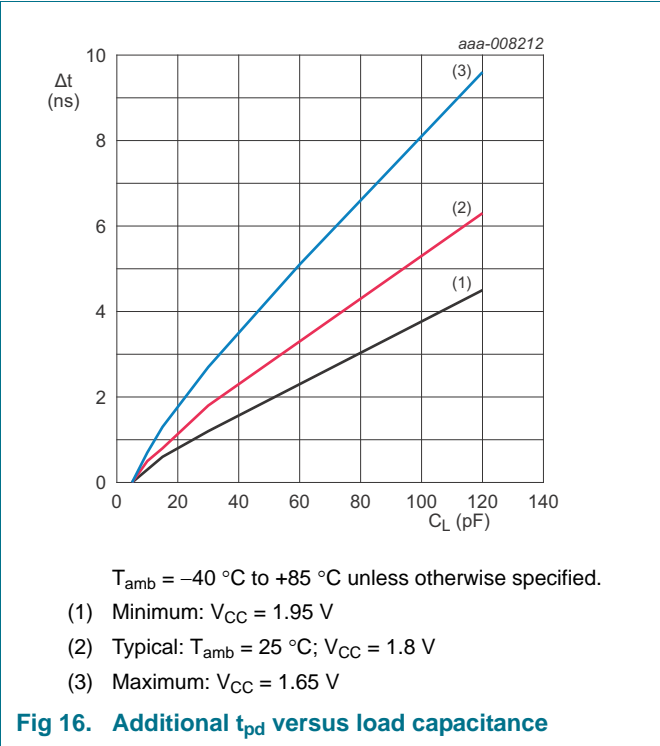

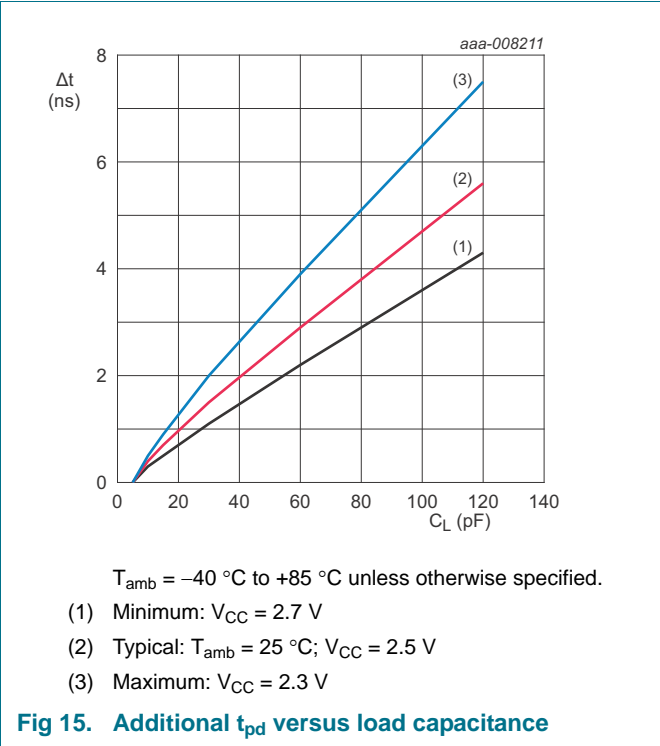


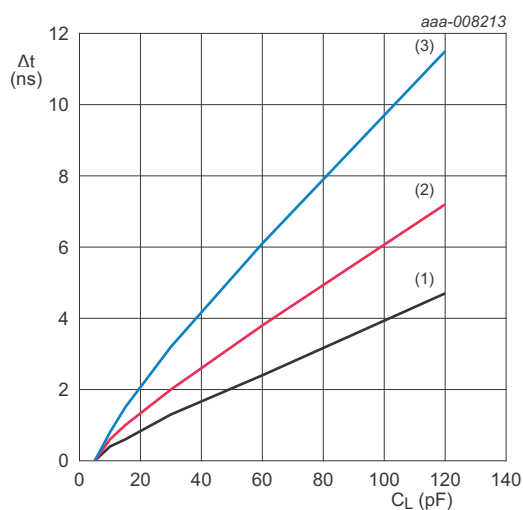

$T_{amb} = -40\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$  unless otherwise specified.

- (1) Minimum:  $V_{CC} = 1.6\text{ V}$
- (2) Typical:  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $V_{CC} = 1.5\text{ V}$
- (3) Maximum:  $V_{CC} = 1.4\text{ V}$


**Fig 17. Additional  $t_{pd}$  versus load capacitance**

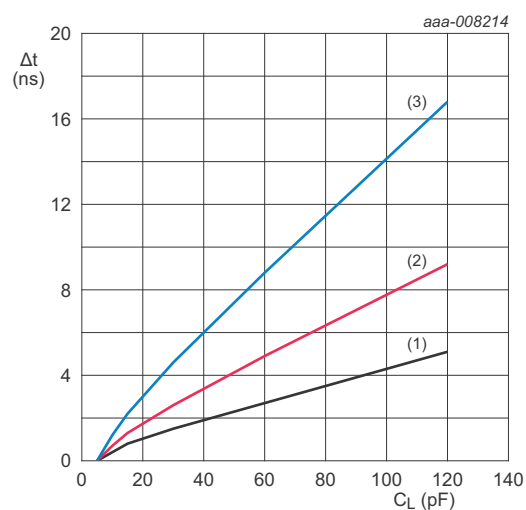

$T_{amb} = -40\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$  unless otherwise specified.

- (1) Minimum:  $V_{CC} = 1.3\text{ V}$
- (2) Typical:  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $V_{CC} = 1.2\text{ V}$
- (3) Maximum:  $V_{CC} = 1.1\text{ V}$


**Fig 18. Additional  $t_{pd}$  versus load capacitance**

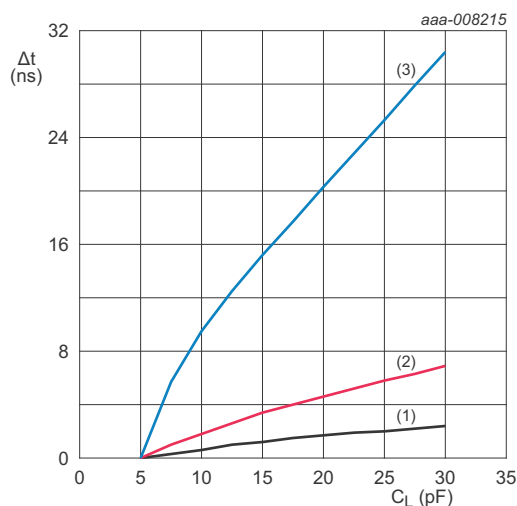

$T_{amb} = -40\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$  unless otherwise specified.

- (1) Minimum:  $V_{CC} = 0.85\text{ V}$
- (2) Typical:  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $V_{CC} = 0.8\text{ V}$
- (3) Maximum:  $V_{CC} = 0.75\text{ V}$

**Fig 19. Additional  $t_{pd}$  versus load capacitance**

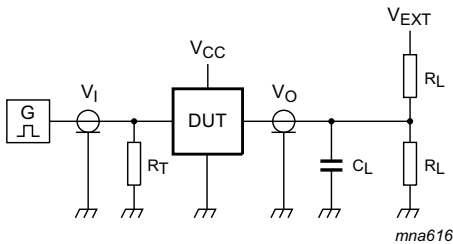

Test data is given in [Table 11](#).  
Definitions for test circuit:  
 $R_L$  = Load resistance.  
 $C_L$  = Load capacitance including jig and probe capacitance.  
 $R_T$  = Termination resistance should be equal to the output impedance  $Z_o$  of the pulse generator.  
 $V_{EXT}$  = External voltage for measuring switching times.

Fig 20. Test circuit for measuring switching times

Table 11. Test data

| Supply voltage  | Load  |               | $V_{EXT}$          |                    |                    |
|-----------------|-------|---------------|--------------------|--------------------|--------------------|
| $V_{CC}$        | $C_L$ | $R_L$         | $t_{PLH}, t_{PHL}$ | $t_{PZH}, t_{PHZ}$ | $t_{PZL}, t_{PLZ}$ |
| 0.75 V to 2.7 V | 5 pF  | 10 k $\Omega$ | 0 V                | 0 V                | $2V_{CC}$          |

12. Package outline

XSON6: plastic extremely thin small outline package; no leads; 6 terminals; body 1 x 1.45 x 0.5 mm SOT886

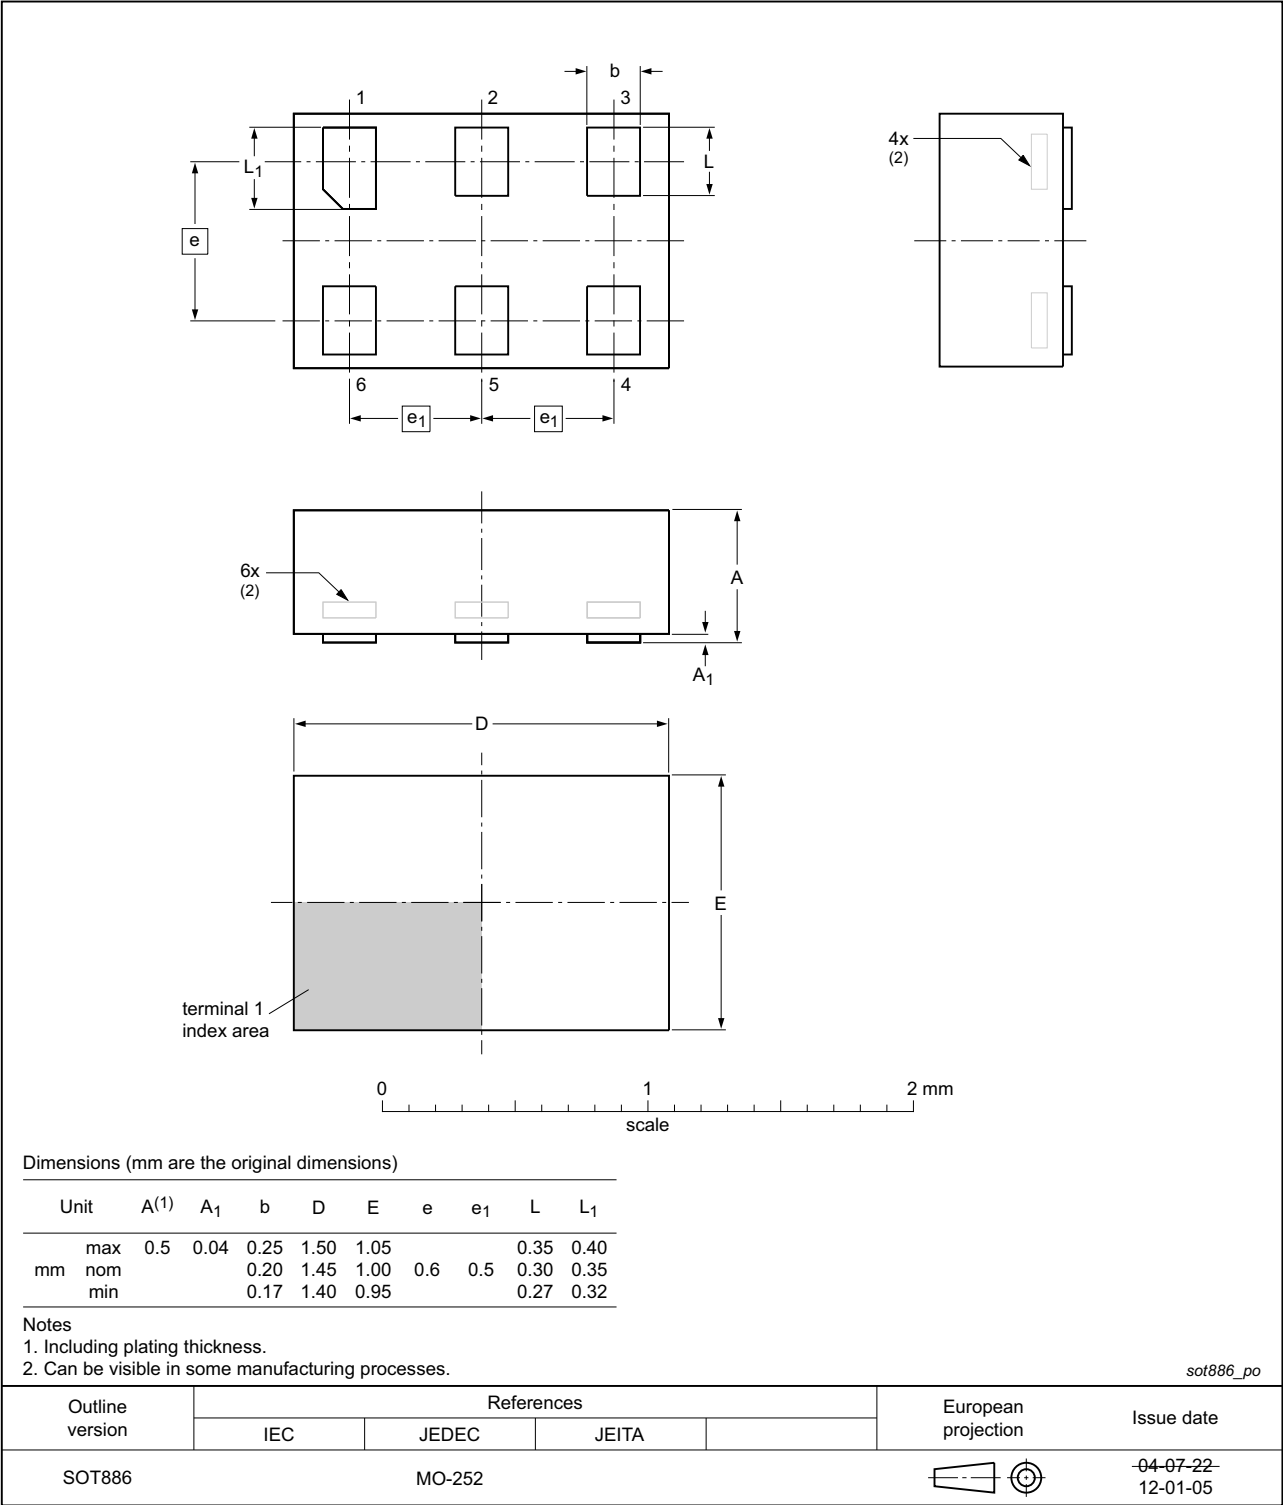


Fig 21. Package outline SOT886 (XSON6)

XSON6: extremely thin small outline package; no leads;  
6 terminals; body 0.9 x 1.0 x 0.35 mm

SOT1115

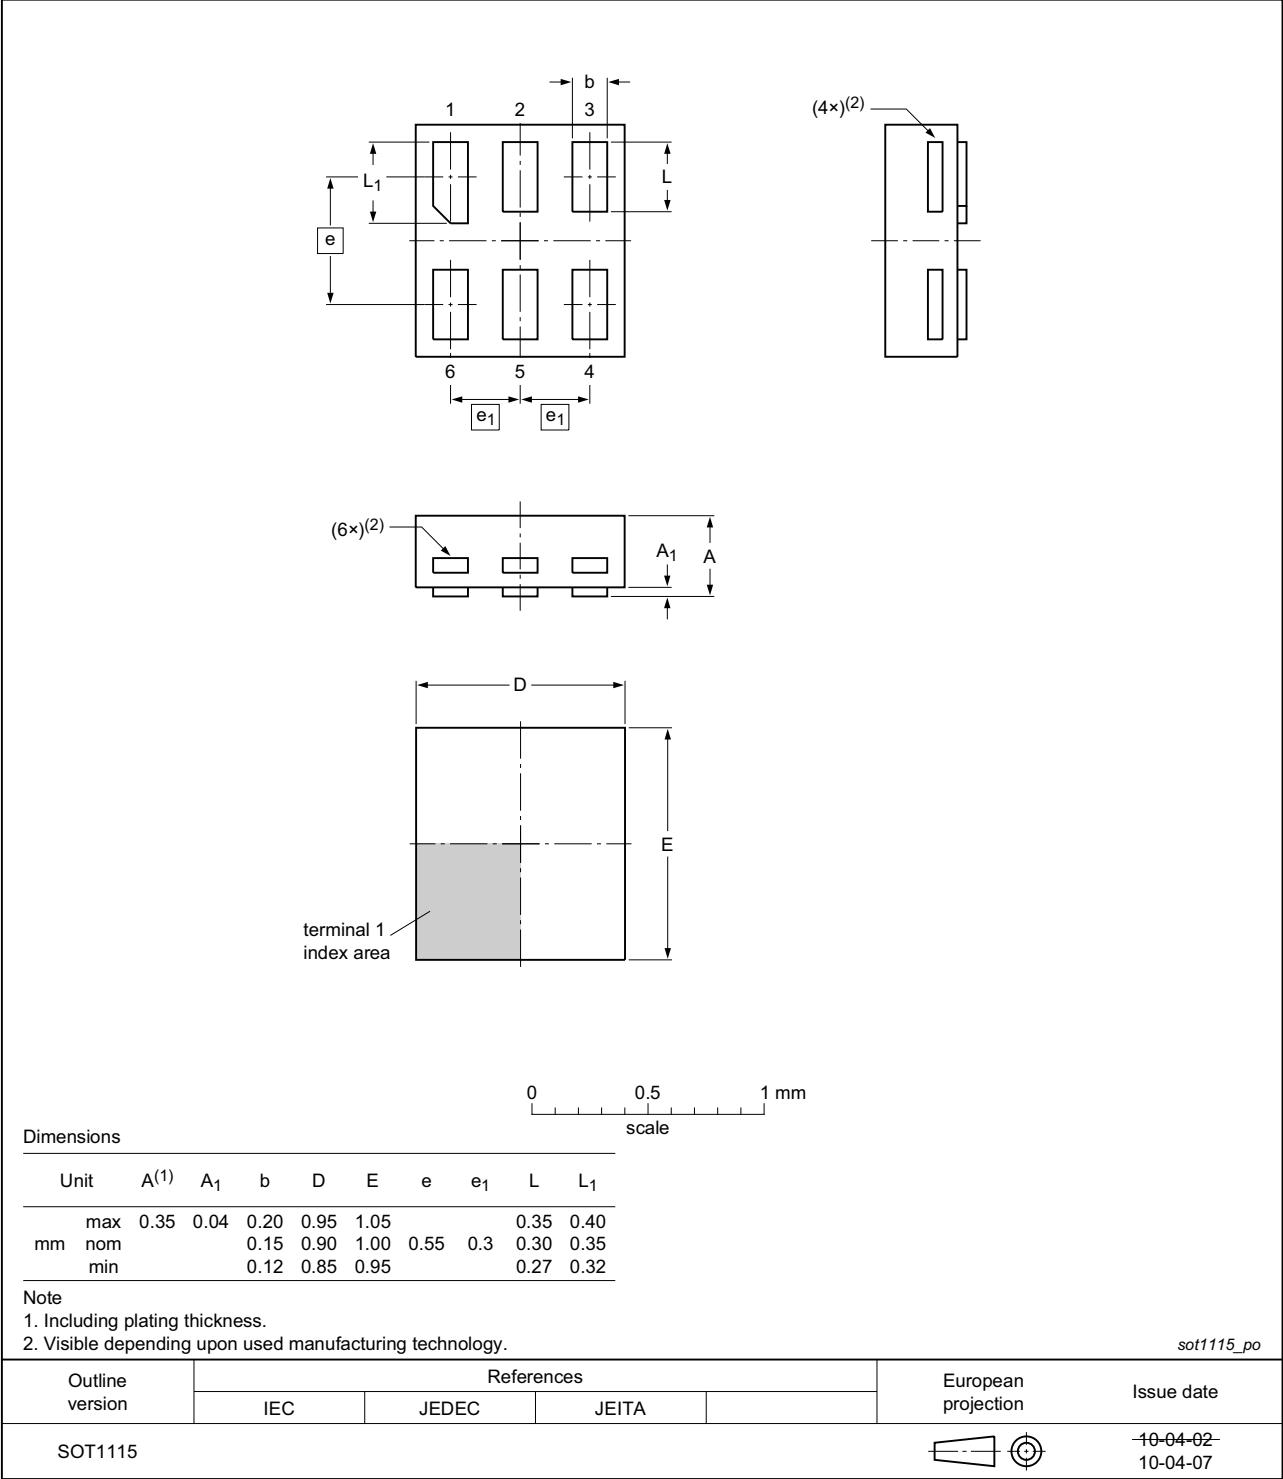


Fig 22. Package outline SOT1115 (XSON6)

XSON6: extremely thin small outline package; no leads;  
6 terminals; body 1.0 x 1.0 x 0.35 mm

SOT1202

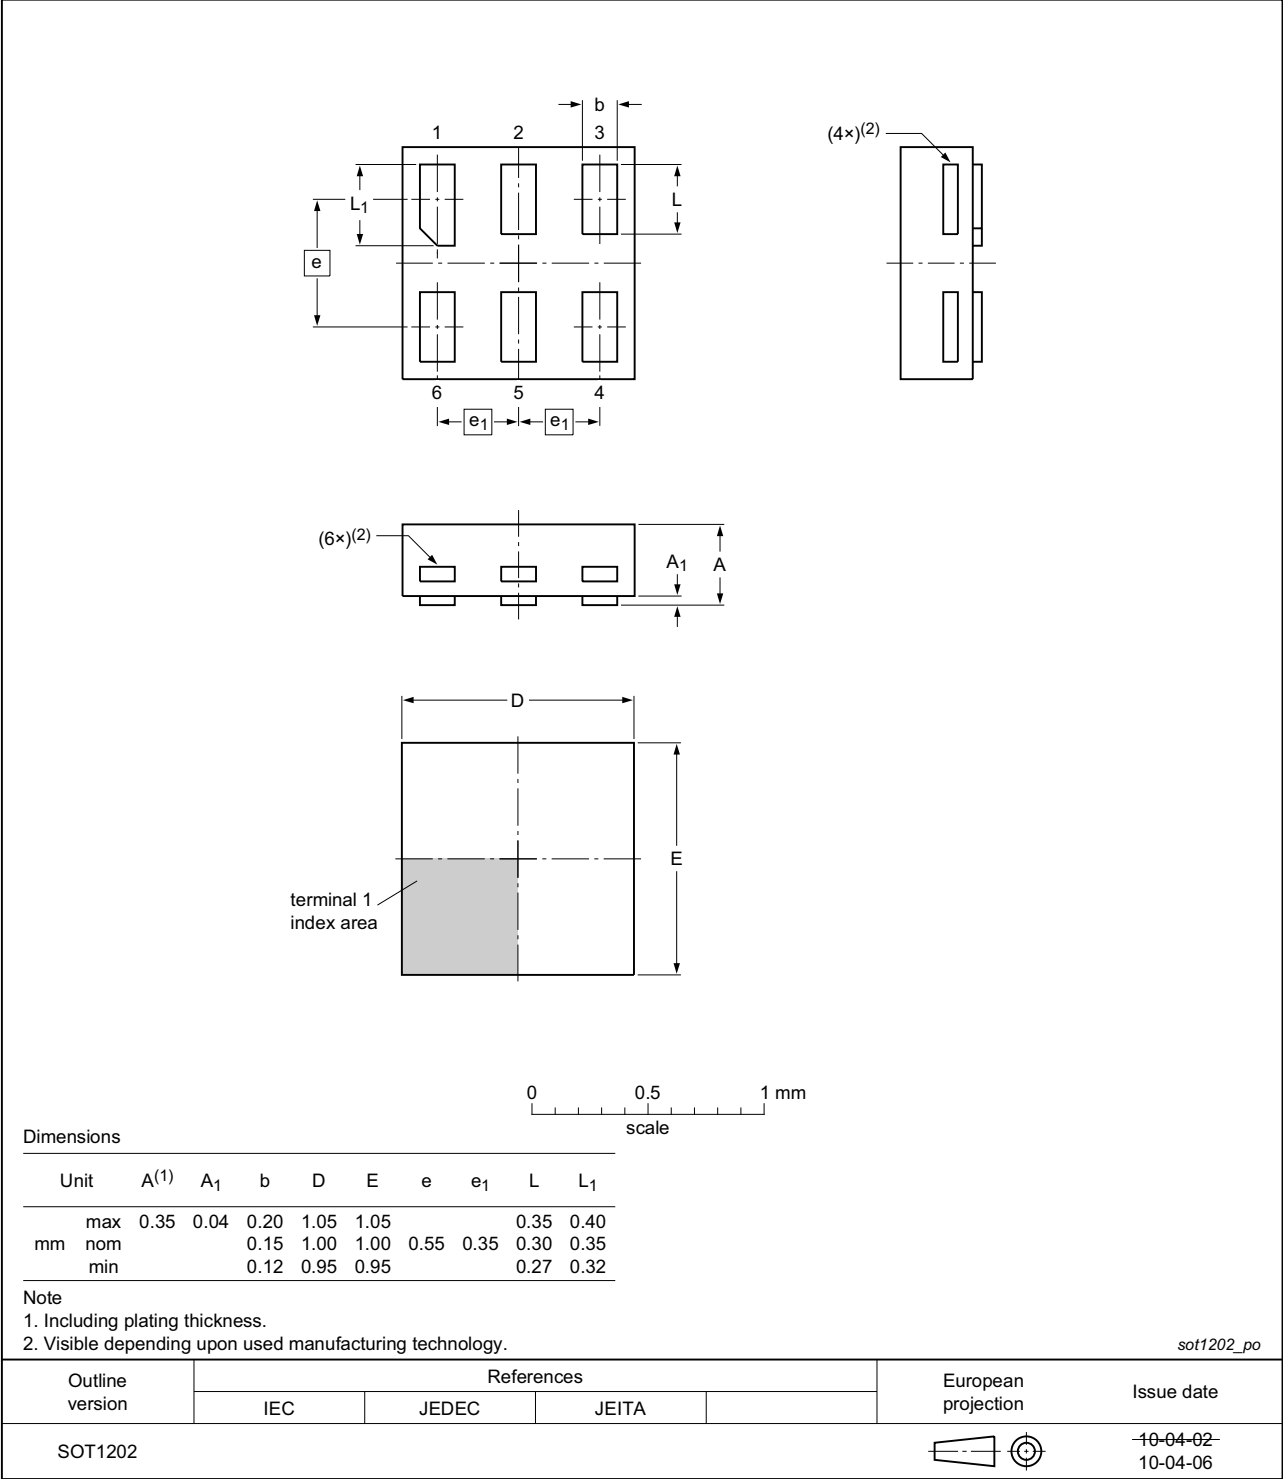


Fig 23. Package outline SOT1202 (XSON6)

X2SON6: plastic thermal enhanced extremely thin small outline package; no leads;  
6 terminals; body 1.0 x 0.8 x 0.35 mm

SOT1255

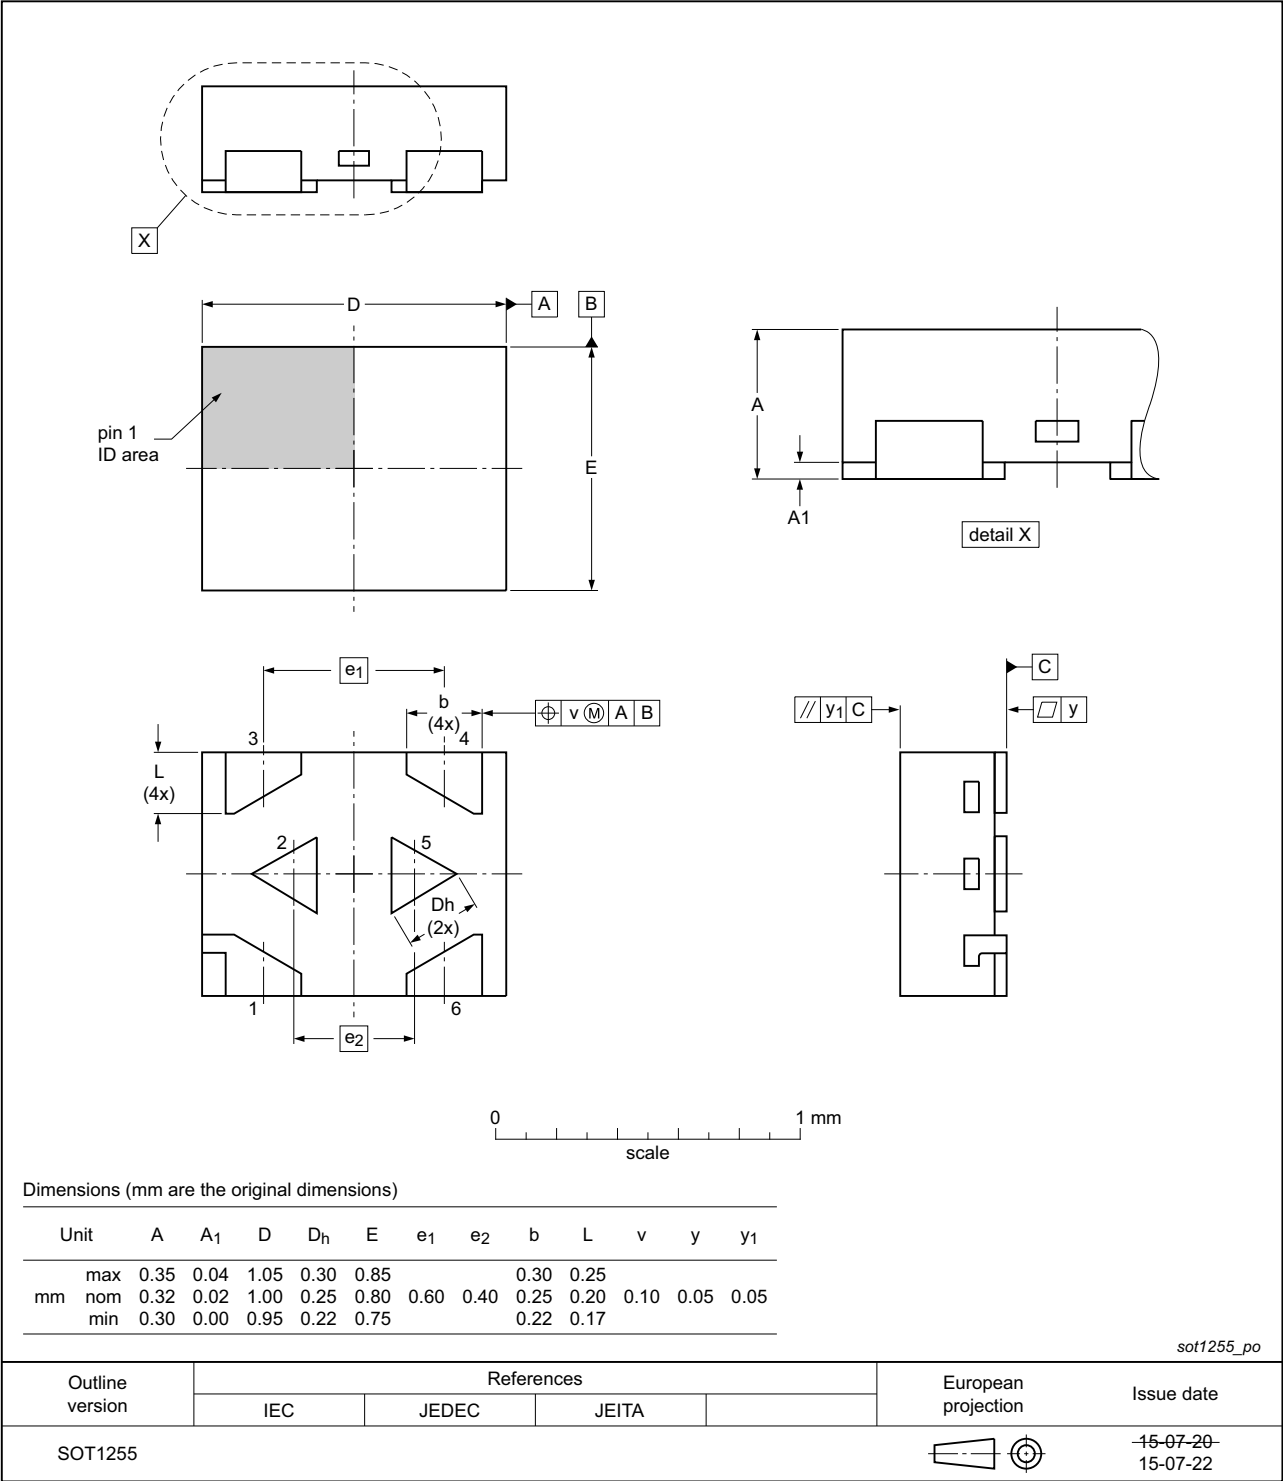


Fig 24. Package outline SOT1255 (X2SON6)

## 13. Abbreviations

Table 12. Abbreviations

| Acronym | Description             |
|---------|-------------------------|
| CDM     | Charged Device Model    |
| DUT     | Device Under Test       |
| ESD     | ElectroStatic Discharge |
| HBM     | Human Body Model        |

## 14. Revision history

Table 13. Revision history

| Document ID    | Release date                                       | Data sheet status      | Change notice | Supersedes    |
|----------------|--|------------------------|---------------|---------------|
| 74AXP1G58 v.3  | 20150916   | Product data sheet     | -             | 74AXP1G58 v.2 |
| Modifications: | • Added type number 74AXP1G58GX (SOT1255/X2SON6).  |                        |               |               |
| 74AXP1G58 v.2  | 20140724   | Product data sheet     | -             | 74AXP1G58 v.1 |
| Modifications: | • Data sheet status changed to product data sheet. |                        |               |               |
| 74AXP1G58 v.1  | 20130625   | Preliminary data sheet | -             | -             |

## 15. Legal information

### 15.1 Data sheet status

| Document status <sup>[1][2]</sup> | Product status <sup>[3]</sup> | Definition  |
|-----------------------------------|-------------------------------|---|
| Objective [short] data sheet      | Development                   | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet    | Qualification                 | This document contains data from the preliminary specification.                       |
| Product [short] data sheet        | Production                    | This document contains the product specification.                                     |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nexperia.com>.

### 15.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### 15.3 Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of Nexperia.

**Right to make changes** — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

**Terms and conditions of commercial sale** — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nexperia.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.



**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Non-automotive qualified products** — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond

Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

## 15.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## 16. Contact information

For more information, please visit: <http://www.nexperia.com>

For sales office addresses, please send an email to: [salesaddresses@nexperia.com](mailto:salesaddresses@nexperia.com)

## 17. Contents

---

|           |   |           |
|-----------|---|-----------|
| <b>1</b>  | <b>General description</b> .....              | <b>1</b>  |
| <b>2</b>  | <b>Features and benefits</b> .....            | <b>1</b>  |
| <b>3</b>  | <b>Ordering information</b> .....             | <b>2</b>  |
| <b>4</b>  | <b>Marking</b> .....                          | <b>2</b>  |
| <b>5</b>  | <b>Functional diagram</b> .....               | <b>2</b>  |
| <b>6</b>  | <b>Pinning information</b> .....              | <b>3</b>  |
| 6.1       | Pinning .....                                 | 3         |
| 6.2       | Pin description .....                         | 3         |
| <b>7</b>  | <b>Functional description</b> .....           | <b>3</b>  |
| 7.1       | Logic configurations .....                    | 4         |
| <b>8</b>  | <b>Limiting values</b> .....                  | <b>5</b>  |
| <b>9</b>  | <b>Recommended operating conditions</b> ..... | <b>5</b>  |
| <b>10</b> | <b>Static characteristics</b> .....           | <b>6</b>  |
| 10.1      | Waveform transfer characteristics .....       | 7         |
| <b>11</b> | <b>Dynamic characteristics</b> .....          | <b>7</b>  |
| 11.1      | Waveforms and graphs .....                    | 8         |
| <b>12</b> | <b>Package outline</b> .....                  | <b>11</b> |
| <b>13</b> | <b>Abbreviations</b> .....                    | <b>15</b> |
| <b>14</b> | <b>Revision history</b> .....                 | <b>15</b> |
| <b>15</b> | <b>Legal information</b> .....                | <b>16</b> |
| 15.1      | Data sheet status .....                       | 16        |
| 15.2      | Definitions .....                             | 16        |
| 15.3      | Disclaimers .....                             | 16        |
| 15.4      | Trademarks .....                              | 17        |
| <b>16</b> | <b>Contact information</b> .....              | <b>17</b> |
| <b>17</b> | <b>Contents</b> .....                         | <b>18</b> |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9