Fixed Frequency Current Mode Controller for Flyback Converters

The NCP1248 is a new fixed-frequency current-mode controller featuring the Dynamic Self-Supply. This function greatly simplifies the design of the auxiliary supply and the V_{CC} capacitor by activating the internal startup current source to supply the controller during start-up, transients, latch, stand-by etc. This device contains a special HV detector which detect the application unplug from the AC input line and triggers the X2 discharge current. This HV structure allows the brown-out detection as well.

It features a timer-based fault detection that ensures the detection of overload and an adjustable compensation to help keep the maximum power independent of the input voltage.

Due to frequency foldback, the controller exhibits excellent efficiency in light load condition while still achieving very low standby power consumption. Internal frequency jittering, ramp compensation, and a versatile latch input make this controller an excellent candidate for the robust power supply designs.

A dedicated Off mode allows to reach the extremely low no load input power consumption via "sleeping" whole device and thus minimize the power consumption of the control circuitry.

Features

- Fixed-Frequency Current-Mode Operation using 65 kHz/100 kHz Switching Frequency
- Frequency Foldback then Skip Mode for Maximized Performance in Light Load and Standby Conditions
- Timer-Based Overload Protection with Latched (Option A) Operation
- High-voltage Current Source with Brown-Out Detection and Dynamic Self-Supply, Simplifying the Design of the V_{CC} Circuitry
- Frequency Modulation for Softened EMI Signature
- Adjustable Overpower Protection Dependant on the Bulk Voltage
- Latch-off Input Combined with the Overpower Protection Sensing Input
- V_{CC} Operation up to 28 V, With Overvoltage Detection
- 500/800 mA Source/Sink Drive Peak Current Capability
- 10 ms Soft-Start
- Internal Thermal Shutdown
- No-Load Standby Power < 30 mW
- X2 Capacitor in EMI Filter Discharging Feature
- These Devices are Pb-Free and Halogen Free/BFR Free



ON Semiconductor®

http://onsemi.com



SOIC-7 CASE 751U

MARKING DIAGRAM



48Axxx = Specific Device Code


xxx = 065 for 65 kHz= 100 for 100 kHz

A = Assembly Location

L = Wafer Lot
 Y = Year
 W = Work Week

= Pb-Free Package

PIN CONNECTIONS



ORDERING INFORMATION

See detailed ordering and shipping information on page 35 of this data sheet.

Typical Applications

- AC-DC Adapters for Notebooks, LCD, and Printers
- Offline Battery Chargers
- Consumer Electronic Power Supplies
- Auxiliary/Housekeeping Power Supplies
- Offline Adapters for Notebooks

TYPICAL APPLICATION EXAMPLE

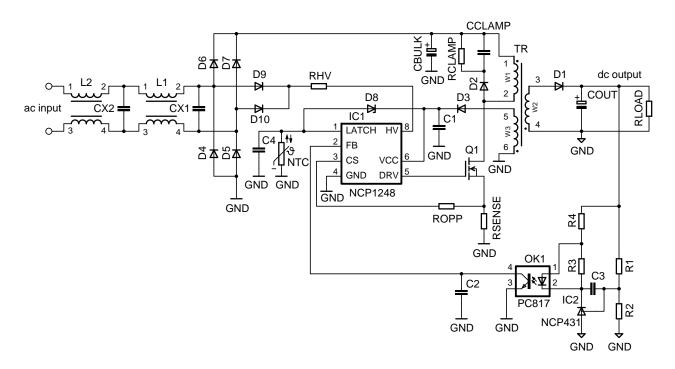


Figure 1. Flyback Converter Application Using the NCP1248

PIN FUNCTION DESCRIPTION

Pin No	Pin Name	Function	Pin Description
1	LATCH	Latch-Off Input	Pull the pin up or down to latch-off the controller. An internal current source allows the direct connection of an NTC for over temperature detection.
2	FB	Feedback + Shutdown pin	An optocoupler collector to ground controls the output regulation. The part goes to the low consumption Off mode if the FB input pin is pulled to GND.
3	CS	Current Sense	This Input senses the Primary Current for current–mode operation, and offers an overpower compensation adjustment.
4	GND	-	The controller ground
5	DRV	Drive output	Drives external MOSFET
6	VCC	VCC input	This supply pin accepts up to 28 Vdc, with overvoltage detection. The pin is connected to an external auxiliary voltage. It is not allowed to connect another circuit to this pin to keep low input power consumption.
8	HV	High-voltage pin	Connects to the rectified AC line to perform the functions of Start–up Current Source, Self–Supply, brown–out detection and X2 capacitor discharge function and the HV sensing for the overpower protection purposes. It is not allowed to connect this pin to DC voltage.

SIMPLIFIED INTERNAL BLOCK SCHEMATIC

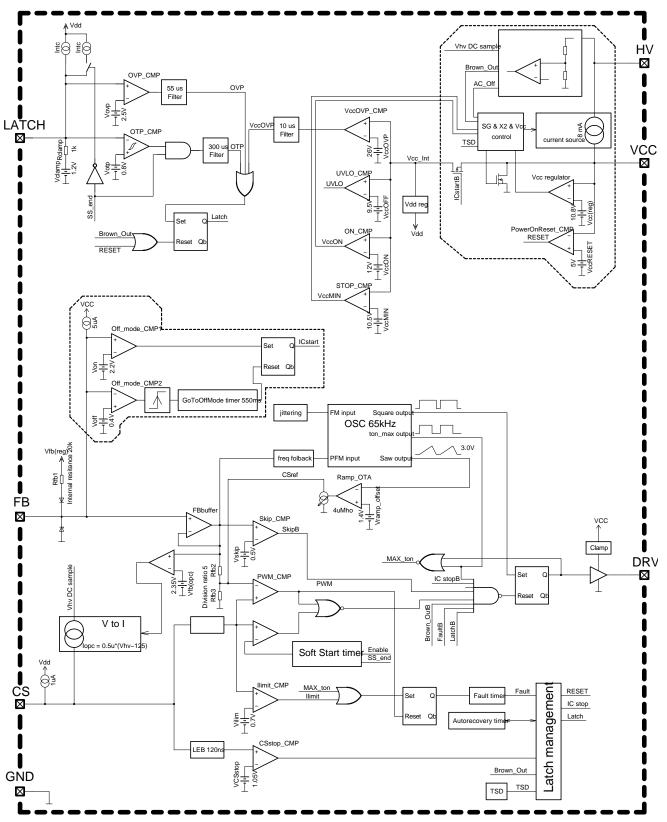


Figure 2. Simplified Internal Block Schematic

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
DRV (pin 5)	Maximum voltage on DRV pin (Dc-Current self-limited if operated within the allowed range) (Note 1)	-0.3 to 20 ±1000 (peak)	V mA
V _{CC} (pin 6)	V _{CC} Power Supply voltage, V _{CC} pin, continuous voltage Power Supply voltage, V _{CC} pin, continuous voltage (Note 1)	-0.3 to 28 ±30 (peak)	V mA
HV (pin 8)	Maximum voltage on HV pin (Dc-Current self-limited if operated within the allowed range)	-0.3 to 500 ±20	V mA
V _{max}	Maximum voltage on low power pins (except pin 5, pin 6 and pin 8) (Dc–Current self–limited if operated within the allowed range) (Note 1)	-0.3 to 10 ±10 (peak)	V mA
R _{θJ-A}	Thermal Resistance SOIC-7 Junction-to-Air, low conductivity PCB (Note 2) Junction-to-Air, medium conductivity PCB (Note 3) Junction-to-Air, high conductivity PCB (Note 4)	162 147 115	°C/W
$R_{\theta J-C}$	Thermal Resistance Junction-to-Case	73	°C/W
T _{JMAX}	Operating Junction Temperature	-40 to +150	°C
T _{STRGMAX}	Storage Temperature Range	-60 to +150	°C
	ESD Capability, HBM model (All pins except HV) per JEDEC Standard JESD22, Method A114E	> 2000	V
	ESD Capability, Machine Model per JEDEC Standard JESD22, Method A115A	> 200	V

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- 1. This device contains latch-up protection and exceeds 100 mA per JEDEC Standard JESD78.
- As mounted on a 80 x 100 x 1.5 mm FR4 substrate with a single layer of 50 mm² of 2 oz copper traces and heat spreading area. As specified for a JEDEC 51-1 conductivity test PCB. Test conditions were under natural convection or zero air flow.
- 3. As mounted on a 80 x 100 x 1.5 mm FR4 substrate with a single layer of 100 mm² of 2 oz copper traces and heat spreading area. As specified for a JEDEC 51-2 conductivity test PCB. Test conditions were under natural convection or zero air flow.
- 4. As mounted on a 80 x 100 x 1.5 mm FR4 substrate with a single layer of 650 mm² of 2 oz copper traces and heat spreading area. As specified for a JEDEC 51-3 conductivity test PCB. Test conditions were under natural convection or zero air flow.

ELECTRICAL CHARACTERISTICS (For typical values $T_J = 25$ °C, for min/max values $T_J = -40$ °C to +125°C, $V_{HV} = 125$ V, V_{CC} = 11 V unless otherwise noted)

Characteristics	Test Condition	Symbol	Min	Тур	Max	Unit
HIGH VOLTAGE CURRENT SOURCE						
Minimum voltage for current source operation		V _{HV(min)}	-	30	40	V
Current flowing out of V _{CC} pin	$V_{CC} = 0 \text{ V}$ $V_{CC} = V_{CC(on)} - 0.5 \text{ V}$	I _{start1} I _{start2}	0.2 5	0.5 8	0.8 11	mA
Off-state leakage current	V _{HV} = 500 V, V _{CC} = 15 V	I _{start(off)}	10	25	50	μΑ
Off-mode HV supply current	V_{HV} = 141 V, V_{HV} = 325 V, V_{CC} loaded by 4.7 μ F cap	I _{HV(off)}	_ _	45 50	60 70	μΑ
SUPPLY						
HV current source regulation threshold		V _{CC(reg)}	8	11	_	V
Turn-on threshold level, V _{CC} going up HV current source stop threshold		V _{CC(on)}	11.0	12.0	13.0	V
HV current source restart threshold		V _{CC(min)}	9.5	10.5	11.5	V
Turn-off threshold		V _{CC(off)}	8.5	8.9	9.3	V
Overvoltage threshold		V _{CC(ovp)}	25	26.5	28	V
Blanking duration on $V_{CC(off)}$ and $V_{CC(ovp)}$ detection		t _{VCC(blank)}	-	10	-	μs
V _{CC} decreasing level at which the internal logic resets		V _{CC(reset)}	4.8	7.0	7.7	V
V _{CC} level for I _{START1} to I _{START2} transition		V _{CC(inhibit)}	0.2	0.8	1.25	V
	DRV open, $V_{FB} = 3 \text{ V}$, 65 kHz DRV open, $V_{FB} = 3 \text{ V}$, 100 kHz	I _{CC1} I _{CC1}	1.3 1.3	1.85 1.85	2.2 2.2	
Internal current consumption (Note 5)	Cdrv = 1 nF, V_{FB} = 3 V, 65 kHz Cdrv = 1 nF, V_{FB} = 3 V, 100 kHz	I _{CC2} I _{CC2}	1.8 2.3	2.6 2.9	3.0 3.5	mA
, , ,	Off mode (skip or before start-up)	I _{CC3}	0.67	0.9	1.13	
	Fault mode (fault or latch)	I _{CC4}	0.3	0.6	0.9	
BROWN-OUT		•		•	•	•
Brown-Out thresholds	V _{HV} going up V _{HV} going down	V _{HV(start)} V _{HV(stop)}	92 84	101 93	110 102	V
Timer duration for line cycle drop-out		t _{HV}	43	-	86	ms
X2 DISCHARGE						
Comparator hysteresis observed at HV pin		V _{HV(hyst)}	1.5	3.5	5	V
HV signal sampling period		T _{sample}	-	1.0	-	ms
Timer duration for no line detection		t _{DET}	21	32	43	ms
Discharge timer duration		t _{DIS}	21	32	43	ms
OSCILLATOR						
Oscillator frequency	65 kHz 100 kHz	fosc	58 87	65 100	72 109	kHz
Maximum on time (T _J = 25°C to +125°C)	$f_{OSC} = 65 \text{ kHz}$ $f_{OSC} = 100 \text{ kHz}$	t _{ONmax} (65kHz) t _{ONmax} (100kHz)	11.5 7.5	12.3 8.0	13.1 8.5	μS

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

5. Internal supply current only, currents sourced via FB pin is not included (current is flowing in GND pin only).

6. Guaranteed by design.

7. CS pin source current is a sum of I_{bias} and I_{OPC}, thus at V_{HV} = 125 V is observed the I_{bias} only, because I_{OPC} is switched off.

ELECTRICAL CHARACTERISTICS (For typical values $T_J = 25$ °C, for min/max values $T_J = -40$ °C to +125°C, $V_{HV} = 125$ V, V_{CC} = 11 V unless otherwise noted)

Characteristics	Test Condition	Symbol	Min	Тур	Max	Unit
OSCILLATOR		•		•		
Maximum on time	f _{OSC} = 65 kHz f _{OSC} = 100 kHz	t _{ONmax} (65kHz) t _{ONmax} (100kHz)	11.3 7.4	12.3 8.0	13.1 8.5	μS
Maximum duty cycle (corresponding to maximum on time at maximum switching frequency)	f _{OSC} = 65 kHz f _{OSC} = 100 kHz	D _{MAX}	-	80	-	%
Frequency jittering amplitude, in percentage of $F_{\mbox{OSC}}$		A _{jitter}	±4	±6	±8	%
Frequency jittering modulation frequency		F _{jitter}	85	125	165	Hz
FREQUENCY FOLDBACK						
Feedback voltage threshold below which frequency foldback starts		V _{FB(foldS)}	1.8	2.0	2.2	٧
Feedback voltage threshold below which frequency foldback is complete		V _{FB(foldE)}	0.8	0.9	1.0	V
Minimum switching frequency	$V_{FB} = V_{skip(in)} + 0.1$	f _{OSC(min)}	21	27	32	kHz
OUTPUT DRIVER						
Rise time, 10 to 90% of $V_{\mbox{\footnotesize CC}}$	$V_{CC} = V_{CC(min)} + 0.2 \text{ V},$ $C_{DRV} = 1 \text{ nF}$	t _{rise}	-	40	70	ns
Fall time, 90 to 10% of V _{CC}	$V_{CC} = V_{CC(min)} + 0.2 \text{ V},$ $C_{DRV} = 1 \text{ nF}$	t _{fall}	-	40	70	ns
Current capability	$\begin{aligned} V_{CC} &= V_{CC(min)} + 0.2 \text{ V,} \\ C_{DRV} &= 1 \text{ nF} \\ DRV \text{ high, } V_{DRV} &= 0 \text{ V} \\ DRV \text{ low, } V_{DRV} &= V_{CC} \end{aligned}$	I _{DRV(source)} I _{DRV(sink)}	- -	500 800	- -	mA
Clamping voltage (maximum gate voltage)	$\begin{aligned} &V_{CC} = V_{CCmax} - 0.2 \text{ V, DRV high,} \\ &R_{DRV} = 33 \text{ k}\Omega, \text{ C}_{load} = 220 \text{ pF} \end{aligned}$	V _{DRV(clamp)}	11	13.5	16	V
High-state voltage drop	$V_{CC} = V_{CC(min)} + 0.2 \text{ V},$ $R_{DRV} = 33 \text{ k}\Omega, \text{ DRV high}$	V _{DRV(drop)}	-	-	1	V
CURRENT SENSE						
Input Pull-up Current	V _{CS} = 0.7 V	I _{bias}	-	1	_	μΑ
Maximum internal current setpoint	V _{FB} > 3.5 V	V_{ILIM}	0.66	0.70	0.74	V
Propagation delay from V _{Ilimit} detection to DRV off	V _{CS} = V _{ILIM}	t _{delay}	-	80	110	ns
Leading Edge Blanking Duration for V _{ILIM}		t _{LEB}	200	250	320	ns
Threshold for immediate fault protection activation		V _{CS(stop)}	0.95	1.05	1.15	V
Leading Edge Blanking Duration for V _{CS(stop)} (Note 6)		t _{BCS}	90	120	150	ns
Soft-start duration	From 1 st pulse to V _{CS} = V _{ILIM}	t _{SSTART}	2.8	4.0	5.2	ms
INTERNAL SLOPE COMPENSATION						
Slope of the compensation ramp		S _{comp(65kHz)} S _{comp(100kHz)}	- -	-32.5 -50	- -	mV / μs
FEEDBACK						
Internal pull-up resistor	T _J = 25°C	R _{FB(up)}	17	22	27	kΩ

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

5. Internal supply current only, currents sourced via FB pin is not included (current is flowing in GND pin only).

- Guaranteed by design.
 CS pin source current is a sum of I_{bias} and I_{OPC}, thus at V_{HV} = 125 V is observed the I_{bias} only, because I_{OPC} is switched off.

ELECTRICAL CHARACTERISTICS (For typical values $T_J = 25$ °C, for min/max values $T_J = -40$ °C to +125°C, $V_{HV} = 125$ V, V_{CC} = 11 V unless otherwise noted)

Characteristics	Test Condition	Symbol	Min	Тур	Max	Unit
FEEDBACK						
V _{FB} to internal current setpoint division ratio		K _{FB}	4.7	5	5.3	-
Internal pull-up voltage on the FB pin		V _{FB(ref)}	4.5	5	5.5	V
SKIP CYCLE MODE						
Feedback voltage thresholds for skip mode	V _{FB} going down V _{FB} going up	V _{skip(in)} V _{skip(out)}	0.45 0.54	0.50 0.60	0.55 0.66	V
REMOTE CONTROL ON FB PIN						
The voltage above which the part enters the on mode	$V_{CC} > V_{CC(off)}$, $V_{HV} = 60 \text{ V}$	V _{ON}	-	2.2	-	V
The voltage below which the part enters the off mode	$V_{CC} > V_{CC(off)}$	V _{OFF}	0.35	0.40	0.45	V
Minimum hysteresis between the V _{ON} and V _{OFF}	$V_{CC} > V_{CC(off)}$, $V_{HV} = 60 \text{ V}$	V _{HYST}	500	_	_	mV
Pull-up current in off mode	$V_{CC} > V_{CC(off)}$	I _{OFF}	-	5	-	μΑ
Go To Off mode timer	$V_{CC} > V_{CC(off)}$	t _{GTOM}	400	550	700	ms
OVERLOAD PROTECTION						
Fault timer duration		t _{fault}	108	128	178	ms
OVERPOWER PROTECTION						
V _{HV} to I _{OPC} conversion ratio		K _{OPC}	ı	0.54	_	$\mu A / V$
Current flowing out of CS pin (Note 7)	$V_{HV} = 125 \text{ V} \\ V_{HV} = 162 \text{ V} \\ V_{HV} = 325 \text{ V} \\ V_{HV} = 365 \text{ V}$	IOPC(125) IOPC(162) IOPC(325) IOPC(365)	- - - 105	0 20 110 130	- - - 150	μΑ
FB voltage above which I _{OPC} is applied	V _{HV} = 365 V	V _{FB(OPCF)}	2.12	2.35	2.58	V
FB voltage below which is no I _{OPC} applied	V _{HV} = 365 V	V _{FB(OPCE)}	-	2.15	-	V
LATCH-OFF INPUT						
High threshold	V _{Latch} going up	V _{OVP}	2.35	2.5	2.65	V
Low threshold	V _{Latch} going down	V _{OTP}	0.76	0.8	0.84	V
Current source for direct NTC connection During normal operation During soft–start	V _{Latch} = 0 V	I _{NTC} I _{NTC(SSTART)}	65 130	95 190	105 210	μΑ
Blanking duration on high latch detection		t _{Latch(OVP)}	20	35	50	μs
Blanking duration on low latch detection		t _{Latch(OTP)}	-	350	-	μS
Clamping voltage	I _{Latch} = 0 mA I _{Latch} = 1 mA	V _{clamp0} (Latch) V _{clamp1} (Latch)	1.0 1.8	1.2 2.4	1.4 3.0	٧
TEMPERATURE SHUTDOWN						
Temperature shutdown	T _J going up	T _{TSD}	_	150	_	°C
	00 01					

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

^{5.} Internal supply current only, currents sourced via FB pin is not included (current is flowing in GND pin only).

Guaranteed by design.
 CS pin source current is a sum of I_{bias} and I_{OPC}, thus at V_{HV} = 125 V is observed the I_{bias} only, because I_{OPC} is switched off.

TYPICAL CHARACTERISTIC

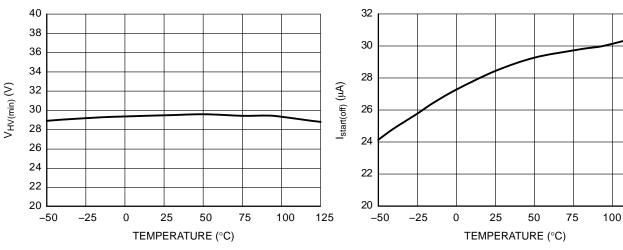


Figure 3. Minimum Current Source Operation V_{HV(min)}

Figure 4. Off-State Leakage Current Istart(off)

125

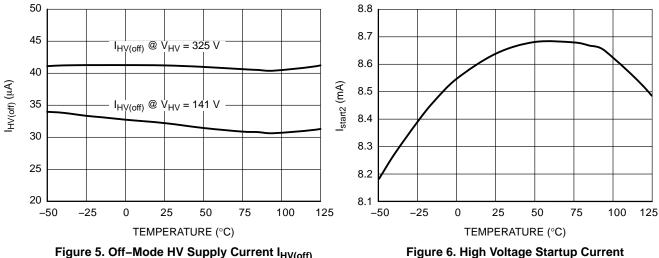


Figure 5. Off-Mode HV Supply Current I_{HV(off)}


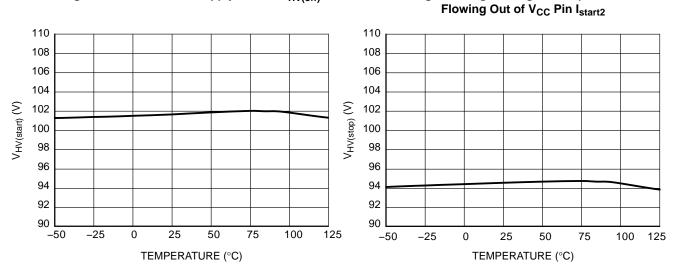


Figure 7. Brown-out Device Start Threshold V_{HV(start)}


Figure 8. Brown-out Device Stop Threshold V_{HV(stop)}

TYPICAL CHARACTERISTIC

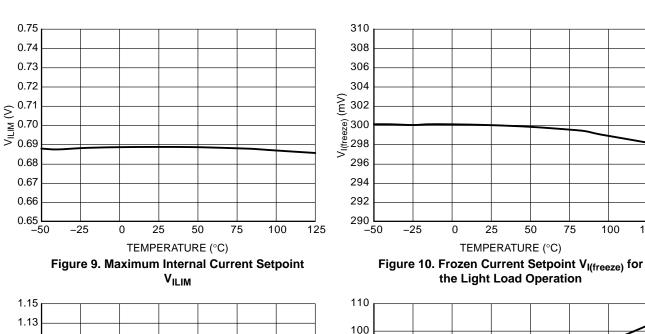

1.11 1.09 1.07 (Stop) 1.05 1.03 1.01 0.99 0.97 0.95 **└** -50 -25 25 75 100 0 50 125 TEMPERATURE (°C)

Figure 11. Threshold for Immediate Fault Protection Activation V_{CS(stop)}



50

75

100

125

Figure 12. Propagation Delay t_{delay}




Figure 13. Leading Edge Blanking Duaration **t**LEB





Figure 14. Maximum Overpower Compensating Current I_{OPC(365)} Flowing Out of CS Pin

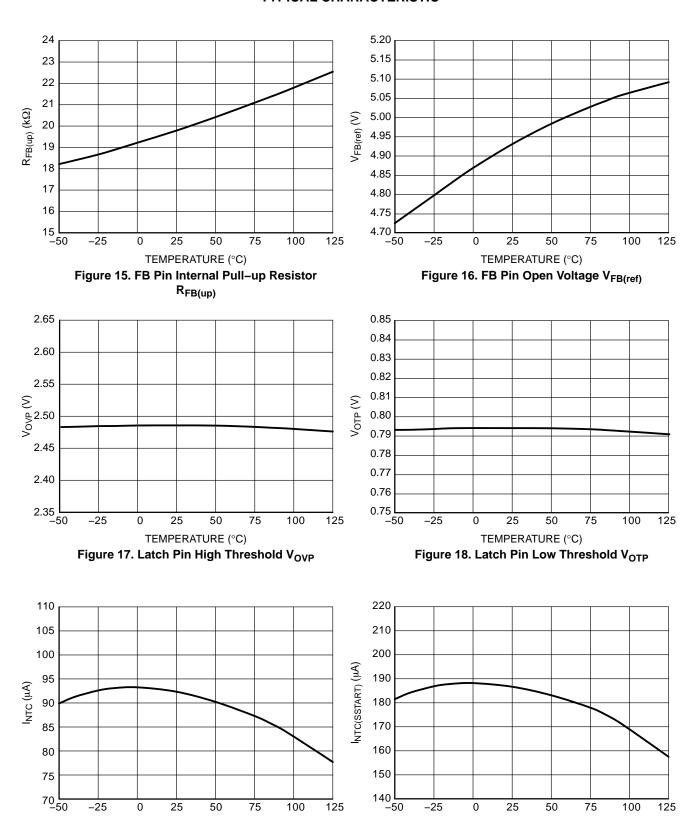

TEMPERATURE (°C)
Figure 19. Current I_{NTC} Sourced from the Latch Pin, Allowing Direct NTC Connection

TEMPERATURE (°C)
Figure 20. Current I_{NTC(SSTART)} Sourced from the Latch Pin, During Soft–Start




Figure 21. Oscillator f_{OSC} for the 100 kHz Version




Figure 22. Maximum Duty Ratio D_{MAX}




Figure 23. Maximum ON Time t_{ONmax} for the 100 kHz Version




Figure 24. Minimum Switching Frequency f_{OSC(min)}

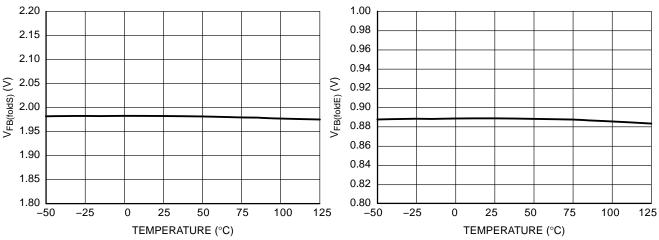


Figure 25. FB Pin Voltage Below Which Frequency Foldback Starts V_{FB(foldS)}

Figure 26. FB Pin Voltage Below Which Frequency Foldback Complete V_{FB(foldE)}

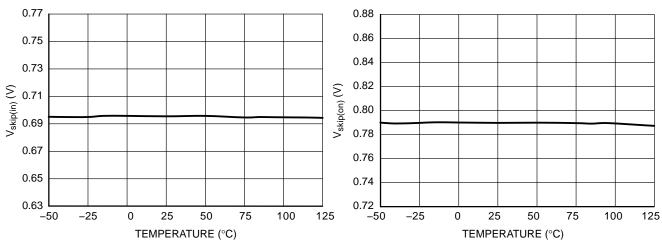


Figure 27. FB Pin Skip-In Level V_{skip(in)}

Figure 28. FB Pin Skip-Out Level V_{skip(out)}

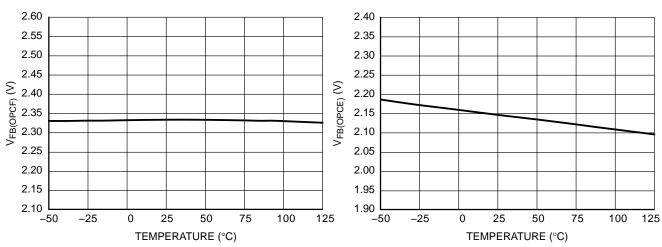


Figure 29. FB Pin Level V_{FB(OPCF)} Above Which is the Overpower Compensation Applied

Figure 30. FB Pin Level V_{FB(OPCE)} Below Which is No Overpower Compensation Applied

TYPICAL CHARACTERISTIC




Figure 31. V_{CC} Turn-on Threshold Level, V_{CC} Going Up HV Current Source Stop Threshold $V_{CC(on)}$




Figure 32. HV Current Source Restart Threshold V_{CC(min)}




Figure 33. V_{CC} Turn-off Threshold (UVLO)




Figure 34. V_{CC} Decreasing Level at Which the Internal Logic Resets V_{CC(reset)}




Figure 35. Internal Current Consumption when DRV Pin is Unloaded




Figure 36. Internal Current Consumption when DRV Pin is Loaded by 1 nF

Icc2 (mA)




Figure 37. X2 Discharge Comparator Hysteresis Observed at HV Pin $V_{HV(hyst)}$




Figure 38. HV Signal Sampling Period T_{sample}




Figure 39. FB Pin Voltage Level Above Which is Entered On Mode V_{ON}




Figure 40. FB Pin Voltage Level Below Which is Entered Off Mode V_{OFF}




Figure 41. Fault Timer Duration t_{fault}




Figure 42. Go To Off Mode Timer Duration t_{GTOM}

APPLICATION INFORMATION

Functional Description

The NCP1248 includes all necessary features to build a safe and efficient power supply based on a fixed–frequency flyback converter. The NCP1248 is a multimode controller as illustrated in Figure 43. The mode of operation depends upon line and load condition. Under all modes of operation, the NCP1248 terminates the DRV signal based on the switch current. Thus, the NCP1248 always operates in current mode control so that the power MOSFET current is always limited.

Under normal operating conditions, the FB pin commands the operating mode of the NCP1248 at the voltage thresholds shown in Figure 43. At normal rated operating loads (from 100% to approximately 33% full rated power) the NCP1248 controls the converter in fixed frequency PWM mode. It can operate in the continuous conduction mode (CCM) or discontinuous conduction mode (DCM) depending upon the input voltage and loading conditions. If the controller is used in CCM with a wide input voltage range, the duty—ratio may increase up to 50%. The build—in slope compensation prevents the appearance of sub—harmonic oscillations in this operating area.

For loads that are between approximately 32% and 10% of full rated power, the converter operates in frequency foldback mode (FFM). If the feedback pin voltage is lower than 1.5 V the peak switch current is kept constant and the output voltage is regulated by modulating the switching frequency for a given and fixed input voltage V_{HV}.

Effectively, operation in FFM results in the application of constant volt–seconds to the flyback transformer each switching cycle. Voltage regulation in FFM is achieved by varying the switching frequency in the range from 65 kHz (or 100 kHz) to 27 kHz. For extremely light loads (below approximately 6% full rated power), the converter is controlled using bursts of 27 kHz pulses. This mode is called as skip mode. The FFM, keeping constant peak current and skip mode allows design of the power supplies with increased efficiency under the light loading conditions. Keep in mind that the aforementioned boundaries of steady–state operation are approximate because they are subject to converter design parameters.

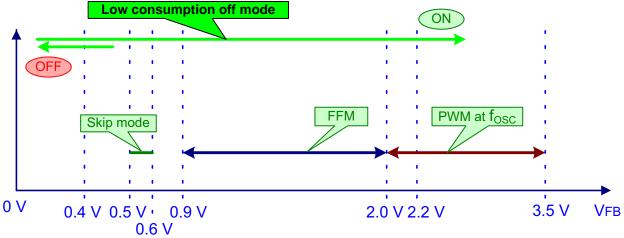


Figure 43. Mode Control with FB pin voltage

There was implemented the low consumption off mode allowing to reach extremely low no load input power. This mode is controlled by the FB pin and allows the remote control (or secondary side control) of the power supply shut—down. Most of the device internal circuitry is unbiased in the low consumption off mode. Only the FB pin control circuitry and X2 cap discharging circuitry is operating in the low consumption off mode. If the voltage at feedback pin

decreases below the 0.4 V the controller will enter the low consumption off mode. The controller can start if the FB pin voltage increases above the 2.2 V level.

See the detailed status diagrams for the both versions fully latched A and the autorecovery B on the following figures. The basic status of the device after wake–up by the V_{CC} is the off mode and mode is used for the overheating protection mode if the thermal shutdown protection is activated.

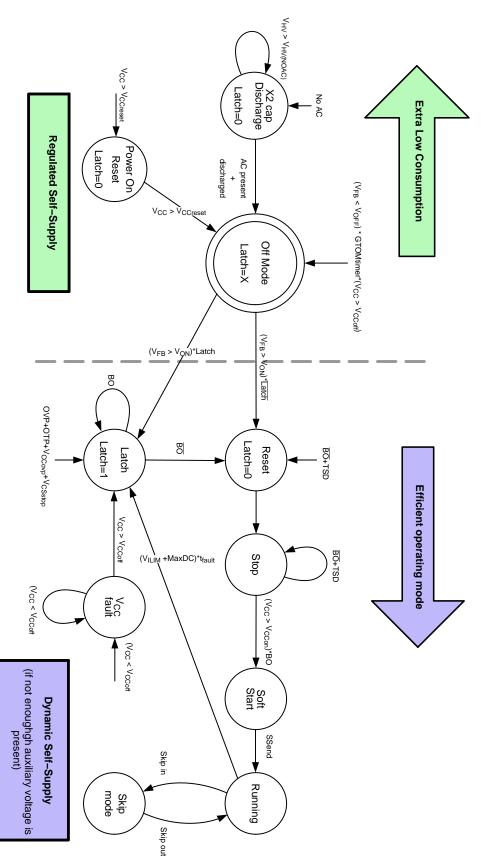


Figure 44. Operating Status Diagram for the Fully Latched Version A of the Device


The information about the fault (permanent Latch or Autorecovery) is kept during the low consumption off mode due the safety reason. The reason is not to allow unlatch the device by the remote control being in off mode.

Start-up of the Controller

At start–up, the current source turns on when the voltage on the HV pin is higher than $V_{HV(min)}$, and turns off when V_{CC} reaches $V_{CC(on)}$, then turns on again when V_{CC} reaches $V_{CC(min)}$, until the input voltage is high enough to ensure a proper start–up, i.e. when V_{HV} reaches $V_{HV(start)}$. The controller actually starts the next time V_{CC} reaches $V_{CC(on)}$. The controller then delivers pulses, starting with a soft–start period t_{SSTART} during which the peak current linearly increases before the current–mode control takes over.

Even though the Dynamic Self–Supply is able to maintain the V_{CC} voltage between $V_{CC(on)}$ and $V_{CC(min)}$ by turning the HV start–up current source on and off, it can only be used in light load condition, otherwise the power dissipation on the die would be too much. As a result, an auxiliary voltage source is needed to supply V_{CC} during normal operation.

The Dynamic Self–Supply is useful to keep the controller alive when no switching pulses are delivered, e.g. in brown–out condition, or to prevent the controller from stopping during load transients when the V_{CC} might drop. The NCP1248 accepts a supply voltage as high as 28 V, with an overvoltage threshold $V_{CC(ovp)}$ that latches the controller off.

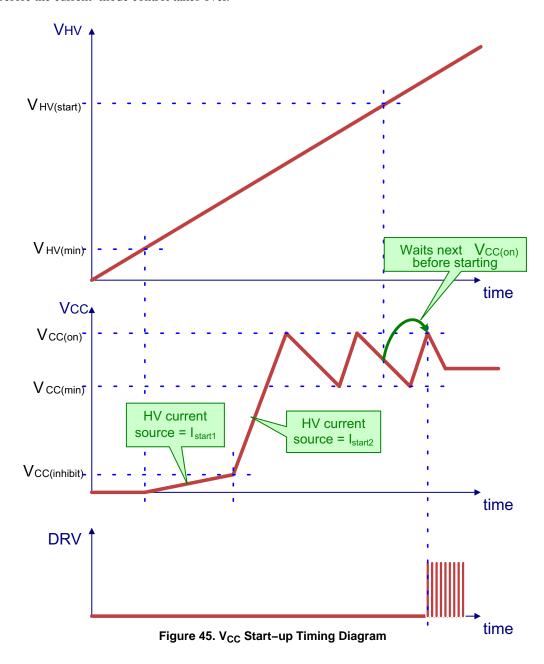

For safety reasons, the start—up current is lowered when V_{CC} is below $V_{CC(inhibit)}$, to reduce the power dissipation in case the V_{CC} pin is shorted to GND (in case of V_{CC} capacitor failure, or external pull—down on V_{CC} to disable the controller). There is only one condition for which the current source doesn't turn on when V_{CC} reaches $V_{CC(inhibit)}$: the voltage on HV pin is too low (below $V_{HV(min)}$).

HV Sensing of Rectified AC Voltage

The NCP1248 features on its HV pin a true ac line monitoring circuitry. It includes a minimum start-up

threshold and an autorecovery brown—out protection; both of them independent of the ripple on the input voltage. It is allowed only to work with an unfiltered, rectified ac input to ensure the X2 capacitor discharge function as well, which is described in following. The brown—out protection thresholds are fixed, but they are designed to fit most of the standard ac—dc conversion applications.

When the input voltage goes below $V_{HV(stop)}$, a brown—out condition is detected, and the controller stops. The HV current source maintains V_{CC} at $V_{CC(min)}$ level until the input voltage is back above $V_{HV(start)}$.

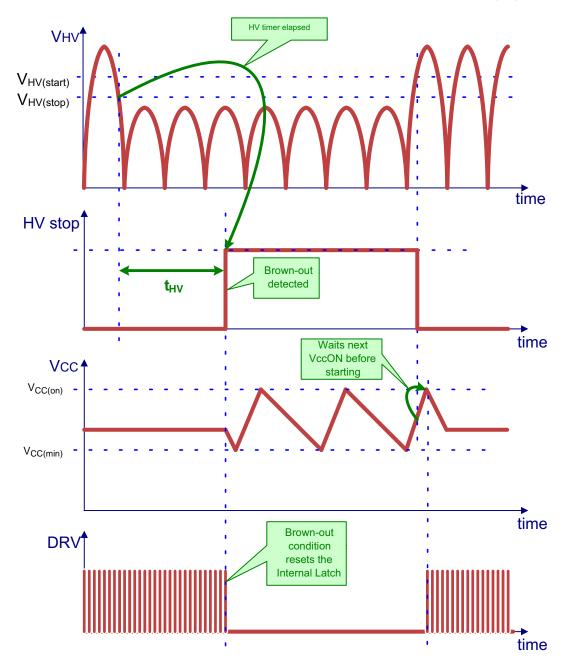


Figure 46. Ac Line Drop-out Timing Diagram

When V_{HV} crosses the $V_{HV(start)}$ threshold, the controller can start immediately. When it crosses $V_{HV(stop)}$, it triggers

a timer of duration t_{HV} , this ensures that the controller doesn't stop in case of line cycle drop—out.

X2 Cap Discharge Feature

The X2 capacitor discharging feature is offered by usage of the NCP1248. This feature save approx. $16 \, \text{mW} - 25 \, \text{mW}$ input power depending on the EMI filter X2 capacitors volume and it saves the external components count as well. The discharge feature is ensured via the start–up current source with a dedicated control circuitry for this function. The X2 capacitors are being discharged by current defined as I_{start2} when this need is detected.

There is used a dedicated structure called ac line unplug detector inside the X2 capacitor discharge control circuitry. See the Figure 47 for the block diagram for this structure and Figures 48, 49, 50 and 51 for the timing diagrams. The basic idea of ac line unplug detector lies in comparison of the direct sample of the high voltage obtained via the high voltage sensing structure with the delayed sample of the high voltage. The delayed signal is created by the sample & hold structure.

The comparator used for the comparison of these signals is without hysteresis inside. The resolution between the slopes of the ac signal and dc signal is defined by the sampling time T_{SAMPLE} and additional internal offset N_{OS}. These parameters ensure the noise immunity as well. The additional offset is added to the picture of the sampled HV signal and its analog sum is stored in the C₁ storage capacitor. If the voltage level of the HV sensing structure output crosses this level the comparator CMP output signal resets the detection timer and no dc signal is detected. The additional offset NOS can be measured as the VHV(hvst) on the HV pin. If the comparator output produces pulses it means that the slope of input signal is higher than set resolution level and the slope is positive. If the comparator output produces the low level it means that the slope of input signal is lower than set resolution level or the slope is negative. There is used the detection timer which is reset by any edge of the comparator output. It means if no edge comes before the timer elapses there is present only dc signal or signal with the small ac ripple at the HV pin. This type of the ac detector detects only the positive slope, which fulfils the requirements for the ac line presence detection.

In case of the dc signal presence on the high voltage input, the direct sample of the high voltage obtained via the high voltage sensing structure and the delayed sample of the high voltage are equivalent and the comparator produces the low level signal during the presence of this signal. No edges are present at the output of the comparator, that's why the detection timer is not reset and dc detect signal appears.

The minimum detectable slope by this ac detector is given by the ration between the maximum hysteresis observed at HV pin V_{HV(hyst),max} and the sampling time:

$$S_{min} = \frac{V_{HV(hyst),max}}{T_{sample}}$$
 (eq. 1)

Than it can be derived the relationship between the minimum detectable slope and the amplitude and frequency of the sinusoidal input voltage:

$$V_{\text{max}} = \frac{V_{\text{HV(hyst),max}}}{2 \cdot \pi \cdot f \cdot T_{\text{sample}}} = \frac{5}{2 \cdot \pi \cdot 35 \cdot 1 \cdot 10^{-3}} \text{ (eq. 2)}$$
$$= 22.7 \text{ V}$$

The minimum detectable AC RMS voltage is 16 V at frequency 35 Hz, if the maximum hysteresis is 5 V and sampling time is 1 ms.

The X2 capacitor discharge feature is available in any controller operation mode to ensure this safety feature. The detection timer is reused for the time limiting of the discharge phase, to protect the device against overheating. The discharging process is cyclic and continues until the ac line is detected again or the voltage across the X2 capacitor is lower than $V_{HV(min)}$. This feature ensures to discharge quite big X2 capacitors used in the input line filter to the safe level. It is important to note that it is not allowed to connect HV pin to any dc voltage due this feature. e.g. directly to bulk capacitor.

During the HV sensing or X2 cap discharging the V_{CC} net is kept above the $V_{CC(off)}$ voltage by the Self–Supply in any mode of device operation to supply the control circuitry. During the discharge sequence is not allowed to start–up the device.

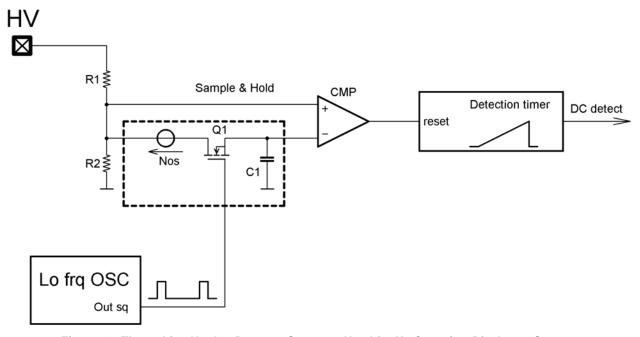


Figure 47. The ac Line Unplug Detector Structure Used for X2 Capacitor Discharge System

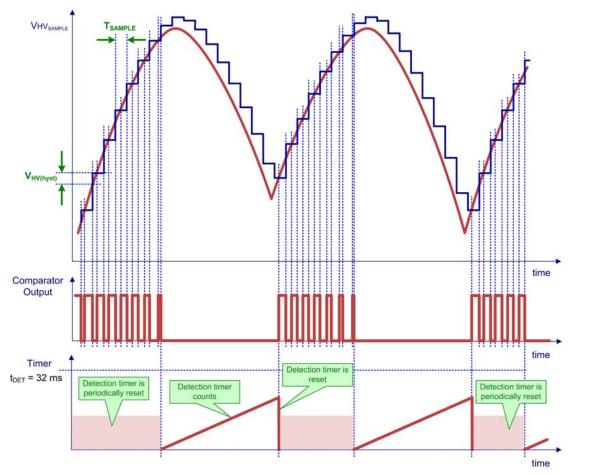


Figure 48. The ac Line Unplug Detector Timing Diagram

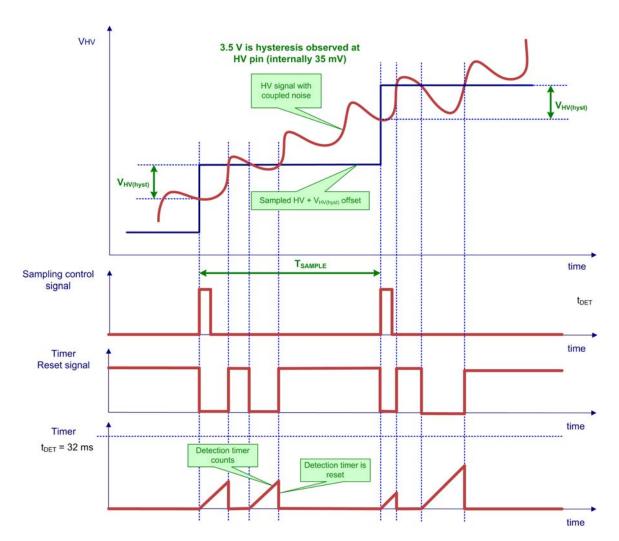


Figure 49. The ac Line Unplug Detector Timing Diagram Detail with Noise Effects

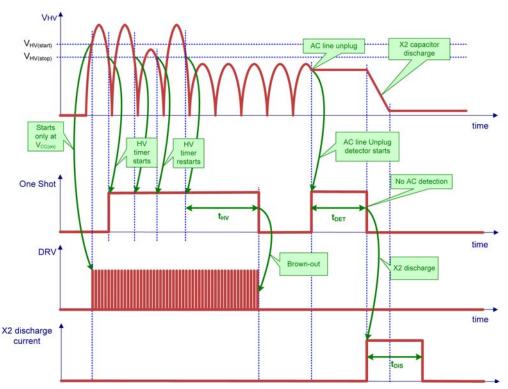


Figure 50. HV Pin ac Input Timing Diagram with X2 Capacitor Discharge Sequence When the Application is Unplugged Under Extremely Low Line Condition

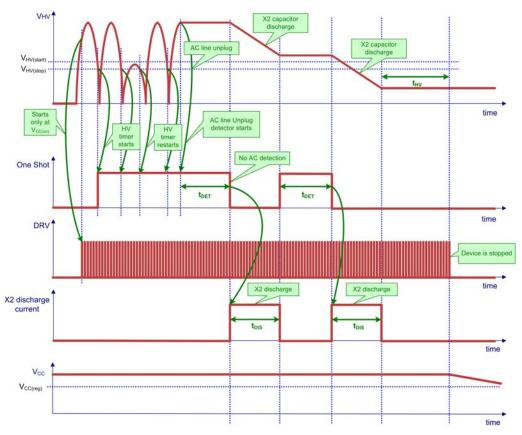


Figure 51. HV Pin ac Input Timing Diagram with X2 Capacitor Discharge Sequence When the Application is Unplugged Under High Line Condition

The Low Consumption Off Mode

There was implemented the low consumption off mode allowing to reach extremely low no load input power as described in previous chapters. If the voltage at feedback pin decreases below the 0.4 V the controller enters the off mode. The internal V_{CC} is turned–off, the IC consumes extremely low V_{CC} current and only the voltage at external V_{CC} capacitor is maintained by the Self–Supply circuit. The Self–Supply circuit keeps the V_{CC} voltage at the $V_{CC(reg)}$ level. The supply for the FB pin watch dog circuitry and FB pin bias is provided via the low consumption current sources from the external V_{CC} capacitor. The controller can only start, if the FB pin voltage increases above the 2.2 V level. See Figure 52 for timing diagrams.

Only the X2 cap discharge and Self–Supply features is enabled in the low consumption off mode. The X2 cap discharging feature is enable due the safety reasons and the Self–Supply is enabled to keep the V_{CC} supply, but only very low V_{CC} consumption appears in this mode. Any other features are disabled in this mode.

The information about the latch status of the device is kept in the low consumption off mode and this mode is used for the TSD protection as well. The protection timer GoToOffMode t_{GTOM} is used to protect the application against the false activation of the low consumption off mode by the fast drop outs of the FB pin voltage below the 0.4 V level. E.g. in case when is present high FB pin voltage ripple during the skip mode.

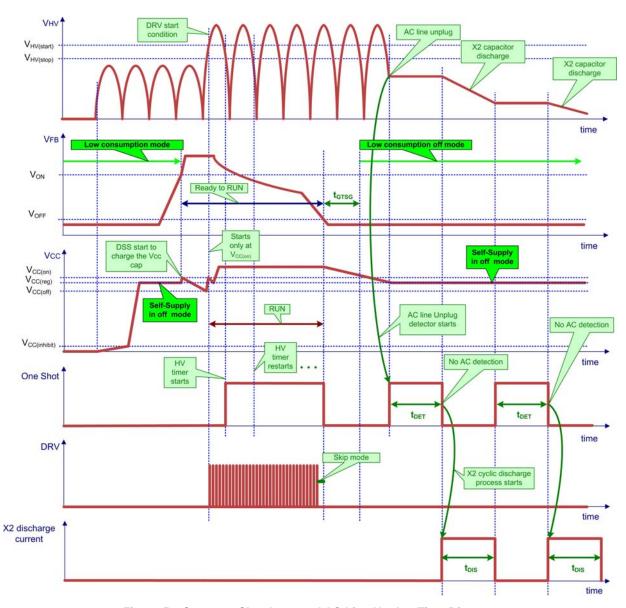


Figure 52. Start-up, Shutdown and AC Line Unplug Time Diagram

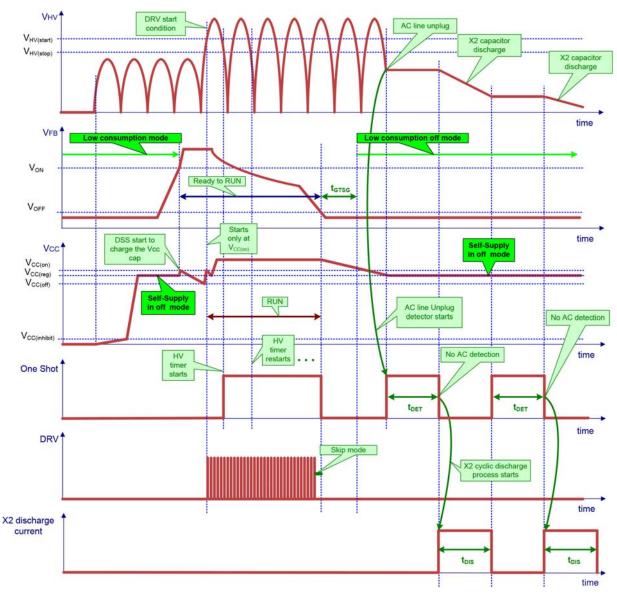


Figure 53. Start-up, Shutdown and AC Line Unplug Time Diagram

Oscillator with Maximum On Time and Frequency Jittering

The NCP1248 includes an oscillator that sets the switching frequency 100 kHz. The maximum on time is 8 μs with an accuracy of $\pm 7\%$. The maximum on time corresponds to maximum duty cycle of the DRV pin is 80% at full switching frequency. In order to improve the EMI signature, the switching frequency jitters ± 6 % around its nominal value, with a triangle–wave shape and at a frequency of 125 Hz. This frequency jittering is active even when the frequency is decreased to improve the efficiency in light load condition.




Figure 54. Frequency Modulation of the Maximum Switching Frequency

Low Load Operation Modes: Frequency Foldback Mode (FFM) and Skip Mode

In order to improve the efficiency in light load conditions, the frequency of the internal oscillator is linearly reduced from its nominal value down to $f_{OSC(min)}$. This frequency foldback starts when the voltage on FB pin goes below $V_{FB(foldS)}$, and is complete when V_{FB} reaches $V_{FB(foldE)}$. The maximum on–time duration control is kept during the

frequency foldback mode to provide the natural transformer core anti–saturation protection. The frequency jittering is still active while the oscillator frequency decreases as well. The current setpoint is fixed to 300 mV in the frequency foldback mode if the feedback voltage decreases below the $V_{FB(freeze)}$ level. This feature increases efficiency under the light loads conditions as well.


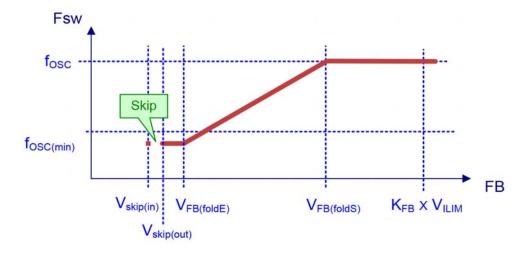


Figure 55. Frequency Foldback Mode Characteristic

When the FB voltage reaches $V_{skip(in)}$ while decreasing, skip mode is activated: the driver stops, and the internal consumption of the controller is decreased. While V_{FB} is

below $V_{skip(out)}$, the controller remains in this state; but as soon as V_{FB} crosses the skip out threshold, the DRV pin starts to pulse again.

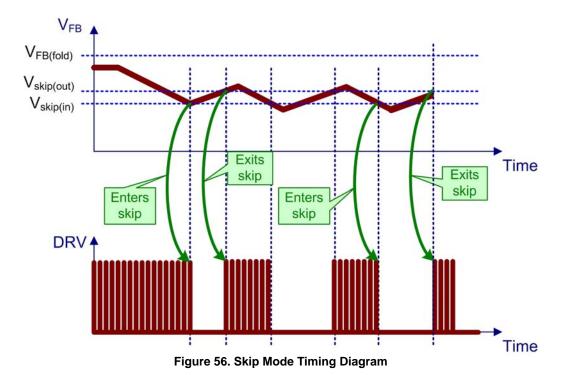

Clamped Driver

The supply voltage for the NCP1248 can be as high as 28 V, but most of the MOSFETs that will be connected to the DRV pin cannot accept more than 20 V on their gate. The driver pin is therefore clamped safely below 16 V. This driver has a typical capability of 500 mA for source current and 800 mA for sink current.

Current-Mode Control With Slope Compensation and Soft-Start

NCP1248 is a current—mode controller, which means that the FB voltage sets the peak current flowing in the inductance and the MOSFET. This is done through a PWM comparator: the current is sensed across a resistor and the resulting voltage is applied to the CS pin. It is applied to one input of the PWM comparator through a 250 ns LEB block. On the other input the FB voltage divided by 5 sets the threshold: when the voltage ramp reaches this threshold, the output driver is turned off. The maximum value for the current sense is 0.7 V, and it is set by a dedicated comparator.

Each time the controller is starting, i.e. the controller was off and starts – or restarts – when V_{CC} reaches $V_{CC(on)}$, a soft–start is applied: the current sense setpoint is increased by 15 discrete steps from 0 (the minimum level can be higher than 0 because of the LEB and propagation delay) until it reaches V_{ILIM} (after a duration of t_{SSTART}), or until the FB loop imposes a setpoint lower than the one imposed by the soft–start (the two comparators outputs are OR'ed).

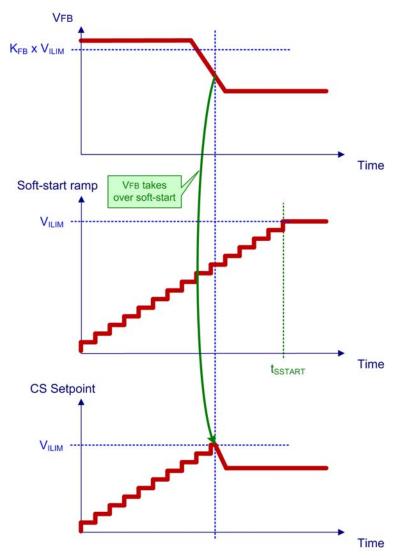


Figure 57. Soft-Start Feature

Under some conditions, like a winding short–circuit for instance, not all the energy stored during the *on* time is transferred to the output during the *off* time, even if the on time duration is at its minimum (imposed by the propagation delay of the detector added to the LEB duration). As a result,

the current sense voltage keeps on increasing above $V_{\rm ILIM}$, because the controller is blind during the LEB blanking time. Dangerously high current can grow in the system if nothing is done to stop the controller. That's what the additional comparator, that senses when the current sense

voltage on CS pin reaches $V_{CS(stop)}$ (= 1.5 x V_{ILIM}), does: as soon as this comparator toggles, the controller immediately enters the protection mode.

In order to allow the NCP1248 to operate in CCM with a duty cycle above 50%, the fixed slope compensation is internally applied to the current-mode control. The slope

appearing on -50 mV/ μ s. The slope compensation can be observable as a value of the peak current at CS pin. The internal slope compensation circuitry uses a sawtooth signal synchronized with the internal oscillator is subtracted from the FB voltage divided by K_{FB} .

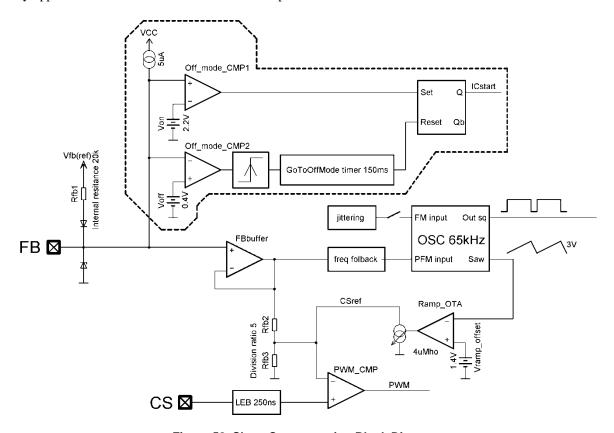


Figure 58. Slope Compensation Block Diagram

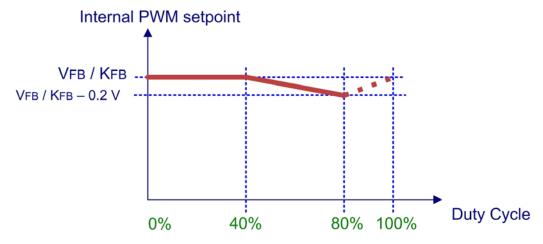


Figure 59. Slope Compensation Timing Diagram

Internal Overpower Protection

The power delivered by a flyback power supply is proportional to the square of the peak current in discontinuous conduction mode:

$$P_{OUT} = \frac{1}{2} \cdot \eta \cdot L_{P} \cdot F_{SW} \cdot I_{P}^{2} \qquad (eq. 3)$$

Unfortunately, due to the inherent propagation delay of the logic, the actual peak current is higher at high input voltage than at low input voltage, leading to a significant difference in the maximum output power delivered by the power supply.

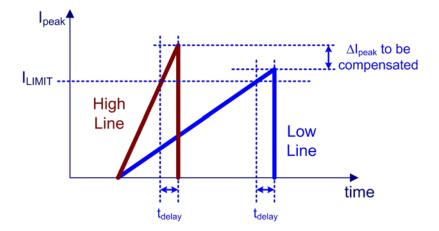


Figure 60. Needs for Line Compensation For True Overpower Protection

To compensate this and have an accurate overpower protection, an offset proportional to the input voltage is added on the CS signal by turning on an internal current source: by adding an external resistor in series between the sense resistor and the CS pin, a voltage offset is created across it by the current. The compensation can be adjusted by changing the value of the resistor.

But this offset is unwanted to appear when the current sense signal is small, i.e. in light load conditions, where it would be in the same order of magnitude. Therefore the compensation current is only added when the FB voltage is higher than $V_{FB(OPCE)}$. However, because the HV pin is being connected to ac voltage, there is needed an additional circuitry to read or at least closely estimate the actual voltage on the bulk capacitor.

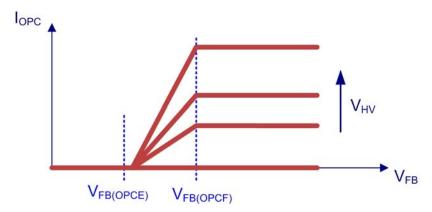


Figure 61. Overpower Protection Current Relation to Feedback Voltage

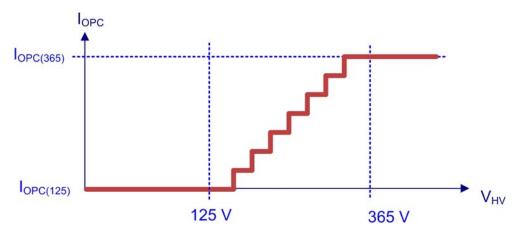


Figure 62. Overpower Protection Current Relation to Peak of Rectified Input Line AC voltage

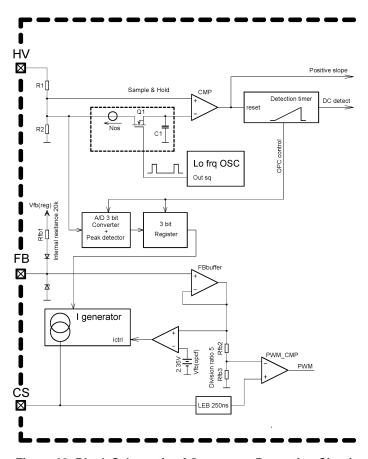


Figure 63. Block Schematic of Overpower Protection Circuit

A 3 bit A/D converter with the peak detector senses the ac input, and its output is periodically sampled and reset, in order to follow closely the input voltage variations. The sample and reset events are given by the output from the ac

line unplug detector. The sensed HV pin voltage peak value is validated when no HV edges from comparator are present after last falling edge during two sample clocks. See Figure 64 for details.

Overcurrent Protection with Fault timer

The overload protection depends only on the current sensing signal, making it able to work with any transformer, even with very poor coupling or high leakage inductance.

When an overcurrent occurs on the output of the power supply, the FB loop asks for more power than the controller can deliver, and the CS setpoint reaches V_{ILIM} . When this event occurs, an internal t_{fault} timer is started: once the timer times out, DRV pulses are stopped and the controller is either latched off (latched protection, option A) or this latch can be released in autorecovery mode (option B), the controller

tries to restart after $t_{autorec}$. Other possibilities of the latch release are the brown–out condition or the V_{CC} power on reset. The timer is reset when the CS setpoint goes back below V_{ILIM} before the timer elapses. The fault timer is also started if the driver signal is reset by the maximum on time. The controller also enters the same protection mode if the voltage on the CS pin reaches 1.5 times the maximum internal setpoint $V_{CS(stop)}$ (allows to detect winding short–circuits) or there appears low V_{CC} supply. See Figures 65 for the timing diagram.

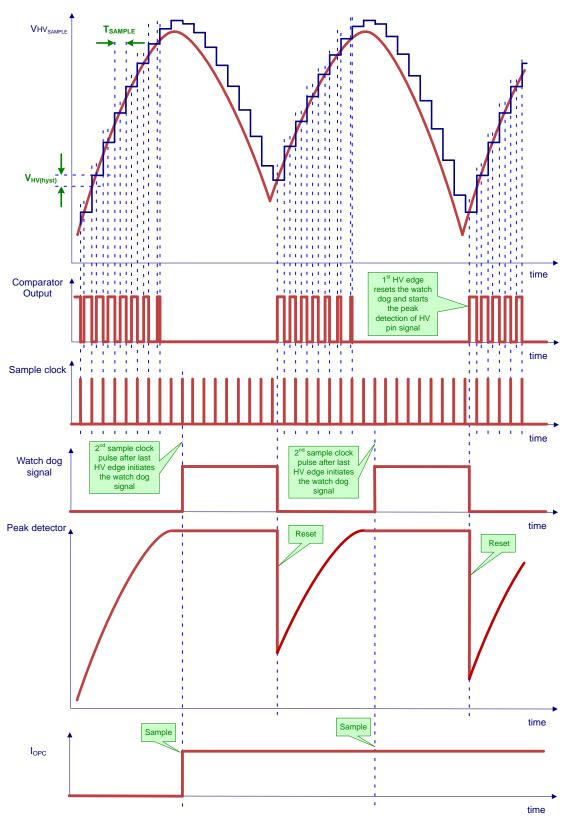


Figure 64. Overpower Compensation Timing Diagram

PROTECTION MODES AND THE LATCH MODE RELEASES

Event	Timer Protection	Next Device Status	Release to Normal Operation Mode
Overcurrent V _{ILIM} > 0.7 V	Fault timer	Latch	Autorecovery – B version Brown–out V _{CC} < V _{CC(reset)}
Maximum on time	Fault timer	Latch	Autorecovery – B version Brown-out V _{CC} < V _{CC(reset)}
Winding short V _{sense} > V _{CS(stop)}	Immediate reaction	Latch	Autorecovery – B version Brown-out V _{CC} < V _{CC(reset)}
Low supply $V_{CC} < V_{CC(off)}$	10 μs timer	Latch	Autorecovery – B version Brown-out V _{CC} < V _{CC(reset)}
External OTP, OVP	55 μs (35 μs at 100 kHz)	Latch	Brown-out $V_{CC} < V_{CC(reset)}$
High supply $V_{CC} > V_{CC(ovp)}$	10 μs timer	Latch	Brown-out V _{CC} < V _{CC(reset)}
Brown-out $V_{HV} < V_{HV(stop)}$	HV timer	Device stops	$(V_{HV} > V_{HV(start)})&(V_{CC} > V_{CC(on)})$
Internal TSD	10 μs timer	Device stops, HV start-up current source stops	$(V_{HV} > V_{HV(start)})$ & $(V_{CC} > V_{CC(on)})$ & TSDb
Off mode V _{FB} < V _{OFF}	550 ms timer	Device stops and internal V _{CC} is turned off	$(V_{HV} > V_{HV(start)})$ & $(V_{CC} > V_{CC(on)})$ & $(V_{FB} > V_{ON})$

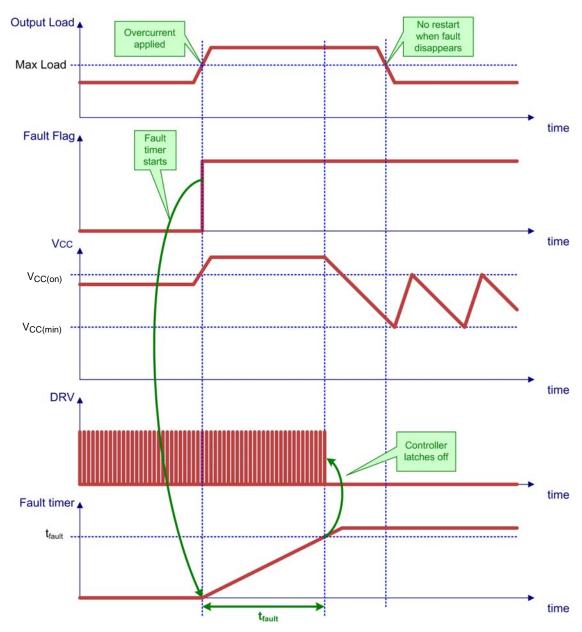


Figure 65. Latched Timer-Based Overcurrent Protection (Option A)

Latch-Off Input

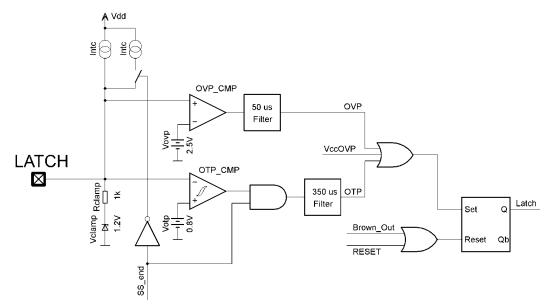


Figure 66. Latch Detection Schematic

The Latch pin is dedicated to the latch—off function: it includes two levels of detection that define a working window, between a high latch and a low latch: within these two thresholds, the controller is allowed to run, but as soon as either the low or the high threshold is crossed, the controller is latched off. The lower threshold is intended to be used with an NTC thermistor, thanks to an internal current source INTC.

An active clamp prevents the voltage from reaching the high threshold if it is only pulled up by the I_{NTC} current. To reach the high threshold, the pull-up current has to be higher than the pull-down capability of the clamp (typically 1.5 mA at V_{OVP}).

To avoid any false triggering, spikes shorter than 50 μ s (for the high latch) or 350 μ s (for the low latch) are blanked and only longer signals can actually latch the controller.

Reset occurs when a brown–out condition is detected or the V_{CC} is cycled down to a reset voltage, which in a real

application can only happen if the power supply is unplugged from the ac line.

Upon startup, the internal references take some time before being at their nominal values; so one of the comparators could toggle even if it should not. Therefore the internal logic does not take the latch signal into account before the controller is ready to start: once V_{CC} reaches V_{CC(on)}, the latch pin High latch state is taken into account and the DRV switching starts only if it is allowed; whereas the Low latch (typically sensing an over temperature) is taken into account only after the soft–start is finished. In addition, the NTC current is doubled to I_{NTC(SSTART)} during the soft–start period, to speed up the charging of the Latch pin capacitor. The maximum value of Latch pin capacitor is given by the following formula (The standard start–up condition is considered and the NTC current is neglected):

$$C_{\text{LATCH max}} = \frac{t_{\text{SSTART min}} \cdot I_{\text{NTC(SSTART) min}}}{V_{\text{clamp0 min}}} = \frac{8.0 \cdot 10^{-3} \cdot 130 \cdot 10^{-6}}{1.0} F = 1.04 \ \mu F \ \ (\text{eq. 4})$$

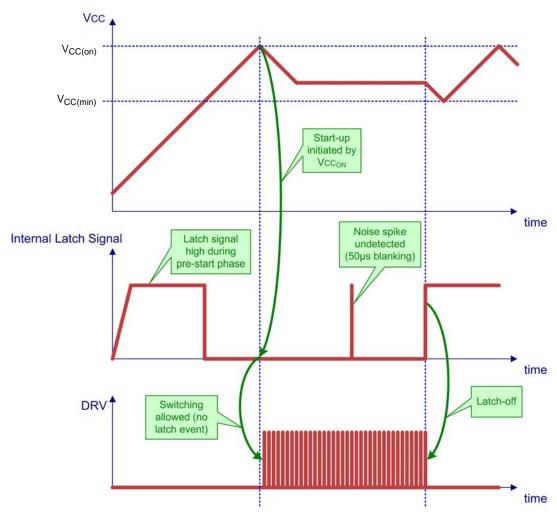


Figure 67. Latch Timing Diagram

Temperature Shutdown

The NCP1248 includes a temperature shutdown protection with a trip point typically at 150°C and the typical hysteresis of 30°C. When the temperature rises above the high threshold, the controller stops switching instantaneously, and goes to the off mode with extremely

low power consumption. There is kept the V_{CC} supply to keep the TSD information. When the temperature falls below the low threshold, the start-up of the device is enabled again, and a regular start-up sequence takes place. See the status diagrams at the Figures 44.


ORDERING INFORMATION 5

Ordering Part No.	Overload Protection	Switching Frequency	Package	Shipping [†]
NCP1248AD065R2G	Latched	65 kHz	SOIC-7 (Pb-Free)	2500 / Tape & Reel
NCP1248AD100R2G	Latched	100 kHz	SOIC-7 (Pb-Free)	2500 / Tape & Reel

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

PACKAGE DIMENSIONS


SOIC-7 CASE 751U ISSUE E

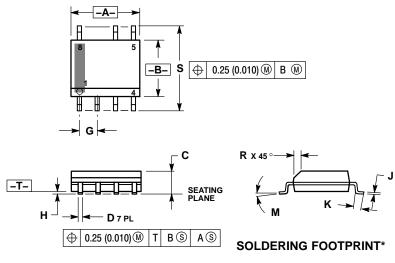

NOTES:

- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M. 1982.
- 2. CONTROLLING DIMENSION: MILLIMETER.
- DIMENSION A AND B ARE DATUMS AND T IS A DATUM SURFACE.
- DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
- MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.

	MILLIN	IETERS	INC	HES			
DIM	MIN MAX		MIN	MAX			
Α	4.80	5.00	0.189	0.197			
В	3.80	4.00	0.150	0.157			
С	1.35	1.75	0.053	0.069			
D	0.33	0.51	0.013	0.020			
G	1.27	BSC	0.05	0 BSC			
Н	0.10	0.25	0.004	0.010			
J	0.19	0.25	0.007	0.010			
K	0.40	1.27	0.016	0.050			
М	0 °	8 °	0 °	8 °			
N	0.25	0.50	0.010	0.020			
S	5.80	6.20	0.228	0.244			



*For additional information on our Pb–Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

SCALE 6:1

ON Semiconductor and was are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products or any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights or the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportun

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA Phone: 303–675–2175 or 800–344–3860 Toll Free USA/Canada Fax: 303–675–2176 or 800–344–3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910 Japan Customer Focus Center

Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru_4 moschip.ru_9