

## General Description

The MIC8115 is an inexpensive microprocessor supervisory circuit that monitors power supplies in microprocessor-based systems.

The function of the MIC8115 is to assert a reset if the power supply drops below a designated reset threshold level or /MR is forced low.

The MIC8115 has an active low /RESET output. The reset output is guaranteed to remain asserted for a minimum of 1100ms after  $V_{CC}$  has risen above the designated reset threshold level. The MIC8115 comes in a 4-pin SOT-143 package.

Datasheets and support documentation are available on Micrel's web site at: [www.micrel.com](http://www.micrel.com).


## Features

- Precision voltage monitor for 3.3V power supplies
- Specifically-tailored to the AMD Elan SC500 Series
- /RESET remains valid with  $V_{CC}$  as low as 1.4V
- $<15\mu A$  supply current
- 1100ms minimum reset pulse width
- Manual reset input
- Available in 4-Pin SOT-143 Package

## Applications

- Portable equipment
- Intelligent instruments
- Critical microprocessor power monitoring
- Printers/computers
- Embedded controllers

## Typical Application

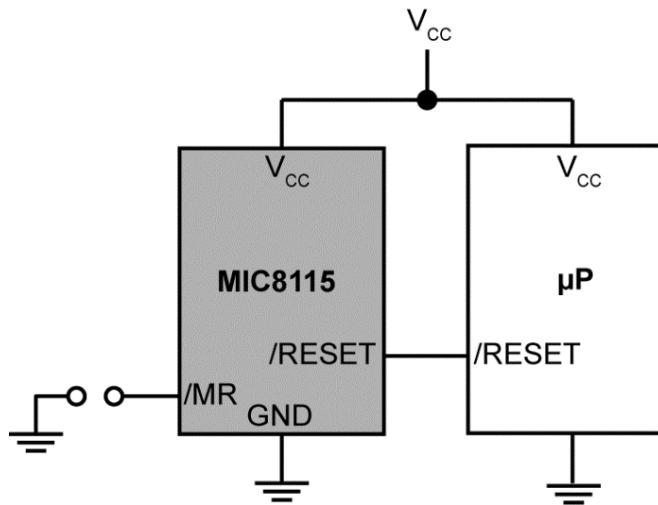


## Ordering Information

Part Number <sup>(1)</sup>	Marking	Junction Temperature Range	Package	Lead Finish
MIC8115-TUY	<u>NT</u>	-40°C to +85°C	4-Pin SOT-143	Pb-Free

**Note:**

1. Underbar (—) may not be to scale.

## Pin Configuration

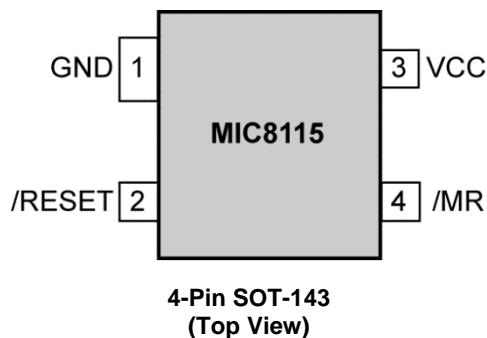

## Pin Description

Pin Number	Pin Name	Pin Function
1	GND	IC Ground Pin.
2	/RESET	/RESET goes low if either VCC falls below the supply reset threshold voltage or if /MR is asserted. /RESET remains asserted for one reset timeout period 1100ms (minimum) after both VCC exceeds the supply reset threshold voltage and /MR is deasserted.
3	/MR	Manual Reset Input. A logic low on /MR forces a reset. The reset will remain asserted as long as /MR is held low and for one reset timeout period (1100ms, minimum) after /MR goes high. This input can be shorted to ground via a switch or driven from CMOS or TTL logic. Pulled high internally through a 20kΩ resistor. Float if unused.
4	VCC	Power Supply Input.

## Absolute Maximum Ratings<sup>(2)</sup>

### Terminal Voltage

(V <sub>CC</sub> )	.....	-0.3V to 6.0V
(/MR)	.....	-0.3V (V <sub>CC</sub> + 0.3V)
Input Current (V <sub>CC</sub> , /MR)	.....	20mA
Output Current (/RESET)	.....	20mA
Rate of Rise (V <sub>CC</sub> )	.....	100V/μs
Lead Temperature (soldering, 10s)	.....	300°C
Storage Temperature (T <sub>S</sub> )	.....	-65°C to +150°C
ESD Rating <sup>(4)</sup>	.....	3kV

## Operating Ratings<sup>(3)</sup>

Operating Temperature Range	.....	-40°C to +85°C
Power Dissipation (T <sub>A</sub> = +70°C)	.....	320mW

## Electrical Characteristics


For typical values, V<sub>CC</sub> = 3.3V; T<sub>A</sub> = 25°C, **bold** values indicate -40°C ≤ T<sub>A</sub> ≤ +85°C, unless noted.

Symbol	Parameter	Condition	Min.	Typ.	Max.	Units
V <sub>CC</sub>	Operating Voltage Range	T <sub>A</sub> = -40°C to +85°C	<b>1</b>		<b>5.5</b>	V
I <sub>CC</sub>	Supply Current			5	<b>15</b>	μA
V <sub>TH</sub>	Reset Voltage Threshold		<b>3.00</b>	3.08	<b>3.15</b>	V
I <sub>RST</sub>	Reset Timeout Period		<b>1100</b>	1700	<b>2500</b>	ms
V <sub>OH</sub>	/RESET Output Voltage	I <sub>SOURCE</sub> = 500μA	<b>0.8 × V<sub>CC</sub></b>			V
V <sub>OL</sub>	/Reset Output Voltage	V <sub>CC</sub> = V <sub>TH(MIN)</sub> , I <sub>SINK</sub> = 1.2mA			<b>0.3</b>	V
		V <sub>CC</sub> = 1V, I <sub>SINK</sub> = 50μA, T <sub>A</sub> = -40°C to +85°C			<b>0.3</b>	
	/MR Minimum Pulse Width		<b>10</b>			μs
	/MR to Reset Delay			0.5		μs
VIH	/MR Input Threshold		<b>0.7 × V<sub>CC</sub></b>			V
VIL	/MR Input Threshold				<b>0.25 × V<sub>CC</sub></b>	
	/MR Pull-Up Resistance		<b>10</b>	20	<b>30</b>	kΩ
	/MR Glitch Immunity			100		ns


### Notes:

- Exceeding the absolute maximum ratings may damage the device.
- The device is not guaranteed to function outside its operating ratings.
- Devices are ESD sensitive. Handling precautions are recommended. Human body model, 1.5kΩ in series with 100pF.

## Timing Diagram

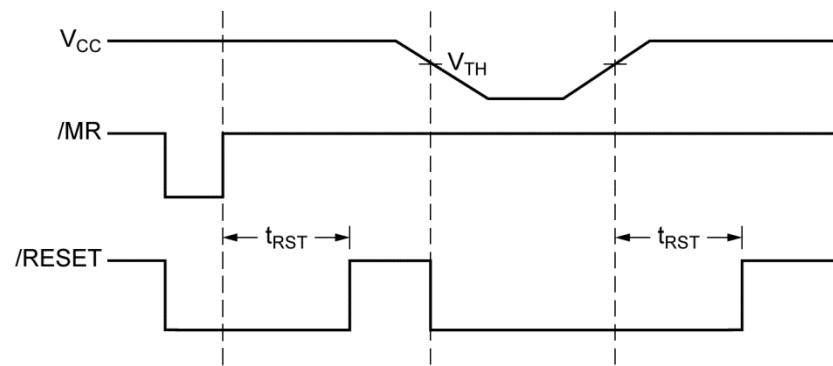

## Functional Diagram

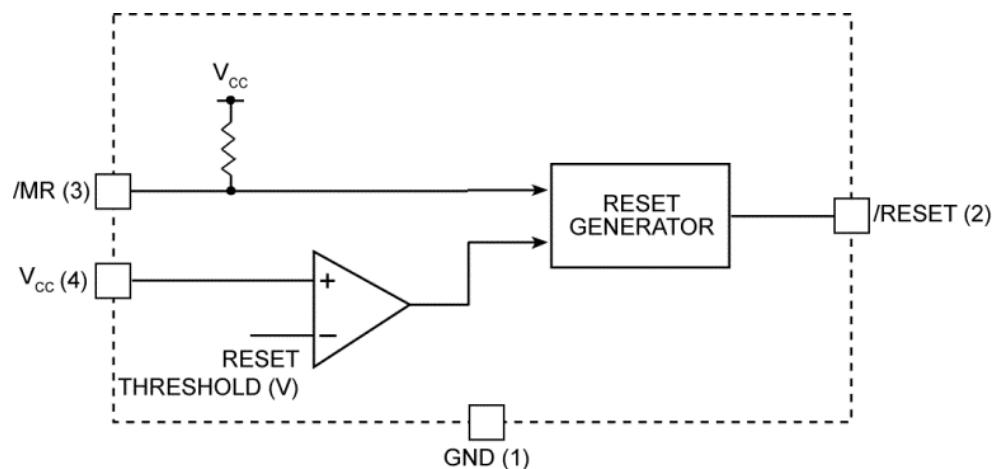

## Application Information

### Microprocessor Reset

The /RESET pin is asserted whenever  $V_{CC}$  falls below the reset threshold voltage. The reset pin remains asserted for a period of 1100ms after  $V_{CC}$  has risen above the reset threshold voltage. The reset function ensures the microprocessor is properly reset and powers up into a known condition after a power failure. /RESET will remain valid with  $V_{CC}$  as low as 1.4V.

### $V_{CC}$ Transients

The MIC1815 is relatively immune to the negative-going  $V_{CC}$  glitches below the reset threshold. Typically, a negative-going transient 125mV belt the reset threshold with duration of 20 $\mu$ s or less will not cause a reset.

### /RESET Valid at Low Voltage

A resistor can be added from the /RESET pin to the ground to ensure the /RESET output remains low with  $V_{CC}$  down to 0V. A 100k $\Omega$  resistor connected from /RESET to ground is recommended. The resistor should be large enough not to load the /RESET output and small enough to pull-down any stray leakage currents.

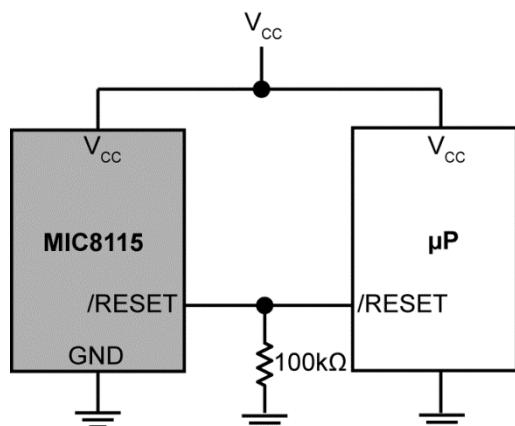
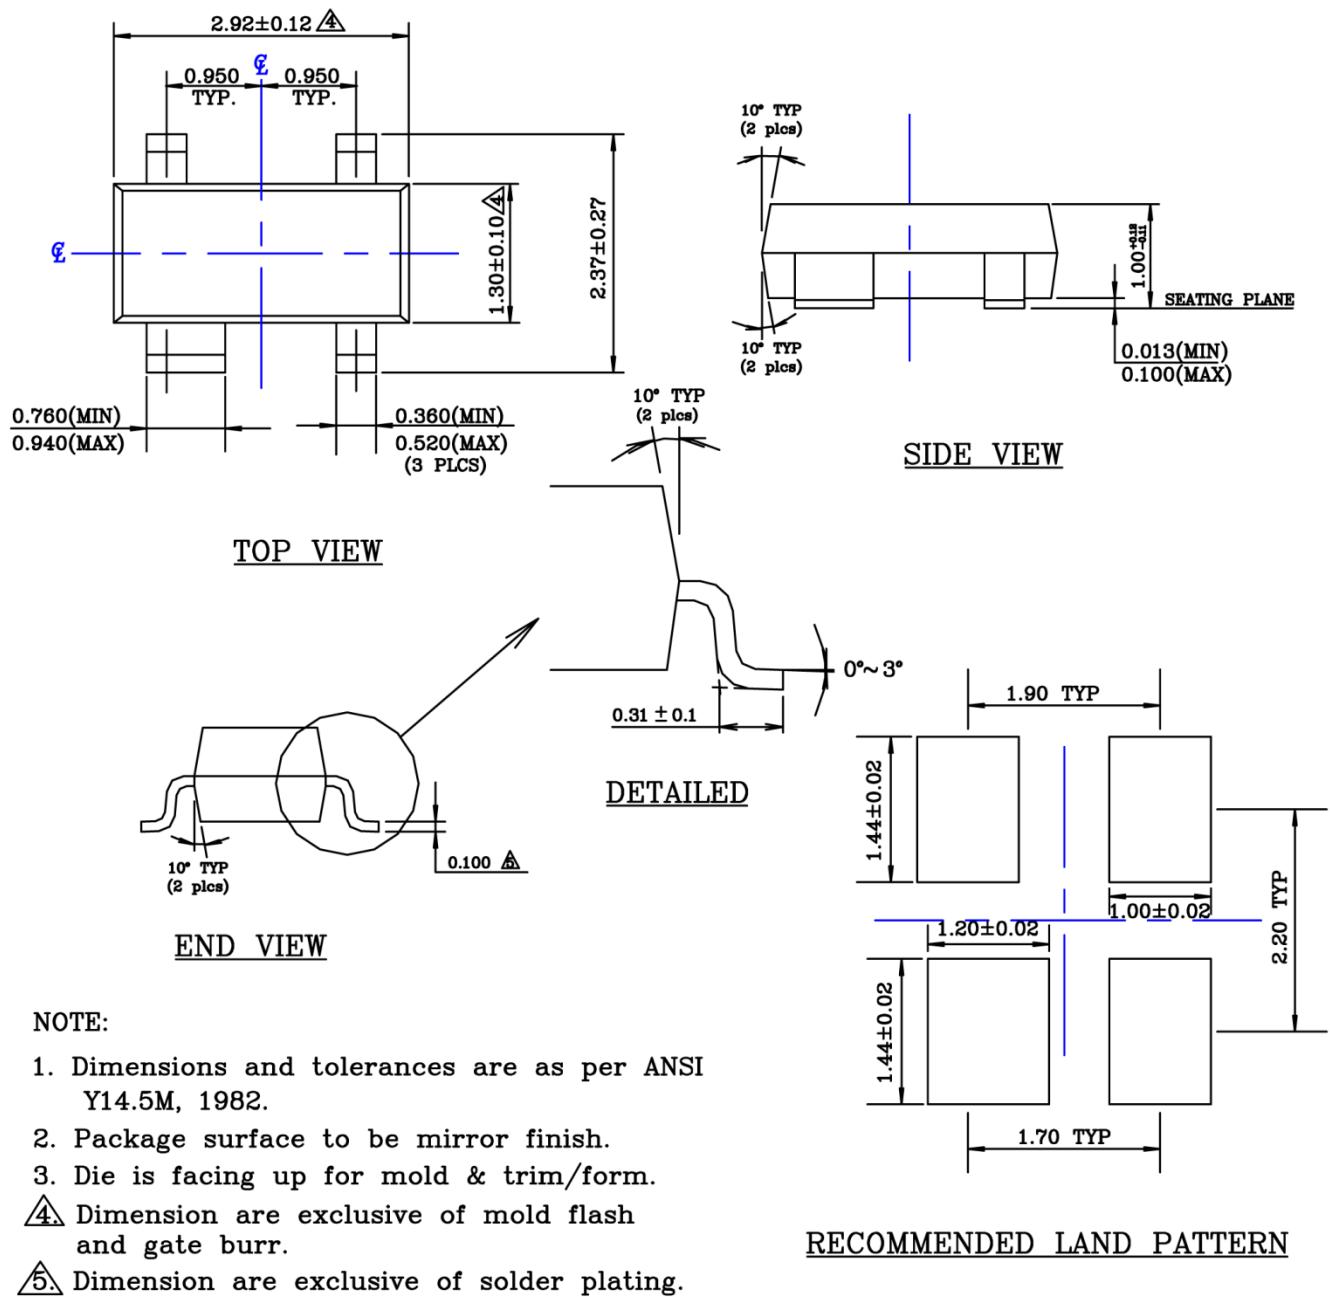


Figure 1. /RESET Valid to  $V_{CC} = 0V$

## Package Information and Recommended Landing Pattern<sup>(5)</sup>


**Note:**

5. Package information is correct as of the publication date. For updates and most current information, go to [www.micrel.com](http://www.micrel.com).

---

**MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA**  
TEL +1 (408) 944-0800 FAX +1 (408) 474-1000 WEB <http://www.micrel.com>

Micrel, Inc. is a leading global manufacturer of IC solutions for the worldwide high performance linear and power, LAN, and timing & communications markets. The Company's products include advanced mixed-signal, analog & power semiconductors; high-performance communication, clock management, MEMs-based clock oscillators & crystal-less clock generators, Ethernet switches, and physical layer transceiver ICs. Company customers include leading manufacturers of enterprise, consumer, industrial, mobile, telecommunications, automotive, and computer products. Corporation headquarters and state-of-the-art wafer fabrication facilities are located in San Jose, CA, with regional sales and support offices and advanced technology design centers situated throughout the Americas, Europe, and Asia. Additionally, the Company maintains an extensive network of distributors and reps worldwide.

Micrel makes no representations or warranties with respect to the accuracy or completeness of the information furnished in this datasheet. This information is not intended as a warranty and Micrel does not assume responsibility for its use. Micrel reserves the right to change circuitry, specifications and descriptions at any time without notice. No license, whether express, implied, arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Micrel's terms and conditions of sale for such products, Micrel assumes no liability whatsoever, and Micrel disclaims any express or implied warranty relating to the sale and/or use of Micrel products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is a Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2003 Micrel, Incorporated.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Micrel](#):

[MIC8115TUY TR](#) [MIC8115TUY-TR](#)

**Данный компонент на территории Российской Федерации****Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

**<http://moschip.ru/get-element>**

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

**Офис по работе с юридическими лицами:**

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru  
moschip.ru\_4

moschip.ru\_6  
moschip.ru\_9