

JLLN/JLLS CLASS T FUSES

300/600 VAC • Fast-Acting • 1-600 Amperes



Specifications

Voltage Ratings:	AC:	300 V (JLLN); 600 V (JLLS)
	DC:	125 V (JLLN 1 – 30 A) 160 V (JLLN 35 – 60 A) 125 V (JLLN 70 – 100 A) 125 V (JLLN 110 – 1200 A) 300 V (JLLS)
Interrupting Ratings:	AC:	200 kA rms symmetrical
	DC:	20 kA (JLLN 70 – 100 A) (JLLN 110 – 1200 A) (JLLS 1 – 1200 A)
Ampere Range:		1 – 1200 A
Approvals:	AC:	Standard 248-15, Class T UL Listed (File No. E81895): JLLN (1-1200 A) JLLS (1-800 A) UL Recognized (File No. E71611) JLLS (900 – 1200 A) CSA Certified (File No. LR29862) JLLN/JLLS (1 – 600 A)
	DC:	UL Listed (File No. E81895): JLLN (35 – 1200 A) Littelfuse self-certified: JLLN (1-30 A) JLLS (1 – 1200 A)

Description

JLLN/JLLS fuses are less than 1/3 the size of comparable Class R fuses and are typically used for short circuit protection of drives and surge sensitive components. When rated in accordance with the NEC®, JLLN/JLLS fuses provide fast-acting overload and short circuit protection for non-inductive circuits and equipment.

Applications

- Variable speed drive protection
- Compact mains switches

Features/Benefits

- Extremely current-limiting
- Compact design
- 200 kA Interrupting Rating
- JLLN Series is RoHS Compliant

Ordering Information

AMPERE RATINGS				
1	30	90	250	800
2	35	100	300	900*
3	40	110	350	1000
6	45	125	400	1100
10	50	150	450	1200
15	60	175	500	
20	70	200	600	
25	80	225	700	

*JLLS only

Note: Contact the factory for RoHS compliant Class T fuses.

SERIES	VOLTAGE	AMPERAGE	CATALOG NUMBER	SYSTEM NUMBER
JLLS	600 V	6	JLLS006	JLLS006.T
JLLN	300 V	10	JLLN010	JLLN010.T

Web Resources

TC Curves, downloadable CAD drawings and other technical information: www.littelfuse.com/jlln
www.littelfuse.com/jlls

Recommended Fuseholders

LFT30 Series
LFT60 Series
LSCR Series for 700-800 A

JLLN/JLLS CLASS T FUSES

Dimensions in inches (mm)




Fig. 1




Fig. 2

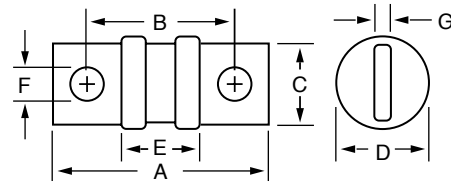


Fig. 3

AMPERES	REFER TO FIG. NO.	SERIES	DIMENSIONS IN INCHES (mm)						
			A	B	C	D	E	F	G
1 – 30	1	JLLN	$\frac{7}{16}$ (22.2)	—	$\frac{9}{32}$ (7.1)	$\frac{13}{32}$ (10.3)	—	—	—
		JLLS	$\frac{1}{2}$ (38.1)	—	$\frac{9}{32}$ (7.1)	$\frac{9}{16}$ (14.3)	—	—	—
35 – 60	1	JLLN	$\frac{7}{16}$ (22.2)	—	$\frac{9}{32}$ (7.1)	$\frac{9}{16}$ (14.3)	—	—	—
		JLLS	$\frac{19}{16}$ (39.7)	$\frac{13}{16}$ (20.6)	$\frac{13}{32}$ (10.3)	1 (25.4)	$\frac{1}{16}$ (1.6)	$\frac{13}{32}$ (27.8)	—
70 – 100	3	JLLN	$2\frac{5}{32}$ (54.8)	$\frac{19}{16}$ (39.7)	$\frac{3}{4}$ (19.1)	$\frac{13}{16}$ (20.6)	$\frac{27}{32}$ (21.4)	$\frac{9}{32}$ (7.1)	$\frac{1}{8}$ (3.2)
		JLLS	$2\frac{61}{64}$ (75.0)	$2\frac{23}{64}$ (59.9)	$\frac{3}{4}$ (19.1)	$\frac{13}{16}$ (20.6)	$\frac{141}{64}$ (41.7)	$\frac{9}{32}$ (7.1)	$\frac{1}{8}$ (3.2)
110 – 200	3	JLLN	$2\frac{7}{16}$ (61.9)	$1\frac{11}{16}$ (42.9)	$\frac{7}{8}$ (22.2)	$1\frac{1}{16}$ (27.0)	$\frac{27}{32}$ (21.4)	$\frac{11}{32}$ (8.7)	$\frac{3}{16}$ (4.8)
		JLLS	$3\frac{3}{4}$ (82.6)	$2\frac{1}{2}$ (63.5)	$\frac{7}{8}$ (22.2)	$1\frac{1}{16}$ (27.0)	$\frac{121}{32}$ (42.1)	$\frac{11}{32}$ (8.7)	$\frac{3}{16}$ (4.8)
225 – 400	3	JLLN	$2\frac{3}{4}$ (69.9)	$1\frac{27}{32}$ (46.8)	1 (25.4)	$1\frac{5}{16}$ (33.3)	$\frac{53}{64}$ (21.0)	$\frac{13}{32}$ (10.3)	$\frac{1}{4}$ (6.4)
		JLLS	$3\frac{5}{8}$ (92.1)	$2\frac{23}{32}$ (69.1)	1 (25.4)	$1\frac{19}{32}$ (40.5)	$\frac{123}{32}$ (43.7)	$\frac{13}{32}$ (10.3)	$\frac{1}{4}$ (6.4)
450 – 600	3	JLLN	$3\frac{1}{16}$ (77.8)	$2\frac{1}{32}$ (51.6)	$1\frac{1}{4}$ (31.8)	$1\frac{19}{32}$ (40.5)	$\frac{7}{8}$ (22.2)	$\frac{31}{64}$ (12.3)	$\frac{5}{16}$ (7.9)
		JLLS	$3\frac{63}{64}$ (101.2)	$2\frac{61}{64}$ (75.0)	$1\frac{1}{4}$ (31.8)	$2\frac{1}{16}$ (52.4)	$\frac{149}{64}$ (44.8)	$\frac{31}{64}$ (12.3)	$\frac{5}{16}$ (7.9)
700 – 800	3	JLLN	$3\frac{3}{8}$ (85.7)	$2\frac{7}{32}$ (64.3)	$1\frac{3}{4}$ (44.5)	$2\frac{1}{16}$ (52.4)	$\frac{7}{8}$ (22.2)	$\frac{35}{64}$ (13.9)	$\frac{3}{8}$ (9.5)
		JLLS	$4\frac{21}{64}$ (109.9)	$3\frac{11}{64}$ (80.6)	$1\frac{3}{4}$ (44.5)	$2\frac{1}{2}$ (63.5)	$\frac{155}{64}$ (47.2)	$\frac{35}{64}$ (13.9)	$\frac{3}{8}$ (9.5)
900 – 1200	3	JLLN	4 (101.6)	$2\frac{17}{32}$ (64.3)	2 (50.8)	$2\frac{1}{2}$ (63.5)	$1\frac{1}{32}$ (26.2)	$\frac{39}{64}$ (15.5)	$\frac{7}{16}$ (11.1)
		JLLS	5.27 (133.9)	3.80 (96.5)	2 (50.8)	2.63 (66.8)	2.30 (58.4)	0.67 (15.5)	0.44 (11.2)

Current-Limiting Effects of JLLN (300 V) fuses

SHORT CIRCUIT CURRENT*	APPARENT RMS SYMMETRICAL CURRENT FOR VARIOUS FUSE RATINGS							
	30 A	60 A	100 A	200 A	400 A	600 A	800 A	1200 A
5,000	700	775	1,100	1,650	3,500	4,000	5,000	5,000
10,000	900	1,000	1,400	2,100	4,400	5,100	6,750	8,250
15,000	1,000	1,100	1,600	2,400	5,000	5,900	7,750	10,000
20,000	1,100	1,250	1,800	2,700	5,500	6,500	8,750	11,000
25,000	1,230	1,300	1,950	2,900	6,000	7,000	9,500	12,000
30,000	1,300	1,475	2,050	3,100	6,400	7,500	10,000	12,500
35,000	1,330	1,575	2,150	3,300	6,750	7,750	10,500	13,500
40,000	1,430	1,600	2,300	3,500	7,000	8,000	11,000	14,000
50,000	1,500	1,750	2,400	3,700	7,500	8,750	12,000	15,000
60,000	1,700	1,900	2,700	4,000	8,000	9,500	12,500	16,000
80,000	1,850	2,100	2,800	4,400	9,000	10,500	14,000	17,500
100,000	2,000	2,250	3,150	4,800	9,750	11,500	15,000	18,500
150,000	2,300	2,600	3,600	5,500	11,000	13,000	17,500	22,000
200,000	2,600	2,800	3,900	6,000	12,000	14,500	19,500	24,000


*Prospective RMS Symmetrical Amperes Short-Circuit Current
Note: Data Derived from Peak Let-Thru Curves

Current-Limiting Effects of JLLS (600 V) fuses

SHORT CIRCUIT CURRENT*	APPARENT RMS SYMMETRICAL CURRENT FOR VARIOUS FUSE RATINGS							
	30 A	60 A	100 A	200 A	400 A	600 A	800 A	1200 A
5,000	750	1,225	1,400	2,850	4,600	5,000	5,000	5,000
10,000	945	1,525	1,700	3,600	6,000	8,500	9,400	10,000
15,000	1,050	1,700	2,000	4,050	6,600	9,750	10,500	13,000
20,000	1,150	1,900	2,200	4,450	7,250	10,500	11,000	14,750
25,000	1,300	2,050	2,400	4,800	8,000	11,500	12,500	15,500
30,000	1,375	2,150	2,450	5,000	8,250	12,000	13,750	16,500
35,000	1,400	2,250	2,600	5,100	8,500	13,000	14,000	17,000
40,000	1,425	2,400	2,800	5,200	8,700	14,000	14,750	18,000
50,000	1,600	2,450	2,900	6,000	9,500	14,500	16,000	20,000
60,000	1,650	2,625	3,100	6,250	10,000	15,500	17,300	21,000
80,000	1,825	2,800	3,400	7,000	11,000	17,000	18,750	23,000
100,000	2,000	3,100	3,700	7,250	12,000	18,000	20,000	25,000
150,000	2,250	3,400	4,300	8,500	13,000	21,000	23,000	28,500
200,000	2,450	3,800	4,600	9,000	15,000	23,000	25,000	31,000

*Prospective RMS Symmetrical Amperes Short-Circuit Current
Note: Data Derived from Peak Let-Thru Curves

Peak Let-Thru Curve JLLS

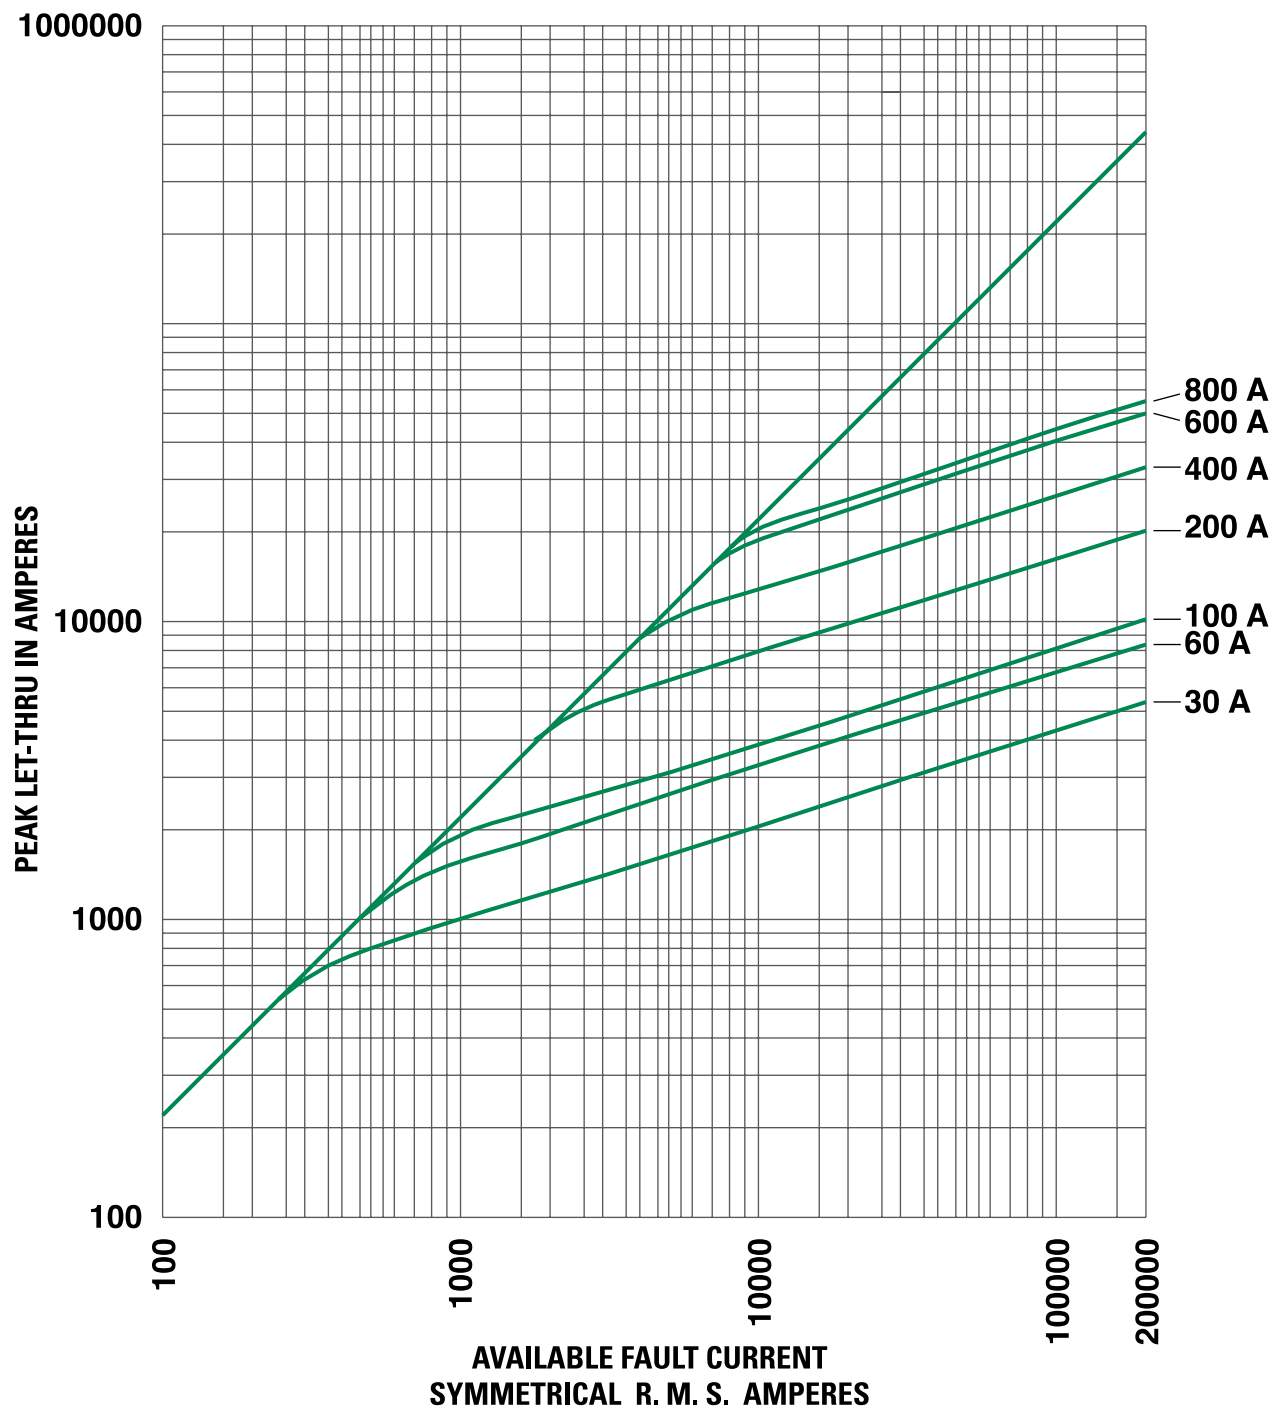

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9