

# TC74VCX245FT, TC74VCX245FK, TC74VCX245FTG

Low-Voltage Octal Bus Transceiver with 3.6 V Tolerant Inputs and Outputs

The TC74VCX245 is a high performance CMOS octal bus transceiver which is guaranteed to operate from 1.2-V to 3.6-V. Designed for use in 1.5V, 1.8V, 2.5V or 3.3 V systems, it achieves high speed operation while maintaining the CMOS low power dissipation.


It is also designed with over voltage tolerant inputs and outputs up to 3.6 V.

The direction of data transmission is determined by the level of the DIR inputs. The OE inputs can be used to disable the device so that the busses are effectively isolated.

All inputs are equipped with protection circuits against static discharge.

## Features (Note 1) (Note 2) (Note 3)

- Low voltage operation:  $V_{CC} = 1.2$  to 3.6 V
- High speed operation:  $t_{pd} = 3.5$  ns (max) ( $V_{CC} = 3.0$  to 3.6 V)  
 $t_{pd} = 4.2$  ns (max) ( $V_{CC} = 2.3$  to 2.7 V)  
 $t_{pd} = 8.4$  ns (max) ( $V_{CC} = 1.65$  to 1.95 V)  
 $t_{pd} = 16.8$  ns (max) ( $V_{CC} = 1.4$  to 1.6 V)  
 $t_{pd} = 42.0$  ns (max) ( $V_{CC} = 1.2$  V)
- 3.6 V tolerant inputs and outputs.
- Output current:  $I_{OH}/I_{OL} = \pm 24$  mA (min) ( $V_{CC} = 3.0$  V)  
 $I_{OH}/I_{OL} = \pm 18$  mA (min) ( $V_{CC} = 2.3$  V)  
 $I_{OH}/I_{OL} = \pm 6$  mA (min) ( $V_{CC} = 1.65$  V)  
 $I_{OH}/I_{OL} = \pm 2$  mA (min) ( $V_{CC} = 1.4$  V)
- Latch-up performance: -300 mA
- ESD performance: Machine model  $\geq \pm 200$  V  
Human body model  $\geq \pm 2000$  V
- Package: TSSOP  
VSSOP (US)  
VQON
- Bidirectional interface between 2.5 V and 3.3 V signals. (Note 1)
- Power down protection is provided on all inputs and outputs. (Note 2)

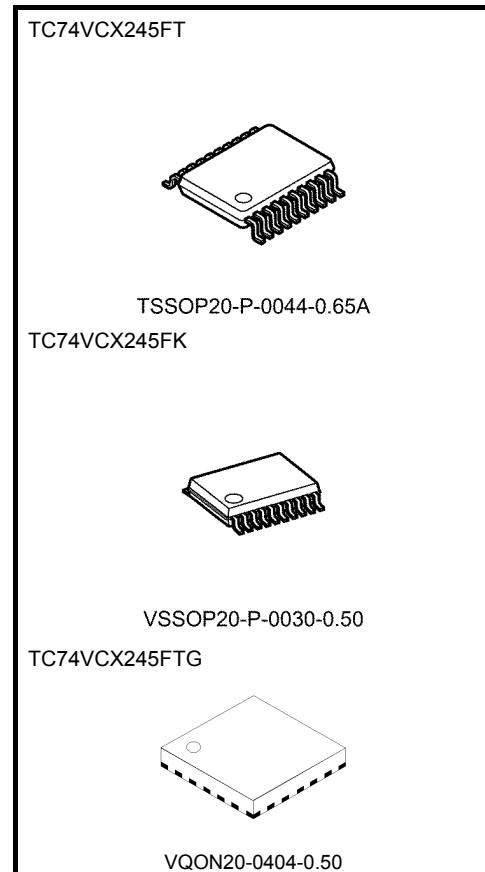

Weight	
TSSOP20-P-0044-0.65A	: 0.08 g (typ.)
VSSOP20-P-0030-0.50	: 0.03 g (typ.)
VQON20-P-0404-0.50	: 0.0145g (typ.)



Note 1: Do not apply a signal to any bus terminal when it is in the output mode. Damage may result.

Note 2: All floating (high impedance) bus terminal must have their input level fixed by means of pull up or pull down resistors.


Note 3: When mounting VQON package, the type of recommended flux is RA or RMA.

Start of commercial production  
1998-06

## Pin Assignment (top view)

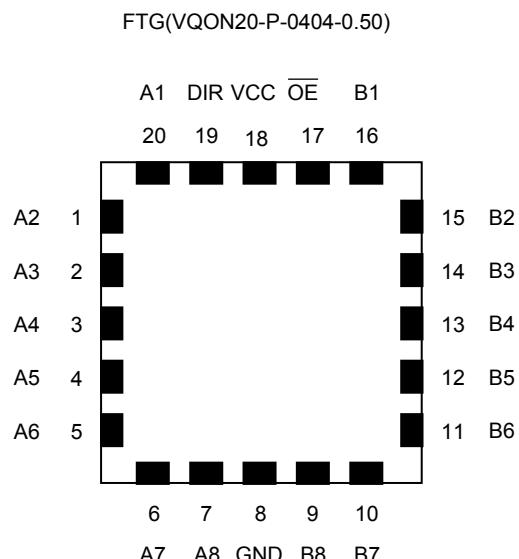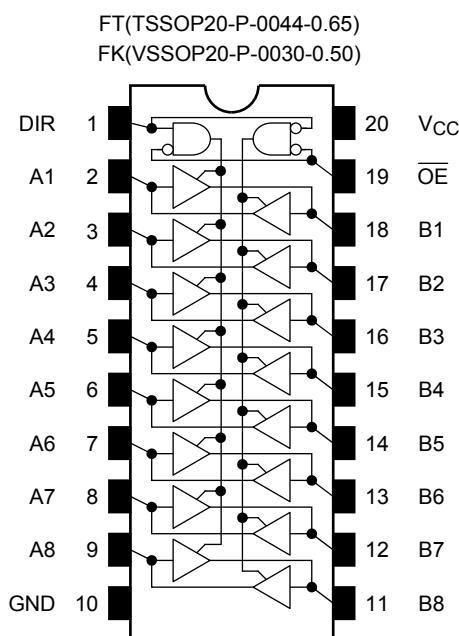

## IEC Logic Symbol

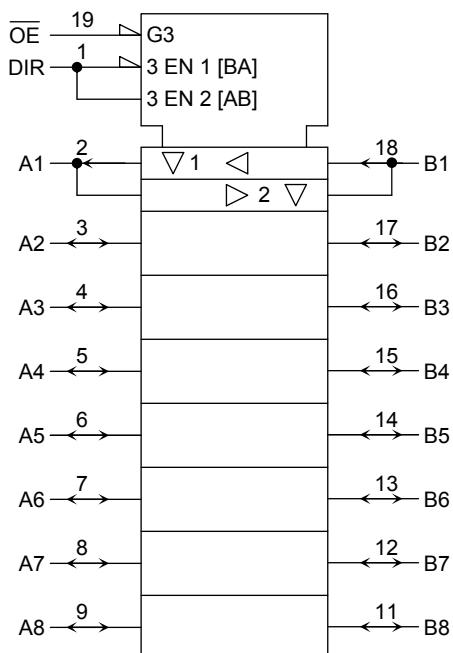

## Truth Table

Inputs		Outputs	Function	
OE	DIR		A-Bus	B-Bus
L	L	A = B	Output	Input
L	H	B = A	Input	Output
H	X	Z		Z

X: Don't care

Z: High impedance

**Absolute Maximum Ratings (Note 1)**

Characteristics	Symbol	Rating	Unit
Power supply voltage	V <sub>CC</sub>	-0.5 to 4.6	V
DC input voltage (DIR, OE )	V <sub>IN</sub>	-0.5 to 4.6	V
DC bus I/O voltage	V <sub>I/O</sub>	-0.5 to 4.6 (Note 2)	V
		-0.5 to V <sub>CC</sub> + 0.5 (Note 3)	
Input diode current	I <sub>IK</sub>	-50	mA
Output diode current	I <sub>OK</sub>	±50 (Note 4)	mA
DC output current	I <sub>OUT</sub>	±50	mA
Power dissipation	P <sub>D</sub>	180	mW
DC V <sub>CC</sub> /ground current	I <sub>CC/GND</sub>	±100	mA
Storage temperature	T <sub>stg</sub>	-65 to 150	°C

Note 1: Exceeding any of the absolute maximum ratings, even briefly, lead to deterioration in IC performance or even destruction.

Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings and the operating ranges.

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

Note 2: Off-state

Note 3: High or low state. I<sub>OUT</sub> absolute maximum rating must be observed.

Note 4: V<sub>OUT</sub> < GND, V<sub>OUT</sub> > V<sub>CC</sub>

**Operating Ranges (Note 1)**

Characteristics	Symbol	Rating	Unit
Supply voltage	V <sub>CC</sub>	1.2 to 3.6	V
Input voltage (DIR, OE )	V <sub>IN</sub>	-0.3 to 3.6	V
Bus I/O voltage	V <sub>I/O</sub>	0 to 3.6 (Note 2)	V
		0 to V <sub>CC</sub> (Note 3)	
Output current	I <sub>OH/OL</sub>	±24 (Note 4)	mA
		±18 (Note 5)	
		±6 (Note 6)	
		±2 (Note 7)	
Operating temperature	T <sub>opr</sub>	-40 to 85	°C
Input rise and fall time	dt/dv	0 to 10 (Note 8)	ns/V

Note 1: The operating ranges must be maintained to ensure the normal operation of the device. Unused inputs and bus inputs must be tied to either V<sub>CC</sub> or GND. Please connect both bus inputs and the bus outputs with V<sub>CC</sub> or GND when the I/O of the bus terminal changes by the function. In this case, please note that the output is not short-circuited.

Note 2: Off-state

Note 3: High or low state

Note 4: V<sub>CC</sub> = 3.0 to 3.6 V

Note 5: V<sub>CC</sub> = 2.3 to 2.7 V

Note 6: V<sub>CC</sub> = 1.65 to 1.95 V

Note 7: V<sub>CC</sub> = 1.4 to 1.6 V

Note 8: V<sub>IN</sub> = 0.8 to 2.0 V, V<sub>CC</sub> = 3.0 V

**Electrical Characteristics****DC Characteristics (Ta = -40 to 85°C, 2.7 V < V<sub>CC</sub> ≤ 3.6 V)**

Characteristics		Symbol	Test Condition		V <sub>CC</sub> (V)	Min	Max	Unit	
Input voltage	High level		—	2.7 to 3.6					
	Low level	V <sub>IL</sub>	—	2.7 to 3.6	—	—	0.8		
Output voltage	High level	V <sub>OH</sub>	V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub>	I <sub>OH</sub> = -100 μA	2.7 to 3.6	V <sub>CC</sub> - 0.2	—	V	
				I <sub>OH</sub> = -12 mA	2.7	2.2	—		
				I <sub>OH</sub> = -18 mA	3.0	2.4	—		
				I <sub>OH</sub> = -24 mA	3.0	2.2	—		
	Low level	V <sub>OL</sub>	V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub>	I <sub>OL</sub> = 100 μA	2.7 to 3.6	—	0.2		
				I <sub>OL</sub> = 12 mA	2.7	—	0.4		
				I <sub>OL</sub> = 18 mA	3.0	—	0.4		
				I <sub>OL</sub> = 24 mA	3.0	—	0.55		
Input leakage current		I <sub>IN</sub>	V <sub>IN</sub> = 0 to 3.6 V		2.7 to 3.6	—	±5.0	μA	
3-state output off-state current		I <sub>OZ</sub>	V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub> V <sub>OUT</sub> = 0 to 3.6 V		2.7 to 3.6	—	±10.0	μA	
Power off leakage current		I <sub>OFF</sub>	V <sub>IN</sub> , V <sub>OUT</sub> = 0 to 3.6 V		0	—	10.0	μA	
Quiescent supply current		I <sub>CC</sub>	V <sub>IN</sub> = V <sub>CC</sub> or GND		2.7 to 3.6	—	20.0	μA	
			V <sub>CC</sub> ≤ (V <sub>IN</sub> , V <sub>OUT</sub> ) ≤ 3.6 V		2.7 to 3.6	—	±20.0		
Increase in I <sub>CC</sub> per input		ΔI <sub>CC</sub>	V <sub>IH</sub> = V <sub>CC</sub> - 0.6 V		2.7 to 3.6	—	750	μA	

**DC Characteristics (Ta = -40 to 85°C, 2.3 V ≤ V<sub>CC</sub> ≤ 2.7 V)**

Characteristics		Symbol	Test Condition		V <sub>CC</sub> (V)	Min	Max	Unit	
Input voltage	High level		—	2.3 to 2.7					
	Low level	V <sub>IL</sub>	—	2.3 to 2.7	—	—	0.7		
Output voltage	High level	V <sub>OH</sub>	V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub>	I <sub>OH</sub> = -100 μA	2.3 to 2.7	V <sub>CC</sub> - 0.2	—	V	
				I <sub>OH</sub> = -6 mA	2.3	2.0	—		
				I <sub>OH</sub> = -12 mA	2.3	1.8	—		
				I <sub>OH</sub> = -18 mA	2.3	1.7	—		
	Low level	V <sub>OL</sub>	V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub>	I <sub>OL</sub> = 100 μA	2.3 to 2.7	—	0.2		
				I <sub>OL</sub> = 12 mA	2.3	—	0.4		
				I <sub>OL</sub> = 18 mA	2.3	—	0.6		
				I <sub>OL</sub> = 24 mA	2.3	—	0.8		
Input leakage current		I <sub>IN</sub>	V <sub>IN</sub> = 0 to 3.6 V		2.3 to 2.7	—	±5.0	μA	
3-state output off-state current		I <sub>OZ</sub>	V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub> V <sub>OUT</sub> = 0 to 3.6 V		2.3 to 2.7	—	±10.0	μA	
Power off leakage current		I <sub>OFF</sub>	V <sub>IN</sub> , V <sub>OUT</sub> = 0 to 3.6 V		0	—	10.0	μA	
Quiescent supply current		I <sub>CC</sub>	V <sub>IN</sub> = V <sub>CC</sub> or GND		2.3 to 2.7	—	20.0	μA	
			V <sub>CC</sub> ≤ (V <sub>IN</sub> , V <sub>OUT</sub> ) ≤ 3.6 V		2.3 to 2.7	—	±20.0		

DC Characteristics ( $T_a = -40$  to  $85^\circ\text{C}$ ,  $1.65 \text{ V} \leq V_{CC} < 2.3 \text{ V}$ )

Characteristics		Symbol	Test Condition		$V_{CC} (\text{V})$	Min	Max	Unit	
Input voltage	High level		—	1.65 to 2.3	$0.65 \times V_{CC}$	—		$\text{V}$	
	Low level	$V_{IL}$	—	1.65 to 2.3	—	—	$0.2 \times V_{CC}$		
Output voltage	High level	$V_{OH}$	$V_{IN} = V_{IH}$ or $V_{IL}$	$I_{OH} = -100 \mu\text{A}$	1.65 to 2.3	$V_{CC} - 0.2$	—	$\text{V}$	
				$I_{OH} = -6 \text{ mA}$	1.65	1.25	—		
	Low level	$V_{OL}$	$V_{IN} = V_{IH}$ or $V_{IL}$	$I_{OL} = 100 \mu\text{A}$	1.65 to 2.3	—	0.2		
				$I_{OL} = 6 \text{ mA}$	1.65	—	0.3		
Input leakage current	$I_{IN}$	$V_{IN} = 0$ to $3.6 \text{ V}$			1.65 to 2.3	—	$\pm 5.0$	$\mu\text{A}$	
3-state output off-state current	$I_{OZ}$	$V_{IN} = V_{IH}$ or $V_{IL}$ $V_{OUT} = 0$ to $3.6 \text{ V}$			1.65 to 2.3	—	$\pm 10.0$	$\mu\text{A}$	
Power off leakage current	$I_{OFF}$	$V_{IN}, V_{OUT} = 0$ to $3.6 \text{ V}$			0	—	10.0	$\mu\text{A}$	
Quiescent supply current	$I_{CC}$	$V_{IN} = V_{CC}$ or GND			1.65 to 2.3	—	20.0	$\mu\text{A}$	
		$V_{CC} \leq (V_{IN}, V_{OUT}) \leq 3.6 \text{ V}$			1.65 to 2.3	—	$\pm 20.0$		

DC Characteristics ( $T_a = -40$  to  $85^\circ\text{C}$ ,  $1.4 \text{ V} \leq V_{CC} < 1.65 \text{ V}$ )

Characteristics		Symbol	Test Condition		$V_{CC} (\text{V})$	Min	Max	Unit	
Input voltage	High level		—	1.4 to 1.65	$0.65 \times V_{CC}$	—	$\text{V}$	$\text{V}$	
	Low level	$V_{IL}$	—	1.4 to 1.65	—	—	$0.05 \times V_{CC}$		
Output voltage	High level	$V_{OH}$	$V_{IN} = V_{IH}$ or $V_{IL}$	$I_{OH} = -100 \mu\text{A}$	1.4 to 1.65	$V_{CC} - 0.2$	—	$\text{V}$	
				$I_{OH} = -2 \text{ mA}$	1.4	1.05	—		
	Low level	$V_{OL}$	$V_{IN} = V_{IH}$ or $V_{IL}$	$I_{OL} = 100 \mu\text{A}$	1.4 to 1.65	—	0.05		
				$I_{OL} = 2 \text{ mA}$	1.4	—	0.35		
Input leakage current	$I_{IN}$	$V_{IN} = 0$ to $3.6 \text{ V}$			1.4 to 1.65	—	$\pm 5.0$	$\mu\text{A}$	
3-state output off-state current	$I_{OZ}$	$V_{IN} = V_{IH}$ or $V_{IL}$ $V_{OUT} = 0$ to $3.6 \text{ V}$			1.4 to 1.65	—	$\pm 10.0$	$\mu\text{A}$	
Power off leakage current	$I_{OFF}$	$V_{IN}, V_{OUT} = 0$ to $3.6 \text{ V}$			0	—	10.0	$\mu\text{A}$	
Quiescent supply current	$I_{CC}$	$V_{IN} = V_{CC}$ or GND			1.4 to 1.65	—	20.0	$\mu\text{A}$	
		$V_{CC} \leq (V_{IN}, V_{OUT}) \leq 3.6 \text{ V}$			1.4 to 1.65	—	$\pm 20.0$		

DC Characteristics ( $T_a = -40$  to  $85^\circ\text{C}$ ,  $1.2 \text{ V} \leq V_{CC} < 1.4 \text{ V}$ )

Characteristics		Symbol	Test Condition		$V_{CC} (\text{V})$	Min	Max	Unit		
Input voltage	High level		—		1.2 to 1.4	$0.8 \times V_{CC}$	—	V		
	Low level	$V_{IL}$	—		1.2 to 1.4	—	$0.05 \times V_{CC}$			
Output voltage	High level	$V_{OH}$	$V_{IN} = V_{IH}$ or $V_{IL}$	$I_{OH} = -100 \mu\text{A}$	1.2	$V_{CC} - 0.1$	—	V		
	Low level	$V_{OL}$	$V_{IN} = V_{IH}$ or $V_{IL}$	$I_{OL} = 100 \mu\text{A}$	1.2	—	0.05			
Input leakage current		$I_{IN}$	$V_{IN} = 0$ to $3.6 \text{ V}$		1.2	—	$\pm 5.0$	$\mu\text{A}$		
3-state output off-state current		$I_{OZ}$	$V_{IN} = V_{IH}$ or $V_{IL}$ $V_{OUT} = 0$ to $3.6 \text{ V}$		1.2	—	$\pm 10.0$	$\mu\text{A}$		
Power off leakage current		$I_{OFF}$	$V_{IN}, V_{OUT} = 0$ to $3.6 \text{ V}$		0	—	10.0	$\mu\text{A}$		
Quiescent supply current	$I_{CC}$	$V_{IN} = V_{CC}$ or GND			1.2	—	20.0	$\mu\text{A}$		
		$V_{CC} \leq (V_{IN}, V_{OUT}) \leq 3.6 \text{ V}$			1.2	—	$\pm 20.0$			

AC Characteristics ( $T_a = -40$  to  $85^\circ\text{C}$ , Input:  $t_r = t_f = 2.0 \text{ ns}$ ,  $C_L = 30 \text{ pF}$ ,  $R_L = 500 \Omega$ ) (Note 1)

Characteristics		Symbol	Test Condition		$V_{CC} (\text{V})$	Min	Max	Unit	
Propagation delay time	$t_{PLH}$ $t_{PHL}$		Figure 1, Figure 2	$C_L = 15 \text{ pF}, R_L = 2 \text{ k}\Omega$	1.2	1.5	42.0	ns	
					$1.5 \pm 0.1$	1.0	16.8		
					$1.8 \pm 0.15$	1.5	8.4		
				$C_L = 30 \text{ pF}, R_L = 500 \Omega$	$2.5 \pm 0.2$	0.8	4.2		
					$3.3 \pm 0.3$	0.6	3.5		
					1.2	1.5	49.0		
3-state output enable time	$t_{PZL}$ $t_{PZH}$		Figure 1, Figure 3	$C_L = 15 \text{ pF}, R_L = 2 \text{ k}\Omega$	$1.5 \pm 0.1$	1.0	19.6	ns	
					$1.8 \pm 0.15$	1.5	9.8		
					$2.5 \pm 0.2$	0.8	5.6		
				$C_L = 30 \text{ pF}, R_L = 500 \Omega$	$3.3 \pm 0.3$	0.6	4.5		
					1.2	1.5	36.0		
					$1.5 \pm 0.1$	1.0	14.4		
3-state output disable time	$t_{PLZ}$ $t_{PHZ}$		Figure 1, Figure 3	$C_L = 15 \text{ pF}, R_L = 2 \text{ k}\Omega$	$1.8 \pm 0.15$	1.5	7.2	ns	
					$2.5 \pm 0.2$	0.8	4.0		
					$3.3 \pm 0.3$	0.6	3.6		
				$C_L = 30 \text{ pF}, R_L = 500 \Omega$	1.2	—	1.5		
					$1.5 \pm 0.1$	—	1.5		
					$1.8 \pm 0.15$	—	0.5		
Output to output skew	$t_{osLH}$ $t_{osHL}$		(Note 2)	$C_L = 15 \text{ pF}, R_L = 2 \text{ k}\Omega$	$2.5 \pm 0.2$	—	0.5	ns	
					$3.3 \pm 0.3$	—	0.5		

Note 1: For  $C_L = 50 \text{ pF}$ , add approximately 300 ps to the AC maximum specification.

Note 2: This parameter is guaranteed by design.

( $t_{osLH} = |t_{PLHm} - t_{PLHn}|$ ,  $t_{osHL} = |t_{PHLm} - t_{PHLn}|$ )

**Dynamic Switching Characteristics (Ta = 25°C, Input: t<sub>r</sub> = t<sub>f</sub> = 2.0 ns, C<sub>L</sub> = 30 pF)**

Characteristics	Symbol	Test Condition	V <sub>CC</sub> (V)	Typ.	Unit
Quiet output maximum dynamic V <sub>OL</sub>	V <sub>O LP</sub>	V <sub>IH</sub> = 1.8 V, V <sub>IL</sub> = 0 V (Note)	1.8	0.25	V
		V <sub>IH</sub> = 2.5 V, V <sub>IL</sub> = 0 V (Note)	2.5	0.6	
		V <sub>IH</sub> = 3.3 V, V <sub>IL</sub> = 0 V (Note)	3.3	0.8	
Quiet output minimum dynamic V <sub>OL</sub>	V <sub>O LV</sub>	V <sub>IH</sub> = 1.8 V, V <sub>IL</sub> = 0 V (Note)	1.8	-0.25	V
		V <sub>IH</sub> = 2.5 V, V <sub>IL</sub> = 0 V (Note)	2.5	-0.6	
		V <sub>IH</sub> = 3.3 V, V <sub>IL</sub> = 0 V (Note)	3.3	-0.8	
Quiet output minimum dynamic V <sub>OH</sub>	V <sub>O HV</sub>	V <sub>IH</sub> = 1.8 V, V <sub>IL</sub> = 0 V (Note)	1.8	1.5	V
		V <sub>IH</sub> = 2.5 V, V <sub>IL</sub> = 0 V (Note)	2.5	1.9	
		V <sub>IH</sub> = 3.3 V, V <sub>IL</sub> = 0 V (Note)	3.3	2.2	

Note: This parameter is guaranteed by design.

**Capacitive Characteristics (Ta = 25°C)**

Characteristics	Symbol	Test Condition	V <sub>CC</sub> (V)	Typ.	Unit
Input capacitance	C <sub>IN</sub>	—	1.8, 2.5, 3.3	6	pF
Bus I/O capacitance	C <sub>I/O</sub>	—	1.8, 2.5, 3.3	7	pF
Power dissipation capacitance	C <sub>PD</sub>	f <sub>IN</sub> = 10 MHz (Note)	1.8, 2.5, 3.3	20	pF

Note: C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load.

Average operating current can be obtained by the equation:

$$I_{CC}(\text{opr}) = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC}/8 \text{ (per bit)}$$

## AC Test Circuit

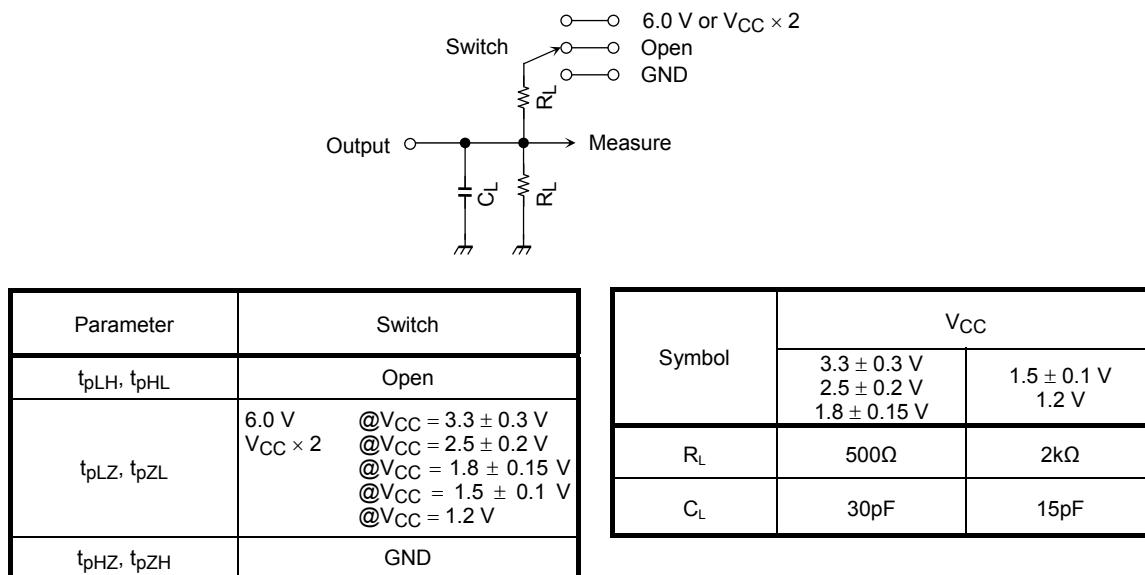
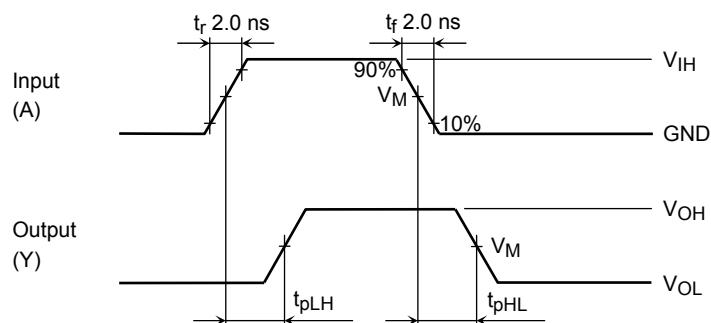


Figure 1

## AC Waveform

Figure 2  $t_{pLH}, t_{pHL}$

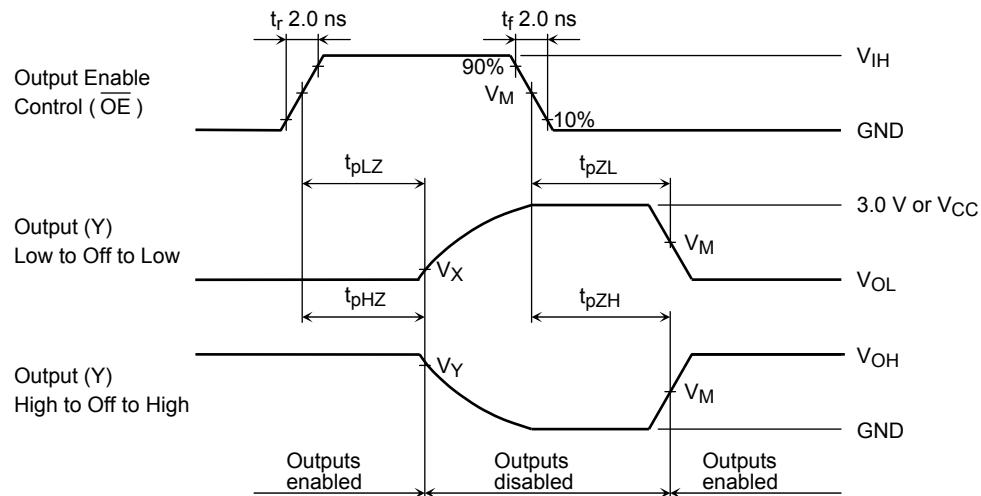



Figure 3  $t_{pLZ}$ ,  $t_{pHZ}$ ,  $t_{pZL}$ ,  $t_{pZH}$

Symbol	$V_{CC}$				
	$3.3 \pm 0.3\text{ V}$	$2.5 \pm 0.2\text{ V}$	$1.8 \pm 0.15\text{ V}$	$1.5 \pm 0.1\text{ V}$	$1.2\text{ V}$
$V_{IH}$	2.7 V	$V_{CC}$	$V_{CC}$	$V_{CC}$	$V_{CC}$
$V_M$	1.5 V	$V_{CC}/2$	$V_{CC}/2$	$V_{CC}/2$	$V_{CC}/2$
$V_X$	$V_{OL} + 0.3\text{ V}$	$V_{OL} + 0.15\text{ V}$	$V_{OL} + 0.15\text{ V}$	$V_{OL} + 0.1\text{ V}$	$V_{OL} + 0.1\text{ V}$
$V_Y$	$V_{OH} - 0.3\text{ V}$	$V_{OH} - 0.15\text{ V}$	$V_{OH} - 0.15\text{ V}$	$V_{OH} - 0.1\text{ V}$	$V_{OH} - 0.1\text{ V}$

**Package Dimensions**

TSSOP20-P-0044-0.65A

Unit: mm

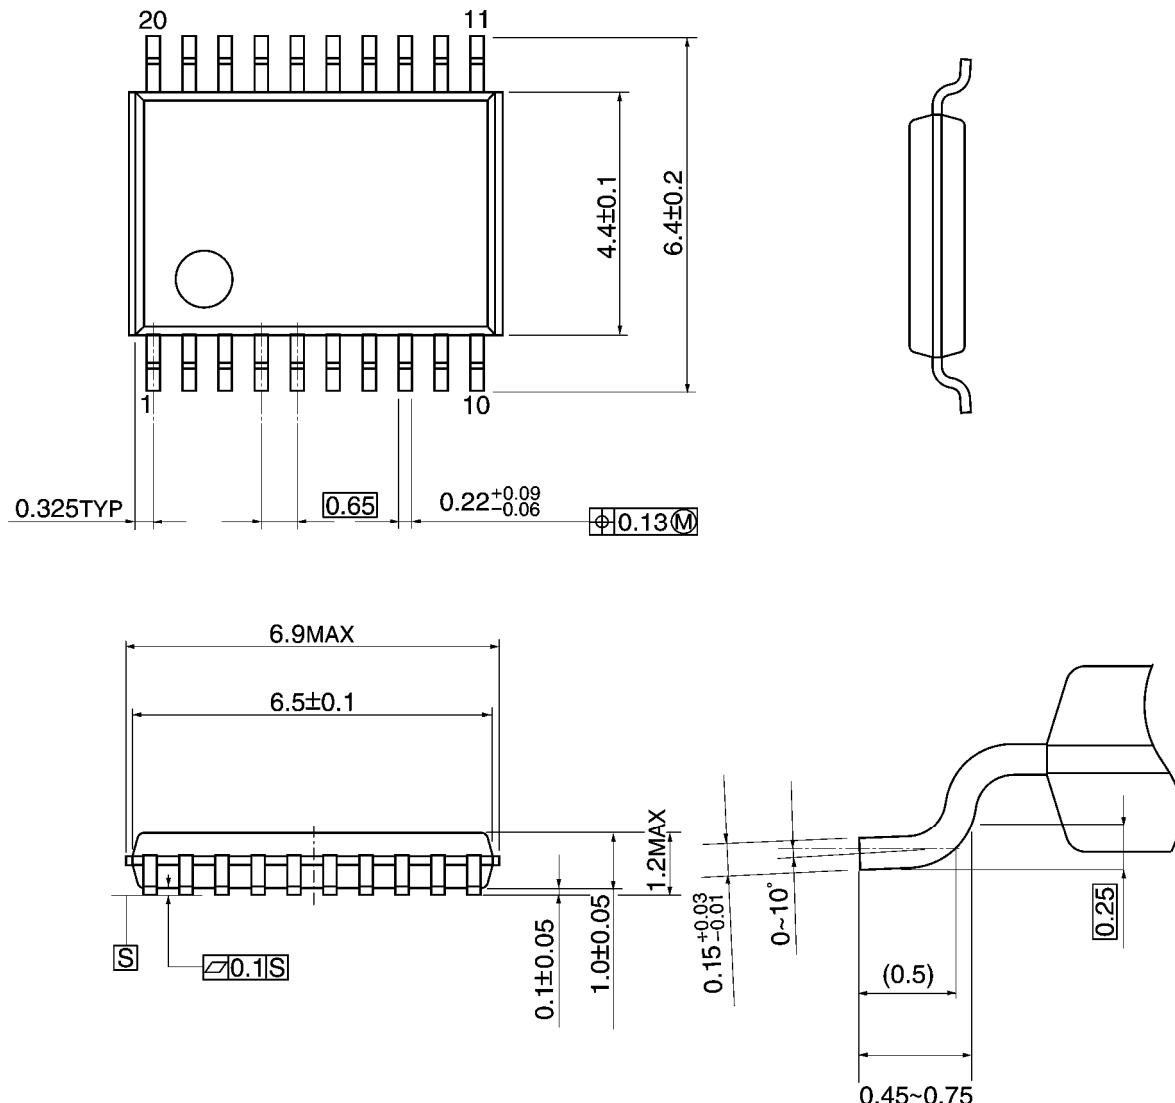


Weight: 0.08 g (typ.)

**Package Dimensions**

VSSOP20-P-0030-0.50

Unit: mm

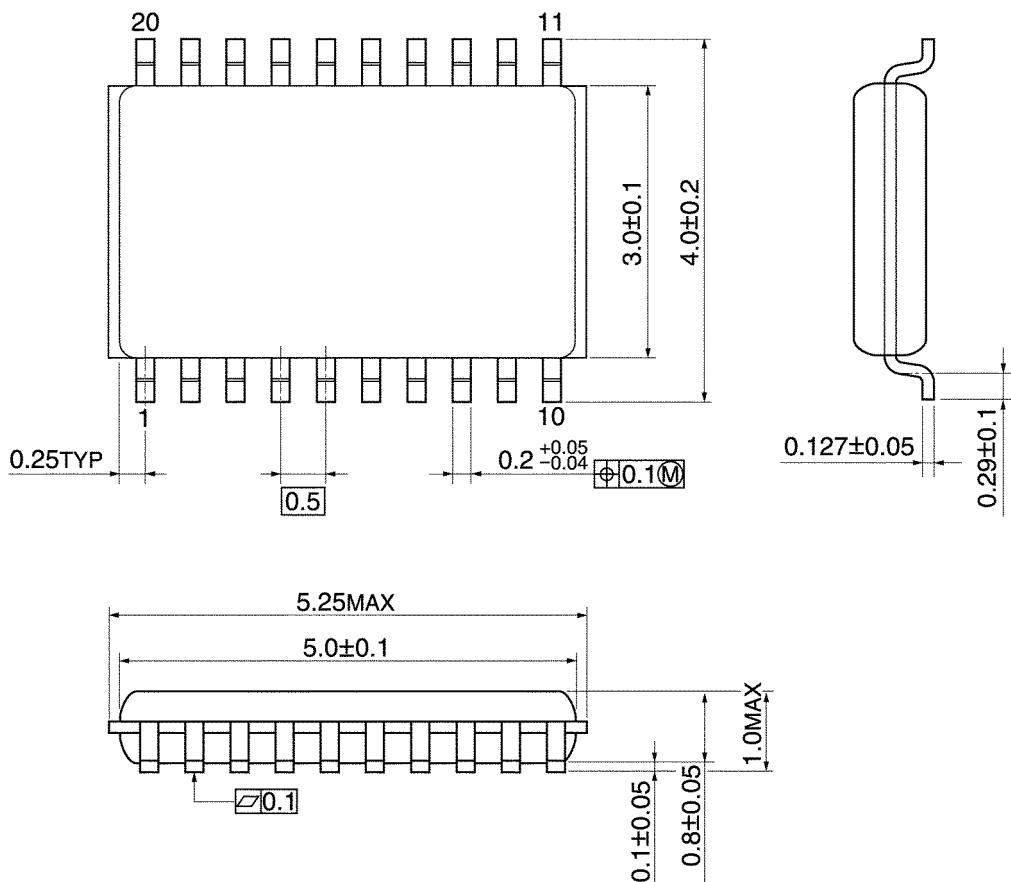


Weight: 0.03 g (typ.)

**Package Dimensions**

VQON20-P-0404-0.50

Unit: mm

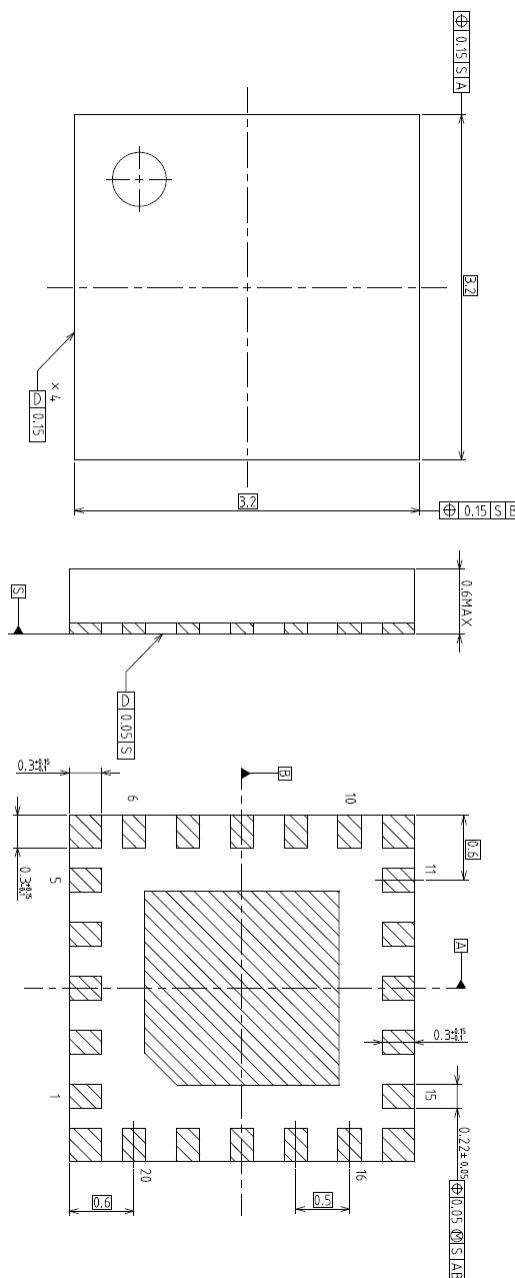

Weight: 0.0145 g (typ.)

## RESTRICTIONS ON PRODUCT USE

- Toshiba Corporation, and its subsidiaries and affiliates (collectively "TOSHIBA"), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively "Product") without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Toshiba:

[TC74VCX245FTEL](#)

**Данный компонент на территории Российской Федерации****Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

**Офис по работе с юридическими лицами:**

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru  
moschip.ru\_4

moschip.ru\_6  
moschip.ru\_9