



Surround Audio Processor for Mobile Applications

■ GENERAL DESCRIPTION


The **NJM2705** is the surround audio processor for mobile applications.

It regenerates the 3D surround sound with extremely narrow space two speakers (2SP mode), headphone surround with normal headphone (HP mode) and reverberation sound with only one speaker (1SP mode).

It includes mode control switches for surround function and standby function and realizes low consumption power design by standby function.

It is suitable for PDA and portable game.

■ PACKAGE OUTLINE




NJM2705V

■ FEATURES

- Operating Voltage 1.8 to 6V
- Operating Current 0.7mA typ. at Active mode
1μA max. at Standby mode
- Low Output Noise 10μVrms typ
(2SP/HP/1SP mode, VR : max.)
- Variable Surround Effect by external resistor
(Adjustable for speaker and headphone independently.)
- Standby Function
- Internal Mode Control Switch
- Bipolar Technology
- Package Outline SSOP16


■ BLOCK DIAGRAM

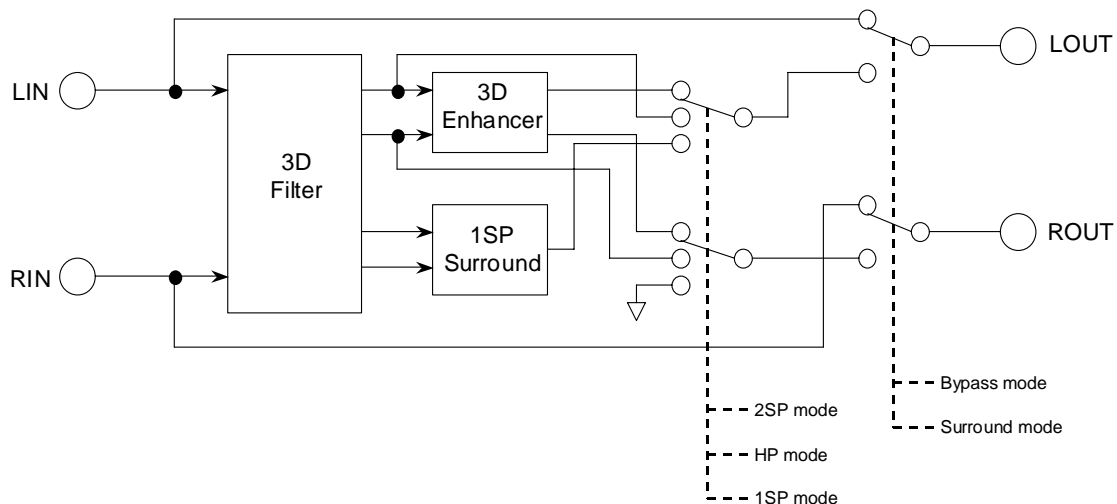

NJM2705

■ PIN CONFIGURATION

SSOP16 (Top View)

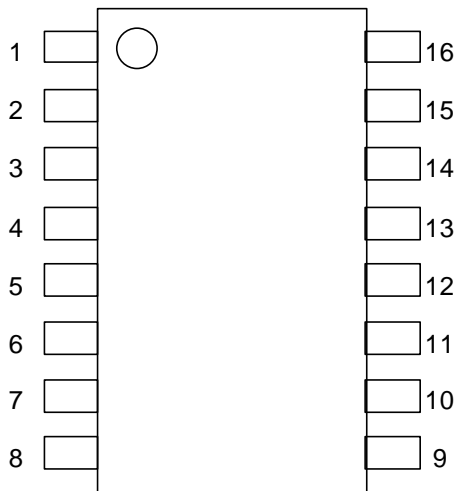

- | | |
|----------|-----------|
| 1. NFHPR | 9. V+ |
| 2. NFSPR | 10. STBY |
| 3. ROUT | 11. SW1 |
| 4. LOUT | 12. SW2 |
| 5. RIN | 13. PS |
| 6. LIN | 14. LMON |
| 7. VREF | 15. NFHPL |
| 8. GND | 16. NFSPL |

■ABSOLUTE MAXIMUM RATING (Ta=25°C)

| PARAMETER | SYMBOL | RATINGS | UNIT |
|-----------------------------|------------------|-------------|------|
| Supply Voltage | V ⁺ | 7 | V |
| Power Dissipation | P _D | 300 | mW |
| Operating Temperature Range | T _{opr} | -20 to +75 | °C |
| Storage Temperature Range | T _{stg} | -40 to +125 | °C |

■OPERATING VOLTAGE

| PARAMETER | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT |
|-------------------|----------------|----------------|-----|-----|-----|------|
| Operating Voltage | V ⁺ | - | 1.8 | 3.0 | 6.0 | V |

■ELECTRICAL CHARACTERISTICS (V⁺=3V, Ta=25°C unless otherwise specified)

| PARAMETER | SYMBOL | TEST CONDITION | TEST CONDITION | | | | | | MIN | TYP | MAX | UNIT |
|-------------------|------------------|----------------|----------------|---|------------|---------|----------|----------|-----|------|-----|------|
| | | | INPUT | | OUT PUT | MODE | SP VR | HP VR | | | | |
| | | | L | R | | | | | | | | |
| Operating Current | I _{cc} | No Signal | 0 | 0 | - | Active | | | - | 450 | 700 | μA |
| | | | 0 | 0 | - | Standby | | | - | 0.1 | 1.0 | |
| Reference Voltage | V _{ref} | No Signal | 0 | 0 | - | - | | | 1.0 | 1.15 | 1.3 | V |

●AC CHARACTERISTICS

(V⁺=3V, Ta=25°C, V_{IN}=-20dBV(100mVrms), f=1kHz, R_L=10kΩ, unless otherwise specified)

| PARAMETER | SYMBOL | TEST CONDITION | TEST CONDITION | | | | | | MIN | TYP | MAX | UNIT |
|-----------------------|-------------------|---|----------------------|----------------------|------------|--------|----------|----------------|----------------|---------------|----------------|------|
| | | | INPUT | | OUT PUT | MODE | SP VR | HP VR | | | | |
| | | | L | R | | | | | | | | |
| Maximum Input Voltage | V _{IM1} | f=1kHz THD=1% | V _{IN} 0 | 0 V _{IN} | L R | Bypass | - - | - - | -2.0 (790) | - | dBV (mVrms) | |
| | V _{IM2} | f=100Hz THD=1% | V _{IN} 0 | 0 V _{IN} | L R | 2SP | MAX - | - - | -16.0 (160) | - | | |
| | V _{IM3} | f=100Hz THD=1% | V _{IN} 0 | 0 V _{IN} | L R | HP | - MAX | - - | -16.0 (160) | - | | |
| | V _{IM4} | f=100Hz THD=1% | V _{IN} | 0 | L | 1SP | MAX | - | -16.0 (160) | - | | |
| | V _{IM5} | f=100Hz THD=1% | 0 | V _{IN} | L | 1SP | MAX | - | -14.5 (190) | - | | |
| | V _{IM6} | V ⁺ =1.8V, f=1kHz THD=1% | V _{IN} 0 | 0 V _{IN} | L R | Bypass | - - | -10.5 (300) | -8.5 (380) | - | | |
| | V _{IM7} | V ⁺ =1.8V, f=100Hz THD=1% | V _{IN} 0 | 0 V _{IN} | L R | 2SP | MAX - | -24.5 (60) | -22.5 (75) | - | | |
| | V _{IM8} | V ⁺ =1.8V, f=100Hz THD=1% | V _{IN} 0 | 0 V _{IN} | L R | HP | - MAX | -24.5 (60) | -22.5 (75) | - | | |
| | V _{IM9} | V ⁺ =1.8V, f=100Hz THD=1% | V _{IN} | 0 | L | 1SP | MAX | - | -24.5 (60) | -22.5 (75) | | - |
| | V _{IM10} | V ⁺ =1.8V, f=100Hz THD=1% | 0 | V _{IN} | L | 1SP | MAX | - | -23.0 (70) | -21.0 (90) | | - |
| Output Noise | V _{NO1} | R _g =∞ A-Weighted | 0 | 0 | L R | Bypass | - - | - - | -112 (25) | -106 (50) | dBV (μVrms) | |
| | V _{NO2} | R _g =∞ A-Weighted | 0 | 0 | L R | 1SP | MAX - | - - | -100 (10) | -94 (20) | | |
| | V _{NO3} | R _g =∞ A-Weighted | 0 | 0 | L R | HP | - MAX | - - | -100 (10) | -94 (20) | | |
| | V _{NO4} | R _g =∞ A-Weighted | 0 | 0 | L | 1SP | MAX | - | -100 (10) | -94 (20) | | |

NJM2705

● AC CHARACTERISTICS

($V^+=3V$, $T_a=25^\circ C$, $V_{IN}=-20dBV(100mVrms)$, $f=1kHz$, $R_L=10k\Omega$, unless otherwise specified)

| PARAMETER | SYMBOL | TEST CONDITION | | | | | | | MIN | TYP | MAX | UNIT |
|---------------------------|-------------|----------------|---------------|---------------|--------|----------|----------|-----|-------|-------|------|------|
| | | INPUT | | OUT PUT | MODE | SP VR | HP VR | | | | | |
| | | L | R | | | | | | | | | |
| Total Harmonic Distortion | THD1 | f=1kHz | V_{IN} 0 | 0 V_{IN} | L R | Bypass | - | - | - | 0.02 | 0.05 | % |
| | THD2 | f=1kHz | V_{IN} 0 | 0 V_{IN} | L R | 2SP | MAX | - | - | 0.1 | 0.5 | |
| | THD3 | f=1kHz | V_{IN} 0 | 0 V_{IN} | L R | HP | - | MAX | - | 0.1 | 0.5 | |
| | THD4 | f=1kHz | V_{IN} 0 | 0 V_{IN} | L R | 1SP | MAX | - | - | 0.1 | 0.5 | |
| BYPASS Gain | G_{VBYP} | f=1kHz | V_{IN} 0 | 0 V_{IN} | L R | Bypass | - | - | -1.0 | 0.0 | 1.0 | dB |
| Surround Gain | G_{VSUR1} | f=100Hz | V_{IN} 0 | 0 V_{IN} | L R | 2SP | MAX | - | 12.5 | 14.5 | 16.5 | dB |
| | G_{VSUR2} | f=100Hz | V_{IN} 0 | 0 V_{IN} | L R | 2SP | MIN | - | 0.5 | 2.5 | 4.5 | |
| | G_{VSUR3} | f=100Hz | V_{IN} 0 | 0 V_{IN} | L R | HP | - | MAX | 12.5 | 14.5 | 16.5 | |
| | G_{VSUR4} | f=100Hz | V_{IN} 0 | 0 V_{IN} | L R | HP | - | MIN | 0.5 | 2.5 | 4.5 | |
| | G_{VSUR5} | f=100Hz | V_{IN} | 0 | L | 1SP | MAX | - | 6.5 | 8.5 | 10.5 | |
| | G_{VSUR6} | f=100Hz | 0 | V_{IN} | L | 1SP | MAX | - | 2.0 | 4.0 | 6.0 | |
| | G_{VSUR7} | f=100Hz | V_{IN} | 0 | L | 1SP | MIN | - | -5.5 | -3.5 | -1.5 | |
| | G_{VSUR8} | f=100Hz | 0 | V_{IN} | L | 1SP | MIN | - | -12.0 | -10.0 | -8.0 | |

● CONTROL CHARACTERISTICS ($V^+=3V$, $T_a=25^\circ C$ unless otherwise specified)

| PARAMETER | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT |
|-----------------------------|------------|----------------------|-----|-----|-------|------|
| MODE Select Control Voltage | V_{MODE} | V_{IN} =High Level | 1.2 | - | V^+ | V |
| | | V_{IN} =Low Level | 0.0 | - | 0.3 | |

■ SWITCH FUNCTION

SURROUND FUNCTION SW

| MODE | SW1 | SW2 | NOTES |
|----------|---------|---------|--|
| Bypass | L, OPEN | L, OPEN | Input Through |
| 2SP mode | L, OPEN | H | Surround mode for narrow space two speakers |
| HP mode | H | L, OPEN | Surround mode for Headphone |
| 1SP mode | H | H | Surround mode for monaural speaker (Surround signal from LOUT) |

STANDBY SW

| MODE | STBY | NOTES |
|---------|---------|------------------|
| Standby | L, open | IC is non-active |
| Active | H | IC is active |

TERMINAL DESCRIPTION

| PIN No. | SYMBOL | FUNCTION | EQUIVALENT CIRCUIT | Voltage |
|--------------------|----------------------------------|--|--------------------|---------|
| 5 6 | LIN RIN | Lch Input Rch Input | | 1.15V |
| 4 3 14 | LOUT ROUT LMON | Lch Output Rch Output Filter terminal | | 1.15V |
| 2 1 16 15 | NFSPR NFHPR NFSPL NFHPL | Filter terminal Filter terminal Filter terminal Filter terminal | | 1.15V |
| 13 | PS | Filter terminal | | 1.15V |


NJM2705

TERMINAL DESCRIPTION


| PIN No. | SYMBOL | FUNCTION | EQUIVALENT CIRCUIT | Voltage |
|----------|------------|--|--------------------|---------|
| 12 11 | SW2 SW1 | Mode control switch Mode control switch | | 0V |
| 10 | STBY | Standby switch | | 0V |
| 9 | V+ | Power Supply | — | V+ |
| 8 | GND | GND | — | 0V |
| 7 | VREF | Reference voltage | | 1.15V |

APPLICATION CIRCUIT

1) 2SP mode, HP mode

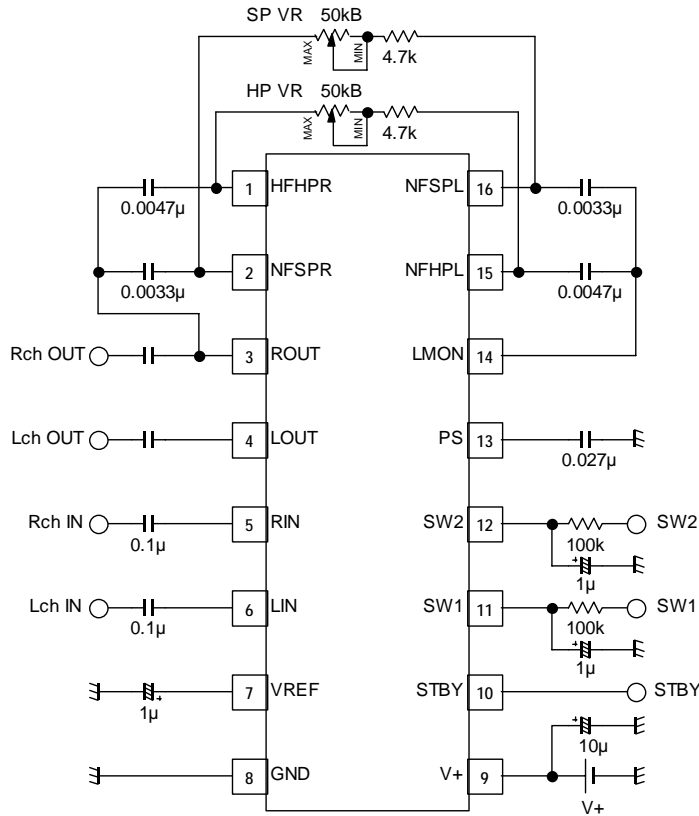


2) 1SP mode, HP mode

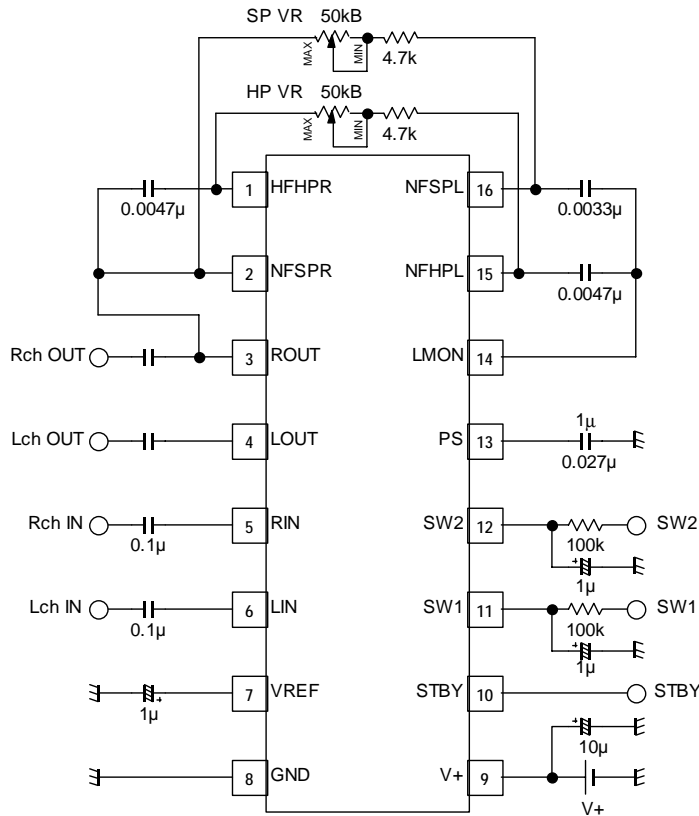


Surround signal is outputted from LOUT terminal at 1SP mode.

TYPICAL CHARACTERISTICS


Operating Current vs. Operating Voltage (STANDBY)

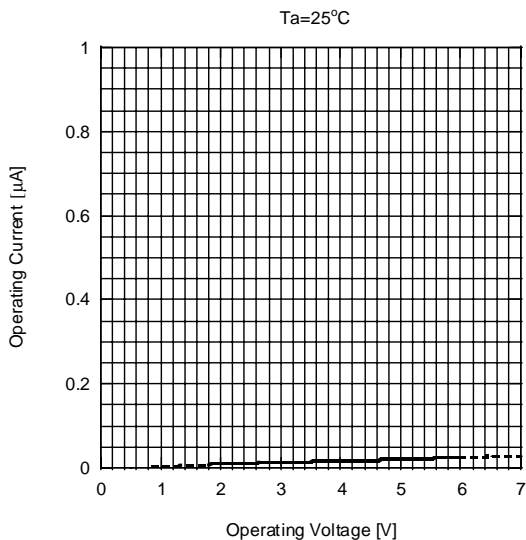


Operating Current vs. Temperature (STANDBY)

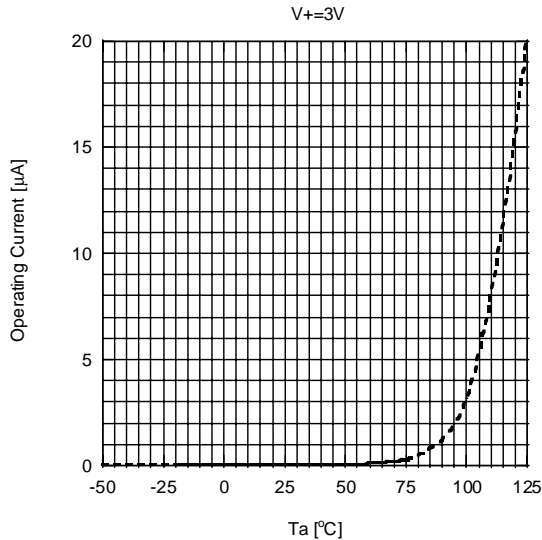


Operating Current vs. Operating Voltage (ACTIVE)

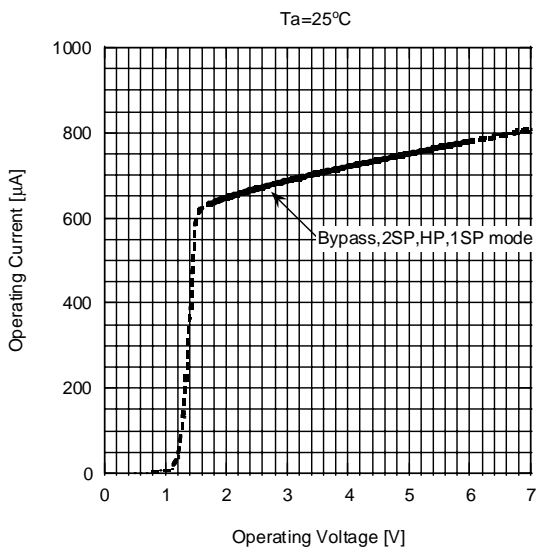


Operating Current vs. Temperature (ACTIVE)

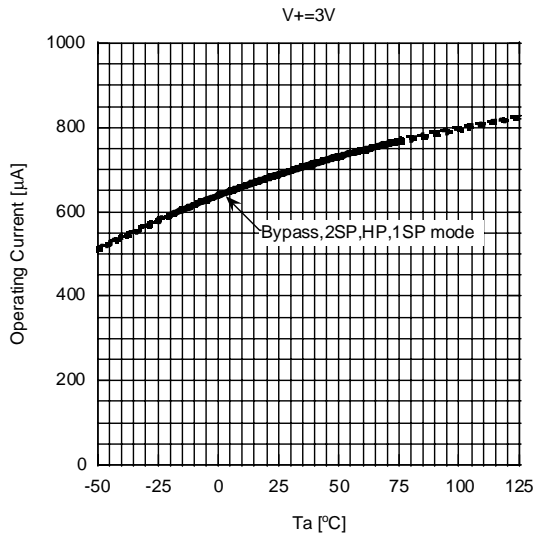

Reference Voltage vs. Operating Voltage

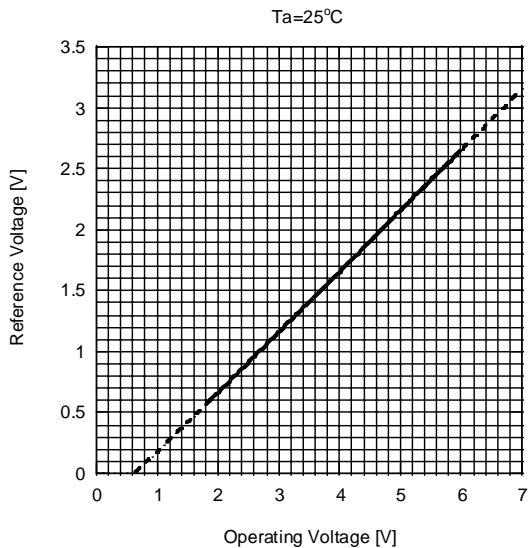


Reference Voltage vs. Temperature

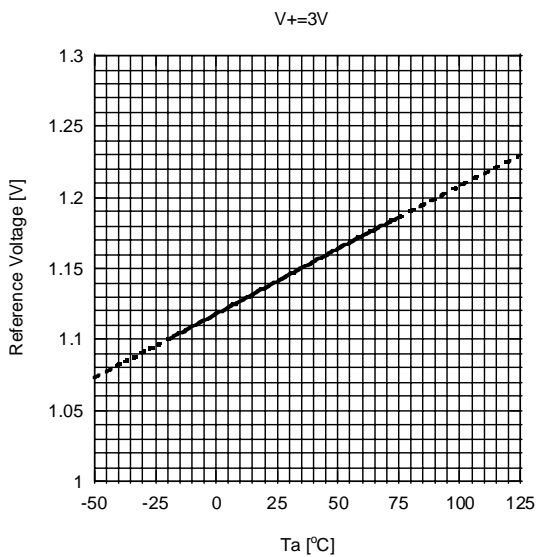


TYPICAL CHARACTERISTICS


Maximum Input Voltage vs. Operating Voltage (BYPASS)

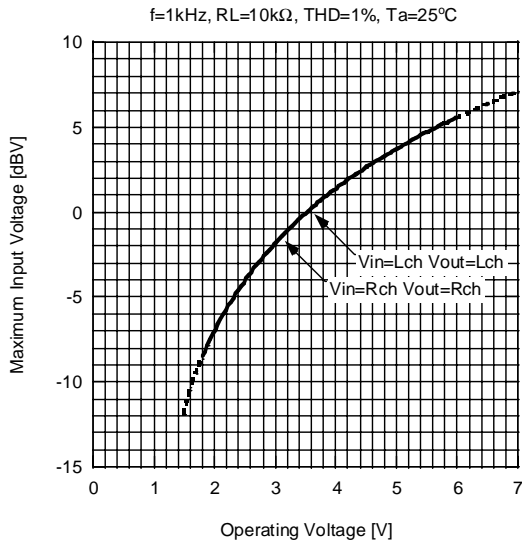


Maximum Input Voltage vs. Operating Voltage (2SP)

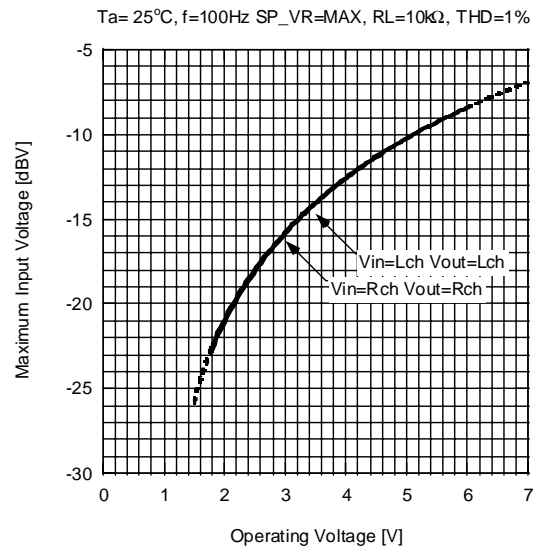


Maximum Input Voltage vs. Operating Voltage (HP)

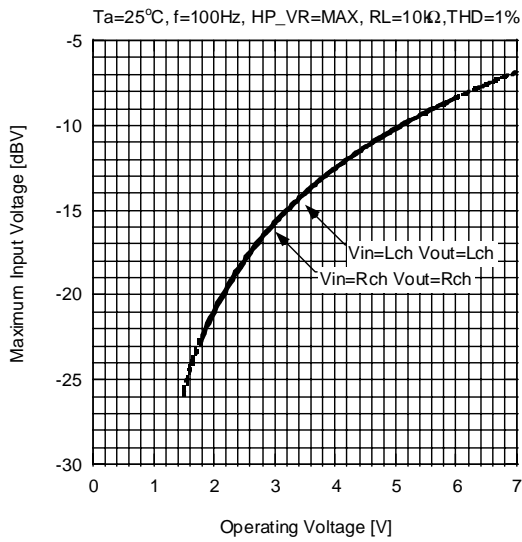


Maximum Input Voltage vs. Temperature (1SP)

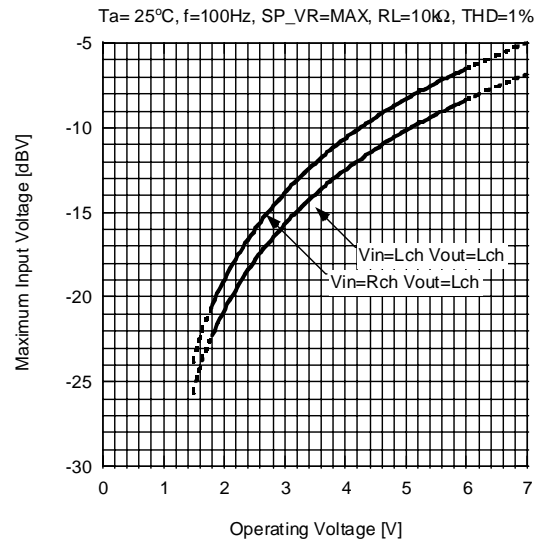

Maximum Input Voltage vs. Temperature (BYPASS)

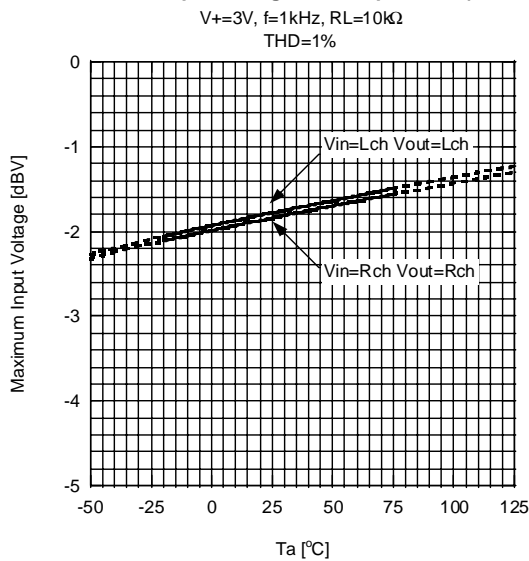


Maximum Input Voltage vs. Temperature (2SP)

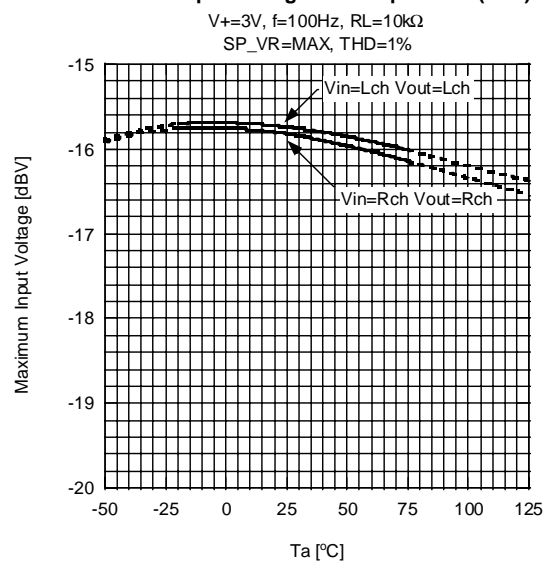


NJM2705

TYPICAL CHARACTERISTICS


Maximum Input Voltage vs. Temperature (HP)

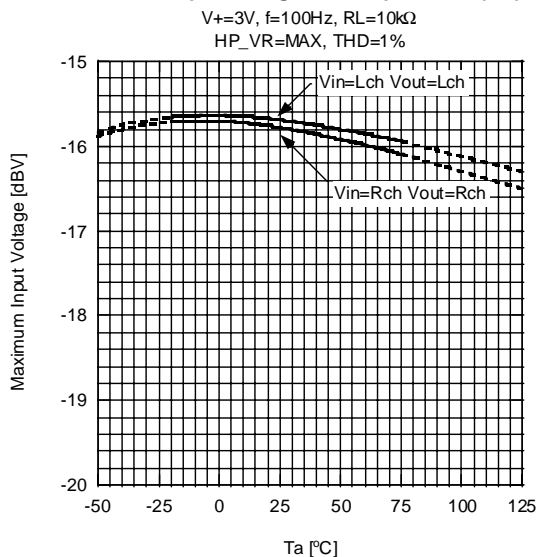


Maximum Input Voltage vs. Temperature (1SP)

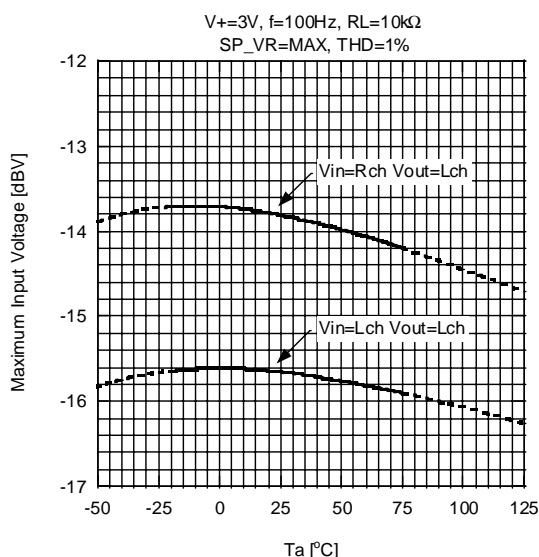


Output Noise Voltage vs. Temperature

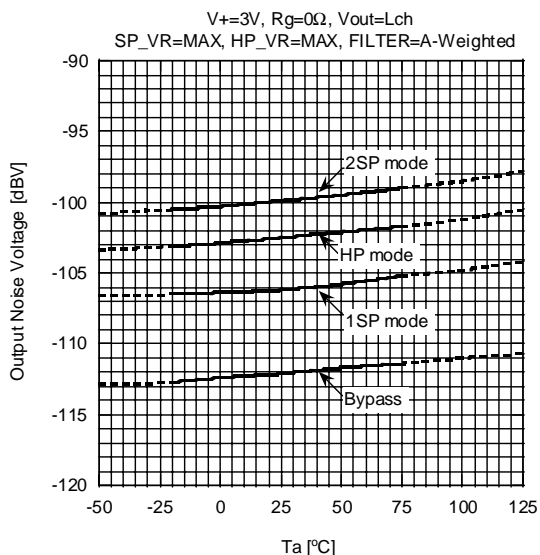


Output Noise Voltage vs. Temperature

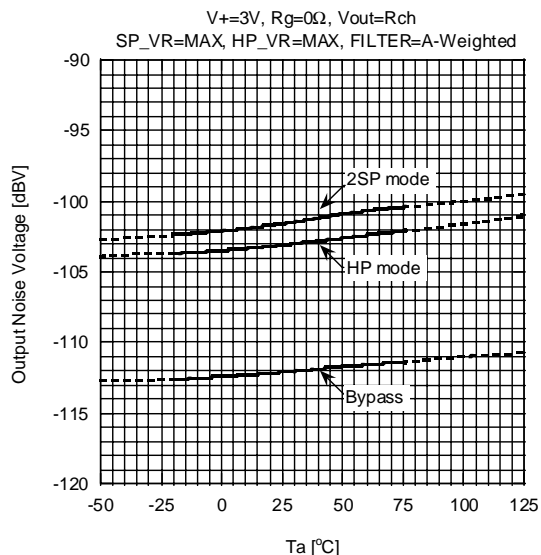

Total Harmonic Distortion vs. Input Voltage (BYPASS)

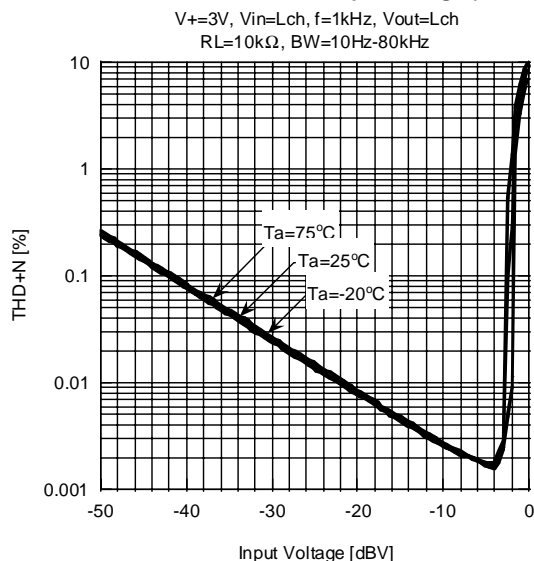


Total Harmonic Distortion vs. Input Voltage (2SP)

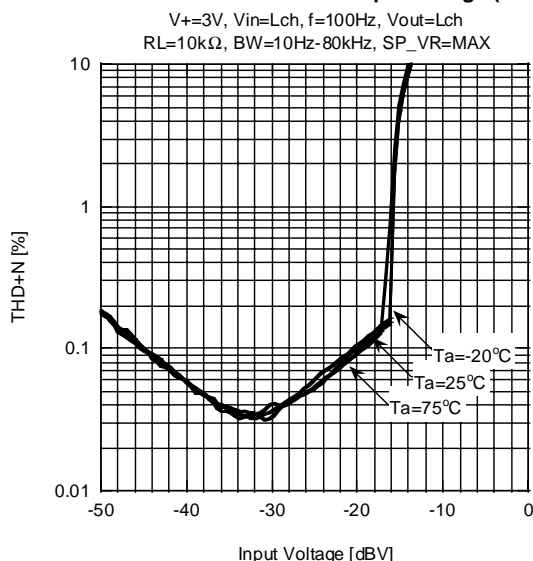


TYPICAL CHARACTERISTICS


Total Harmonic Distortion vs. Input Voltage (HP)

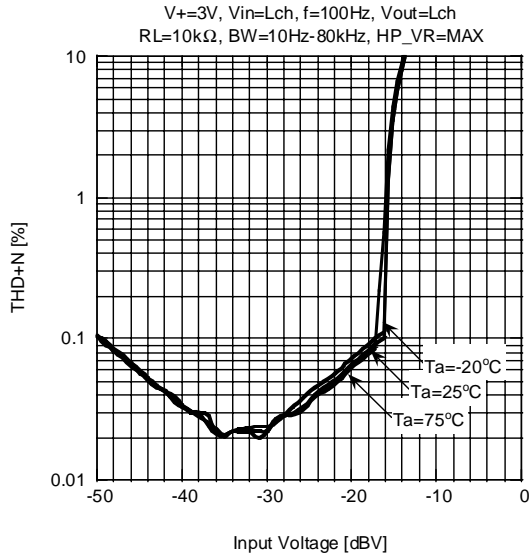


Total Harmonic Distortion vs. Input Voltage (1SP)

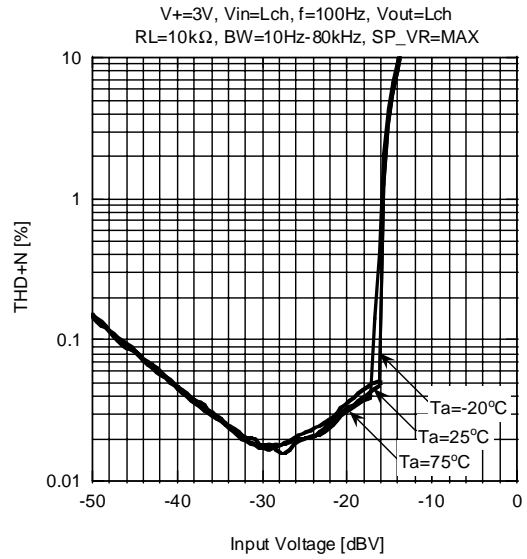


Frequency Response (BYPASS)

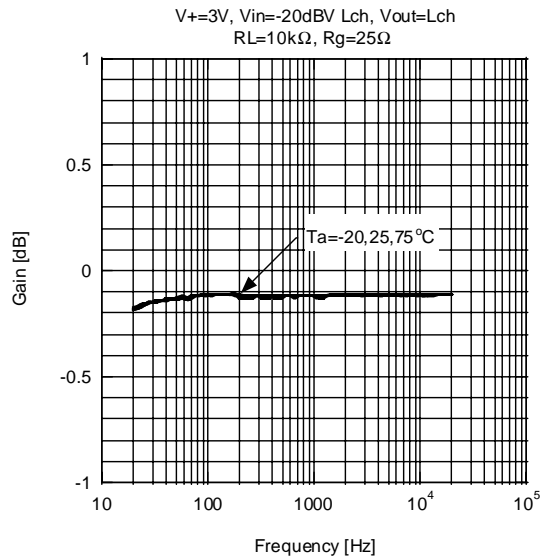


Frequency Response (2SP)

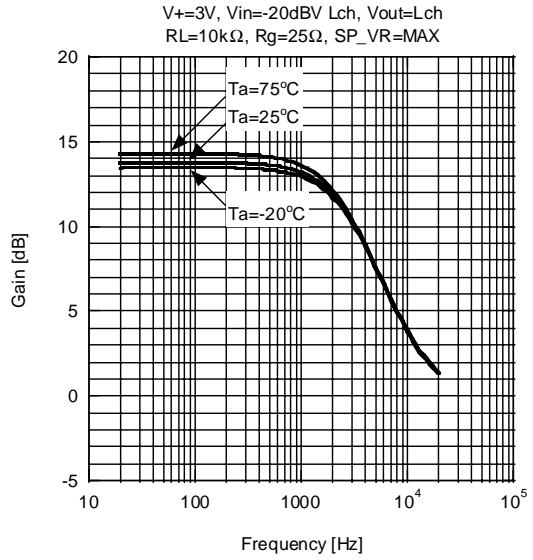

Frequency Response (2SP)

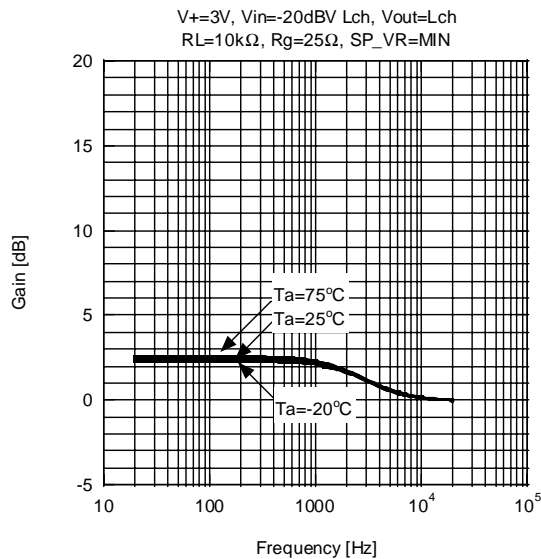

Phase vs. Frequency (2SP)

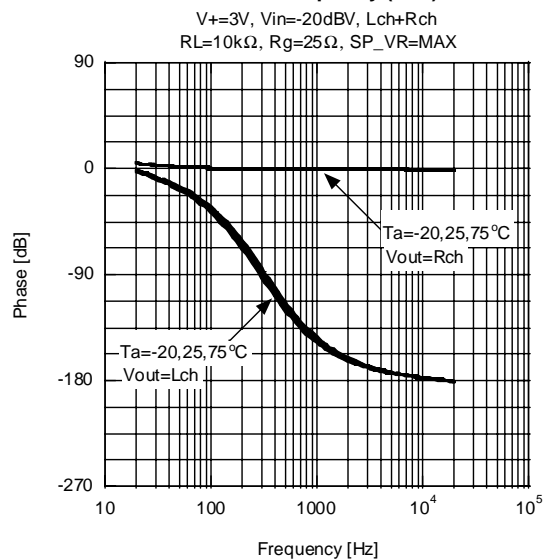


NJM2705

TYPICAL CHARACTERISTICS


Frequency Response (HP)

V+=3V, Vin=-20dBV Lch, Vout=Lch
RL=10kΩ, Rg=25Ω, HP_VR=MAX

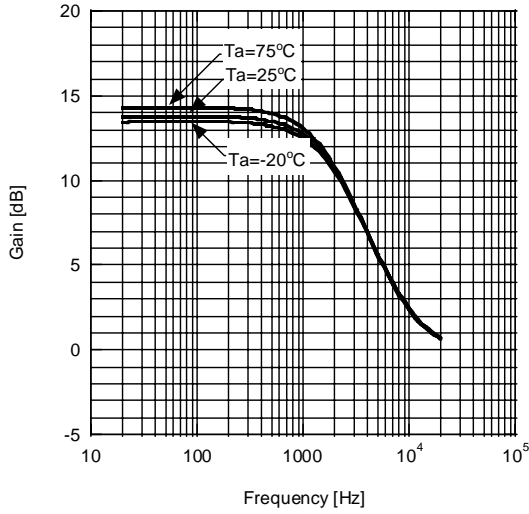


Frequency Response (HP)

V+=3V, Vin=-20dBV Lch, Vout=Lch
RL=10kΩ, Rg=25Ω, HP_VR=MIN

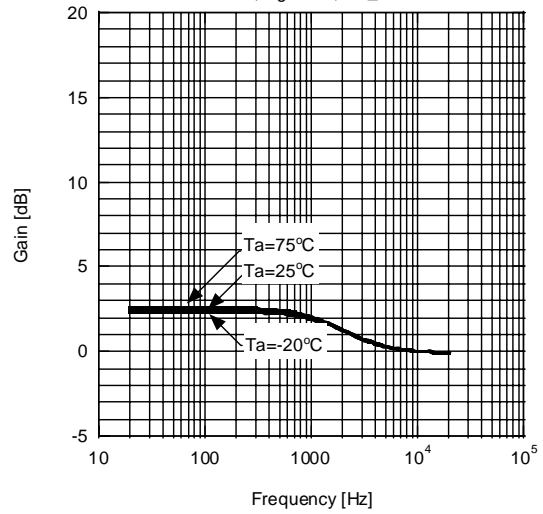


Frequency Response (1SP)

V+=3V, Vin=-20dBV, Vout=Lch
RL=10kΩ, Rg=25Ω, SP_VR=MAX

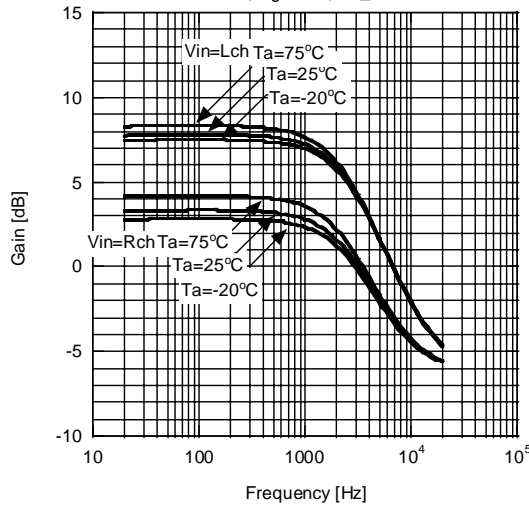

Frequency Response (1SP)

V+=3V, Vin=-20dBV, Vout=Lch
RL=10kΩ, Rg=25Ω, VR=MIN

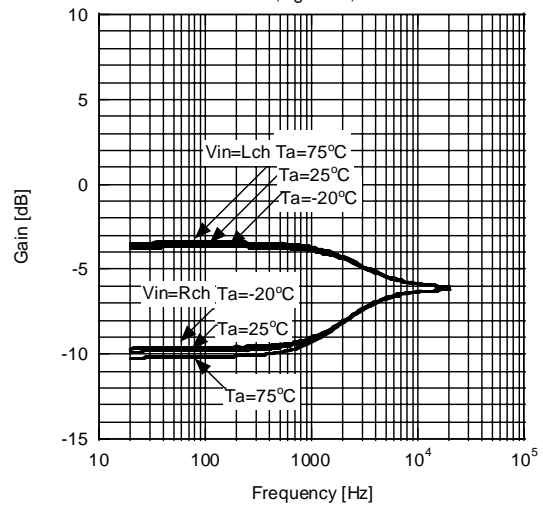

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM2705SD3-TE1](#) [NJM2705V-TE2](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9