

4-Channel Electronic Volume with Input Selector

■ GENERAL DESCRIPTION

The NJW1195 is a 4-channel electronic volume with 4-in 2-out stereo audio selector. It performs low noise and low distortion characteristics with resistance ladder circuit.

The NJW1195 is also available for 2-channel differential transmission electronic volume with 2-in 1-out stereo audio selector by a differential transmission select function.

All of functions are controlled via three-wired serial bus. Selectable 4-Chip address is available for using four chips on same serial bus line.

It's suitable for two-channel stereo system and or multi-channel audio system.

■ PACKAGE OUTLINE



NJW1195V


■ FEATURES

- Operating Voltage ±4.5 to ±7.5V
- 3-Wired Serial Control Chip Address Select Function
- Selectable 4-Chip Address Available for using four chips on same serial bus line
- Low Output Noise -118dBV typ.
- Low Distortion 0.0003% typ. at Vin=1Vrms (Differential transmission)
- 4in 2out Stereo Signal Selector +31.5 to -95dB / 0.5dB step, Mute
- Volume -120dB typ.
- Differential transmission select function
- Channel Separation
- Zero Cross Detection
- Bi-CMOS Technology
- Package Outline SSOP32

■ BLOCK DIAGRAM


Application example 1

4-channel electronic volume with 4-in 2-out stereo audio selector (DIFF pin = Low)

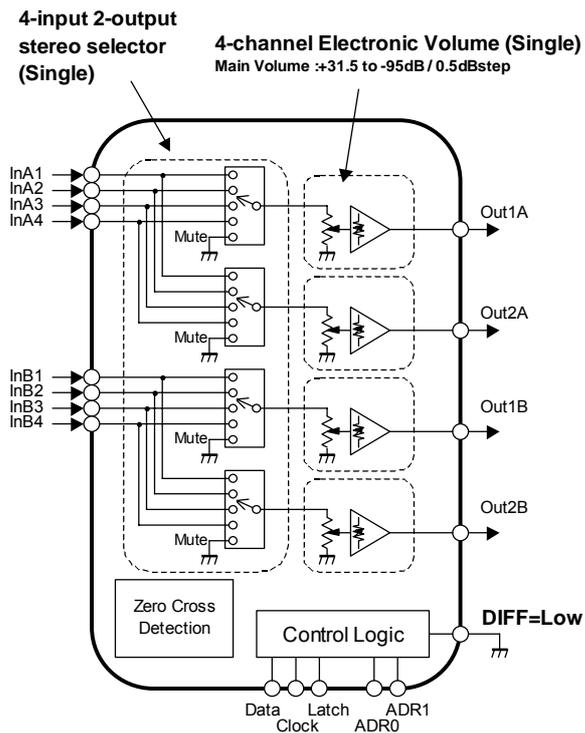

Application example 2

2-channel differential transmission electronic volume with 2-in 1-out stereo audio selector (DIFF pin = High)

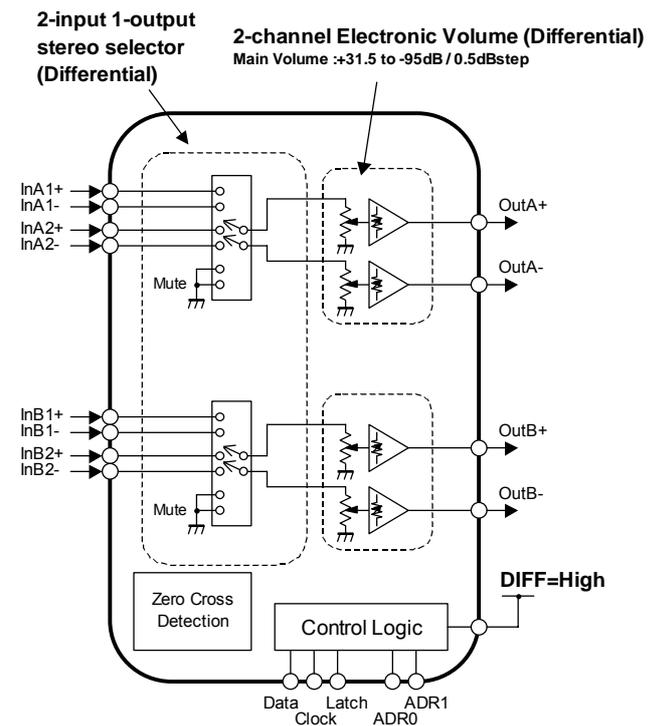

■ ABSOLUTE MAXIMUM RATING (Ta=25°C)

| PARAMETER | SYMBOL | RATING | UNIT |
|-----------------------------|------------------|--|------|
| Power Supply Voltage | V _{+/-} | +8/-8 | V |
| Maximum Input Voltage | V _{IM} | V _{+/-} | V |
| Power Dissipation | P _D | 800 NOTE: EIA/JEDEC STANDARD Test board (76.2x114.3x1.6mm, 2layer, FR-4) mounting | mW |
| Operating Temperature Range | Topr | -40 ~ +85 | °C |
| Storage Temperature Range | Tstg | -40 ~ +125 | °C |

■ ELECTRICAL CHARACTERISTICS (Ta=25°C, V_{+/-}=±7V, R_L=47kΩ, Volume=0dB)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|--|------------------|---|-------|-------|-------|------|
| ◆ Power Supply | | | | | | |
| Operating Voltage | V _{+/-} | | ± 4.5 | ± 7.0 | ± 7.5 | V |
| Supply Current 1 | I _{CC} | No signal | - | 9 | 15 | mA |
| Supply Current 2 | I _{EE} | No signal | - | 9 | 15 | mA |
| ◆ Input/Output Characteristics (Output) | | | | | | |
| Maximum Output Voltage | V _{OM} | f=1kHz, THD=1% Volume=0dB | 3.6 | 4.2 | - | Vrms |
| Voltage Gain 1 | G _{V1} | V _{IN} =2Vrms, f=1kHz Volume=0dB | -0.5 | 0 | 0.5 | dB |
| Voltage Gain 2 | G _{V2} | V _{IN} =100mVrms, f=1kHz Volume=+15dB | +14 | +15 | +16 | dB |
| Voltage Gain Error 1 | ΔG _{V1} | V _{IN} =2Vrms, f=1kHz Volume=0dB | -0.5 | 0 | 0.5 | dB |
| Voltage Gain Error 2 | ΔG _{V2} | V _{IN} =2Vrms, f=1kHz Volume=-60dB | -1.0 | 0 | 1.0 | dB |
| Maximum Attenuation | A _{TT} | f=1kHz, V _{IN} =2Vrms Volume=-95dB, A-weight | - | -95 | - | dB |
| Mute level | Mute | f=1kHz, V _{IN} =2Vrms Volume=Mute, A-weight | - | -120 | - | dB |
| Cross Talk 1 | CT1 | f=1kHz, V _{IN} =2Vrms, A-weight Volume=0dB, R _g =0Ω | - | -115 | - | dB |
| Cross Talk 2 | CT2 | f=20kHz, V _{IN} =2Vrms, Volume=0dB, R _g =0Ω | - | -95 | - | dB |
| Channel Separation 1 | CS1 | f=1kHz, V _{IN} =2Vrms, A-weight Volume=0dB, R _g =0Ω Out1 vs. Out2 | - | -120 | -90 | dB |
| Channel Separation 2 | CS2 | f=20kHz, V _{IN} =2Vrms, Volume=0dB, R _g =0Ω Out1 vs. Out2 | - | -100 | - | dB |
| Channel Separation 3 | CS3 | f=1kHz, V _{IN} =2Vrms, A-weight Volume=0dB, R _g =0Ω OutA vs. OutB | - | -120 | -90 | dB |
| Channel Separation 4 | CS4 | f=20kHz, V _{IN} =2Vrms, Volume=0dB, R _g =0Ω OutA vs. OutB | - | -100 | - | dB |
| Input Impedance * | R _{IN} | Select Channel Input Terminal | 15 | 20 | - | kΩ |

* Input Impedance is reduced by half (10kΩ typ.) when input selector 1 (SEL1) and input selector 2 (SEL2) chose the same input.

■ ELECTRICAL CHARACTERISTICS (Ta=25°C, V⁺/V⁻=±7V, RL=47kΩ, Volume=0dB)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|--|------------------|---|------|-----------------|----------------|---------------|
| ◆ Input/Output Characteristics (Output) | | | | | | |
| Output Noise1 | V _{NO1} | Volume=0dB, Rg=0, A-weight | - | -118 (1.26μ) | -100 (10μ) | dBV (Vrms) |
| Output Noise2 | V _{NO2} | Volume=-95dB, Rg=0, A-weight | - | -118 (1.26μ) | - | dBV (Vrms) |
| Total Harmonic Distortion 1 | T.H.D.1 | f=1kHz, V _{IN} =200mVrms, VOL=0dB, BW=400Hz-30kHz | - | 0.001 | - | % |
| Total Harmonic Distortion 2 | T.H.D.2 | f=10kHz, V _{IN} =200mVrms, VOL=0dB, BW=400Hz-30kHz | - | 0.0015 | - | % |
| Total Harmonic Distortion 3 | T.H.D.3 | f=1kHz, V _{IN} =2Vrms, VOL=0dB, BW=400Hz-30kHz | - | 0.0007 | - | % |
| Total Harmonic Distortion 4 | T.H.D.4 | f=10kHz, V _{IN} =2Vrms, VOL=0dB, BW=400Hz-30kHz | - | 0.001 | - | % |
| Total Harmonic Distortion 5 | T.H.D.5 | f=1kHz, V _{IN} =200mVrms, VOL=+15dB, BW=400Hz-30kHz | - | 0.001 | - | % |
| Total Harmonic Distortion 6 | T.H.D.6 | f=10kHz, V _{IN} =200mVrms, VOL=+15dB, BW=400Hz-30kHz | - | 0.0015 | - | % |
| Total Harmonic Distortion 7 | T.H.D.7 | f=1kHz, V _{IN} =2Vrms, VOL=-18dB, BW=400Hz-30kHz | - | 0.0015 | 0.02 | % |
| Total Harmonic Distortion 8 | T.H.D.8 | f=10kHz, V _{IN} =2Vrms, VOL=-18dB, BW=400Hz-30kHz | - | 0.0015 | - | % |
| Total Harmonic Distortion 9 | T.H.D.9 | f=1kHz, V _{IN} =1Vrms, VOL=0dB, BW=400Hz-30kHz, Differential transmission | - | 0.0003 | - | % |
| Total Harmonic Distortion 10 | T.H.D.10 | f=10kHz, V _{IN} =1Vrms, VOL=0dB, BW=400Hz-30kHz, Differential transmission | - | 0.0003 | - | % |
| ◆ Logic Control Characteristics | | | | | | |
| High Level Input Voltage | V _{IH} | DATA, CLOCK, LATCH, ADR0, ADR1, DIFF Terminal Input | 2.5 | - | V ⁺ | V |
| Low Level Input Voltage | V _{IL} | DATA, CLOCK, LATCH, ADR0, ADR1, DIFF Terminal Input | 0 | - | 1.5 | V |

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJW1195V-TE1](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9