

LT3825 and LT3837

Non-opto Synchronous Flyback Controller

DESCRIPTION

Demonstration circuit 950A is a 30W multi-output synchronous flyback converter in 1/8 brick format featuring the LT3825 and LT3837. Output voltage sensing is implemented without the use of opto-coupler, by sensing the voltage across a primary side auxiliary winding. A load compensation circuit is used to compensate for voltage drops caused by load currents.

DC950A-A has input voltage range 36V-72V and features the LT3825.

DC950A-B has input voltage range 9V-36V and features the LT3837.

Demonstration circuit 950A uses a transformer design with tapped secondary winding, to achieve higher efficiency and better cross regulation than is possible with a transformer that uses a separate winding for each output.

Design files for this circuit board are available. Call the LTC factory.

LT, LTC, LTM, LT, Burst Mode, OPTI-LOOP, Over-The-Top and PolyPhase are registered trademarks of Linear Technology Corporation. Adaptive Power, C-Load, DirectSense, Easy Drive, FilterCAD, Hot Swap, LinearView, μ Module, Micropower SwitcherCAD, Multimode Dimming, No Latency $\Delta\Sigma$, No Latency Delta-Sigma, No R_{SENSE} , Operational Filter, PanelProtect, PowerPath, PowerSOT, SmartStart, SoftSpan, Stage Shedding, SwitcherCAD, ThinSOT, UltraFast and VLDO are trademarks of Linear Technology Corporation. Other product names may be trademarks of the companies that manufacture the products.

PERFORMANCE SUMMARY

Specifications are at TA = 25°C

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V _{IN}	Input Supply Range	DC950A-A	36		72	V
		DC950A-B	9		36	V
V _{OUT}	Output Voltage	V _{OUT1}	4.85	5V	5.15	V
		V _{OUT2}	3.20	3.3V	3.40	V
		V _{OUT3}	2.42	2.5V	2.58	V
I _{OUT}	Output Current (Note: Total output power not to exceed 30W)	I _{OUT1} (5V output)	0	2	4	A
		I _{OUT2} (3.3V output)	0	3	4	A
		I _{OUT3} (2.5V output)	0	3	4	A
Efficiency	Efficiency	DC950A-A, V _{IN} =48V, I _{OUT1} =2A, I _{OUT1} =3A, I _{OUT3} =3A		90		%
		DC950A-B, V _{IN} =24V, I _{OUT1} =2A, I _{OUT1} =3A, I _{OUT3} =3A		89		%

EQUIPMENT

8 DMMs

1 DC Supply 0-72V 1A for DC950A-A test

1 DC Supply 0-36V 5A for DC950A-B test

3 Adjustable loads 0-3A

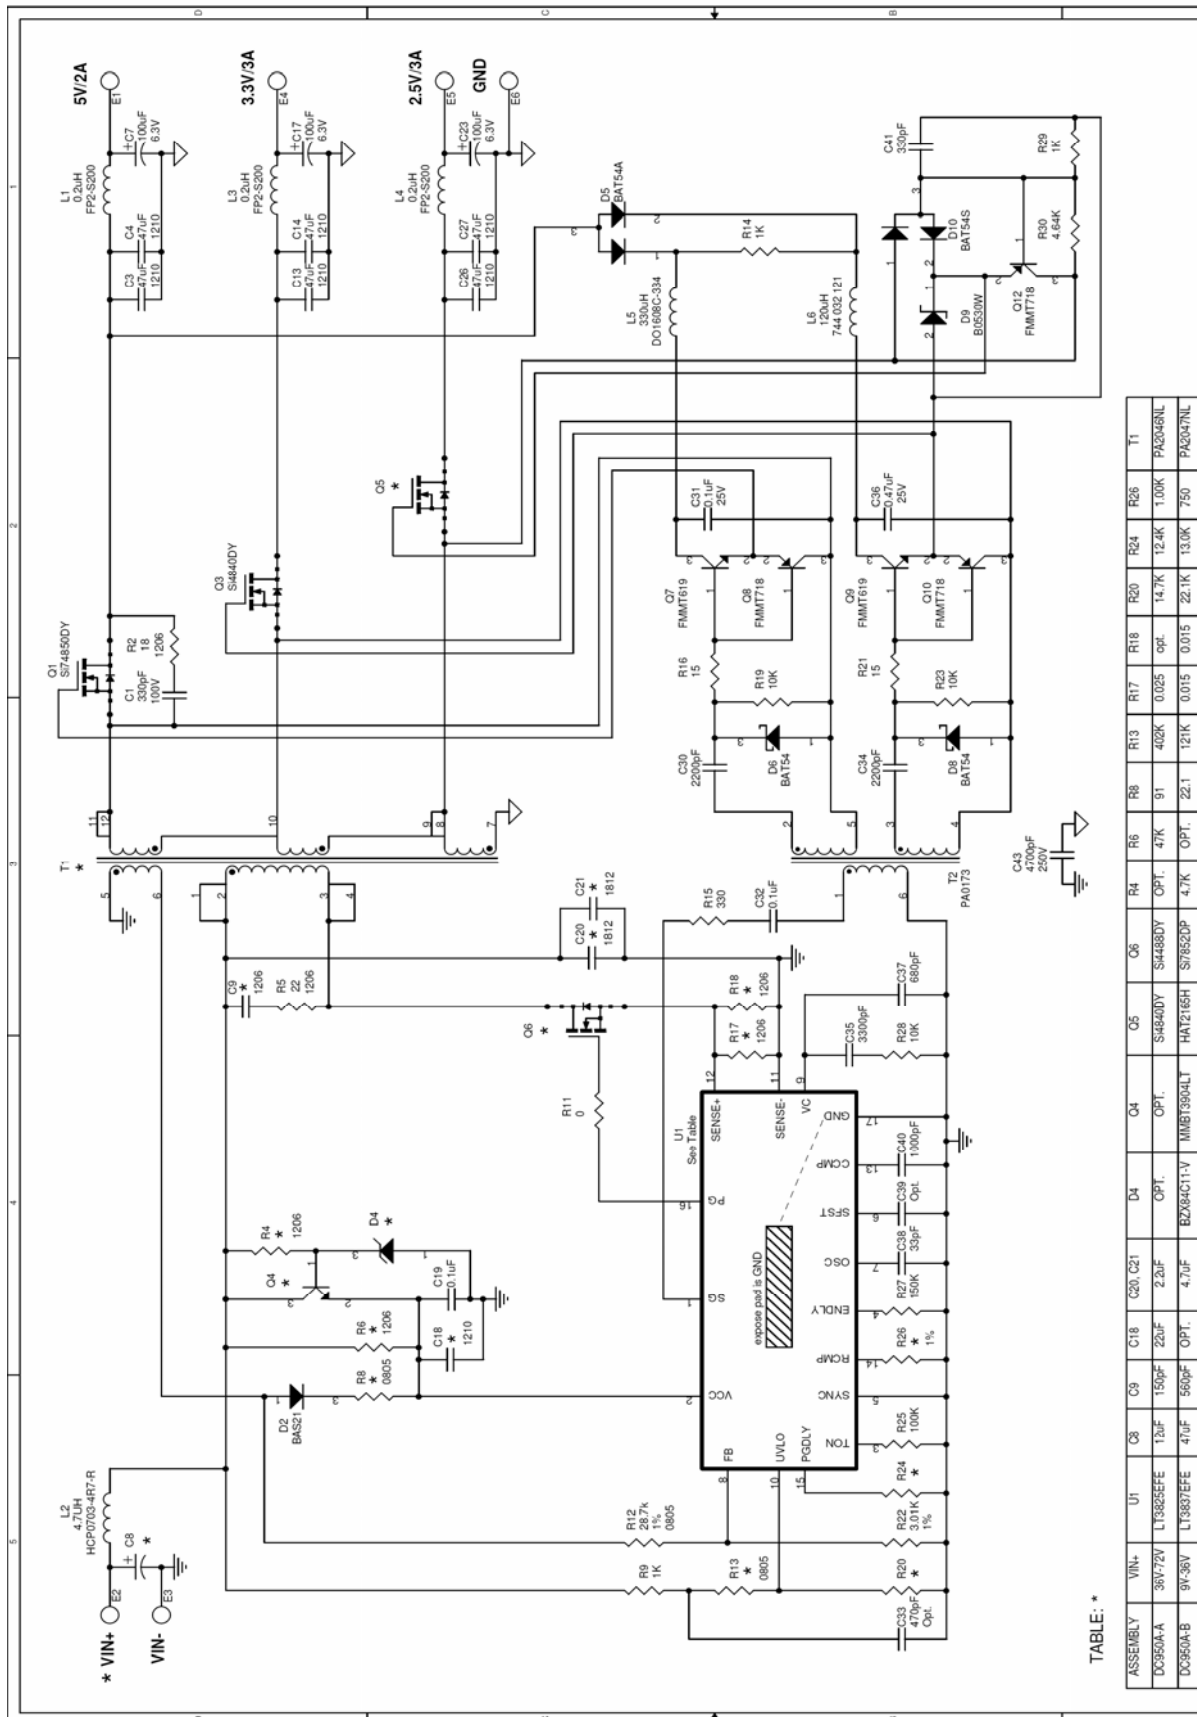


TABLE 1. ★

ASSEMBLY	VIN+	U1	C3	C9	C18	C20, C21	D4	Q4	Q5	O6	R4	R6	R8	R13	R17	R18	R20	R24	R26	T1
D3950A-4	38V-72V	L73825FE	12uF	150uF	22uF	2.2uF	OPT.	OPT.	S4440DY	S4480DY	OPT.	47K	91	402K	0.025	opt.	14.7K	12.4K	1.00K	PA2049NL
D3950A-B	9V-36V	L73837FE	47uF	560uF	OPT.	4.7uF	BX46411-V	MM813904LT	HAT2165H	S7852DP	4.7K	OPT.	221	121K	0.015	0.015	22.1K	13.0K	750	PA2047NL

LTC CONFIDENTIAL - FOR CUSTOMER USE ONLY

Customer Notice

Linear Technology Has Made A Best Effort To Design A Circuit That Meets Customer-Supplied Specifications. However, It Remains The Customer's Responsibility To Verify Proper And Reliable Operation In The Actual Application. Component Substitution And Printed Circuit Board Layout May Significantly Affect Circuit Performance Or Reliability. Contact Linear Technology Applications Engineering For Assistance.

LINEAR TECHNOLOGY CORPORATION

1630 MCCARTHY BLVD.
MILPITAS, CA. 95035
408-432-1900
408-434-0507 FAX

Multi-Output Flyback in 1/8 Brick Format

Document Number	Rev
-----------------	-----

Demo Circuit 950A-A/B	LT3825EFE/LT3837EFE	A
-----------------------	---------------------	---

Thursday, October 11, 2007

LT3825 AND LT3837

DC950A-A BILL OF MATERIAL

Item	Qty	Reference	Part Description	Manufacture / Part #
REQUIRED CIRCUIT COMPONENTS¹				
1	1	C38	Capacitor, NP0, 33pF, 50V, 0603	AVX, 06035A330KAT2
2	1	C41	Capacitor, NPO, 330PF, 50V, 0603	AVX, 06035A331KAT
3	1	C1	Capacitor, NPO 330PF 100V 1206	AVX, 12061A331KAT
4	2	C34,C30	Capacitor, X7R, 2200pF, 50V, 0603	AVX, 06035C222JAT
5	3	C19,C31,C32	Capacitor, X5R, 0.1uF, 25V, 0603	AVX, 06033D104KAT2A
6	1	C40	Capacitor, X7R, 1000pF, 50V, 0603	AVX, 06035C102KAT2A
7	1	C36	Capacitor, X5R, 0.47uF, 16V, 0603	AVX, 0603YD474M
8	6	C3,C4,C13,C14,C26,C27	Capacitor, X5R, 47uF, 6.3V, 1210	TDK, 3225X5R0J476M
9	0	C33,C39	Capacitor, 0603	OPT
10	1	C35	Capacitor, X7R, 3300PF, 50V, 0603	KEMET, C0603C332J5RAC
11	1	C37	Capacitor, NPO, 680PF, 50V, 0603	AVX, 06035A681JAT
12	1	C9	Capacitor, NPO, 150pF, 200V, 1206	AVX, 12062A151KAT2A
13	1	C18	Capacitor, X7R, 22uF, 16V, 1210	TDK, C3225RX7R1C226M
14	2	C20,C21	Capacitor, X7R, 2.2uF, 100V, 1812	TDK, C4532X7R2A225M
15	1	D2	BAS21	Diodes, Inc.,BAS21-7-F
16	2	D8,D6	BAT54	Diodes, Inc.,BAT54-7-F
17	1	D5	BAT54A	Diodes, Inc.,BAT54A-7
18	1	D10	BAT54S	Diodes, Inc.,BAT54S-7-F
19	1	D9	B0530W	Diodes, Inc.,B0530W-7-F
20	0	D4	Zenerdiode, 12V, 5%, SOT23	OPT
21	1	L5	Inductor, 330uH	Coilcraft, DO1608C-334MLB
22	1	L6	Inductor, 120uH	Wurth Elektronik, 744 032 121
23	1	Q1	MOSFET, n-ch, SO8	Vishay, Si4850EY-T1-E3
24	1	Q3	MOSFET, n-ch, SO8	Vishay, Si4840DY-T1-E3
25	2	Q7,Q9	Transistor, npn, SOT23	Zetex, FMMT619TA
26	3	Q8,Q10,Q12	Transistor, pnp, SOT23	Zetex, FMMT718TA
27	0	Q4	Transistor, npn, SOT23	OPT
28	1	Q5	MOSFET, n-ch, SO8	Vishay, Si4840DY-T1-E3
29	1	Q6	MOSFET, n-ch, SO8	Vishay, Si4488DY-T1-E3
30	1	R11	Resistor, 0 OHMS 0603	VISHAY, CRCW06030000Z0EA
31	1	R2	Resistor, 18 OHMS 1206	VISHAY, CRCW120618R0JNEA
32	2	R21,R16	Resistor, 15 OHMS 0603	VISHAY, CRCW060315R0FKEA
33	1	R15	Resistor, 330 OHMS 0603	VISHAY, CRCW0603330RFKEA
34	2	R9,R29	Resistor, 1.00k, 0603	VISHAY, CRCW06031K0FKED
35	1	R14	Resistor, 1.00k, 0805	VISHAY, CRCW08051K0FKED
36	1	R22	Resistor, 3.01K, 0603	VISHAY, CRCW06033011FRT6
37	1	R30	Resistor, 4.64K, 0603	VISHAY, CRCW06034K64FKED
38	3	R19,R23,R28	Resistor, 10.0K, 0603	VISHAY, CRCW060310K0FKED
39	1	R12	Resistor, 28.7K, 0805	VISHAY, CRCW080528K7FKED
40	1	R25	Resistor, 100K, 0603	VISHAY, CRCW0603100KJNEA
41	1	R27	Resistor, 150K, 0603	VISHAY, CRCW0603150KJNEA
42	1	R5	Resistor, 22 OHM, 1206	VISHAY, CRCW120622R0JNEA
43	1	R17	Resistor, 0.025 OHM 1% 1206	IRC, LRF1206LF-01-R025-F
44	1	R26	Resistor, 1.00K, 0603	VISHAY, CRCW06031K00FKEA
45	1	R6	Resistor, 47K, 1206	VISHAY, CRCW120647K0JNEA
46	1	R13	Resistor, 402K, 0805	VISHAY, CRCW0805402KFKEA
47	0	R4,R18	Resistor, 1206	OPT
48	1	R8	Resistor, 91 OHMS 0805	VISHAY, CRCW080591R0FKEA
49	1	R20	Resistor, 14.7K, 0603	VISHAY, CRCW060314K7FKEA
50	1	R24	Resistor, 12.4K, 0603	VISHAY, CRCW060312K4FKEA

LT3825 AND LT3837

51	1	T2	Gatedrive transformer	Pulse Engineering, PA0173
52	1	T1	EFD20 Flyback transformer	Pulse Engineering, PA2046NL
53	1	U1	LT3825EFE#PBF	Linear Technology, LT3825EFE#PBF
ADDITIONAL DEMO BOARD CIRCUIT COMPONENTS²				
1	1	C8	Capacitor, electrolytic, 12UF, 100V	Sanyo, 100ME12AX+TS
2	3	C7,C17,C23	Capacitor, TANT, 100uF, 6.3V, 3528	Kemet, T520B107M006ASE070
3	1	C43	Capacitor, X7R, 4700pF 250V, 1812	MURATA, GA343DR7GD472KW01L
4	3	L1,L3,L4	Inductor, 0.2uH	Cooper, FP2-S200
5	1	L2	Inductor, 4.7uH	Cooper, HCP0703-4R7-R
HARDWARE-FOR DEMO BOARD ONLY:				
1	4	(STAND-OFF),	STAND-OFF, NYLON 0.50"	KEYSTONE, 8833(SNAP ON)
2	6	E1-E6	Turret, 0.094"	Mill-Max, 2501-200-80-00-00-07-0
Notes:				
1. Required Circuit Components are those parts that are required to implement the circuit function				
2. Additional Demo Board Circuit Components are those parts that provide added functionality for the demo board but are not required in the actual circuit.				

DC950A-B BILL OF MATERIAL

Item	Qty	Reference	Part Description	Manufacture / Part #
REQUIRED CIRCUIT COMPONENTS¹				
1	1	C38	Capacitor, NP0, 33pF, 50V, 0603	AVX, 06035A330KAT2
2	1	C41	Capacitor, NPO, 330PF, 50V, 0603	AVX, 06035A331KAT
3	1	C1	Capacitor, NPO 330PF 100V 1206	AVX, 12061A331KAT
4	2	C34,C30	Capacitor, X7R, 2200pF, 50V, 0603	AVX, 06035C222JAT
5	3	C19,C31,C32	Capacitor, X5R, 0.1uF, 25V, 0603	AVX, 06033D104KAT2A
6	1	C40	Capacitor, X7R, 1000pF, 50V, 0603	AVX, 06035C102KAT2A
7	1	C36	Capacitor, X5R, 0.47uF, 16V, 0603	AVX, 0603YD474M
8	6	C3,C4,C13,C14,C26,C27	Capacitor, X5R, 47uF, 6.3V, 1210	TDK, 3225X5R0J476M
9	0	C33,C39	Capacitor, 0603	OPT
10	1	C35	Capacitor, X7R, 3300PF, 50V, 0603	KEMET, C0603C332J5RAC
11	1	C37	Capacitor, NPO, 680PF, 50V, 0603	AVX, 06035A681JAT
12	1	C9	Capacitor, NPO, 560pF, 100V, 1206	AVX, 12061A561KAT2A
13	0	C18	Capacitor, 1210	OPT
14	2	C20,C21	Capacitor, X7R, 4.7uF, 50V, 1812	TDK,C4532X7R1H475MT
15	1	D2	BAS21	Diodes, Inc.,BAS21-7-F
16	2	D8,D6	BAT54	Diodes, Inc.,BAT54-7-F
17	1	D5	BAT54A	Diodes, Inc.,BAT54A-7
18	1	D10	BAT54S	Diodes, Inc.,BAT54S-7-F
19	1	D9	B0530W	Diodes, Inc.,B0530W-7-F
20	1	D4	Zenerdiode, 11V, 5%, SOT23	Vishay, BZX84C11-V
21	1	L5	Inductor, 330uH	Coilcraft, DO1608C-334MLB
22	1	L6	Inductor, 120uH	Würth Elektronik, 744 032 121
23	1	Q1	MOSFET, n-ch, SO8	Vishay, Si4850EY-T1-E3
24	1	Q3	MOSFET, n-ch, SO8	Vishay, Si4840DY-T1-E3
25	2	Q7,Q9	Transistor, npn, SOT23	Zetex, FMMT619TA
26	3	Q8,Q10,Q12	Transistor, pnp, SOT23	Zetex, FMMT718TA

LT3825 AND LT3837

27	1	Q4	Transistor, npn, SOT23	MMBT3904LT
28	1	Q5	MOSFET, n-ch, SO8	Renesas, HAT2165H
29	1	Q6	MOSFET, n-ch, SO8	Vishay, Si7852DP-T1-E3
30	1	R11	Resistor, 0 OHMS 0603	VISHAY, CRCW06030000Z0EA
31	1	R2	Resistor, 18 OHMS 1206	VISHAY, CRCW120618R0JNEA
32	2	R21,R16	Resistor, 15 OHMS 0603	VISHAY, CRCW060315R0FKEA
33	1	R15	Resistor, 330 OHMS 0603	VISHAY, CRCW0603330RFKEA
34	2	R9,R29	Resistor, 1.00k, 0603	VISHAY, CRCW06031K0FKED
35	1	R14	Resistor, 1.00k, 0805	VISHAY, CRCW08051K0FKED
36	1	R22	Resistor, 3.01K, 0603	VISHAY, CRCW06033011FRT6
37	1	R30	Resistor, 4.64K, 0603	VISHAY, CRCW06034K64FKED
38	3	R19,R23,R28	Resistor, 10.0K, 0603	VISHAY, CRCW060310K0FKED
39	1	R12	Resistor, 28.7K, 0805	VISHAY, CRCW080528K7FKED
40	1	R25	Resistor, 100K, 0603	VISHAY, CRCW0603100KJNEA
41	1	R27	Resistor, 150K, 0603	VISHAY, CRCW0603150KJNEA
42	1	R5	Resistor, 22 OHM, 1206	VISHAY, CRCW120622R0JNEA
43	2	R17,R18	Resistor, 0.015 OHM 1% 1206	IRC, LRF1206-01-R015-F
44	1	R26	Resistor, 750 OHMS, 0603	VISHAY, CRCW0603750RFKEA
45	1	R4	Resistor, 4.7k, 1206	VISHAY, CRCW12064K70FKEA
46	1	R13	Resistor, 121K, 0805	VISHAY, CRCW0805121KFKEA
47	0	R6	Resistor, 1206	OPT
48	1	R8	Resistor, 22.1 OHMS 0805	VISHAY, CRCW080522R1FKEA
49	1	R20	Resistor, 22.1K, 0603	VISHAY, CRCW060322K1FKEA
50	1	R24	Resistor, 13.0K, 0603	VISHAY, CRCW060313K0FKEA
51	1	T2	Gate drive transformer	Pulse Engineering, PA0173
52	1	T1	EFD20 Flyback transformer	Pulse Engineering, PA2047NL
53	1	U1	LT3837EFE#PBF	Linear Technology, LT3837EFE#PBF
ADDITIONAL DEMO BOARD CIRCUIT COMPONENTS²				
1	1	C8	Capacitor, electrolytic, 47UF, 50V	Sanyo, 50ME47AX+TS
2	3	C7,C17,C23	Capacitor, TANT, 100uF, 6.3V, 3528	Kemet, T520B107M006ASE070
3	1	C43	Capacitor, X7R, 4700pF 250V, 1812	MURATA, GA343DR7GD472KW01L
4	3	L1,L3,L4	Inductor, 0.2uH	Cooper, FP2-S200
5	1	L2	Inductor, 4.7uH	Cooper, HCP0703-4R7-R
HARDWARE-FOR DEMO BOARD ONLY:				
1	4	(STAND-OFF),	STAND-OFF, NYLON 0.50"	KEYSTONE, 8833(SNAP ON)
2	6	E1-E6	Turret, 0.094"	Mill-Max, 2501-200-80-00-00-07-0
Notes:				
1. Required Circuit Components are those parts that are required to implement the circuit function				
2. Additional Demo Board Circuit Components are those parts that provide added functionality for the demo board but are not required in the actual circuit.				

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9