

Encapsulated Non-Isolated Switching Regulator DC-DC



Typical units

FEATURES

- 7-36Vin (3.3 & 5Vout), 15-36Vin (12Vout)
- Fixed Output: 3.3 or 5V @ 1.5A or 12V @ 1.0A
- Vertical SIP or horizontal mount, small footprint, in an Encapsulated package
- "No heat sink" direct replacement for 3-terminal 78xx-series linear regulators
- High efficiency with no external components
- Short circuit protection
- Outstanding thermal derating performance
- UL/EN/IEC 60950-1, 2nd Edition safety approvals

PRODUCT OVERVIEW

Encapsulated in a 0.47 x 0.69 inch (11.9 x 17.6 mm) vertical or horizontal package, the OKI-78SR-E series are non-isolated switching regulator (SR) DC-DC power converters for embedded applications. The fixed single output converters offer both tight regulation and high efficiency directly at the power usage site and are a direct plug-in replacement for TO-220 package 78xx series linear regulators. Typically, no extra outside components are required.

Three nominal output voltages are offered (3.3, 5 and 12 VDC), up to 1.5 Amp maximum output. Based on fixed-frequency buck switching topology, the high efficiency means very low heat and little electrical noise, requiring no external components. The 3.3 and 5Vout models have an ultra wide input range of 7 to 36 Volts DC and the 12Vout model has an input voltage range of 15 to 36V

Protection features include short circuit current limit protection. The OKI-78SR-E is designed to meet all standards approvals. RoHS-6 (no lead) hazardous material compliance is specified as standard.

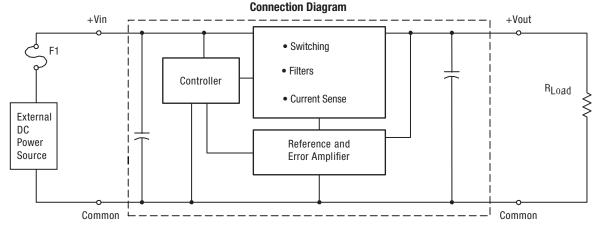


Figure 1. OKI-78SR-E

Note: Murata Power Solutions strongly recommends an external input fuse, F1. See specifications.








Encapsulated Non-Isolated Switching Regulator

FUNCTIONAL SPECIFICATIONS SUMMARY AND ORDERING GUIDE													
				Output				In	put				
		Іоит		R/N (mVp-p)	Regulati	on (Typ.)			lın,	lın,	Effici	iency	
Root Model	Vout (Volts)	(Amps max)	Power (Watts)	Max.	Line	Load	Vin Nom. (Volts)	Range (Volts)	no load (mA)	full load (Amps)	Min.	Тур.	Package Inches (mm)
OKI-78SR-3.3/1.5-W36E-C	3.3	1.5	4.95	40	±0.30%	±0.40%	12	7-36	5	0.48	84%	85.5%	0.47 x 0.40 x 0.69 (11.9 x 10.0 x 17.6)
OKI-78SR-5/1.5-W36E-C	5	1.5	7.5	75	±0.30%	±0.40%	12	7-36	5	0.69	89%	90.5%	0.47 x 0.40 x 0.69 (11.9 x 10.0 x 17.6)
OKI-78SR-12/1.0-W36E-C	12	1.0	12	75	±0.25%	±0.25%	24	15-36	5	0.53	93.5%	95.3%	0.47 x 0.40 x 0.69 (11.9 x 10.0 x 17.6)

NOTE: All specifications are at nominal line voltage, Vout = nominal and full load, +25°C.with no external capacitor, unless otherwise noted.

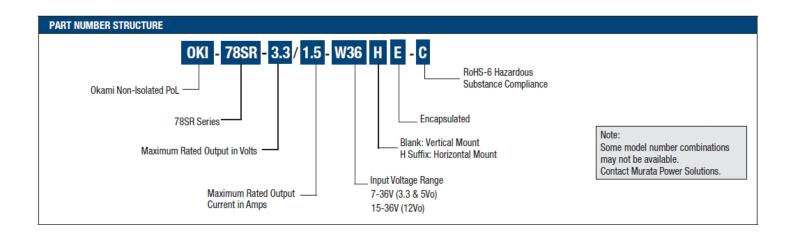

NOTE: Please click <u>here</u> to view the data sheet for the OKI-78SR "Open-frame" series.

Encapsulated Non-Isolated Switching Regulator

FUNCTIONAL SPECIFICATIONS - OKI-78SR-3.3/1.5-W36E-C

ABSOLUTE MAXIMUM RATINGS	Conditions ①	Minimum	Typical/Nominal	Maximum	Units
Input Voltage, Continuous	Full power operation	0		36	Vdc
Input Reverse Polarity	None, install external fuse		None		Vdc
Output Power		0		5.15	W
Output Current	Current-limited, no damage, short-circuit protected	0		1.5	Α
Storage Temperature Range	Vin = Zero (no power)	-55		125	°C
Absolute maximums are stress ratings. Exposure	of devices to greater than any of these conditions n	nay adversely affect lon	g-term reliability. Proper op	eration under conditions	other than those
listed in the Performance/Functional Specification	s Table is not implied or recommended.				
INPUT					
Operating voltage range		7	12	36	Vdc
Recommended External Fuse	Fast blow			2	Α
Reverse Polarity Protection	None, install external fuse		None		Vdc
Internal Filter Type			C-TYPE		
Input current					
Full Load Conditions	Vin = nominal		0.48	0.51	Α
Low Line	Vin @ min		0.80	0.85	Α
Inrush Transient			0.16		A ² -Sec.
Short Circuit Input Current			5		mA
No Load Input Current	Vin = nominal		5	10	mA
Shut-Down Mode Input Current			1		mA
Reflected (back) ripple current ②	(Cin = 2 X 100uF, CBus = 1000uF, LBus = 1uH)		50		mA, pk-pk
GENERAL and SAFETY					
Efficiency	@ Vin nom, 3.3Vout	83.7	85.5		%
Efficiency	@ Vin min, 3.3Vout	87.0	88.4		%
Safety	Certified to UL-60950-1, IEC/EN60950-1,		Yes		
datety	2nd Edition		100		
Calculated MTBF ④	Per Telcordia SR332, issue 1, class 3, ground fixed, Tambient=+25°C		78.7		Hours x 10 ⁶
DYNAMIC CHARACTERISTICS	mod, rambone 120 0				<u> </u>
Fixed Switching Frequency			500		kHz
Dynamic Load Response	50-100-50% load step, settling time to within		0.5	F0	
	$\pm 2\%$ of Vout di/dt =1A/ μ Sec		25	50	μSec
Dynamic Load Peak Deviation	same as above		100	150	mV

Encapsulated Non-Isolated Switching Regulator


FUNCTIONAL SPECIFICATIONS - OKI-78SR-3.3/1.5-W36E-C (CONT.)

OUTPUT	Conditions	Minimum	Typical/Nominal	Maximum	Units
Total Output Power		0	4.95	5.15	W
Voltage					
Nominal Output Voltage Range		3.168	3.3	3.432	Vdc
Setting Accuracy	At 50% load	-4		4	% of Vnom.
Output Voltage Overshoot - Startup:				3	%Vo nom
Current					
Output Current Range		0	1.5	1.5	Α
Minimum Load (11)			No minimum load		
Current Limit Inception	98% of Vnom., after warmup @3.3Vout	2.50	3.50	5.00	Α
Short Circuit Mode @①					
Short Circuit Current	Hiccup technique, autorecovery within ±1% of Vout		0.01		А
Short Circuit Duration (remove short for recovery)	Output shorted to ground, no damage		Continuous		
Short circuit protection method ®	Current limiting				
Regulation (1)					
Total Regulation Band	Over all line, load and temp conditions	-3	Vo set	3	% Vo set
Line Regulation	Vin=min. to max. Vout=nom.			±0.30	%
Load Regulation	lout=min. to max.			±0.40	%
Ripple and Noise (20MHz BW) ①	3.3Vo, 12Vin		30	40	mV pk-pk
Temperature Coefficient	At all outputs		±0.02		% of Vnom./°C
Maximum Capacitive Loading	low ESR; >0.001, <0.01 ohm		300		μF
Maximum Capacitive Loading	0.01 ohm		3300		μF
MECHANICAL					
Outline Dimensions			0.47 x 0.69 x 0.40		Inches
			11.9 x 17.6 x 10.0		mm
Weight			0.16		Ounces
			4.5		Grams
Pin Material			copper alloy		
Pin Finish	Matte Tin		100-300		μ"
	Nickel		75-150		μ"
ENVIRONMENTAL					
Operating Ambient Temperature Range ③	see derating curves	-40		85	°C
Storage Temperature	Vin = Zero (no power)	-55		125	°C
RoHS Compliant			RoHS-6		

Specification Notes:

- All specifications are typical unless noted. General conditions for Specifications are +25 deg.C ambient temperature, Vin=nominal, Vout=nominal, full rated load. Adequate airflow must be supplied for extended testing under power. See Derating curves.
- Input Back Ripple Current is tested and specified over a 5 Hz to 20 MHz bandwidth. Input filtering is Cin=2 x 100 μF, Cbus=1000 μF, Lbus=1 μH. All caps are low ESR types.
- 3) Note that Maximum Power Derating curves indicate an average current at nominal input voltage. At higher temperatures and/or lower airflow, the DC/DC converter will tolerate brief full current outputs if the total RMS current over time does not exceed the Derating curve. All Derating curves are presented near sea level altitude. Be aware of reduced power dissipation with increasing altitude.
- 4) Mean Time Before Failure is calculated using the Telcordia (Belcore) SR-332 Method 1, Case 3, ground fixed conditions, Tpcboard=+25 °C, full output load, natural air convection.
- 5) The input and output are not isolated. They share a single COMMON power and signal return.
- 6) Short circuit shutdown begins when the output voltage degrades approximately 2% from the selected setting. Output current limit and short circuit protection are non-latching. When the overcurrent fault is removed, the converter will immediately recover.


- The output is not intended to sink appreciable reverse current.
- 8) "Hiccup" overcurrent operation repeatedly attempts to restart the converter with a brief, full-current output. If the overcurrent condition still exists, the restart current will be removed and then tried again. This short current pulse prevents overheating and damaging the converter.
- 9) Input Fusing: If reverse polarity is accidentally applied to the input, to ensure reverse input protection, always connect an external input fast-blow fuse in series with the +Vin input. Use approximately twice the full input current rating with nominal input voltage.
- 10) Regulation specifications describe the deviation as the line input voltage or output load current is varied from a nominal midpoint value to either extreme.
- 11) Output noise may be further reduced by installing an external filter. Do not exceed the maximum output capacitance. At zero output current and no external capacitor, the output may contain low frequency components which exceed the ripple specification. The output may be operated indefinitely with no load.

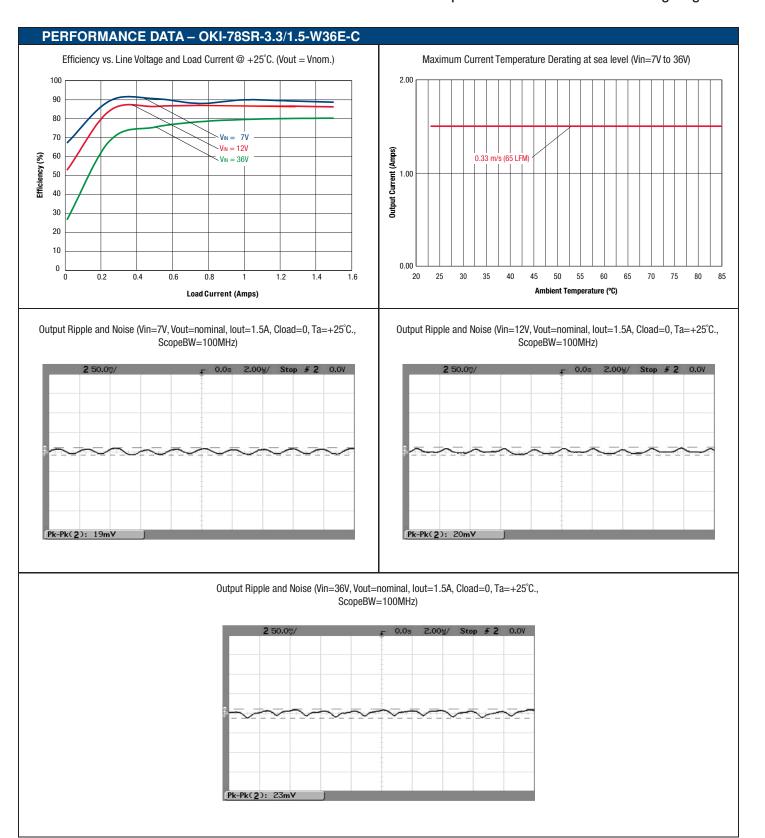


Encapsulated Non-Isolated Switching Regulator

PERFORMANCE DATA - OKI-78SR-3.3/1.5-W36E-C


Step Load Transient Response (Vin=7V, Vout=nominal, Cload=0, lout=0.75A to 1.5A, Slew=1A/µS, Ta=+25°C.) Trace 2=Vout, 100 mV/div. Trace 4=lout, 0.5A/div

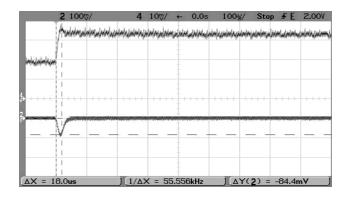


Step Load Transient Response (Vin=7V, Vout=nominal, Cload=0, lout=1.5A to 0.75A, Slew=1A/uS, Ta=+25°C.) Trace 2=Vout, 100 mV/div. Trace 4=lout, 0.5A/div.

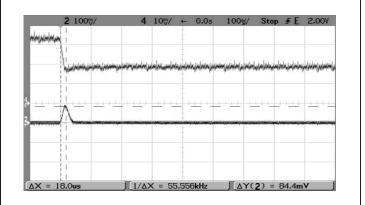


Step Load Transient Response (Vin=12V, Vout=nominal, Cload=0, Iout=0.75A to 1.5A, Slew=1A/ μ S, Ta=+25°C.) Trace 2=Vout, 100 mV/div. Trace 4=Iout, 0.5A/div.




Step Load Transient Response (Vin=12V, Vout=nominal, Cload=0, lout=1.5A to 0.75A, Slew=1A/ μ S, Ta=+25°C.) Trace 2=Vout, 100 mV/div. Trace 4=lout, 0.5A/div.



Step Load Transient Response (Vin=36V, Vout=nominal, Cload=0, Iout=0.75A to 1.5A, Slew=1A/µS, Ta=+25°C.) Trace 2=Vout, 100 mV/div. Trace 4=Iout, 0.5A/div.

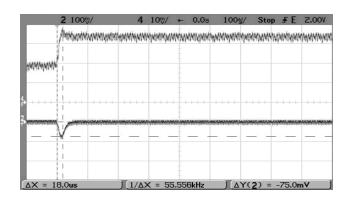

Step Load Transient Response (Vin=36V, Vout=nominal, Cload=0, lout=1.5A to 0.75A, Slew= $1A/\mu$ S, Ta= $+25^{\circ}$ C.) Trace 2=Vout, 100 mV/div. Trace 4=lout, 0.5A/div.



Encapsulated Non-Isolated Switching Regulator

FUNCTIONAL SPECIFICATIONS - OKI-78SR-5/1.5-W36E-C

ABSOLUTE MAXIMUM RATINGS	Conditions ①	Minimum	Typical/Nominal	Maximum	Units
Input Voltage, Continuous	Full power operation	0		36	Vdc
Input Reverse Polarity	None, install external fuse		None		Vdc
Output Power		0		7.80	W
Output Current	Current-limited, no damage, short-circuit protected	0		1.5	Α
Storage Temperature Range	Vin = Zero (no power)	-55		125	°C
	ire of devices to greater than any of these conditions m	ay adversely affect lor	ng-term reliability. Proper op	eration under condition	s other than those
listed in the Performance/Functional Specificat	ions Table is not implied or recommended.				
INPUT					
Operating voltage range		7	12	36	Vdc
Recommended External Fuse	Fast blow			2	A
Reverse Polarity Protection	None, install external fuse		None		Vdc
Internal Filter Type			C-TYPE		
Input current					
Full Load Conditions	Vin = nominal		0.69	0.73	Α
Low Line	Vin @ min		1.16	1.22	Α
Inrush Transient			0.16		A ² -Sec.
Short Circuit Input Current			5		mA
No Load Input Current	Vin = nominal		5	10	mA
Shut-Down Mode Input Current			1		mA
Reflected (back) ripple current ②	(Cin = 2 X 100uF, CBus = 1000uF, LBus = 1uH)		15		mA, pk-pk
GENERAL and SAFETY					
T#ining.	@ Vin nom, 5Vout	89.0	90.5		%
Efficiency	@ Vin min, 5Vout	91.4	92.5		%
Safety	Certified to UL-60950-1, IEC/EN60950-1,		Yes		
	2nd Edition				
Calculated MTBF ④	Per Telcordia SR332, issue 1, class 3, ground fixed, Tambient=+25°C		78.7		Hours x 106
DYNAMIC CHARACTERISTICS					
Fixed Switching Frequency			500		kHz
Dynamic Load Response	50-100-50% load step, settling time to within ±2% of Vout di/dt =1A/µSec		50	75	μSec
Dynamic Load Peak Deviation	same as above		150	200	mV

Encapsulated Non-Isolated Switching Regulator


FUNCTIONAL SPECIFICATIONS - OKI-78SR-5/1.5-W36E-C (CONT.)

OUTPUT	Conditions	Minimum	Typical/Nominal	Maximum	Units
Total Output Power		0	7.5	7.8	W
Voltage					
Nominal Output Voltage Range		4.8	5.0	5.2	Vdc
Setting Accuracy	At 50% load	-4		4	% of Vnom.
Output Voltage Overshoot - Startup:				3	%Vo nom
Current					
Output Current Range		0	1.5	1.5	Α
Minimum Load ①			No minimum load		
Current Limit Inception	98% of Vnom., after warmup @5Vout	2.50	3.50	5.00	Α
Short Circuit Mode 61					
Short Circuit Current	Hiccup technique, autorecovery within ±1% of Vout		0.01		А
Short Circuit Duration (remove short for recovery)	Output shorted to ground, no damage		Continuous		
Short circuit protection method ®	Current limiting				
Regulation (10)					
Total Regulation Band	Over all line, load and temp conditions	-3	Vo set	3	% Vo set
Line Regulation	Vin=min. to max. Vout=nom.			±0.30	%
Load Regulation	lout=min. to max.			±0.40	%
Ripple and Noise (20MHz BW) ①	5Vo, 12Vin		50	75	mV pk-pk
Temperature Coefficient	At all outputs		±0.02		% of Vnom./°C
Maximum Capacitive Loading	low ESR; >0.001, <0.01 ohm		300		μF
Maximum Capacitive Loading	0.01 ohm		3300		μF
MECHANICAL					
Outline Dimensions			0.47 x 0.69 x 0.40		Inches
			11.9 x 17.6 x 10.0		mm
Weight			0.16		Ounces
			4.5		Grams
Pin Material			copper alloy		
Pin Finish	Matte Tin		100-300		μ"
	Nickel		75-150		μ"
ENVIRONMENTAL					
Operating Ambient Temperature Range ③	see derating curves	-40		85	°C
Storage Temperature	Vin = Zero (no power)	-55		125	°C
RoHS Compliant			RoHS-6		

Specification Notes:

- All specifications are typical unless noted. General conditions for Specifications are +25 deg.C ambient temperature, Vin=nominal, Vout=nominal, full rated load. Adequate airflow must be supplied for extended testing under power. See Derating curves.
- Input Back Ripple Current is tested and specified over a 5 Hz to 20 MHz bandwidth. Input filtering is Cin=2 x 100 μF, Cbus=1000 μF, Lbus=1 μH. All caps are low ESR types.
- Note that Maximum Power Derating curves indicate an average current at nominal input voltage. At higher temperatures and/or lower airflow, the DC/DC converter will tolerate brief full current outputs if the total RMS current over time does not exceed the Derating curve. All Derating curves are presented near sea level altitude. Be aware of reduced power dissipation with increasing altitude.
- 4) Mean Time Before Failure is calculated using the Telcordia (Belcore) SR-332 Method 1, Case 3, ground fixed conditions, Tpcboard=+25 °C, full output load, natural air convection.
- 5) The input and output are not isolated. They share a single COMMON power and signal return.
- 6) Short circuit shutdown begins when the output voltage degrades approximately 2% from the selected setting. Output current limit and short circuit protection are non-latching. When the overcurrent fault is removed, the converter will immediately recover.


- The output is not intended to sink appreciable reverse current.
- 8) "Hiccup" overcurrent operation repeatedly attempts to restart the converter with a brief, full-current output. If the overcurrent condition still exists, the restart current will be removed and then tried again. This short current pulse prevents overheating and damaging the converter.
- 9) Input Fusing: If reverse polarity is accidentally applied to the input, to ensure reverse input protection, always connect an external input fast-blow fuse in series with the +Vin input. Use approximately twice the full input current rating with nominal input voltage.
- 10) Regulation specifications describe the deviation as the line input voltage or output load current is varied from a nominal midpoint value to either extreme.
- 11) Output noise may be further reduced by installing an external filter. Do not exceed the maximum output capacitance. At zero output current and no external capacitor, the output may contain low frequency components which exceed the ripple specification. The output may be operated indefinitely with no load.

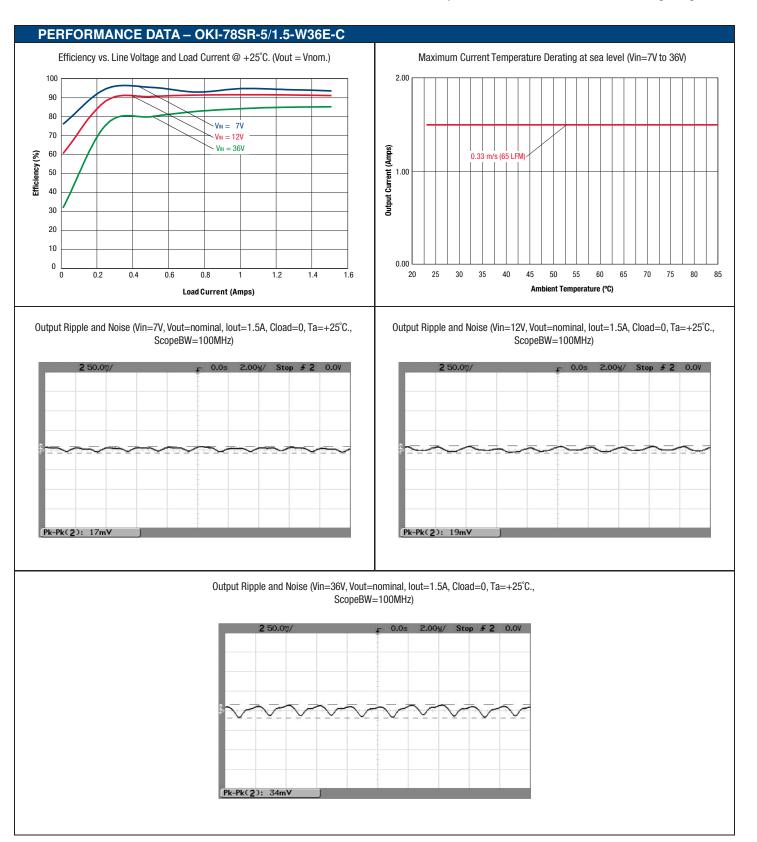


Encapsulated Non-Isolated Switching Regulator

PERFORMANCE DATA - OKI-78SR-5/1.5-W36E-C


Step Load Transient Response (Vin=7V, Vout=nominal, Cload=0, lout=0.75A to 1.5A, Slew=1A/µS, Ta=+25°C.) Trace 2=Vout, 100 mV/div. Trace 4=lout, 0.5A/div.

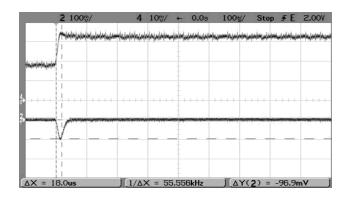


Step Load Transient Response (Vin=7V, Vout=nominal, Cload=0, lout=1.5A to 0.75A, Slew=1A/µS, Ta=+25°C.) Trace 2=Vout, 100 mV/div. Trace 4=lout, 0.5A/div.

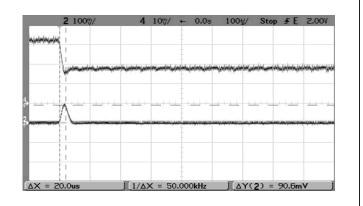


Step Load Transient Response (Vin=12V, Vout=nominal, Cload=0, Iout=0.75A to 1.5A, SIew=1A/ μ S, Ta=+25°C.) Trace 2=Vout, 100 mV/div. Trace 4=Iout, 0.5A/div.




Step Load Transient Response (Vin=12V, Vout=nominal, Cload=0, Iout=1.5A to 0.75A, Slew=1A/µS, Ta=+25°C.) Trace 2=Vout, 100 mV/div. Trace 4=lout, 0.5A/div.



Step Load Transient Response (Vin=36V, Vout=nominal, Cload=0, Iout=0.75A to 1.5A, SIew=1A/μS, Ta=+25°C.) Trace 2=Vout, 100 mV/div. Trace 4=Iout, 0.5A/div.

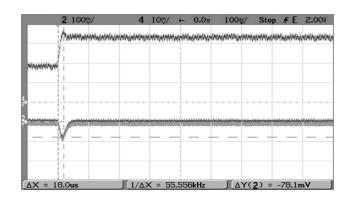

Step Load Transient Response (Vin=36V, Vout=nominal, Cload=0, lout=1.5A to 0.75A, Slew= $1A/\mu$ S, Ta= $+25^{\circ}$ C.) Trace 2=Vout, 100 mV/div. Trace 4=lout, 0.5A/div.

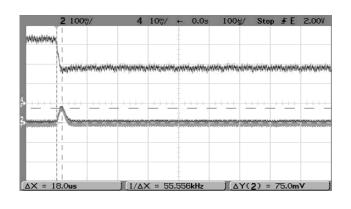

Encapsulated Non-Isolated Switching Regulator

FUNCTIONAL SPECIFICATIONS - OKI-78SR-12/1.0-W36E-C

ABSOLUTE MAXIMUM RATINGS	Conditions ①	Minimum	Typical/Nominal	Maximum	Units
Input Voltage, Continuous	Full power operation	0		36	Vdc
Input Reverse Polarity	None, install external fuse		None		Vdc
Output Power		0		5.15	W
Output Current	Current-limited, no damage, short-circuit protected	0		1.0	Α
Storage Temperature Range	Vin = Zero (no power)	-55		125	°C
Absolute maximums are stress ratings. Exposure	of devices to greater than any of these conditions n	nay adversely affect long	g-term reliability. Proper op	eration under conditions	other than those
listed in the Performance/Functional Specification	s Table is not implied or recommended.				
INPUT					
Operating voltage range		15	24	36	Vdc
Recommended External Fuse	Fast blow			2	Α
Reverse Polarity Protection 9	None, install external fuse		None		Vdc
Internal Filter Type			C-TYPE		
Input current					
Full Load Conditions	Vin = nominal		0.53	0.56	Α
Low Line	Vin @ min		0.84	0.87	Α
Inrush Transient			0.16		A²-Sec.
Short Circuit Input Current			5		mA
No Load Input Current	Vin = nominal		5	10	mA
Shut-Down Mode Input Current			1		mA
Reflected (back) ripple current ②	(Cin = 2 X 100uF, CBus = 1000uF, LBus = 1uH)		30		mA, pk-pk
GENERAL and SAFETY					
- Ffficiency	@ Vin nom, 12Vout	93.5	95.3		%
Efficiency	@ Vin min, 12Vout	95.5	97.0		%
Safety	Certified to UL-60950-1, IEC/EN60950-1, 2nd Edition		Yes		
Calculated MTBF ④	Per Telcordia SR332, issue 1, class 3, ground fixed, Tambient=+25°C		25.9		Hours x 10 ⁶
DYNAMIC CHARACTERISTICS					
Fixed Switching Frequency			500		kHz
Dynamic Load Response	50-100-50% load step, settling time to within $\pm 2\%$ of Vout di/dt =1A/ μ Sec		50	75	μSec
Dynamic Load Peak Deviation	same as above		165	225	mV

Encapsulated Non-Isolated Switching Regulator


FUNCTIONAL SPECIFICATIONS - OKI-78SR-12/1.0-W36E-C (CONT.)

Maximum Capacitive Loading low ESR; >0.001, <0.01 ohm	OUTPUT	Conditions	Minimum	Typical/Nominal	Maximum	Units
Nominal Output Voltage Range	Total Output Power		0	12.0	12.5	W
Setting Accuracy	Voltage					
Output Voltage Overshoot - Startup: 3 %Vo nom Current Output Current Range 0 1.0 1.0 A Minimum Load ① 99% of Vnom., after warmup @12Vout 2.50 3.50 5.00 A Short Circuit function (remove Short for unit protection method ③ Hiccup technique, autorecovery within ±1% of Vout 0.01 A Short Circuit Duration (remove short for recovery) Output shorted to ground, no damage Continuous Continuous Short Circuit protection method ⑥ Current limiting Continuous 3 % Vo set Short Circuit protection method ⑥ Current limiting 3 Vo set 3 % Vo set Short Circuit protection method ⑥ Current limiting 3 Vo set 3 % Vo set Short Circuit protection method ⑥ Over all line, load and temp conditions -3 Vo set 3 % Vo set Line Regulation Band Over all line, load and temp conditions -3 Vo set 3 % Vo set Line Regulation Out=min. to max. ±0.25 % 10.25 %	Nominal Output Voltage Range		11.52	12.0	12.48	Vdc
Current Output Current Range 0 1.0 1.0 A Minimum Load ① No minimum load No minimum load Current Limit Inception 98% of Vnom., after warmup @12Vout 2.50 3.50 5.00 A Short Circuit Mode ⑥① Short Circuit Duration (remove short for recovery) Output shorted to ground, no damage Continuous Continuous Short circuit protection method ⑧ Current limiting Continuous 4 A Vo set 3 % Vo set 3 % Vo set Line Regulation @ Vin=min. to max. Vout=nom. ±0.25 % Load Regulation ±0.25 % Load Regulation & ±0.25 % Inches & ±0.25 % % Inches & ±0.25 % <t< th=""><th>Setting Accuracy</th><th>At 50% load</th><th>-4</th><th></th><th>4</th><th>% of Vnom.</th></t<>	Setting Accuracy	At 50% load	-4		4	% of Vnom.
Output Current Range 0 1.0 1.0 A Minimum Load ⊕ No minimum load No minimum load No minimum load Current Limit Inception 98% of Vnom., after warmup @12Vout 2.50 3.50 5.00 A Short Circuit Mode ⊕⊕ Short circuit Duration (remove short for recovery) Output shorted to ground, no damage Continuous Short Circuit Duration (remove short for recovery) Output shorted to ground, no damage Continuous Short circuit protection method ® Current limiting Regulation ⊕ Total Regulation Band Over all line, load and temp conditions -3 Vo set 3 % Vo set Line Regulation Vinemin to max. Wout=nom. ±0.25 % Load Regulation Vinemin to max. Wout=nom. ±0.25 % Ripple and Noise (20MHz BW) ⊕ 1 2Vo, 24Vin 50 75 mV pk-pk Temperature Coefficient At all outputs ±0.02 % of Vnom./°C Maximum Capaci	Output Voltage Overshoot - Startup:				3	%Vo nom
Minimum Load	Current					
Current Limit inception 98% of Vnom., after warmup @12Vout 2.50 3.50 5.00 A Short Circuit Mode ⑥① Short Circuit Duration (remove short for recovery) Hiccup technique, autorecovery within ±1% of Vout 0.01 A Short Circuit Duration (remove short for recovery) Output shorted to ground, no damage Continuous Total Regulation ⑩ Total Regulation Band Over all line, load and temp conditions -3 Vo set 3 % Vo set Line Regulation Unimplication of the Sequitation (a) Inches (a) Inches (b) In	Output Current Range		0	1.0	1.0	Α
Short Circuit Mode ⑥① Short Circuit Current Short Circuit Current Short Circuit Duration (remove short for recovery) Short circuit protection method ⑧ Regulation ⑩ Total Regulation Band Line Regulation Load Regulation I 2Vo, 24Vin At all outputs At all outputs Maximum Capacitive Loading Maximum Capacitive Loading Maximum Capacitive Loading Meight Dutline Dimensions Hiccup technique, autorecovery within ±1% of Vout £10,02 Moderna Moving Commander Moderna Moderna Moving Moderna M	Minimum Load ①			No minimum load		
Short Circuit Duration (remove short for recovery) Output shorted to ground, no damage (remove short for recovery) Continuous Short Circuit Duration (remove short for recovery) Output shorted to ground, no damage (remove short for recovery) Short circuit protection method ® Current limiting Regulation ® Total Regulation Band Over all line, load and temp conditions -3 Vo set 3 % Vo set Line Regulation Vin=min. to max. Vout=nom. ±0.25 % % Load Regulation Interper alloy Explaints ±0.25 % % Load Regulation 1 Joy 2.24 Vin 50 75 mV pk-pk Load Regulation 1 Joy 2.24 Vin 50 75 mV pk-pk Temperature Coefficient A Right plane Allow plane Al	Current Limit Inception	98% of Vnom., after warmup @12Vout	2.50	3.50	5.00	Α
Short Circuit Duration (remove short for recovery)	Short Circuit Mode 61					
Continuous	Short Circuit Current			0.01		А
Regulation ⑩ Total Regulation Band Over all line, load and temp conditions -3 Vo set 3 % Vo set Line Regulation Vin=min. to max. Vout=nom. ±0.25 % Load Regulation lout=min. to max. ±0.25 % Ripple and Noise (20MHz BW) ⑪ 12Vo, 24Vin 50 75 mV pk-pk Temperature Coefficient At all outputs ±0.02 % of Vnom./°C Maximum Capacitive Loading low ESR; >0.001, <0.01 ohm		Output shorted to ground, no damage		Continuous		
Total Regulation Band Over all line, load and temp conditions -3 Vo set 3 % Vo set Line Regulation Vin=min. to max. Vout=nom. ±0.25 % Load Regulation lout=min. to max. ±0.25 % Ripple and Noise (20MHz BW) ① 12Vo, 24Vin 50 75 mV pk-pk Temperature Coefficient At all outputs ±0.02 % of Vnom./°C Maximum Capacitive Loading low ESR; >0.001, <0.01 ohm	Short circuit protection method ®	Current limiting				
Line Regulation Vin=min. to max. Vout=nom. ±0.25 % Load Regulation lout=min. to max. ±0.25 % Ripple and Noise (20MHz BW) ① 12Vo, 24Vin 50 75 mV pk-pk Temperature Coefficient At all outputs ±0.02 % of Vnom./°C Maximum Capacitive Loading low ESR; >0.001, <0.01 ohm 300 μF MECHANICAL 0.01 ohm 3300 μF MECHANICAL 0.47 x 0.69 x 0.40 Inches 11.9 x 17.6 x 10.0 mm Weight 0.16 Ounces Pin Material copper alloy Pin Finish Matte Tin 100-300 μ" ENVIRONMENTAL T5-150 μ"	Regulation 10					
Load Regulation Iout=min. to max. ±0.25 %	Total Regulation Band	Over all line, load and temp conditions	-3	Vo set	3	% Vo set
Ripple and Noise (20MHz BW) ⊕ 12Vo, 24Vin 50 75 mV pk-pk Temperature Coefficient At all outputs ±0.02 % of Vnom./°C Maximum Capacitive Loading low ESR; >0.001, <0.01 ohm	Line Regulation	Vin=min. to max. Vout=nom.			±0.25	%
Temperature Coefficient	Load Regulation	lout=min. to max.			±0.25	%
Maximum Capacitive Loading low ESR; >0.001, <0.01 ohm	Ripple and Noise (20MHz BW) ①	12Vo, 24Vin		50	75	mV pk-pk
Maximum Capacitive Loading 0.01 ohm 3300 μF MECHANICAL Outline Dimensions 0.47 x 0.69 x 0.40 Inches Weight 11.9 x 17.6 x 10.0 mm Weight 0.16 Ounces Fin Material copper alloy Pin Finish Matte Tin 100-300 μ" Nickel 75-150 μ"		At all outputs		±0.02		% of Vnom./°C
MECHANICAL 0.47 x 0.69 x 0.40 Inches Outline Dimensions 0.47 x 0.69 x 0.40 Inches 11.9 x 17.6 x 10.0 mm Weight 0.16 Ounces Pin Material copper alloy Pin Finish Matte Tin 100-300 μ" Nickel 75-150 μ"	Maximum Capacitive Loading	low ESR; >0.001, <0.01 ohm		300		
Outline Dimensions 0.47 x 0.69 x 0.40 Inches Weight 11.9 x 17.6 x 10.0 mm Weight 0.16 Ounces Fin Material copper alloy Pin Finish Matte Tin 100-300 μ" Nickel 75-150 μ"		0.01 ohm		3300		μF
11.9 x 17.6 x 10.0 mm	MECHANICAL					
Weight 0.16 Ounces 4.5 Grams Pin Material copper alloy Pin Finish Matte Tin 100-300 μ" Nickel 75-150 μ" ENVIRONMENTAL	Outline Dimensions					Inches
A.5 Grams						mm
Pin Material copper alloy Pin Finish Matte Tin 100-300 μ" Nickel 75-150 μ" ENVIRONMENTAL	Weight					Ounces
Pin Finish Matte Tin 100-300 μ" Nickel 75-150 μ" ENVIRONMENTAL				4.5		Grams
Nickel 75-150 μ" ENVIRONMENTAL						
ENVIRONMENTAL	Pin Finish					
		Nickel		75-150		μ"
Operating Ambient Temperature Pengs (2) see derating curves 40	ENVIRONMENTAL					
Uperaturing Animient, Terriperature naringe (a) See defauting curves -40 05 0	Operating Ambient Temperature Range ③	see derating curves	-40		85	°C
Storage Temperature Vin = Zero (no power) -55 125 °C	Storage Temperature	Vin = Zero (no power)	-55		125	°C
RoHS Compliant RoHS-6	RoHS Compliant			RoHS-6		

Specification Notes:

- All specifications are typical unless noted. General conditions for Specifications are +25 deg.C ambient temperature, Vin=nominal, Vout=nominal, full rated load. Adequate airflow must be supplied for extended testing under power. See Derating curves.
- Input Back Ripple Current is tested and specified over a 5 Hz to 20 MHz bandwidth. Input filtering is Cin=2 x 100 μF, Cbus=1000 μF, Lbus=1 μH. All caps are low ESR types.
- 3) Note that Maximum Power Derating curves indicate an average current at nominal input voltage. At higher temperatures and/or lower airflow, the DC/DC converter will tolerate brief full current outputs if the total RMS current over time does not exceed the Derating curve. All Derating curves are presented near sea level altitude. Be aware of reduced power dissipation with increasing altitude.
- 4) Mean Time Before Failure is calculated using the Telcordia (Belcore) SR-332 Method 1, Issue 2, Class 3, ground benign, controlled conditions, Tpcboard=+25 °C, full output load, natural air convection.
- 5) The input and output are not isolated. They share a single COMMON power and signal return.
- 6) Short circuit shutdown begins when the output voltage degrades approximately 2% from the selected setting. Output current limit and short circuit protection are non-latching. When the overcurrent fault is removed, the converter will immediately recover.


- The output is not intended to sink appreciable reverse current.
- 8) "Hiccup" overcurrent operation repeatedly attempts to restart the converter with a brief, full-current output. If the overcurrent condition still exists, the restart current will be removed and then tried again. This short current pulse prevents overheating and damaging the converter.
- 9) Input Fusing: If reverse polarity is accidentally applied to the input, to ensure reverse input protection, always connect an external input fast-blow fuse in series with the +Vin input. Use approximately twice the full input current rating with nominal input voltage.
- 10) Regulation specifications describe the deviation as the line input voltage or output load current is varied from a nominal midpoint value to either extreme.
- 11) Output noise may be further reduced by installing an external filter. Do not exceed the maximum output capacitance. At zero output current and no external capacitor, the output may contain low frequency components which exceed the ripple specification. The output may be operated indefinitely with no load.

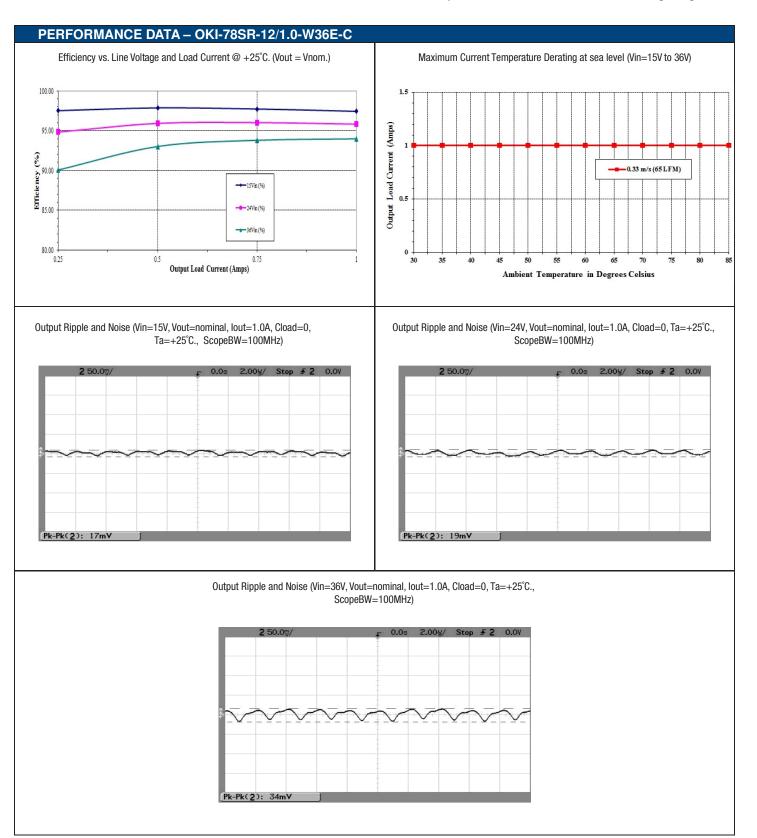


Encapsulated Non-Isolated Switching Regulator

PERFORMANCE DATA - OKI-78SR-12/1.0-W36E-C


Step Load Transient Response (Vin=15V, Vout=nominal, Cload=0, Iout=0.5A to 1.0A, Slew=1A/μS, Ta=+25°C.) Trace 2=Vout, 100 mV/div. Trace 4=Iout, 0.5A/div.




Step Load Transient Response (Vin=15V, Vout=nominal, Cload=0, lout=1.0A to 0.5A, Slew=1A/µS, Ta=+25°C,) Trace 2=Vout, 100 mV/div. Trace 4=lout, 0.5A/div.

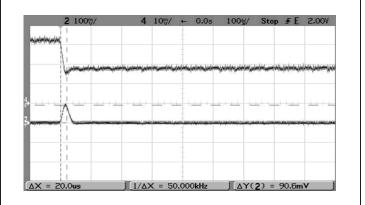


Step Load Transient Response (Vin=24V, Vout=nominal, Cload=0, Iout=0.5A to 1.0A, Slew=1A/ μ S, Ta=+25°C.) Trace 2=Vout, 100 mV/div. Trace 4=Iout, 0.5A/div.




Step Load Transient Response (Vin=24V, Vout=nominal, Cload=0, Iout=1.0A to 0.5A, Slew=1A/µS, Ta=+25°C.) Trace 2=Vout, 100 mV/div. Trace 4=Iout, 0.5A/div.




Step Load Transient Response (Vin=36V, Vout=nominal, Cload=0, lout=0.5A to 1.0A, Slew=1A/µS, Ta=+25°C.) Trace 2=Vout, 100 mV/div. Trace 4=lout, 0.5A/div.

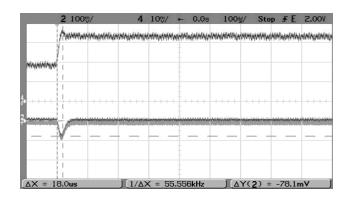


Step Load Transient Response (Vin=36V, Vout=nominal, Cload=0, Iout=1.0A to 0.5A, Slew=1A/µS, Ta=+25°C.) Trace 2=Vout, 100 mV/div. Trace 4=lout, 0.5A/div.



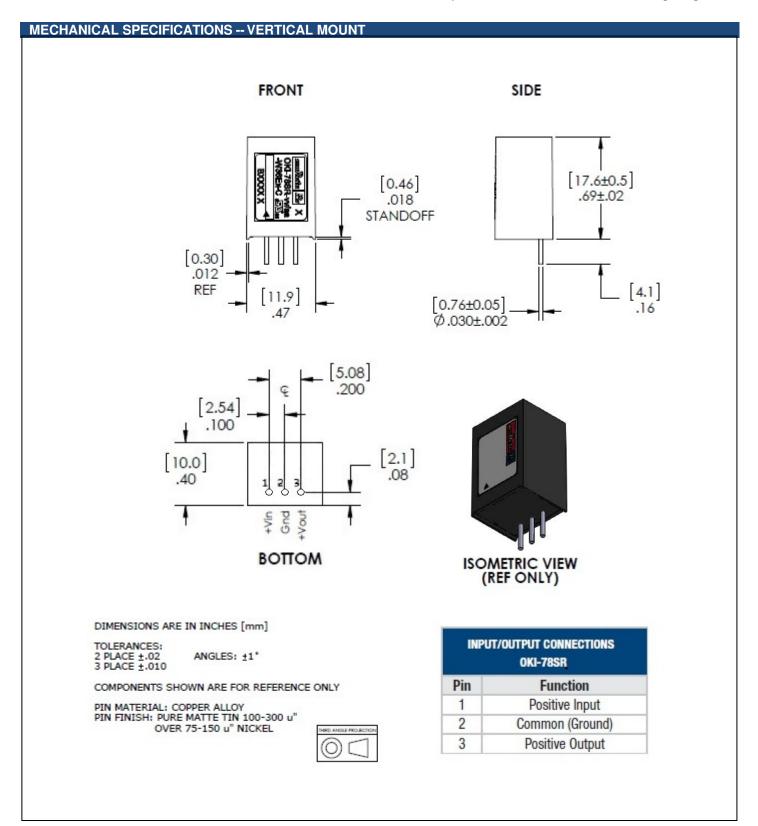

Encapsulated Non-Isolated Switching Regulator

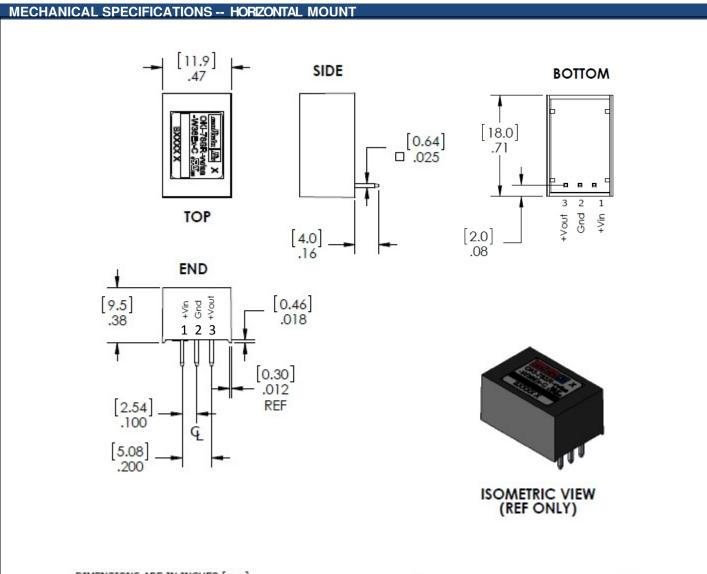

DIMENSIONS ARE IN INCHES [mm]

TOLERANCES: 2 PLACE ±.02 3 PLACE ±.010


ANGLES: ±1°


COMPONENTS SHOWN ARE FOR REFERENCE ONLY

PIN MATERIAL: COPPER ALLOY PIN FINISH: PURE MATTE TIN 100-300 u" OVER 75-150 u" NICKEL



INPUT/OUTPUT CONNECTIONS OKI-78SR				
Pin	Function			
1	Positive Input			
2	Common (Ground)			
3	Positive Output			

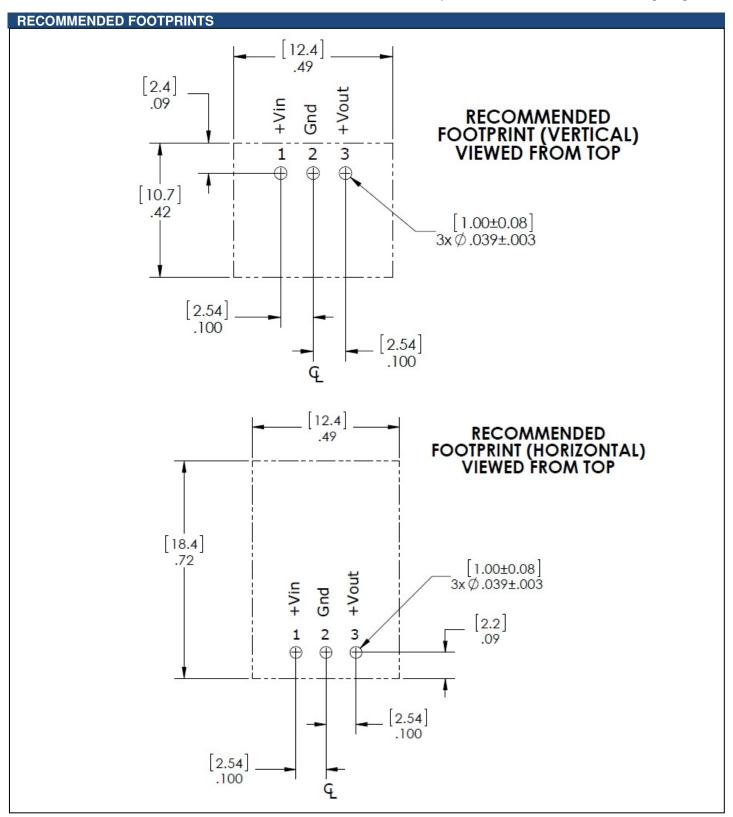

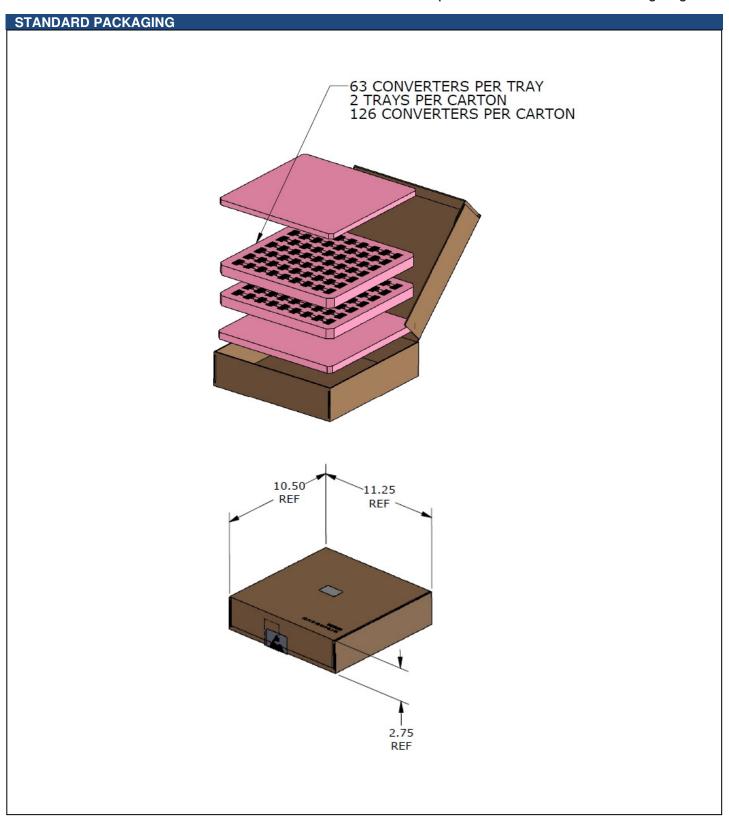

Encapsulated Non-Isolated Switching Regulator

TECHNICAL NOTES

Input Fusing

Certain applications and/or safety agencies may require fuses at the inputs of power conversion components. Fuses should also be used when there is the possibility of sustained input voltage reversal which is not current-limited. For greatest safety, we recommend a fast blow fuse installed in the ungrounded input supply line.

The installer must observe all relevant safety standards and regulations. For safety agency approvals, install the converter in compliance with the end-user safety standard.

Recommended Input Filtering

The user must assure that the input source has low AC impedance to provide dynamic stability and that the input supply has little or no inductive content, including long distributed wiring to a remote power supply. The converter will operate with no additional external capacitance if these conditions are met.

For best performance, we recommend installing a low-ESR capacitor immediately adjacent to the converter's input terminals. The capacitor should be a ceramic type such as the Murata GRM32 series or a polymer type. Initial suggested capacitor values are 10 to 22 μF , rated at twice the expected maximum input voltage. Make sure that the input terminals do not go below the undervoltage shutdown voltage at all times. More input bulk capacitance may be added in parallel (either electrolytic or tantalum) if needed.

Recommended Output Filtering

The converter will achieve its rated output ripple and noise with no additional external capacitor. However, the user may install more external output capacitance to reduce the ripple even further or for improved dynamic response. Again, use low-ESR ceramic (Murata GRM32 series) or polymer capacitors. Initial values of 10 to 47 μF may be tried, either single or multiple capacitors in parallel. Mount these close to the converter. Measure the output ripple under your load conditions.

Use only as much capacitance as required to achieve your ripple and noise objectives. Excessive capacitance can make step load recovery sluggish or possibly introduce instability. Do not exceed the maximum rated output capacitance listed in the specifications.

Input Ripple Current and Output Noise

All models in this converter series are tested and specified for input reflected ripple current and output noise using designated external input/output components, circuits and layout as shown in the following figures. The Cbus and Lbus components simulate a typical DC voltage bus. Please note that the values of Cin, Lbus and Cbus will vary according to the specific converter model.


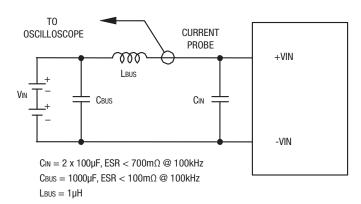


Figure 3 Measuring Input Ripple Current



LUAD 2-3 INCHES (ST-70IIIII) FRUM MUDULE

Figure 4. Measuring Output Ripple and Noise (PARD)

Encapsulated Non-Isolated Switching Regulator

Minimum Output Loading Requirements

All models regulate within specification and are stable under no load to full load conditions. Operation under no load might however slightly increase output ripple and noise.

Temperature Derating Curves

The graphs in this data sheet illustrate typical operation under a variety of conditions. The Derating curves show the maximum continuous ambient air temperature and decreasing maximum output current which is acceptable under increasing forced airflow measured in Linear Feet per Minute ("LFM"). Note that these are AVERAGE measurements. The converter will accept brief increases in current or reduced airflow as long as the average is not exceeded.

Note that the temperatures are of the ambient airflow, not the converter itself which is obviously running at higher temperature than the outside air. Also note that "natural convection" is defined as very flow rates which are not using fan-forced airflow. Depending on the application, "natural convection" is usually about 30-65 LFM but is not equal to still air (0 LFM).

Murata Power Solutions makes Characterization measurements in a closed cycle wind tunnel with calibrated airflow. We use both thermocouples and an infrared camera system to observe thermal performance. As a practical matter, it is quite difficult to insert an anemometer to precisely measure airflow in most applications. Sometimes it is possible to estimate the effective airflow if you thoroughly understand the enclosure geometry, entry/exit orifice areas and the fan flowrate specifications.

CAUTION: If you routinely or accidentally exceed these Derating guidelines, the converter may have an unplanned Over Temperature shut down. Also, these graphs are all collected at near Sea Level altitude. Be sure to reduce the derating for higher altitude.

Output Fusing

The converter is extensively protected against current, voltage and temperature extremes. However your output application circuit may need additional protection. In the extremely unlikely event of output circuit failure, excessive voltage could be applied to your circuit. Consider using an appropriate fuse in series with the output.

Output Current Limiting

Current limiting inception is defined as the point at which full power falls below the rated tolerance. See the Performance/Functional Specifications. Note particularly that the output current may briefly rise above its rated value in normal operation as long as the average output power is not exceeded. This enhances reliability and continued operation of your application. If the output current is too high, the converter will enter the short circuit condition.

Output Short Circuit Condition

When a converter is in current-limit mode, the output voltage will drop as the output current demand increases. If the output voltage drops too low (approximately 98% of nominal output voltage for most models), the bias voltage may shut down the PWM controller. Following a time-out period, the PWM will restart, causing the output voltage to begin rising to its appropriate value. If the short-circuit condition persists, another shutdown cycle will initiate. This rapid on/off cycling is called "hiccup mode". The hiccup cycling reduces the average output current, thereby preventing excessive internal temperatures and/or component damage.

The "hiccup" system differs from older latching short circuit systems because you do not have to power down the converter to make it restart. The system will automatically restore operation as soon as the short circuit condition is removed.

Soldering Guidelines

Murata Power Solutions recommends the specifications below when installing these converters. These specifications vary depending on the solder type. Exceeding these specifications may cause damage to the product. Your production environment may differ; therefore please thoroughly review these guidelines with your process engineers.

Wave Solder Operations for through-hole mounted products (THMT)							
For Sn/Ag/Cu based solders: For Sn/Pb based solders:							
Maximum Preheat Temperature	115° C.	Maximum Preheat Temperature	105° C.				
Maximum Pot Temperature	270° C.	Maximum Pot Temperature	250° C.				
Maximum Solder Dwell Time	7 seconds	Maximum Solder Dwell Time	6 seconds				

Murata Power Solutions, Inc. 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A. ISO 9001 and 14001 REGISTERED



This product is subject to the following operating requirements and the Life and Safety Critical Application Sales Policy:

Refer to: http://www.murata-ps.com/requirements/

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

© 2017 Murata Power Solutions, Inc.

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru_4 moschip.ru_9