



Product Description

The QPM1002 is a Gallium Nitride MMIC front-end module (FEM) designed for X-Band radar applications within the 8.5 – 10.5 GHz range. The MMIC combines a T/R switch, low-noise amplifier, and a power amplifier. The receive path offers 25 dB gain with low noise figure of 2.2 dB. The transmit path offers a small signal gain of 33 dB, it can deliver 3 W of saturated power with a PAE of 32%, with a 25 dB of large signal gain. The FEM is robust up to 2 W of input power into the ANT port eliminating the need for a limiter.

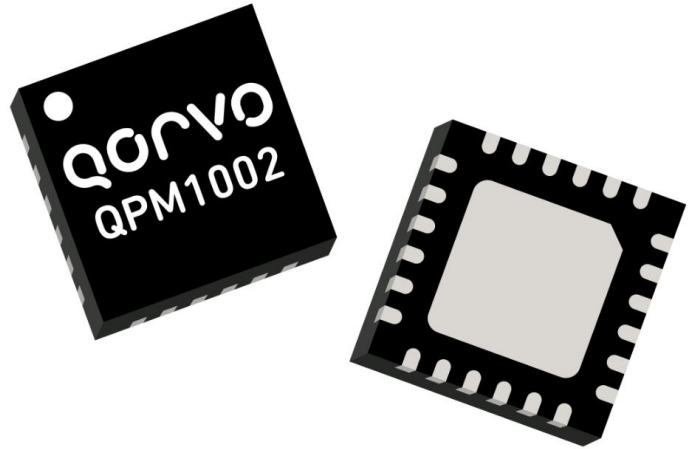

The QPM1002 is fabricated on Qorvo's QGaN25 0.25um GaN-on-SiC process. The 5 x 5 mm QFN surface mount package with over-mold encapsulant, coupled with high thermal conductivity die-attach process, allows the QPM1002 to perform well in a high temperature environment. Its compact size supports tight lattice spacing requirements needed for X-Band phased array radar applications.

Functional Block Diagram

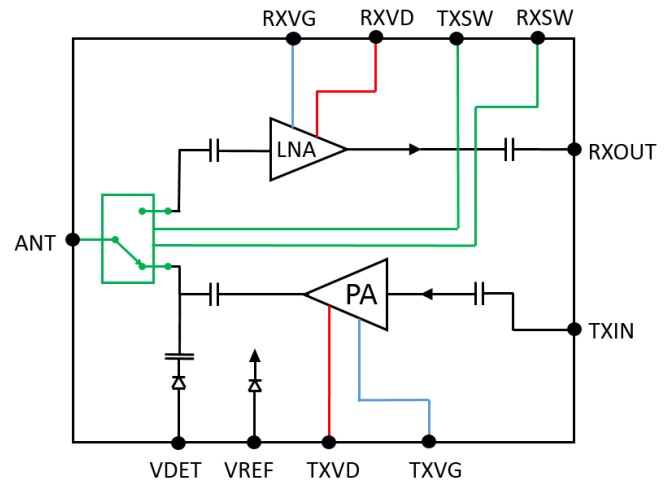

Product Features

- Frequency Range: 8.5 – 10.5 GHz
- RX Noise Figure: 2.2 dB
- RX Small Signal Gain: 25 dB
- RX Saturated Power: 16 dBm
- RX Output TOI: 22dBm
- TX Small Signal Gain: 33 dB
- TX Large Signal Gain: 25 dB
- TX Saturated Power: 35 dBm, Pulsed
- TX PAE: 32% @ 35 dBm Pout, Pulsed
- TX Output TOI @ 6 dBm Pin / tone: 38.5 dBm
- TX Harmonics Suppression: 35 dBc
- Package Dimensions: 5 x 5 x 0.85 mm

*Performance is typical at room temperature.
Please reference electrical specification table and data plots for more details.*

Applications

- Electronics Warfare (EW)
- Commercial and Military Radar
- Communications

Ordering Information

| Part No. | Description |
|-------------|--------------------------------|
| QPM1002SR | QPM1002 Tape and Reel, Qty 100 |
| QPM1002 | QPM1002 Shipping Tray, Qty 250 |
| QPM1002TR7 | QPM1002 Tape and Reel, Qty 750 |
| QPM1002EVB1 | QPM1002 Evaluation Board |

Normal Operating Conditions

| Parameter | Value |
|---|--|
| RX Drain Voltage (RXVD) ^{1, 3} | 10 V |
| RX Drain Quiescent Current (RXIDQ) | 20 mA |
| RX Gate Control (RXVG) ² | -2.5 V |
| TX Drain Voltage (TXVD) | 25 V |
| TX Drain Quiescent Current (TXIDQ) | 110 mA |
| TX Gate Voltage (TXVG) ² | -2.5 V |
| Control Voltage (TXSW / RXSW) | Transmit: -28V / 0 V; Receive: 0V / -28V |
| Operating Temperature Range | -40 to 95 °C |

1. Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.
2. Gate voltage shown are typical, can be adjusted to set required drain current.
3. Drain of LNA is switched off by internal switch when in transmit mode. In receive mode, the PA should be biased off.

Absolute Maximum Ratings

| Parameter | Value |
|--------------------------------------|---------------|
| Drain Voltage (TXVD and RXVD) | 32 V |
| Drain Current (TXID) | 600 mA |
| Drain Current (RXID) | 60 mA |
| Gate Voltage (RXVG, TXVG) | 0 to -5 V |
| Gate Current (RXIG) | 10 mA |
| Gate Current (TXIG) | 20 mA |
| Switch Control Voltage (TXSW, RXSW) | 0 to -50 V |
| Switch Control Current | 20 mA |
| RF Input Power (All RF ports, 85 °C) | 33 dBm |
| Channel Temperature, T _{CH} | 225 °C |
| Mounting Temperature (30 seconds) | 260 °C |
| Storage Temperature | -55 to 150 °C |

Operation of this device outside the parameter ranges given above may cause permanent damage. These are stress ratings only, and functional operation of the device at these conditions is not implied.

Electrical Specifications, Receive

Test conditions unless otherwise noted: RXVD = 10 V, RXIDQ = 20 mA, RXSW = - 28 V, TXSW = 0 V, Transmit channel biased off.
Data de-embedded to device reference plane, 25 °C

| Parameter | Min | Typical | Max | Units |
|--|-------|---------|------|-------|
| Frequency | 8.5 | | 10.5 | GHz |
| Small Signal Gain | 23 | 25 | 28.5 | dB |
| Noise Figure | | 2.2 | | dB |
| Input Return Loss | | 13 | | dB |
| Output Return Loss | | 12 | | dB |
| Saturated Output Power, CW Mode | | 16 | | dBm |
| Output TOI @ -31 dBm Pin / Tone, CW Mode | | 22 | | dBm |
| Gate Leakage Current (RXVG leak, RXVD = 10 V, RXVG = -3.7 V) | -0.44 | 0 | | mA |
| Switch Settling Time, Rising Edge ¹ | | | 20 | nS |
| Switch Settling Time, Falling Edge ² | | | 100 | nS |
| Gain Temperature Coefficient | | -0.04 | | dB/°C |

- 1 From 50% trigger signal to 90 % of RF on (Trigger signal to switch driver to DUT).
2 From 50% trigger signal to 10 % of RF off (Trigger signal to switch driver to DUT).

Electrical Specifications, Transmit





Test conditions unless otherwise noted: TXVD = 25 V, TXIDQ = 110 mA, RXSW = 0V, TXSW = - 28 V
Data de-embedded to device reference plane, 25 °C

| Parameter | Min | Typical | Max | Units |
|--|--------|---------|------|-------|
| Frequency | 8.5 | | 10.5 | GHz |
| Small Signal Gain | | 33 | | dB |
| Large Signal Gain | | 25 | | dB |
| Input Return Loss | | 15 | | dB |
| Output Return Loss | | 15 | | dB |
| Saturated Output Power @ 8.5 GHz to 9.5 GHz ¹ | 33 | 35 | | dBm |
| Saturated Output Power @ 10 GHz ¹ | 32 | 35 | | dBm |
| Saturated Output Power @ 10.5 GHz ¹ | 31.5 | 35 | | dBm |
| PAE at Saturated Power (@ 10 dBm Pin) ¹ | | 32 | | % |
| Output TOI @ 6 dBm Pin / tone, CW Mode | | 38.5 | | dBm |
| Harmonic Suppression, CW Mode | | 35 | | dBc |
| Power Detection Output (VREF – VDET) | 0 | | 0.3 | V |
| Gate Leakage Current (TXVG leak, TXVD = 10 V, TXVG = -3.7 V) | - 2.37 | 0 | | mA |
| Switch Settling Time, Rising Edge ² | | | 40 | nS |
| Switch Settling Time, Falling Edge ³ | | | 60 | nS |
| Gain Temperature Coefficient | | -0.05 | | dB/°C |

1. Power and PAE measured with DC drain pulsed, PW = 100 uS, Duty Cycle = 10%.
2. From 50% trigger signal to 90 % of RF on (Trigger signal to switch driver to DUT)
3. From 50% trigger signal to 10 % of RF off (Trigger signal to switch driver to DUT)







Small Signal Performance, Receive

Test Conditions unless otherwise stated: RXVD = 10 V, RXIDQ = 20 mA, RXSW = -28 V, TXSW = 0 V, 25 °C
Transmit channel biased off.

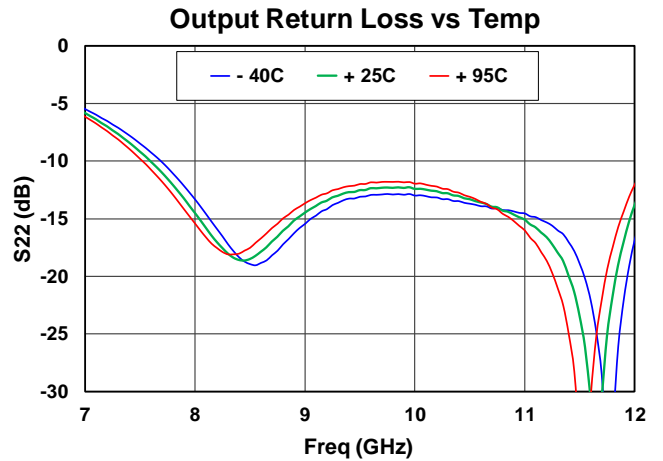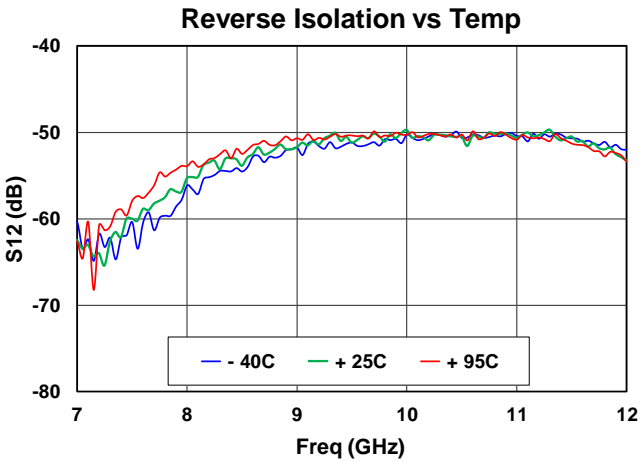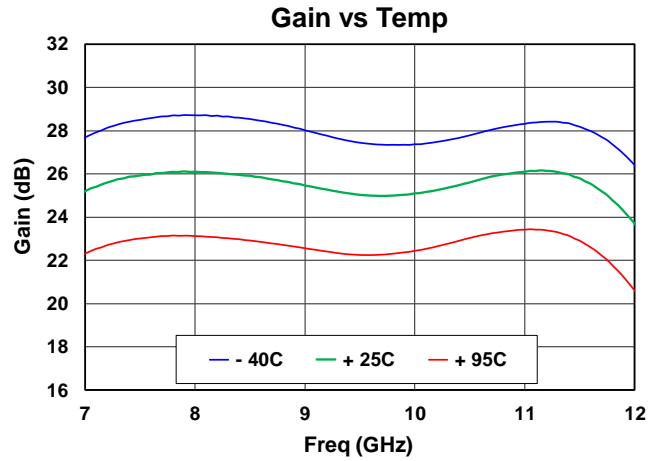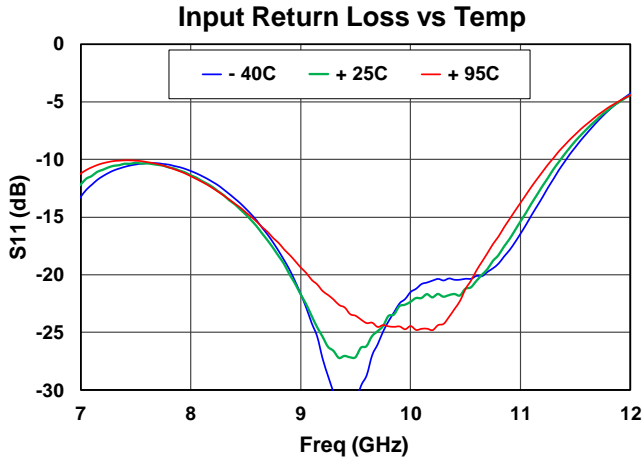






Small Signal Performance, Receive

Test Conditions unless otherwise stated: RXVD = 10 V, RXIDQ = 20 mA, RXSW = -28 V, TXSW = 0 V, 25 °C
Transmit channel biased off.

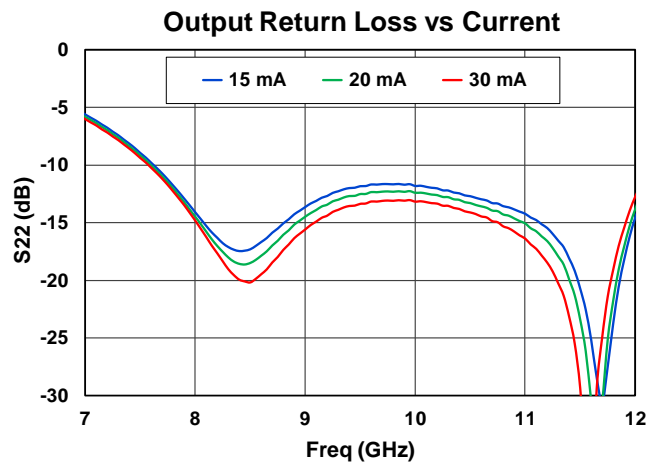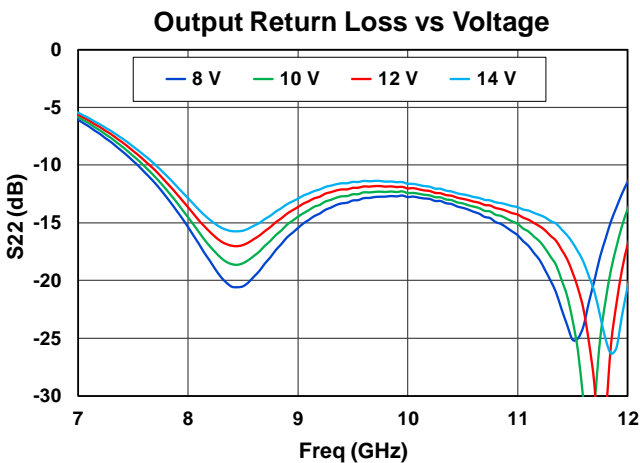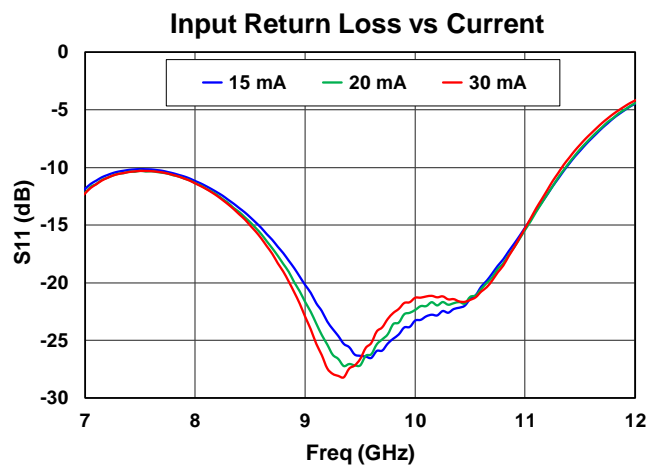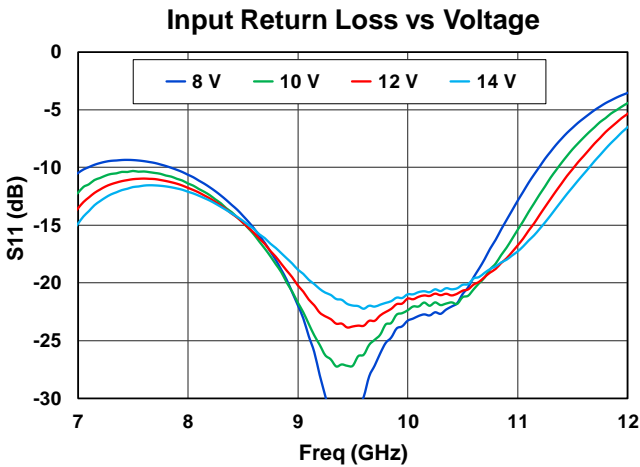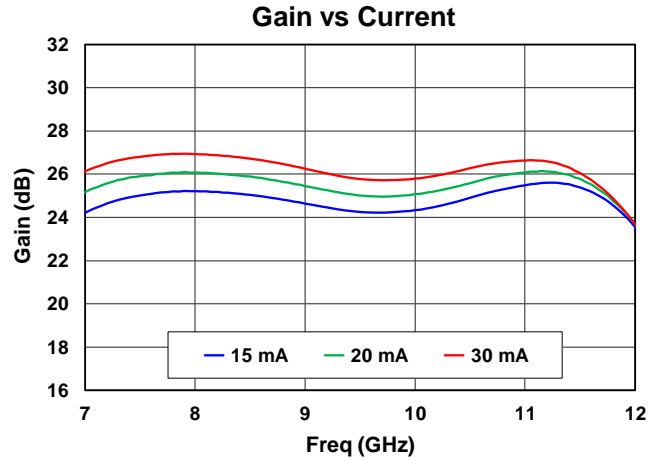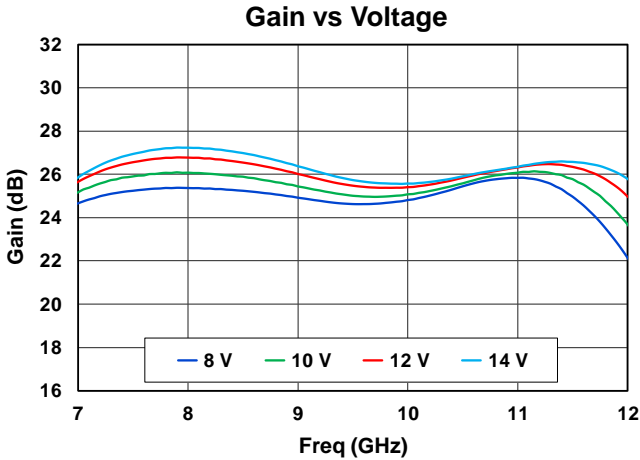







Noise Figure and Isolation

Test Conditions unless otherwise stated: VD = 10 V, RXIDQ = 20 mA, RXSW = -28 V, TXSW = 0 V, 25 °C
Transmit channel biased off.

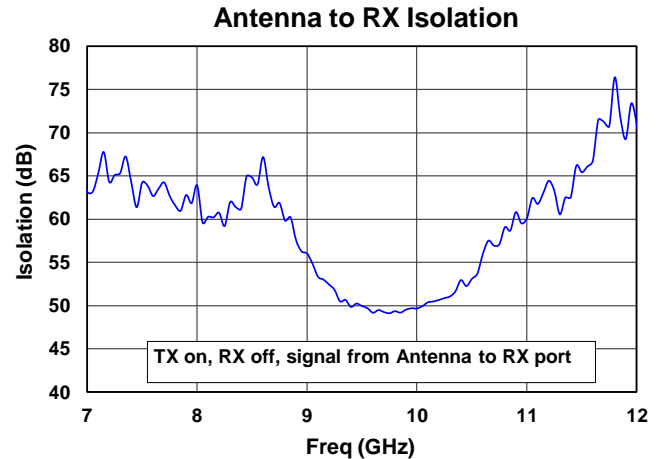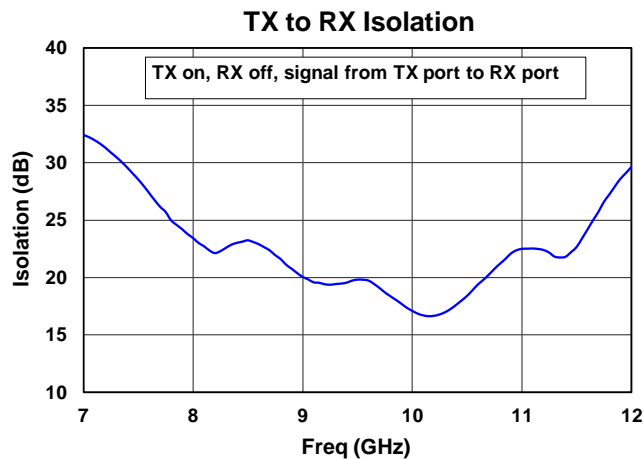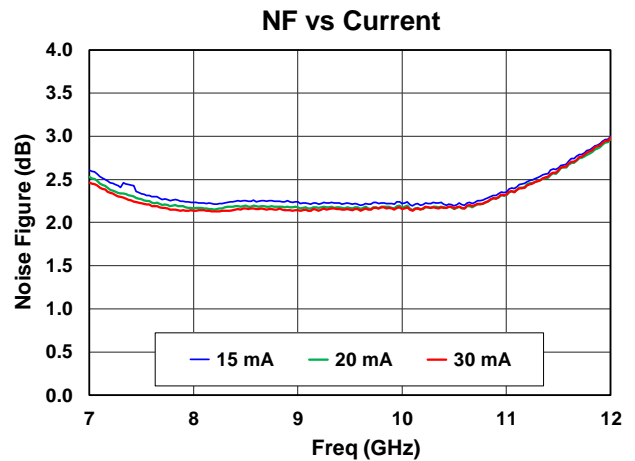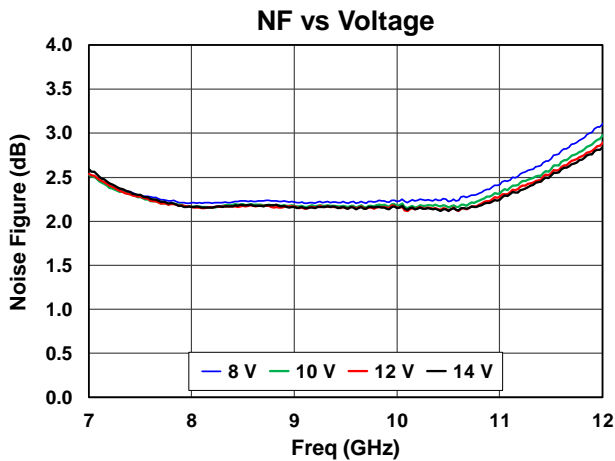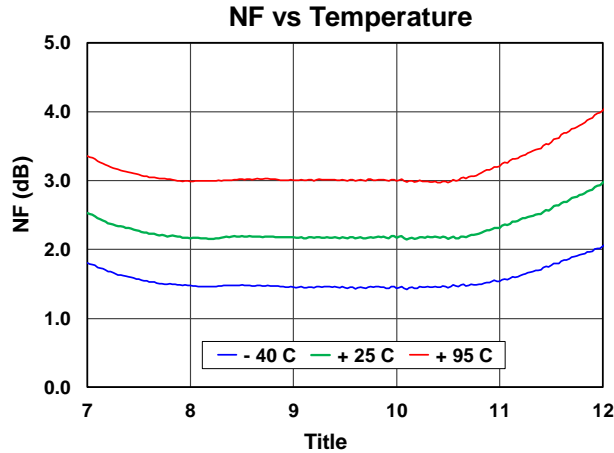





Power Performance, Receive

Test Conditions unless otherwise stated: $V_D = 10\text{ V}$, $RXIDQ = 20\text{ mA}$, $RXSW = -28\text{ V}$, $TXSW = 0\text{ V}$
CW Mode, $P_{in} = 5\text{ dBm}$, transmit channel biased off., $25\text{ }^\circ\text{C}$

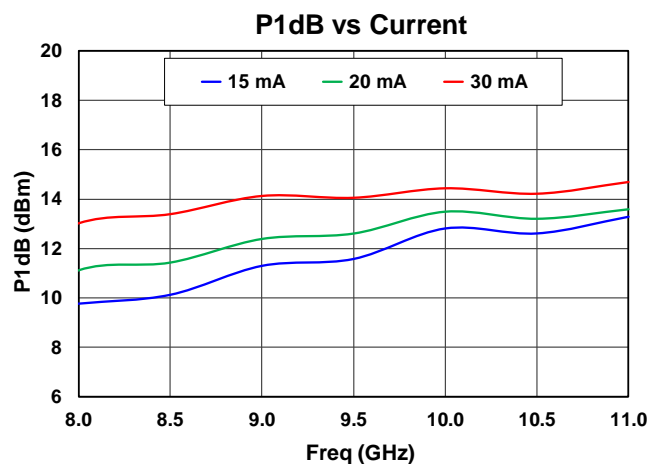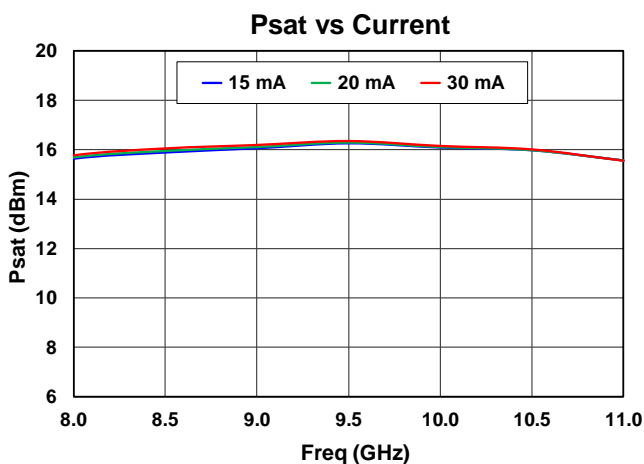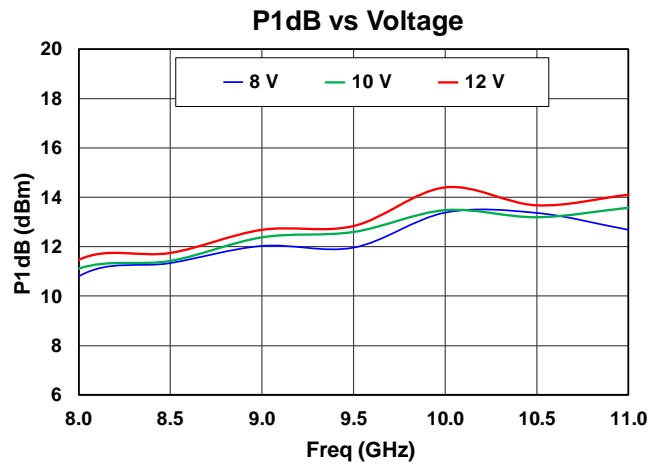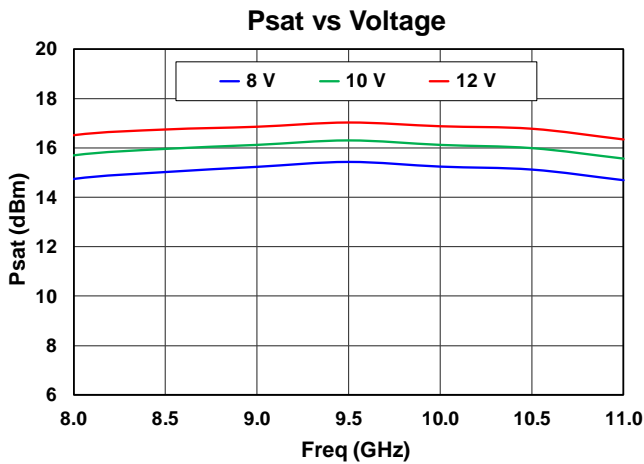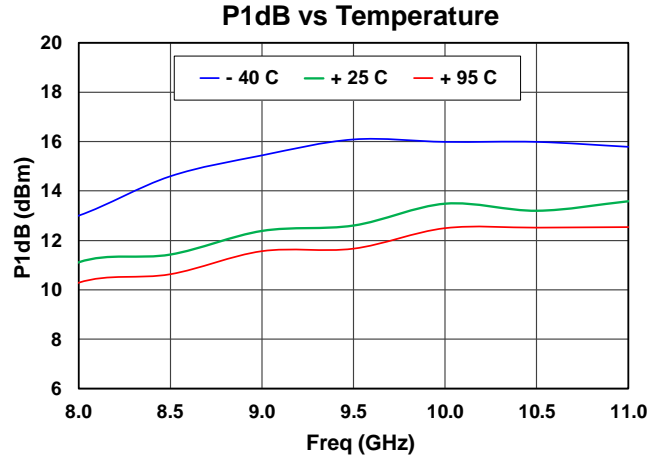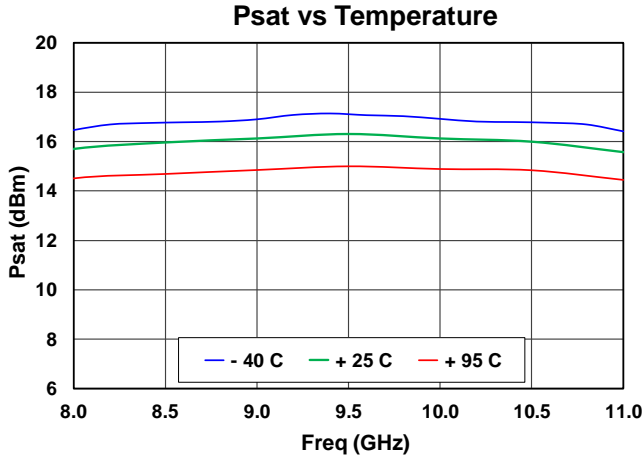






Power Sweep, Receive

Test Conditions unless otherwise stated: $V_D = 10\text{ V}$, $R_{XIDQ} = 20\text{ mA}$, $R_{XSW} = -28\text{ V}$, $R_{TSW} = 0\text{ V}$
CW Mode, transmit channel biased off, $25\text{ }^\circ\text{C}$

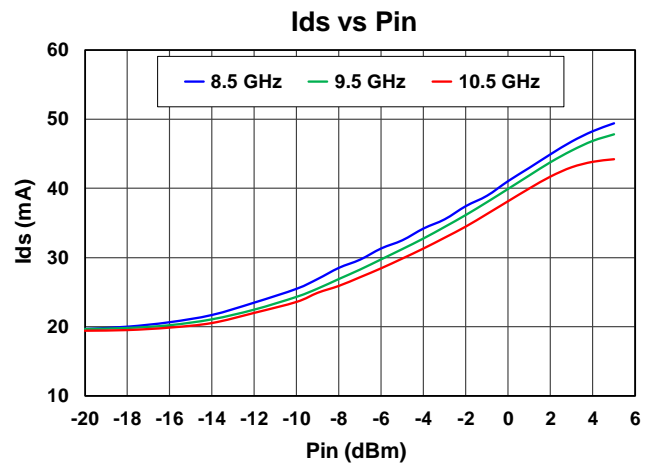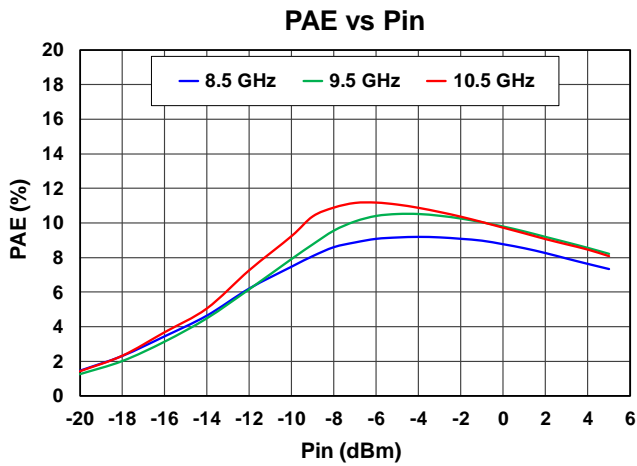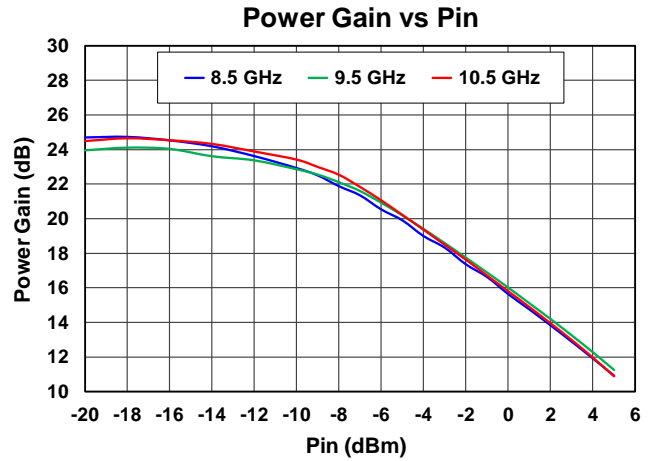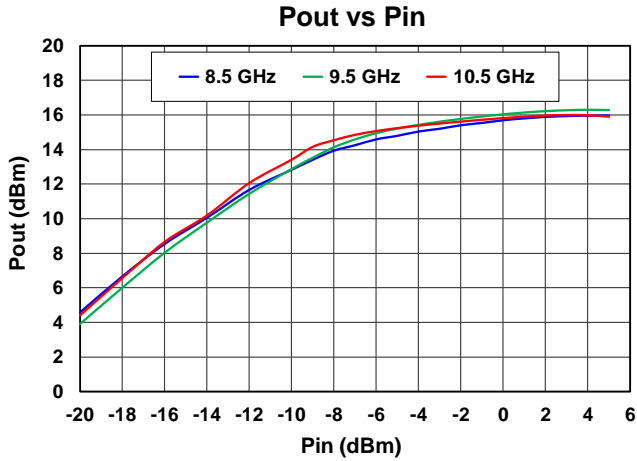





Linearity, Receive

Test Conditions unless otherwise stated: Transmit channel biased off, 25 °C
VD = 10 V, RXIDQ = 20 mA, RXSW = -28 V, TXSW = 0 V, CW Mode, Tone spacing = 20 MHz.

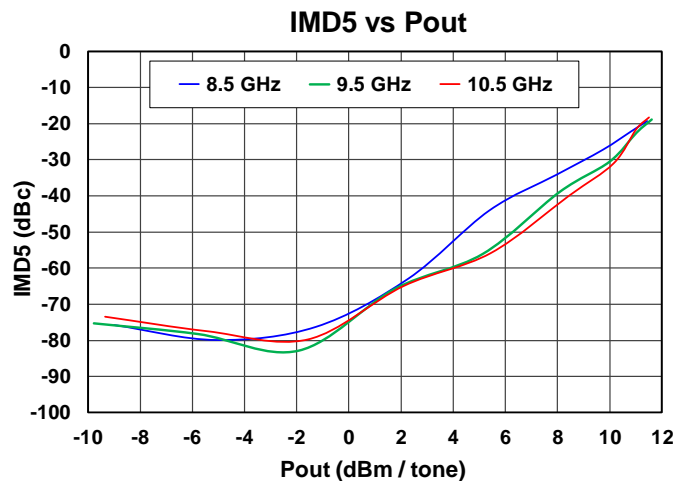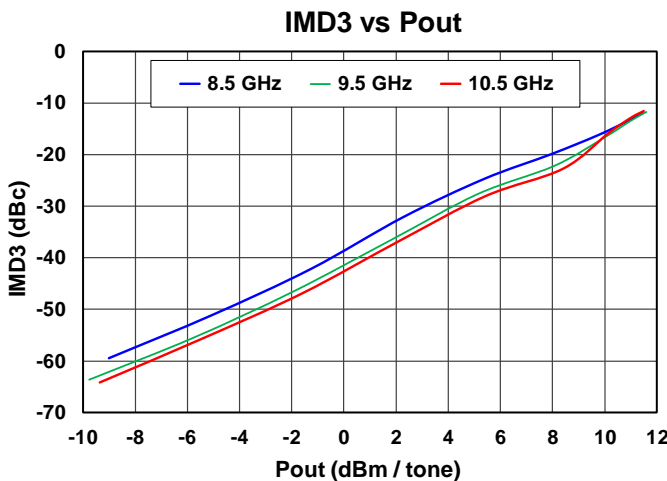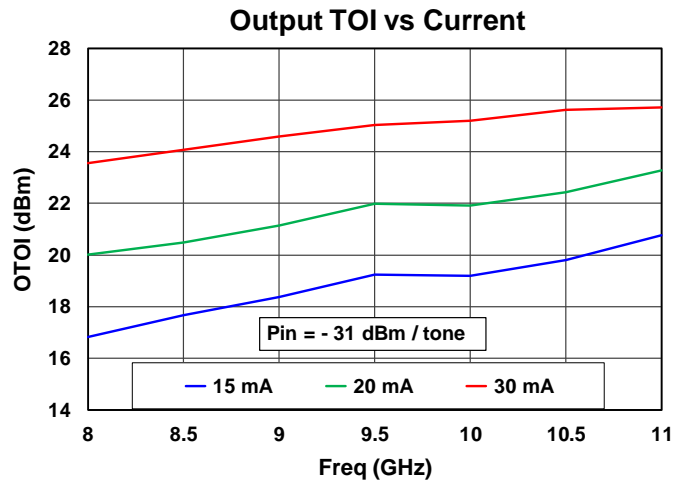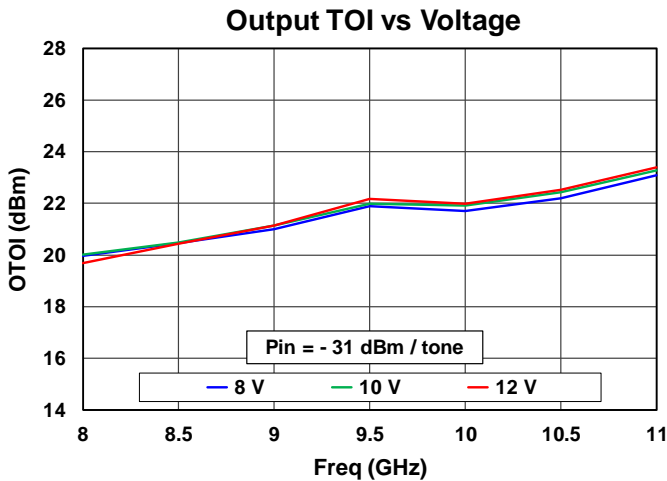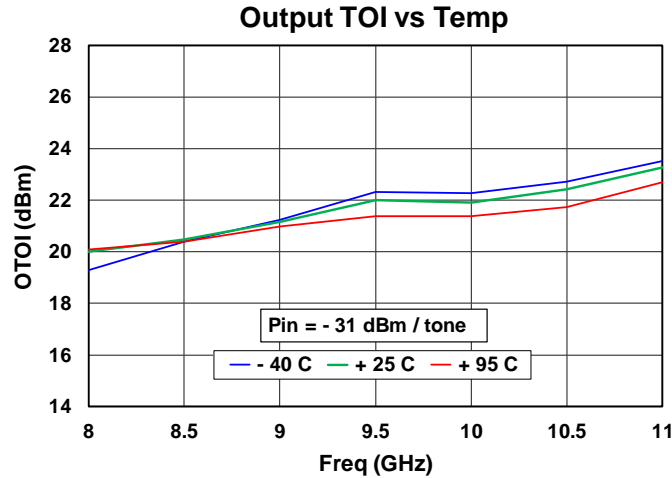







Small Signal Performance, Transmit

Test Conditions unless otherwise stated: TXVD = 25 V, TXIDQ = 110 mA, RXSW = 0V, TXSW = -28 V, 25 °C

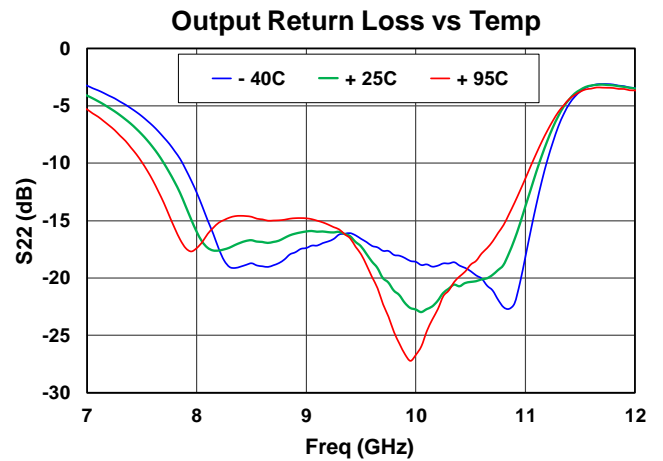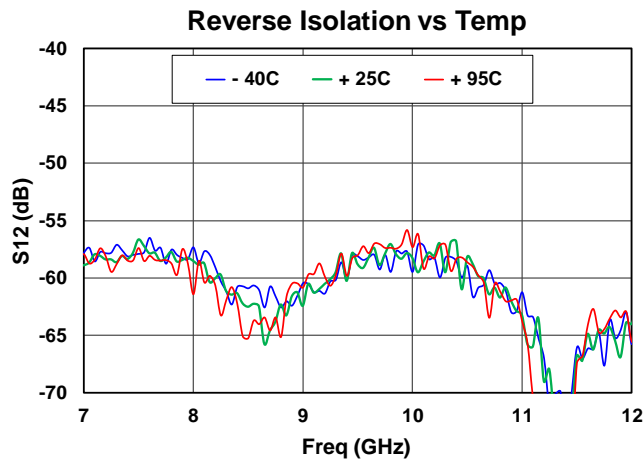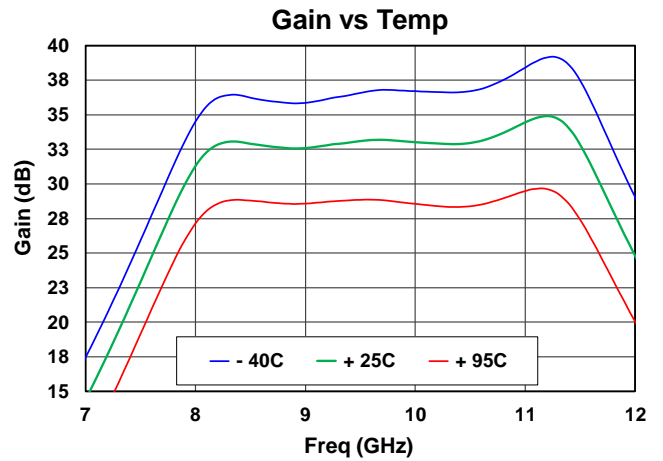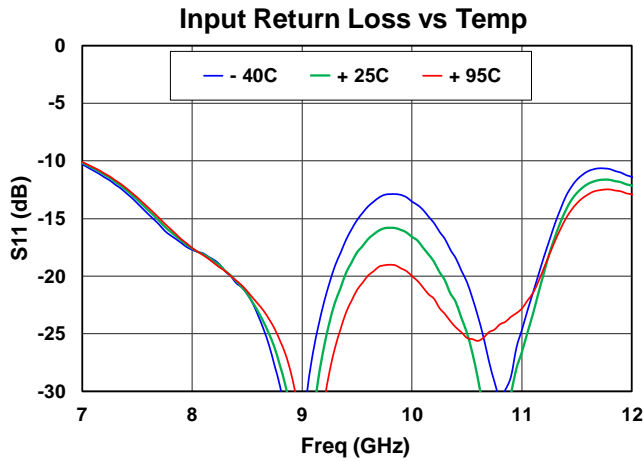







Small Signal Performance, Transmit

Test Conditions unless otherwise stated: VD = 25 V, TXIDQ = 110 mA, RXSW = 0V, TXSW = -28 V, 25 °C

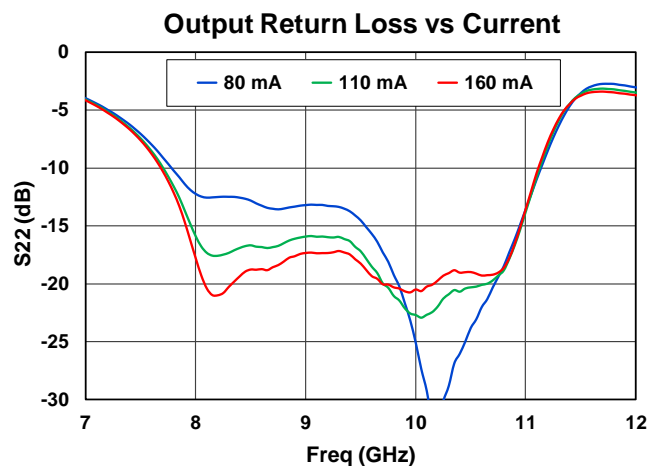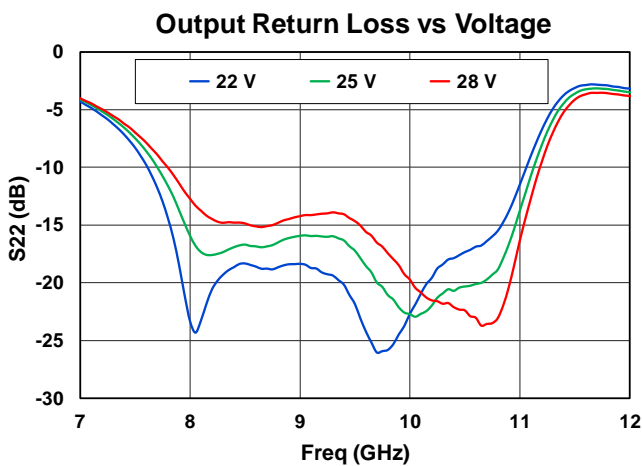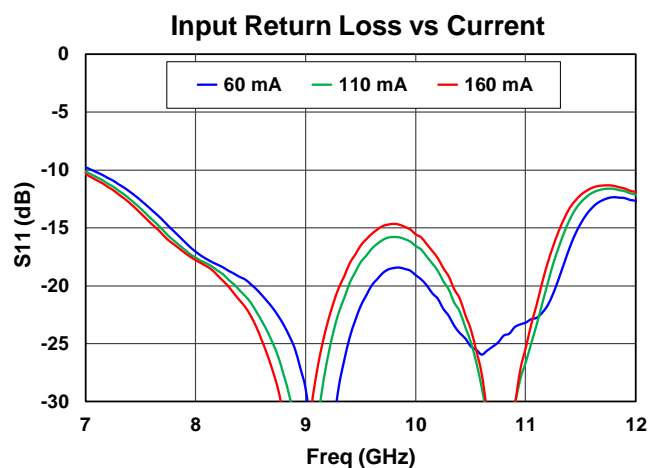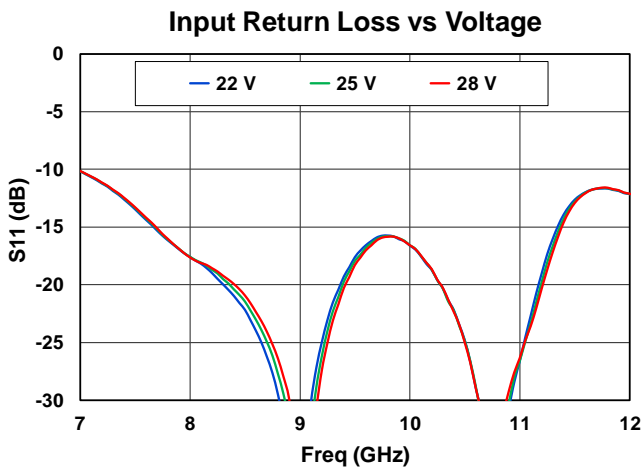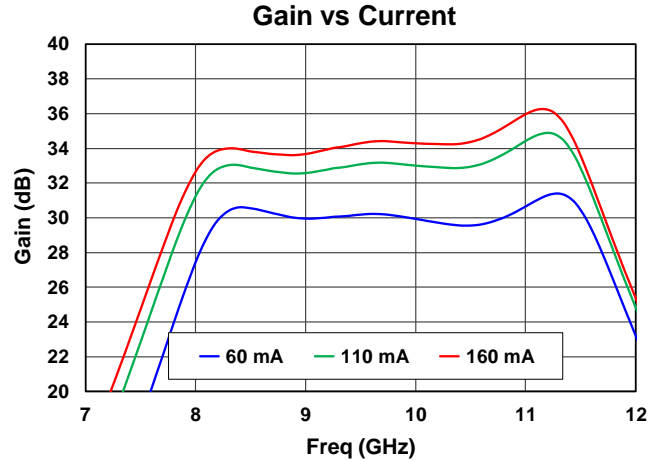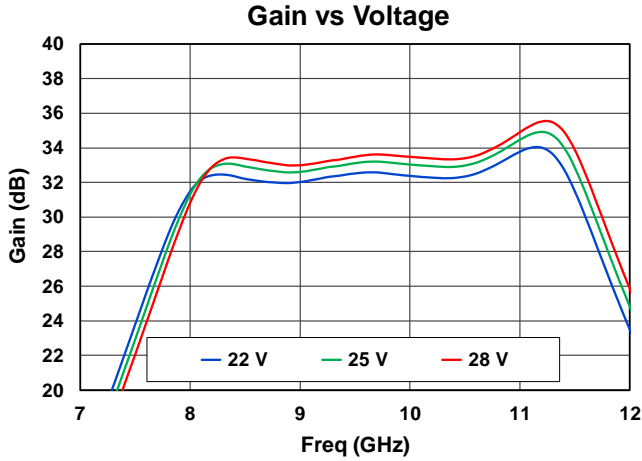







Power Performance, Transmit

Test Conditions unless otherwise stated: TXVD = 25 V, TXIDQ = 110 mA, RXSW = 0V, TXSW = -28 V
Pulse Mode, Pin = 16 dBm, PW = 100 uS, DC = 10%, 25 °C

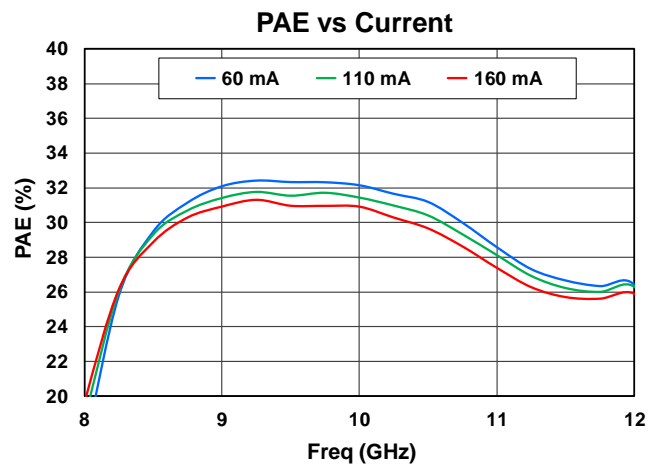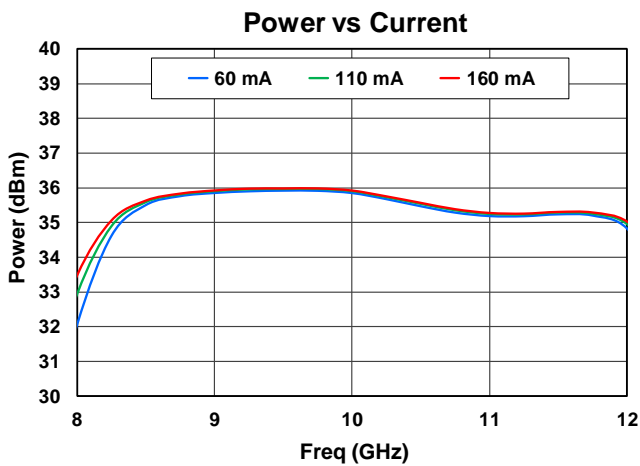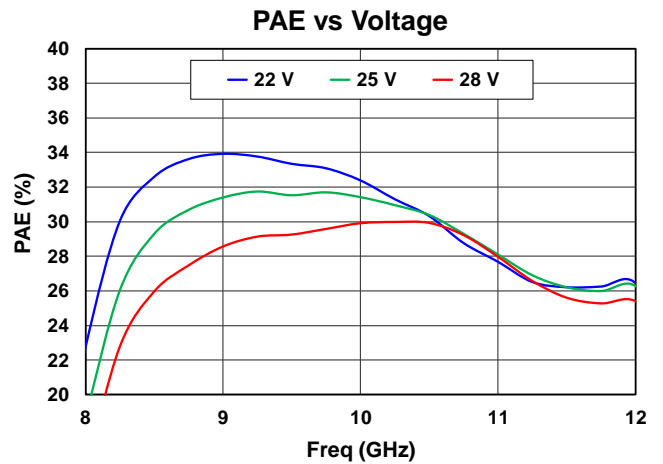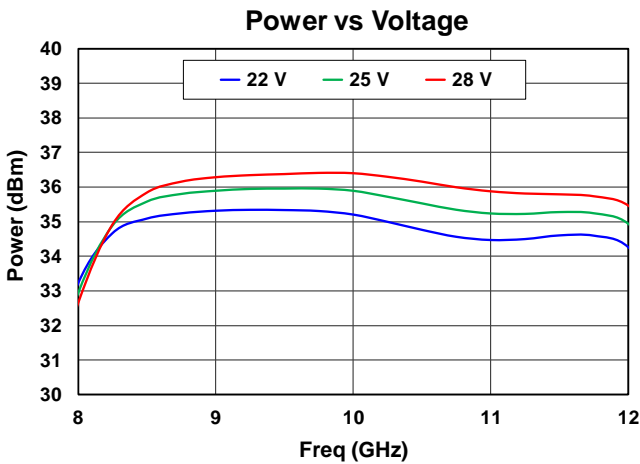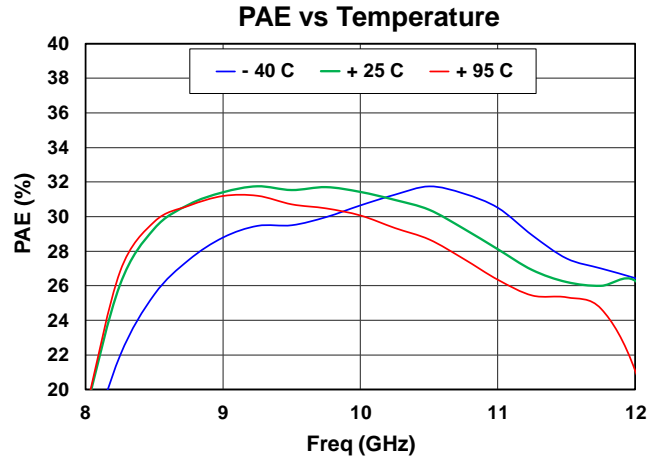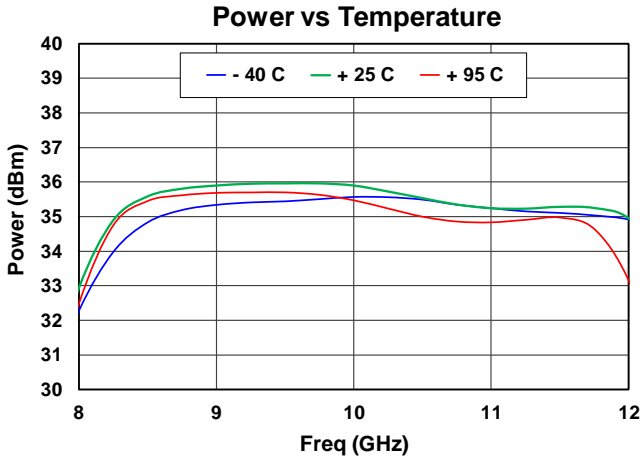







Power Performance, Transmit

Test Conditions unless otherwise stated: TXVD = 25 V, TXIDQ = 110 mA, RXSW = 0V, TXSW = -28 V
Pulse Mode, Pin = 10 dBm, PW = 100 uS, DC = 10%, 25 °C

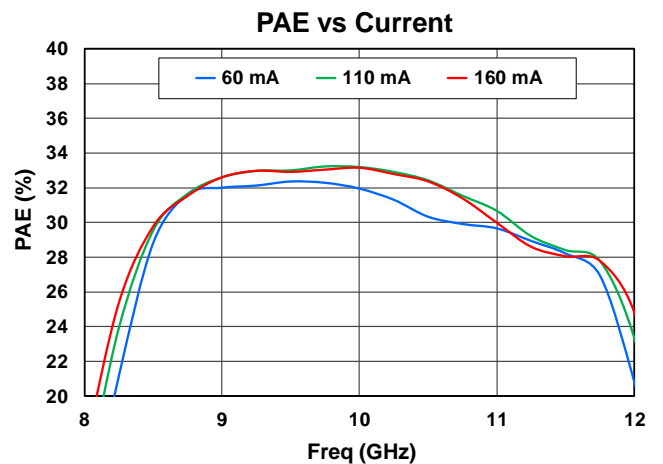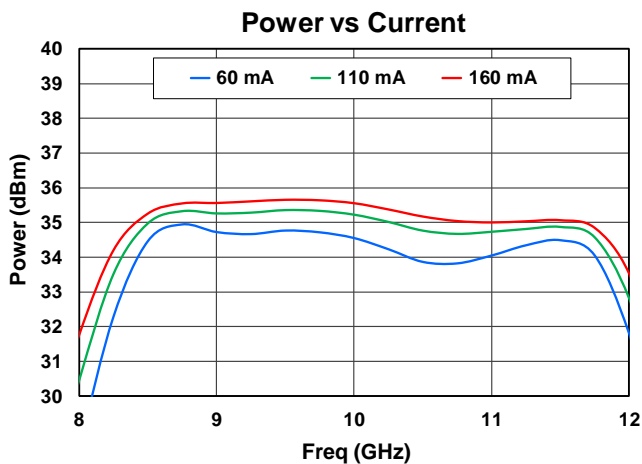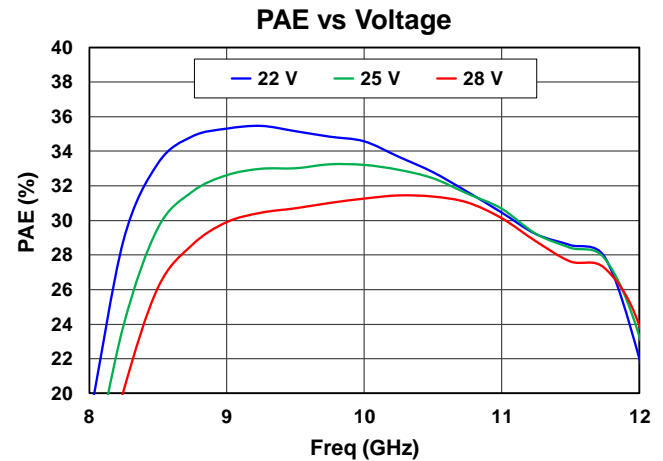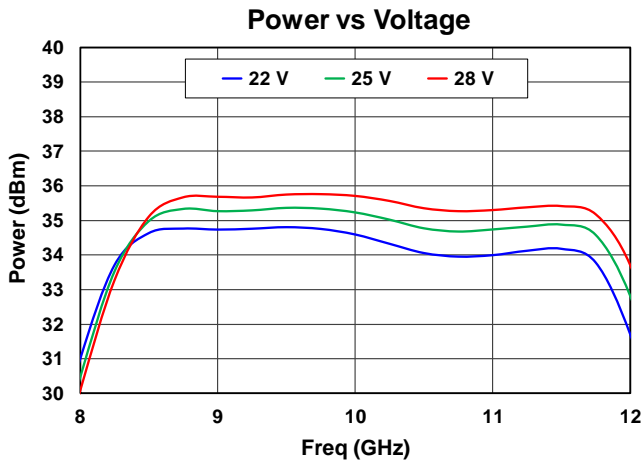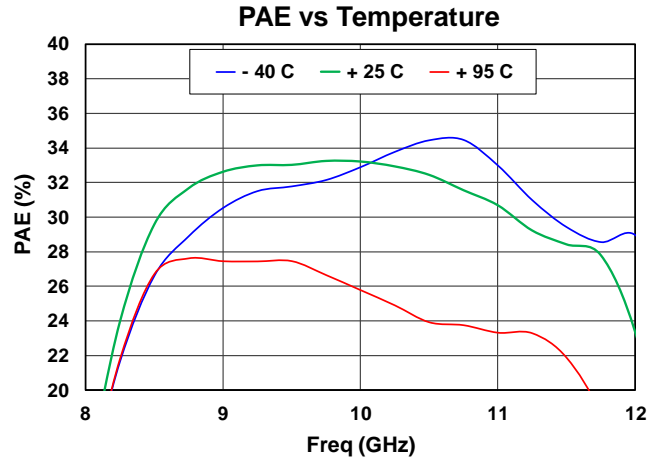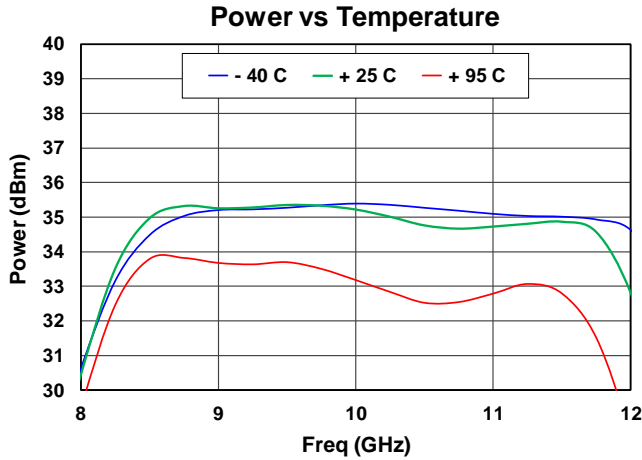





Power Performance, Transmit

Test Conditions unless otherwise stated: TXVD = 25 V, TXIDQ = 110 mA, RXSW = 0V, TXSW = -28 V
Pulse Mode, PW = 100 uS, DC = 10%, 25 °C

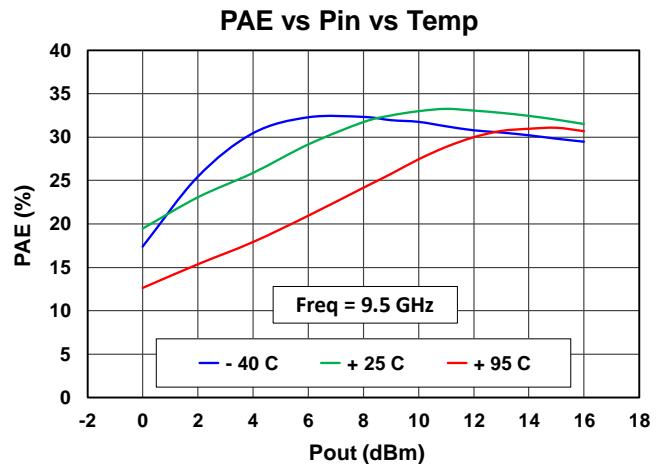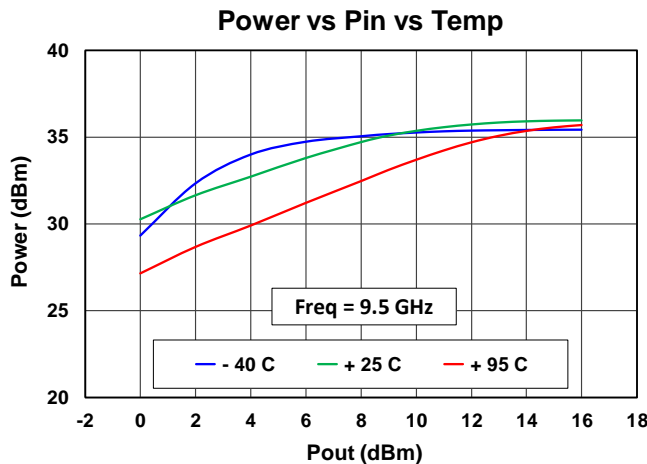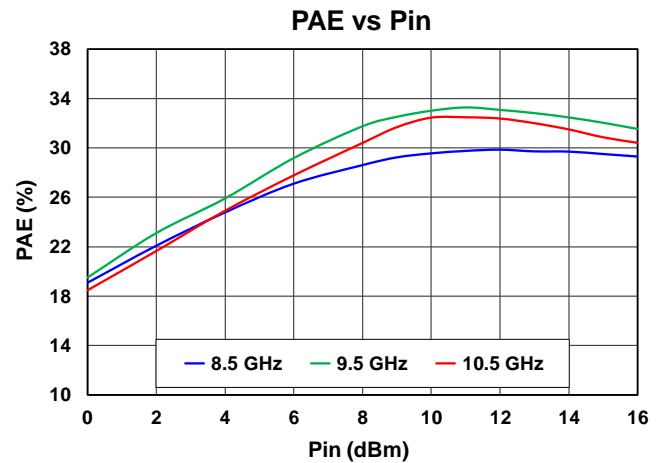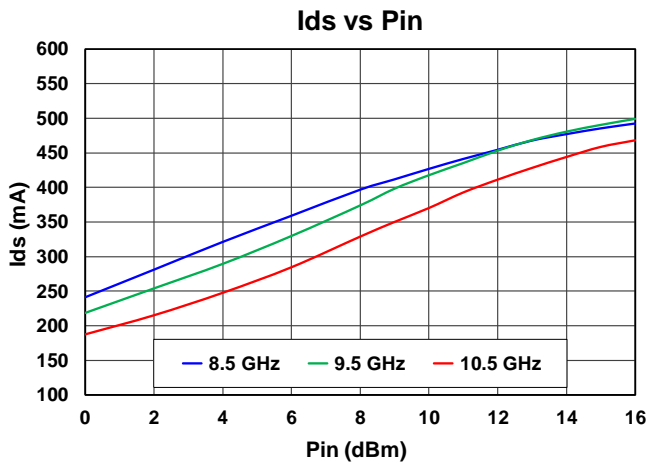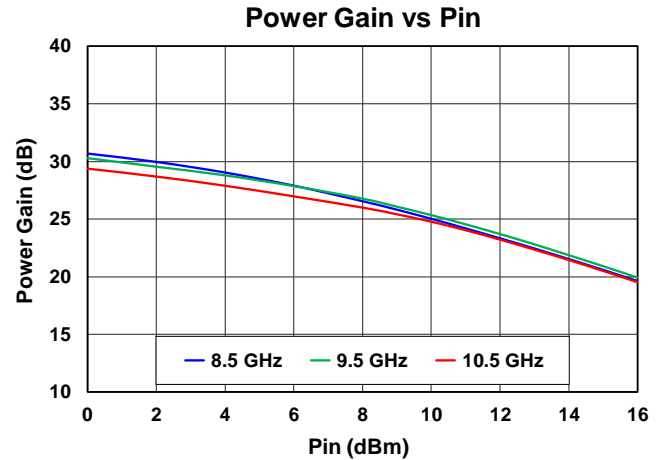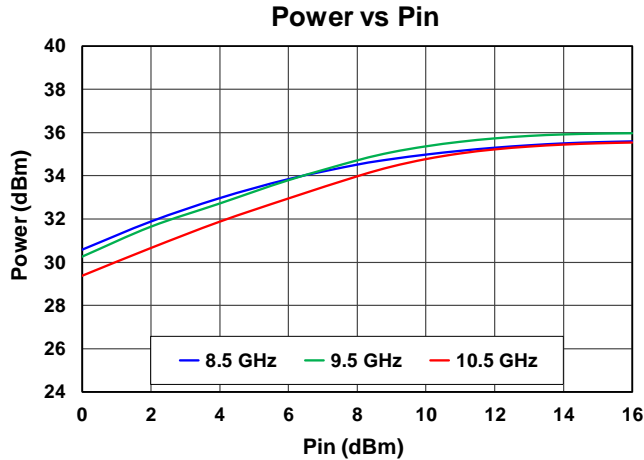

Power Performance, Transmit


Test Conditions unless otherwise stated: TXVD = 25 V, TXIDQ = 110 mA, RXSW = 0V, TXSW = -28 V
Pulse Mode, PW = 100 uS, DC = 10%, 25 °C
Detector Diodes are internally biased, Vout = VREF - VDET

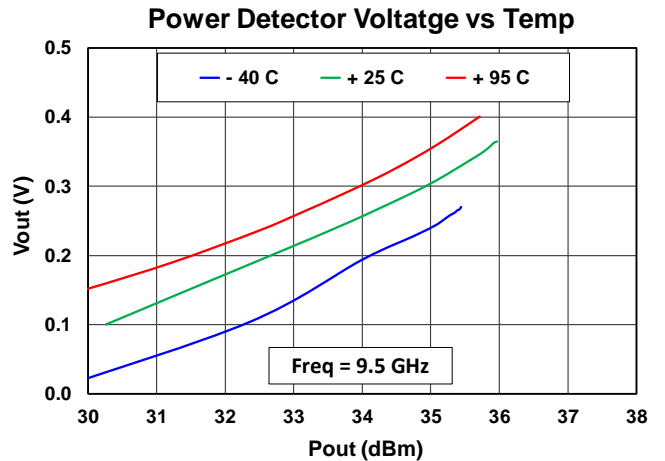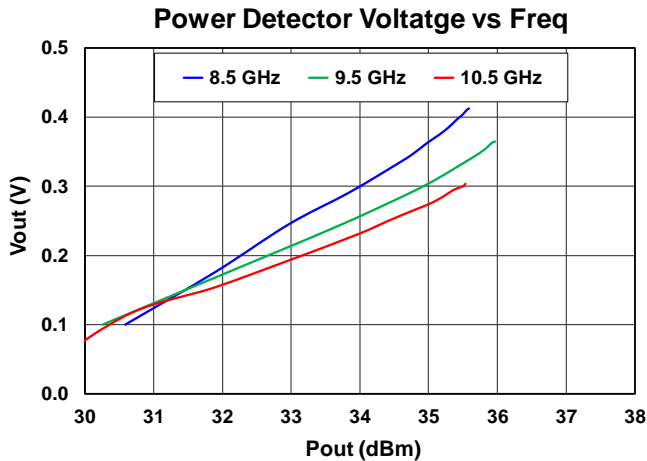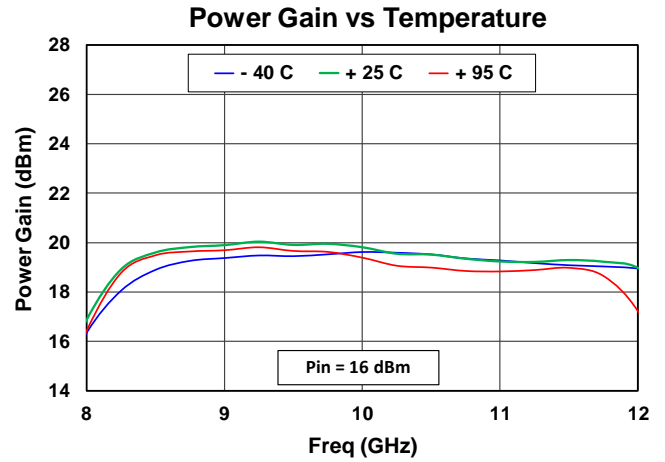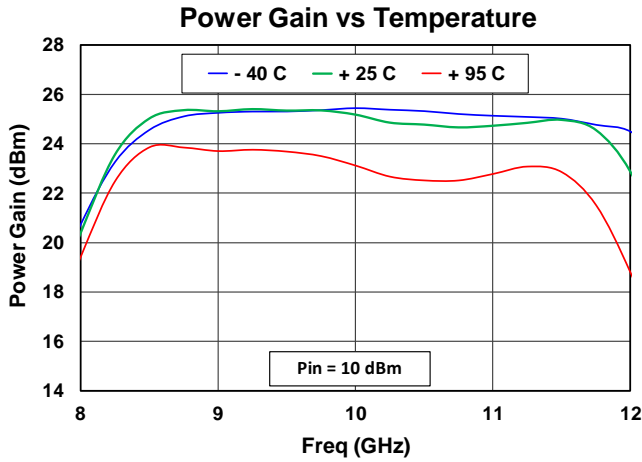


Linearity, Transmit

Test Conditions unless otherwise stated: 25 °C
TXVD = 25 V, TXIDQ = 110 mA, RXSW = 0V, TXSW = -28 V, CW Mode, Tone Spacing = 20 MHz


Output TOI vs Temp

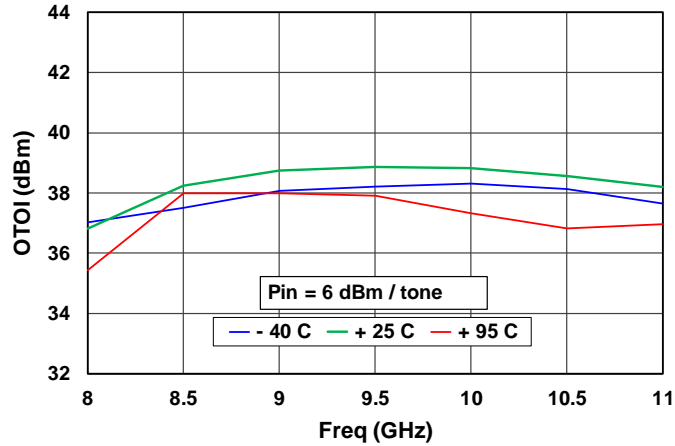


Output TOI vs Voltage

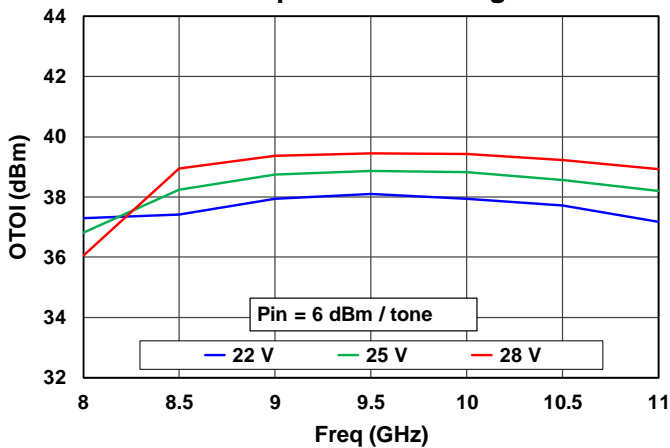


Output TOI vs Current

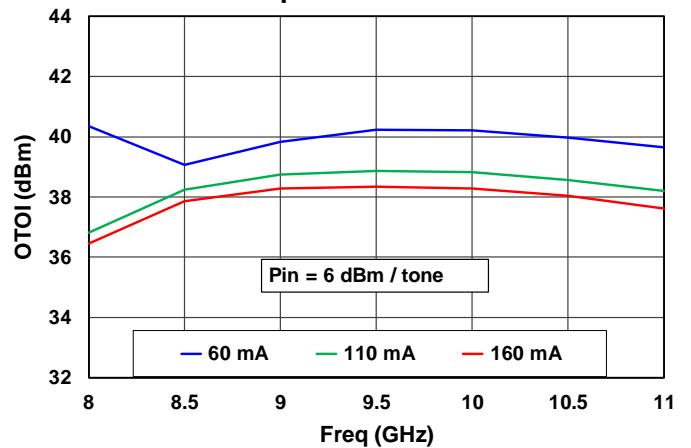

IMD3 vs Pout






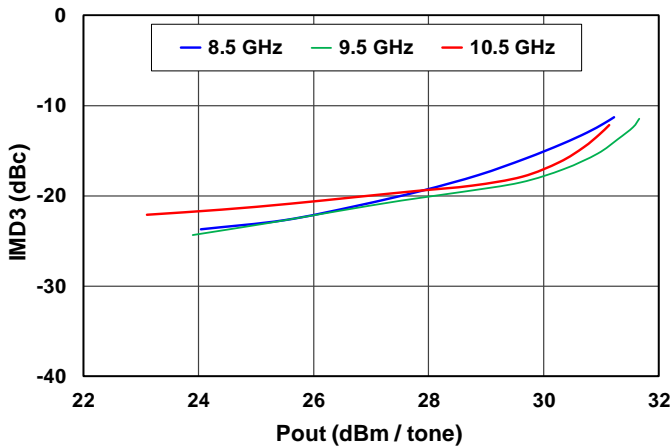


IMD5 vs Pout

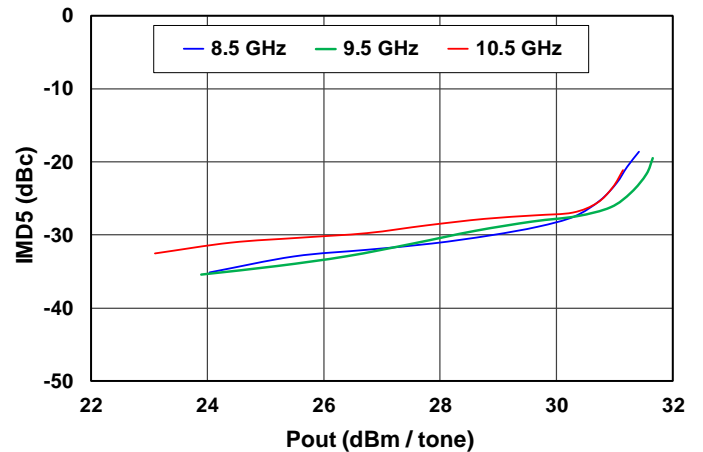


Harmonics, Transmit

Test Conditions unless otherwise stated: TXVD = 25 V, TXIDQ = 110 mA, RXSW = 0V, TXSW = -28 V, CW mode, 25 °C

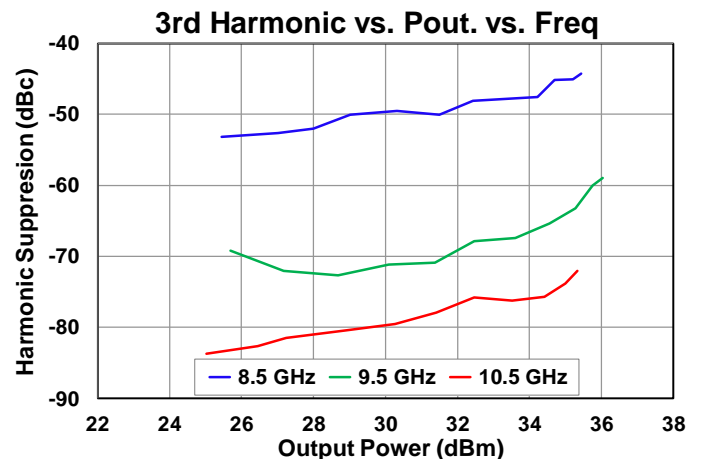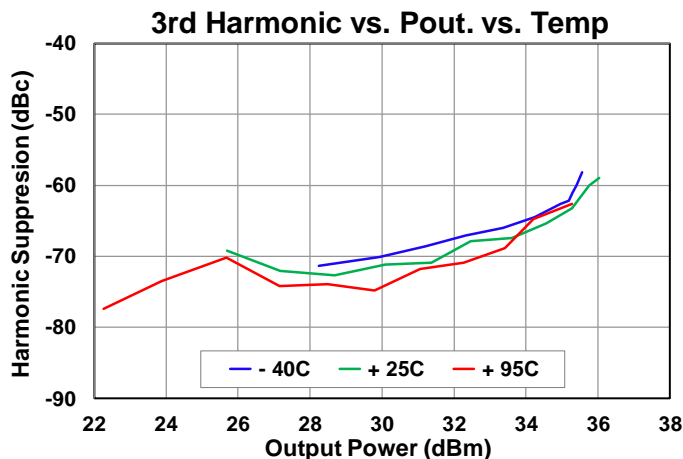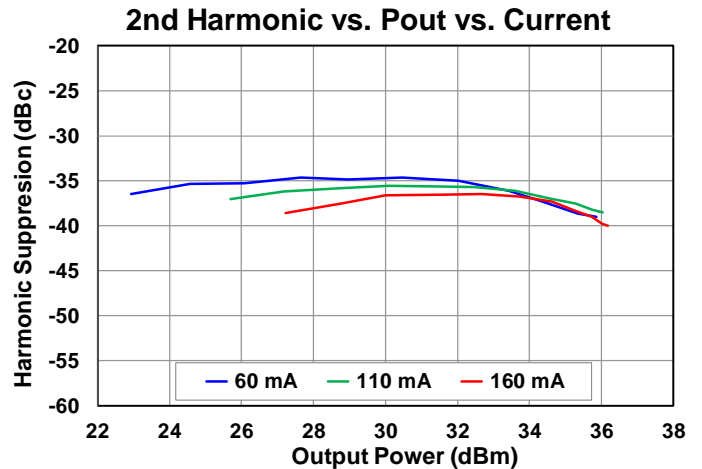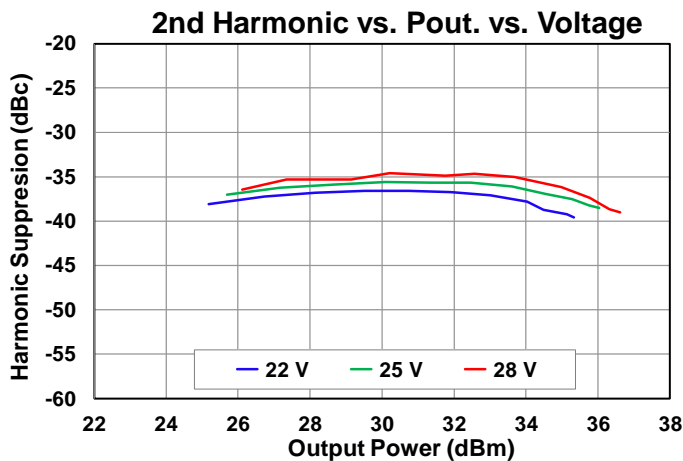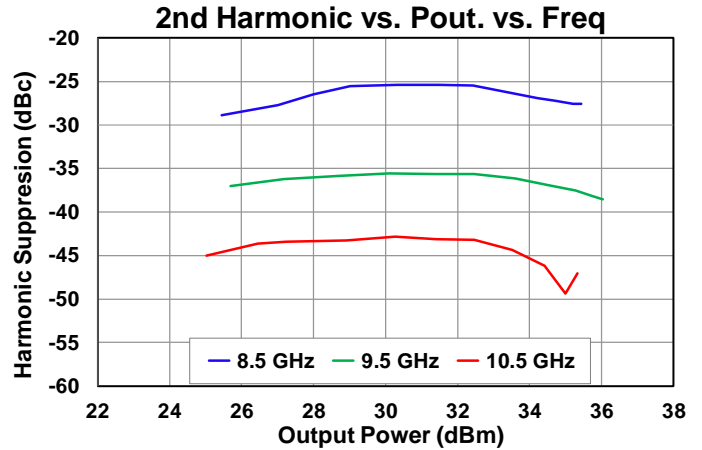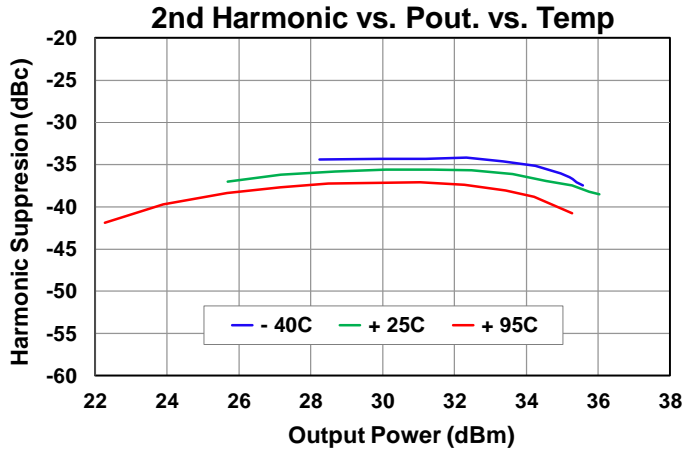

Application Circuit

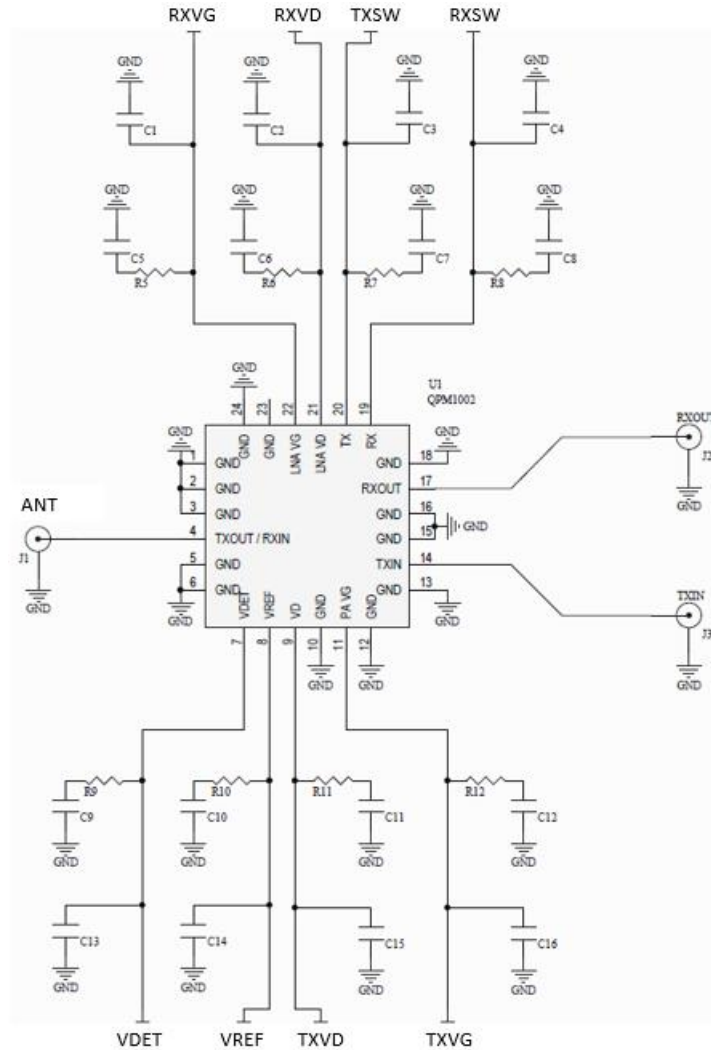


Bias-up Procedure

1. Set TXVD current limit to 600 mA, RXVD current limit to 60mA, gate current limit to 10 mA, switch control current limit to 10mA
2. Set RXVG and TXVG to - 5 V
3. Set TXSW = - 28 V (or 0 V), RXSW = 0 V (or - 28 V) for Transmit (Receive)
4. Set RXVD = + 10 V, TXVD = + 25 V (when in receive mode, should either set TXVG = -5 V, or TXVD off).
5. Adjust TXVG, RXVG to achieve required drain current for TX and RX (-2.5 V Typical)
6. Apply RF signal

Bias-down Procedure

1. Turn off RF signal
2. Set RXVG, TXVG to -5 V
3. Set RXVD = 0 V, TXVD = 0 V
4. Turn off drain supply
5. Turn off TXSW, RXSW
6. Turn off gate supply


Mechanical Drawing & Pad Description

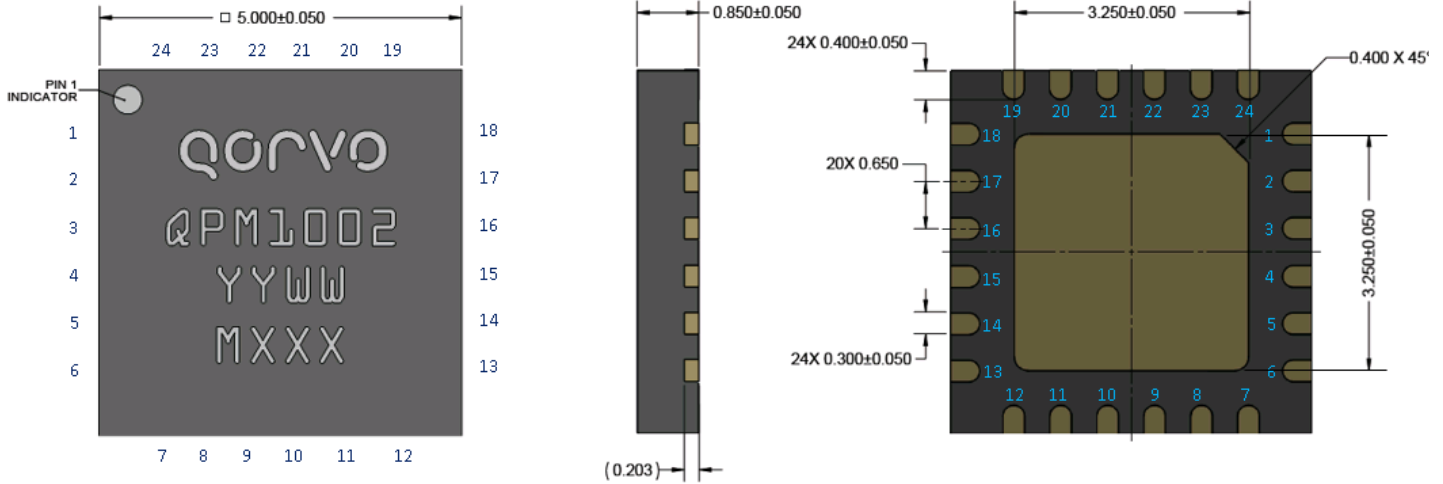

Dimensions in mm, package is mold encapsulated with gold plated leads
 Part Marking: QPM1002 = Part Number
 YY = Part Assembly Year, WW = Part Assembly Week, MXXX = Batch ID

| Pin Number | Label | Description |
|---|-------|-----------------------------|
| Slug | GND | GROUND |
| 4 | ANT | Common Port to Antenna |
| 7 | VDET | PA Power Detector |
| 8 | VREF | PA Power Detector Reference |
| 9 | TXVD | Transmit Drain Supply |
| 11 | TXVG | Transmit Gate Control |
| 14 | TXIN | Transmit Input |
| 17 | RXOUT | Receive Output |
| 19 | RXSW | Receive Switch Control |
| 20 | TXSW | Transmit Switch Control |
| 21 | RXVD | Receive Drain Supply |
| 22 | RXVG | Receive Gate Control |
| 1, 2, 3, 5, 6, 10, 12, 13, 15, 16, 18, 23, 24 | N/C | No Internal Connections |

Evaluation Board and Assembly

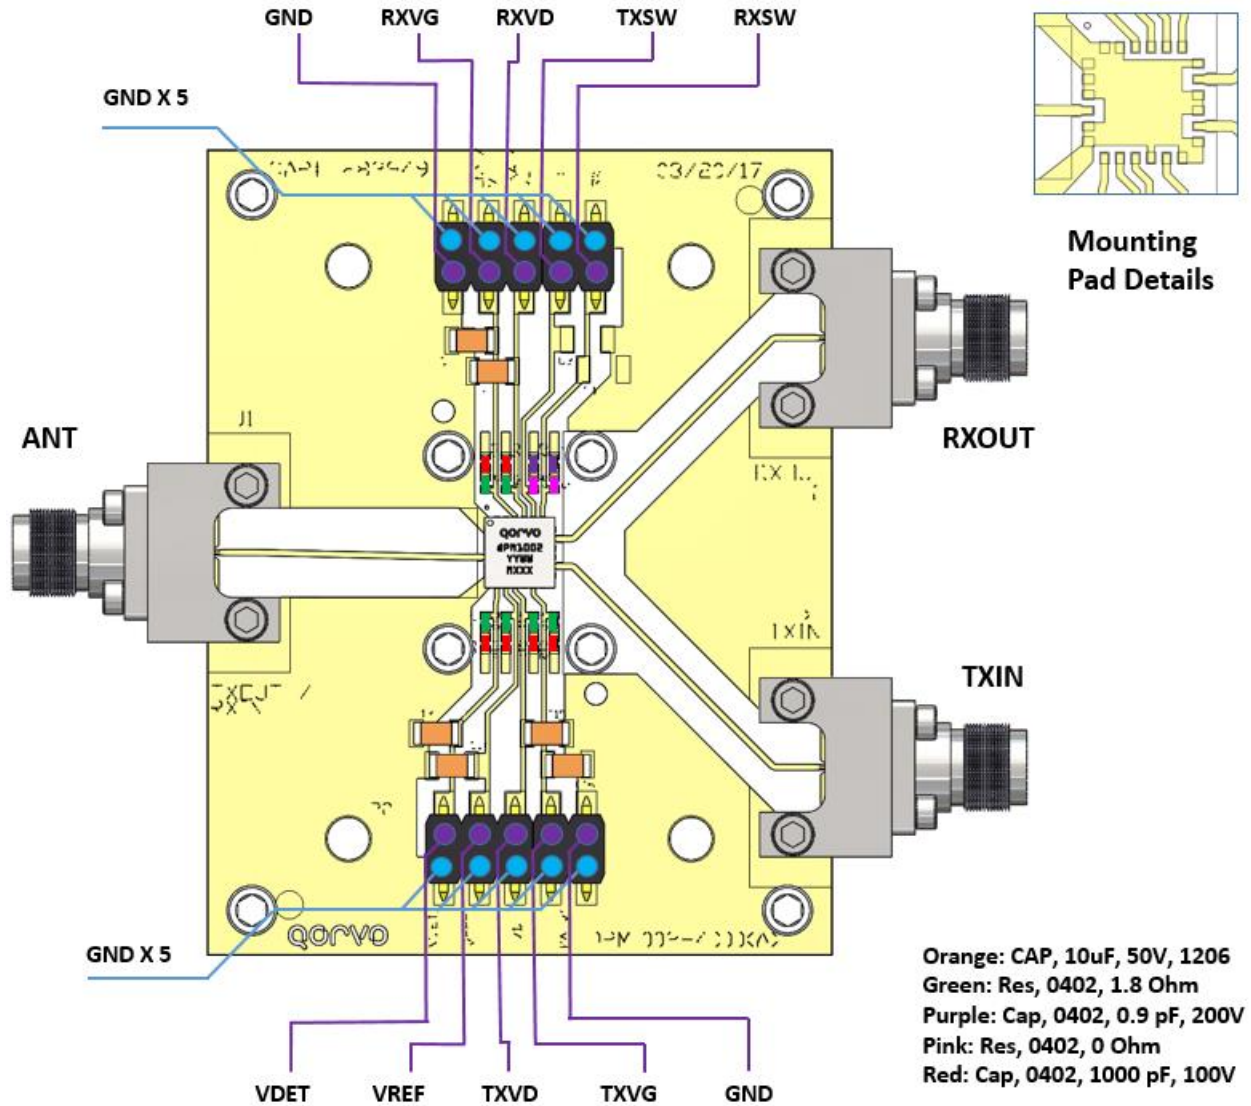

RF Layer is 0.008" thick Rogers Corp. RO4003C ($\epsilon_r = 3.35$). Metal layers are 0.5 oz. copper. The microstrip line at the connector interface is optimized for the Southwest Microwave end launch connector 1092-01A-5.

| Ref. Des. | Component | Value | Manuf. | Part Number |
|-------------------|-----------|---------------------------------------|---------|-------------|
| C5, C6, C9 - C12 | SMT Cap. | CAP, 0402 1000pF +/-10% 100V X7R ROHS | Various | |
| C1, C2, C13 - C16 | SMT Cap. | CAP, 1206 10uF +/-10% 50V X7R | Various | |
| R5, R6, R9 - R12 | SMT Res. | RES, 0402 1.8 OHM, 5% 1/10W | Various | |
| R7, R8 | SMT Res. | RES, 0402 0 OHM, 5% 1/10 W | Various | |
| C7, C8 | SMT Res. | CAP, 0402 0.9 pF, 0.05% 200V, Hi-Q | Various | |

Thermal and Reliability Information


| Parameter | Values | Units | Conditions |
|---|--------|-------|--|
| TX Channel, Thermal Resistance (θ_{JC}) ^(1,3) | 7.1 | °C/W | T _{BASE} = 95°C, TXVD = 25 V, TXIDQ = 110 mA TXID_DRIVE = 482 mA, P _{IN} = 16 dBm, Freq = 9.5 GHz, P _{DISS} = 8.38 W (PA only, LNA off) |
| Channel Temperature (T _{CH}) | 154.5 | °C | |
| RX Channel, Thermal Resistance (θ_{JC}) ⁽¹⁾ | 11.0 | °C/W | T _{BASE} = 95°C, RXVD = 10 V, RXIDQ = 20 mA P _{DISS} = 0.2 W (LNA only, PA off) |
| Channel Temperature (T _{CH}) | 97.2 | °C | |

Notes:

1. Thermal resistance is referenced to package backside
2. Base or ambient temperature is 95 °C
3. Transmit Channel, RF drive is under pulse drain supply condition, PW = 100 uS, DC = 10%, P_{DISS} and ID_DRIVE are peak values.
4. Refer to the following document: [GaN Device Channel Temperature, Thermal Resistance, and Reliability Estimates](#)

Solderability and Recommended Soldering Temperature Profile


1. Compatible with the latest version of J-STD-020, Lead-free solder, peak reflow temperature 260 °C.

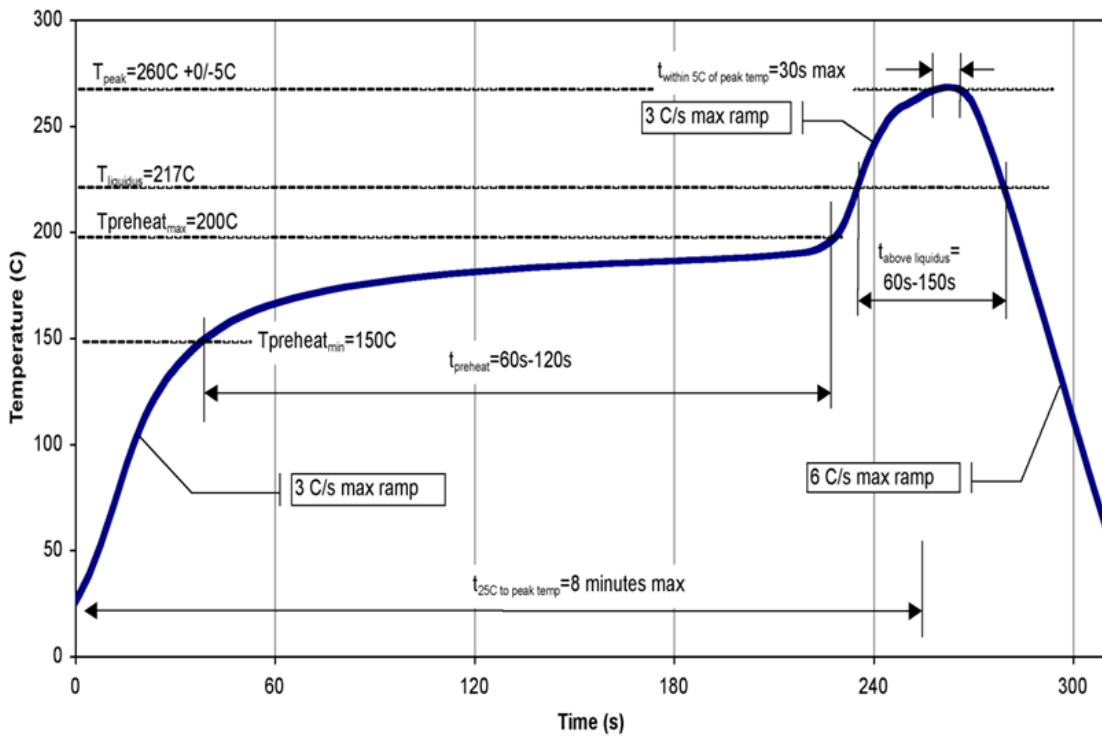

Tape and Reel Information

Standard T/R size = 750 pieces on a 7" reel.


| Material | | Cavity (mm) | | | | Distance Between Centerline (mm) | | Carrier Tape (mm) | Cover Carrier (mm) |
|----------|------------|-------------|------------|------------|------------|----------------------------------|---------------------|-------------------|--------------------|
| Vendor | Vendor P/N | Length (A0) | Width (B0) | Depth (K0) | Pitch (P1) | Length direction (P2) | Width Direction (F) | Width (W) | Width (W) |
| Advantek | ML0505-A | 5.25 | 5.25 | 1.1 | 8.0 | 2.00 | 5.50 | 12.0 | 9.20 |

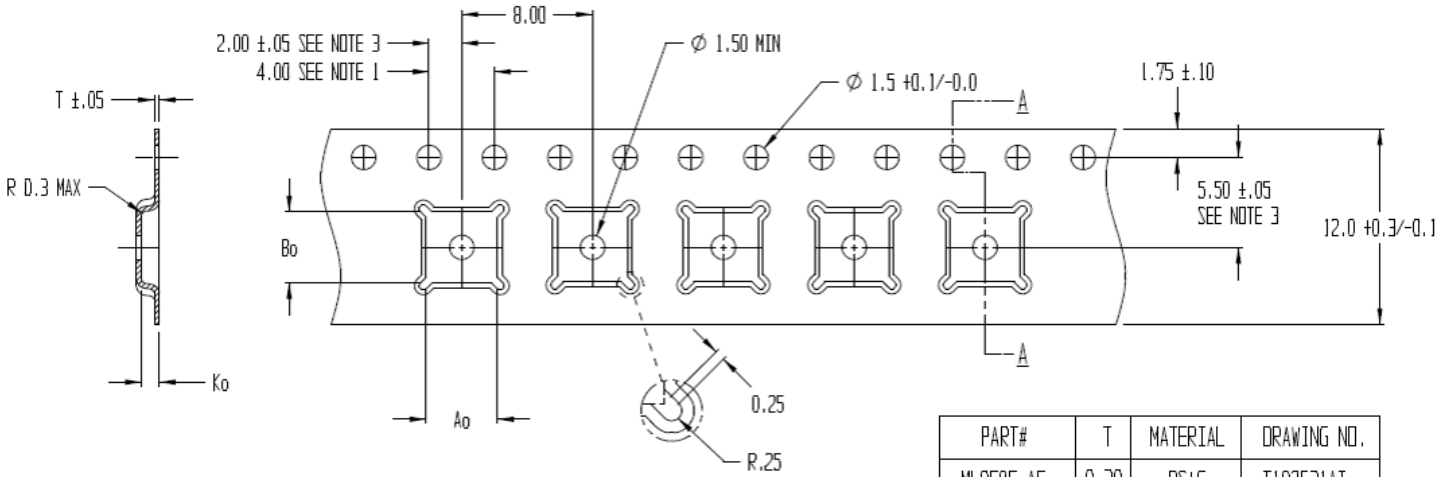

SECTION A - A

A₀ = 5.25
B₀ = 5.25
K₀ = 1.10

| PART# | T | MATERIAL | DRAWING NO. |
|-----------|------|----------|-------------|
| ML0505-AC | 0.30 | PS+C | T102531AT |
| ML0505-AD | 0.30 | PS+C | T108759BT |
| ML0505-AI | 0.25 | PS+C | T111798BT |

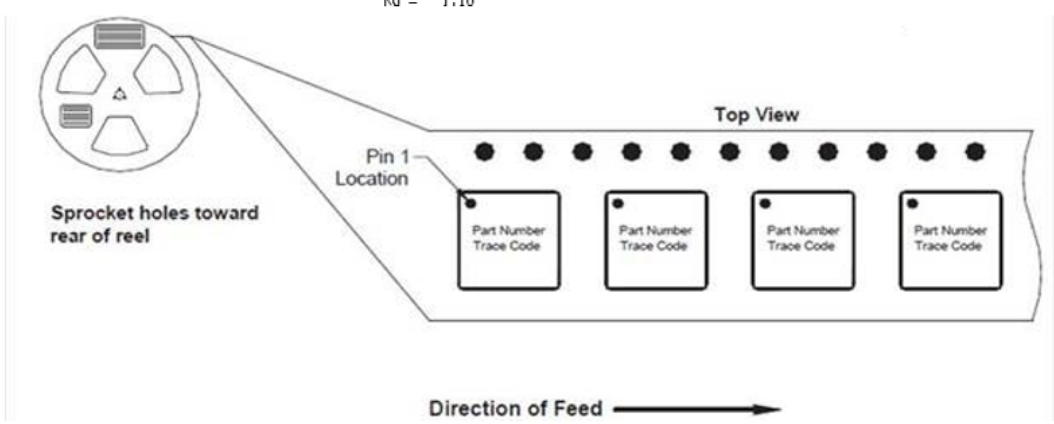

Handling Precautions

| Parameter | Rating | Standard |
|----------------------------------|--------|------------------------------------|
| ESD – Human Body Model (HBM) | 0Z | ESDA / JEDEC JS-001-2012 |
| ESD – Charged Device Model (CDM) | C3 | ESDA / JEDEC JS-002-2014 |
| MSL – Convection Reflow 260 °C | 3 | JEDEC standard IPC/JEDEC J-STD-020 |



Caution!
ESD-Sensitive Device

RoHS Compliance

This product is compliant with the 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment), as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, romine)
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Tel: 1-844-890-8163

Web: www.qorvo.com

Email: customer.support@qorvo.com

Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2020 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9