

NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input

0.75 Vdc - 5.5 Vdc/16 A Output


bel
POWER PRODUCTS

VRBC-16A2Ax

RoHS Compliant

Rev.A

- Non-Isolated
- High Efficiency
- High Power Density
- Excellent Thermal Performance
- Low Cost
- Flexible Output Voltage Sequencing (option)
- Able to Sink & Source Current
- Vout Prebias
- Under-voltage Lockout (UVLO)
- Over Temperature Protection
- OCP/SCP
- Wide Input
- Wide Trim
- Remote On/Off
- Active Low/High (option)
- Remote Sense
- Industrial Temperature Range

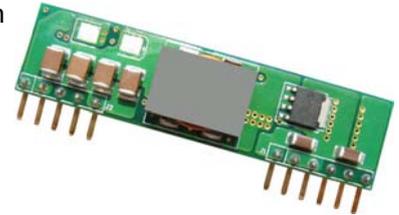

Description

The Bel VRBC-16A2Ax is part of the non-isolated dc/dc converter series. The modules use a SIP package. These converters are available in a range of output voltages from 0.75 Vdc to 5.5 Vdc over a wide range of input voltage ($V_{in} = 8.3 \text{ Vdc} - 14 \text{ Vdc}$). The Bel VRBC-16A2Ax has a sequencing feature that enables designers to implement various types of output voltage sequencing when powering. The efficiency is typically 92% at 3.3 Vdc output and 12 Vdc input at full load.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active Low	Model Number Active High
0.75 V - 5.5 V	8.3 V - 14 V	16 A	80 W	94%	VRBC-16A2AL	VRBC-16A2A0

- Notes:**
1. Change the last character to "C" to indicate 0.20" pin length and active low.
 2. Add "G" suffix at the end of the model number to indicate Tray Packaging.
 3. All part numbers above indicate RoHS 6. Change the second letter "R" to "7" for RoHS 5 part numbers.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	15 V	
Output Enable Terminal Voltage	-0.3 V	-	15 V	
Sequencing Voltage ¹	-0.3 V	-	V_{in}	
Ambient Temperature	-40 °C	-	85 °C	
Storage Temperature	-55 °C	-	125 °C	

Notes: All specifications are typical at 25 °C unless otherwise stated.

1. VRBC-16A2Ax series of modules include a sequencing feature that enables users to implement various types of output voltage sequencing in their applications. This is accomplished via an additional sequencing pin. When not using the sequencing feature, either, tie the SEQ pin to V_{in} or leave it unconnected.

NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input

0.75 Vdc - 5.5 Vdc/16 A Output



Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage				
Vo, set ≤ 3.63 V	8.3 V	12 V	14 V	
Vo, set > 3.63 V	8.3 V	12 V	13.2 V	
Input Current (full load)	-	-	11 A	
Input Current (no load)	-	100 mA	-	
Remote Off Input Current	-	2 mA	-	
Input Reflected Ripple Current (pk-pk)	-	30 mA	-	Tested with one 1000 uF/25 V AL input capacitor with ESR=0.03 ohm max and 6 × 47uF/16 V tan capacitors with ESR=0.013 ohm max at 100 kHz, & simulated source impedance of 1000 nH, 5 Hz to 20 MHz.
I ² t Inrush Current Transient	-	0.2 A ² s	0.4 A ² s	
Turn-on Voltage Threshold	-	7.8 V	-	
Turn-off Voltage Threshold	-	7.3 V	-	

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

Output Specifications

Parameter	Min	Typ	Max	Notes
Output Voltage Set Point	-2% Vo,set	-	2% Vo,set	Vin=12 V, full load
Load Regulation	-	0.4% Vo,set	-	Io=Iomin to Iomax
Line Regulation	-	0.3% Vo,set	-	Vin=Vinmin to Vinmax
Regulation Over Temperature (-40°C to +85°C)	-	0.4% Vo,set	-	Tref=Tamin to Tamax
Output Current	0 A	-	16 A	
Current Limit Threshold	-	180% Io,out	-	
Short Circuit Surge Transient	-	1 A ² s	3 A ² s	
Ripple and Noise (pk-pk)	-	50 mV	100 mV	Tested with 0-20 MHz, 10 uF Tantalum capacitor & 1 uF ceramic capacitor at the output
Ripple and Noise (rms)	-	30 mV	45 mV	
Turn on Time	-	8 mS	20 mS	
Overshoot at Turn on	-	-	1% Vo,set	
Output Capacitance	0 uF	-	5000 uF	ESR ≥ 10 mohm
	0 uF	-	1000 uF	ESR ≥ 1 mΩ
Transient Response				
50% ~ 100% Max Load	All	-	100 mV	di/dt=2.5 A/uS; Vin=12 V; and with 330uF Tantalum capacitors at the output
Settling Time		-	80 uS	
100% ~ 50% Max Load		-	100 mV	
Settling Time		-	80 uS	

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input

0.75 Vdc - 5.5 Vdc/16 A Output




General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency				Measured at Vin=12 V, full load
Vo=5.0 V	-	94%	-	
Vo=3.3 V	-	92%	-	
Vo=2.5 V	-	90%	-	
Vo=1.8 V	-	88%	-	
Vo=1.5 V	-	87%	-	
Vo=1.2 V	-	85%	-	
Vo=0.75 V	-	78%	-	
Switching Frequency	250 kHz	280 kHz	310 kHz	
Over Temperature Shutdown ¹	-	130 °C	-	
Output Trim Range (Wide Trim)	0.7525 V	-	5.5 V	
Remote Sense Compensation	-	-	0.5 V	
MTBF	4,619,490 hours			Calculated Per Bell Core SR-332 (Io = 80% Io,max; Vin=12 V; Vo=3.3 V; Ta = 25 °C)
Dimensions				
Inches (L × W × H)	2.0x 0.5 x 0.32			
Millimeters (L × W × H)	50.8 x 12.7 x 8.13			
Weight	-	7.1 g	-	

Notes: All specifications are typical at 25 °C unless otherwise stated.

1. The Tref temperature measurement location:

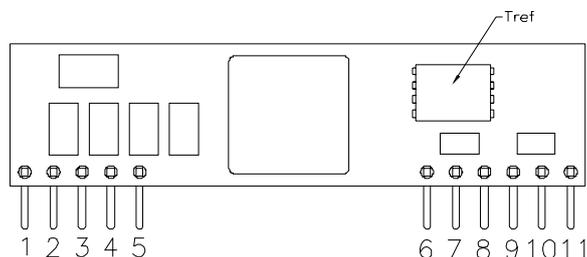

Control Specifications

Parameter	Min	Typ	Max	Notes
Remote On/Off				
Signal Low (Unit Off)	-0.2 V	-	0.3 V	VRBC-16A2A0; Remote On/Off pin open, Unit on.
Signal High (Unit On)	-	-	Vin, max	
Signal Low (Unit On)	-0.2 V	-	0.3 V	VRBC-16A2AL; Remote On/Off pin open, Unit on.
Signal High (Unit Off)	2.5 V	-	Vin, max	
Voltage Sequencing				
Sequencing Delay Time	10 mS	-	-	Delay from Vin, min to application of voltage on SEQ pin
Sequencing Slew Rate Capability	-	-	2 V/mS	Vin, min to Vin, max; Io, min to Io, max; Vseq<Vo
Tracking Accuracy				
Power-Up	-	100 mV	200 mV	
Power-Down	-	300 mV	500 mV	

NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input

0.75 Vdc - 5.5 Vdc/16 A Output


bel
POWER PRODUCTS

Remote On/Off

For Active High Modules (Positive Logic)

When the transistor Q1 is in the Off state, the power module is ON.


When the transistor Q1 is turned On, the power module is OFF.

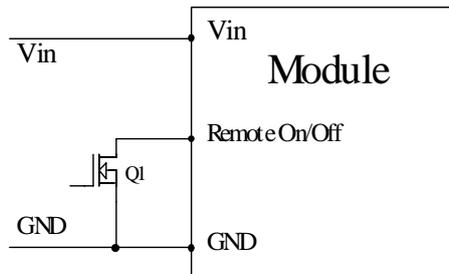

For Active Low Modules (Negative Logic)

When the transistor Q1 is in the Off state, the power module is OFF.

When the transistor Q1 is turned On, the power module is ON.

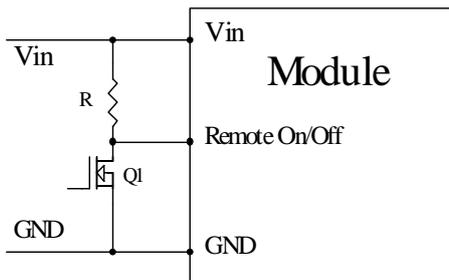


Output Trim Equations

Equation for calculating the trim resistor given the desired output voltage (V_o) is shown below. The Trim Up resistor should be connected between the Trim pin and Ground.

$$R_{trim} = \frac{10500}{V_o - 0.7525} - 1000(\Omega)$$

V_o (V)	R_{trim} (K Ω)
0.7525	Open
1.2	22.46
1.5	13.05
1.8	9.024
2.5	5.009
3.3	3.122
5.0	1.472

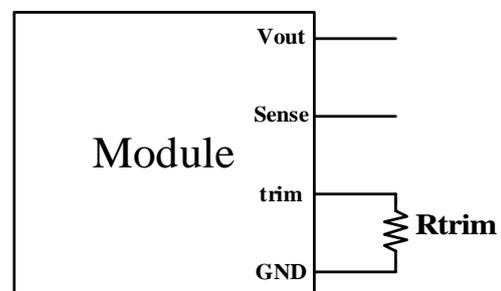








NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input

0.75 Vdc - 5.5 Vdc/16 A Output



Efficiency Data

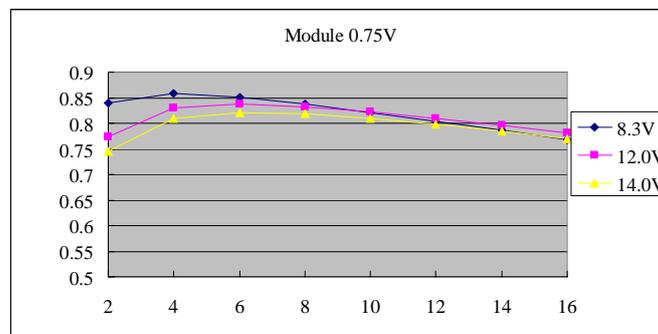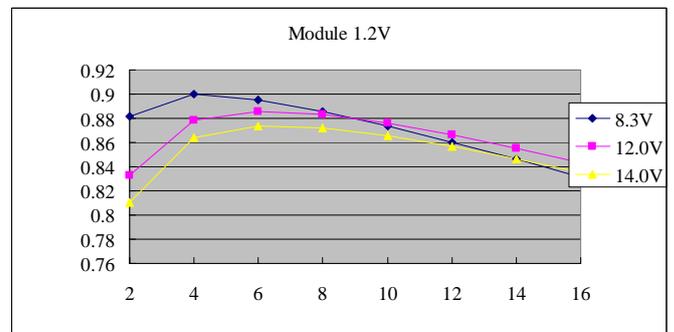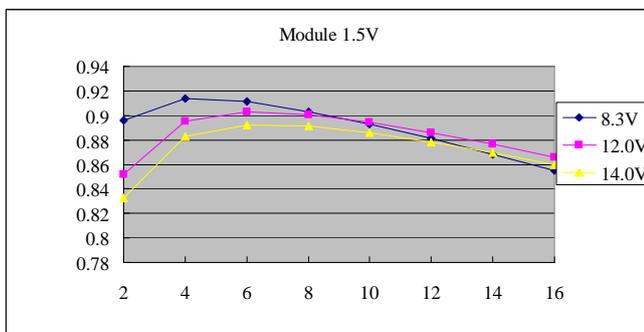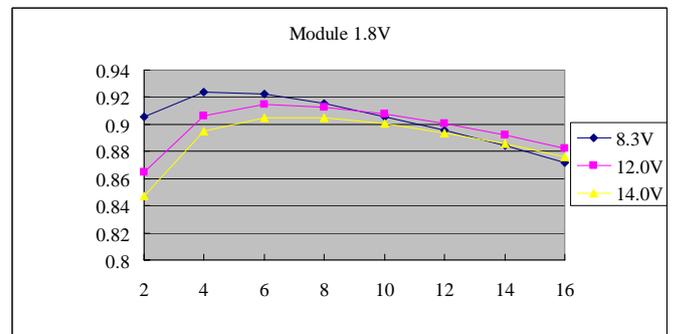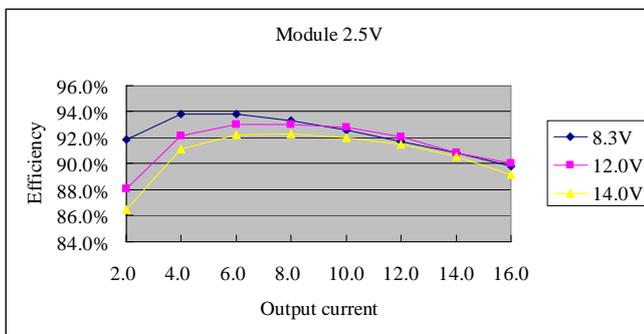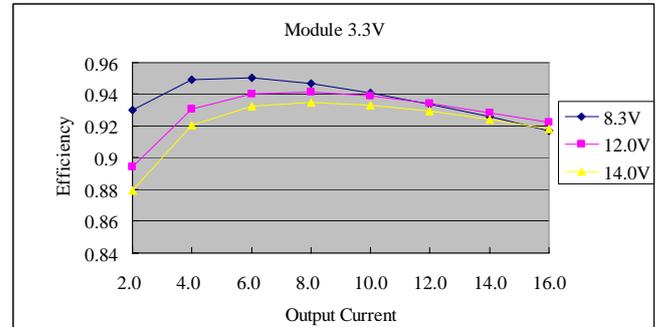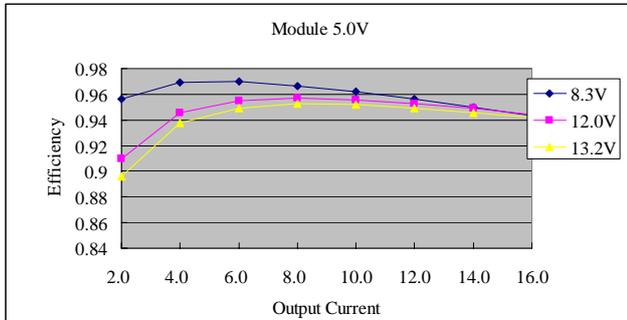


NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input


0.75 Vdc - 5.5 Vdc/16 A Output




Thermal Derating Curves

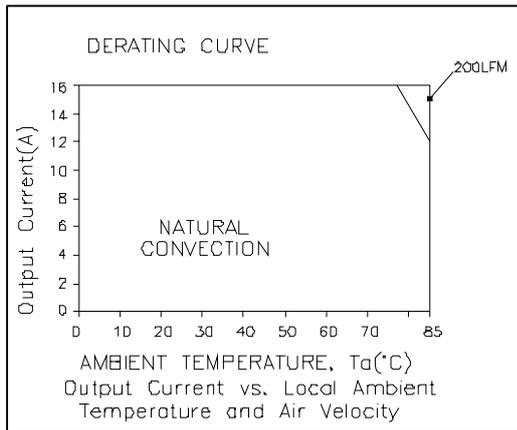

Vo=0.75 V; Vin=12.0 V

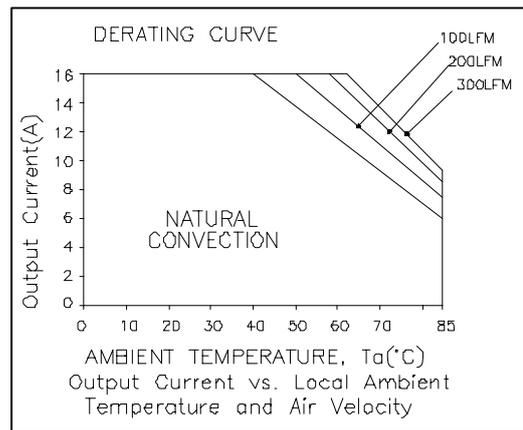

Vo=1.8 V; Vin=12.0 V

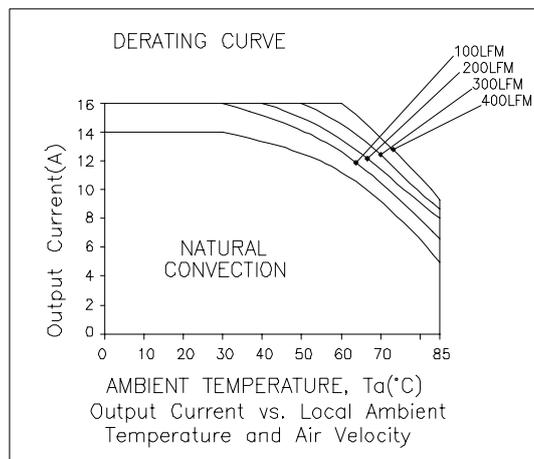

Vo=3.3 V; Vin=12.0 V


NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input


0.75 Vdc - 5.5 Vdc/16 A Output




Ripple and Noise Waveforms

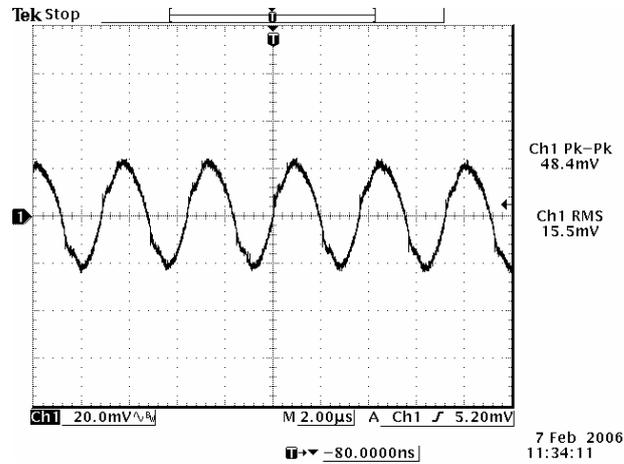

Ripple and noise at full load, 12 Vdc input, 5.0 V output and Ta=25 deg C

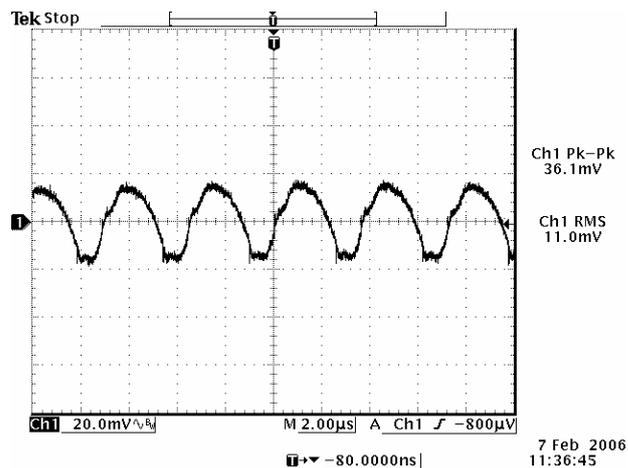

Ripple and noise at full load, 12 Vdc input, 3.3 V output and Ta=25 deg C

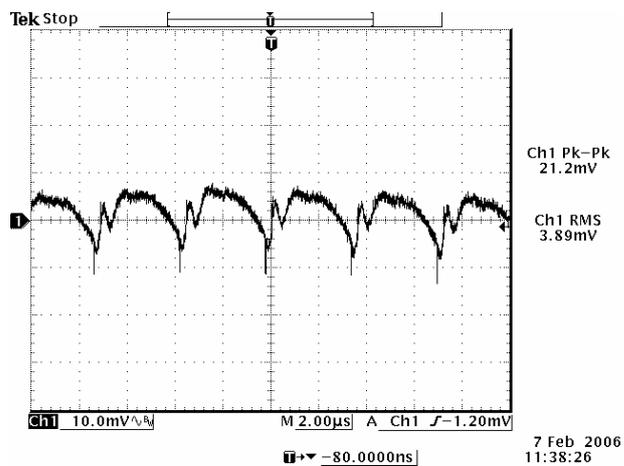

Ripple and noise at full load, 12 Vdc input, 0.75 V output and Ta=25 deg C

Note: External load with 10 uF tantalum capacitor and 1 uF ceramic at the output.

NON-ISOLATED DC/DC CONVERTERS


8.3 Vdc - 14 Vdc Input

0.75 Vdc - 5.5 Vdc/16 A Output




Transient Response Waveforms


External load capacitor $C_{ext}=0 \mu\text{F}$, $di/dt=2.5 \text{ A}/\mu\text{s}$

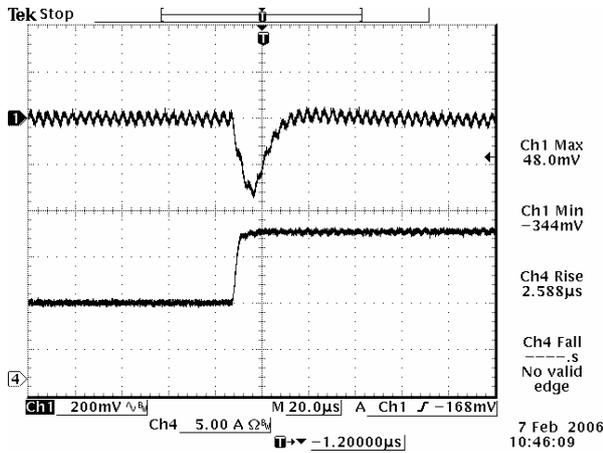


50% to 100% load Transient at 5.0 Vdc output

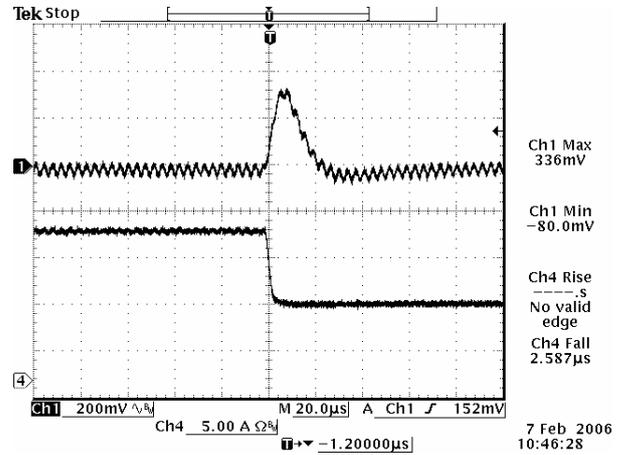


100% to 50% load Transient at 5.0 Vdc output

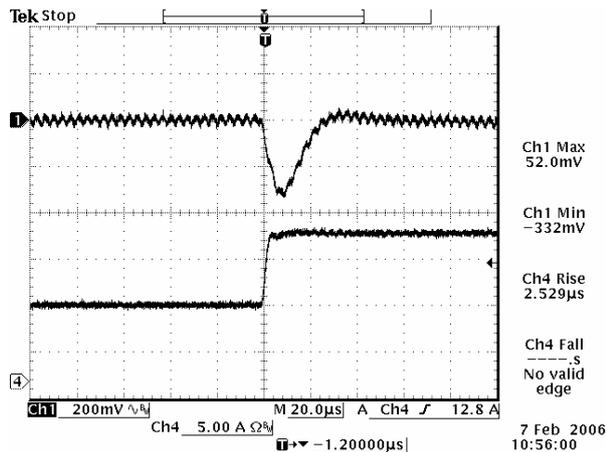


50% to 100% load Transient at 3.3 Vdc output

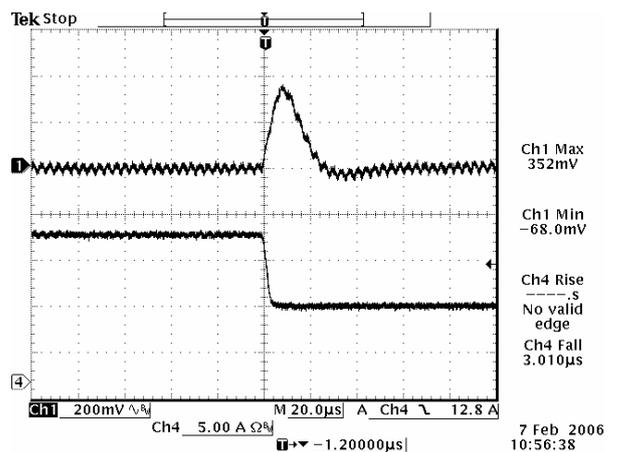

100% to 50% load Transient at 3.3 Vdc output

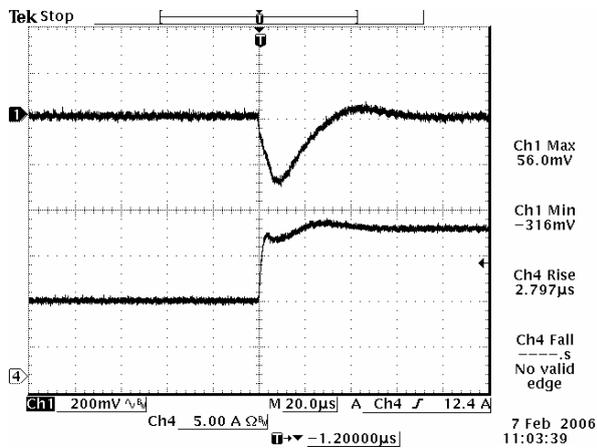

50% to 100% load Transient 0.75 Vdc output

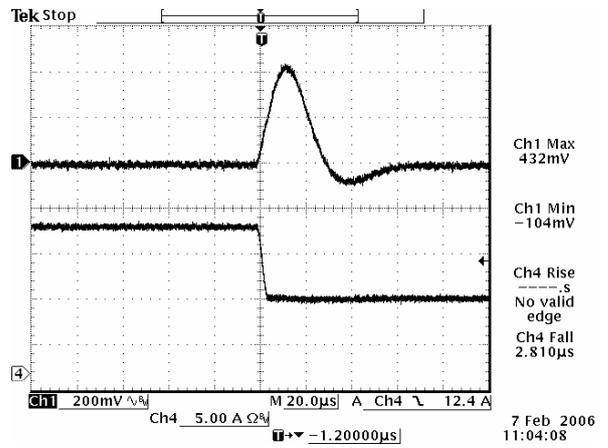

100% to 50% load Transient at 0.75 Vdc output

NON-ISOLATED DC/DC CONVERTERS


8.3 Vdc - 14 Vdc Input

0.75 Vdc - 5.5 Vdc/16 A Output




Transient Response Waveforms (continued)


External load capacitor $C_{ext}=330 \mu\text{F}$ Tantalum capacitor, $di/dt=2.5 \text{ A/us}$

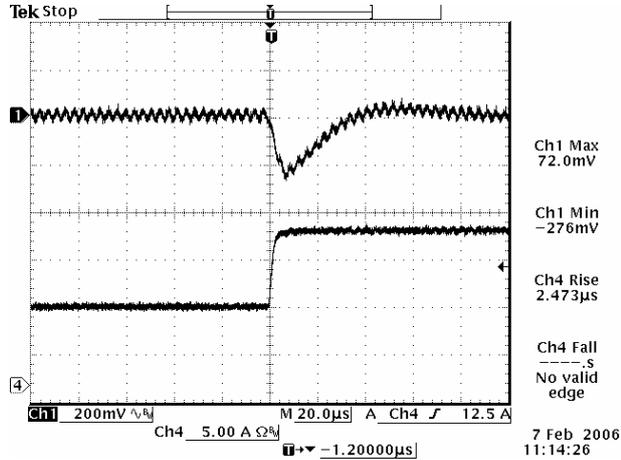


50% to 100% load Transient at 5.0 Vdc output

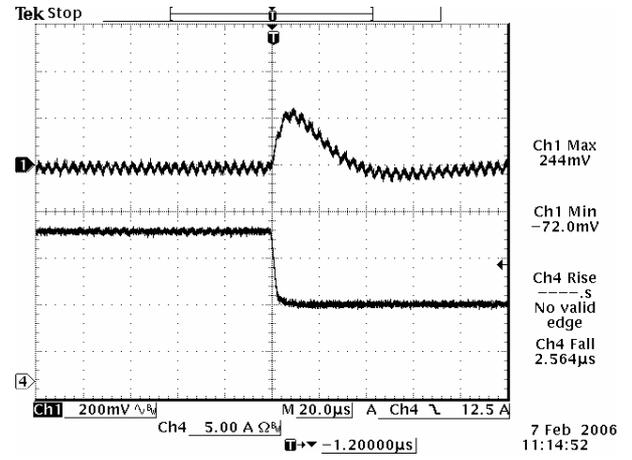


100% to 50% load Transient at 5.0 Vdc output

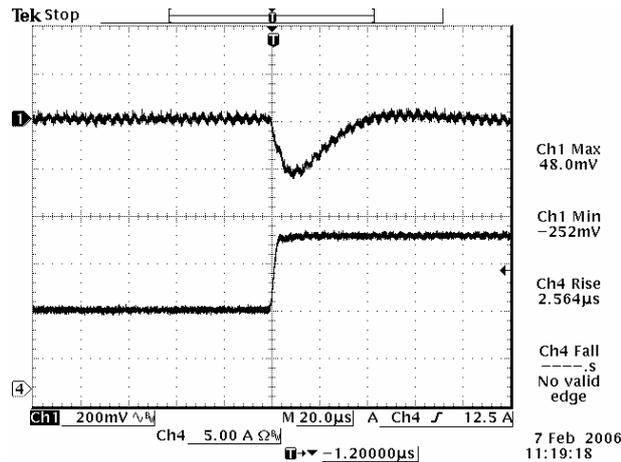


50% to 100% load Transient at 3.3 Vdc output

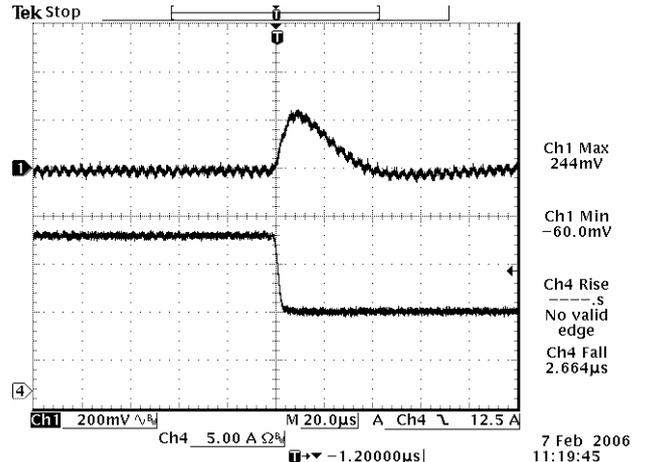

100% to 50% load Transient at 3.3 Vdc output

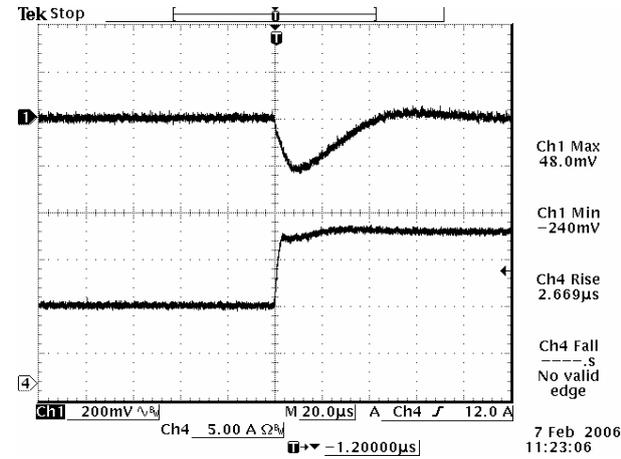

50% to 100% load Transient 0.75 Vdc output

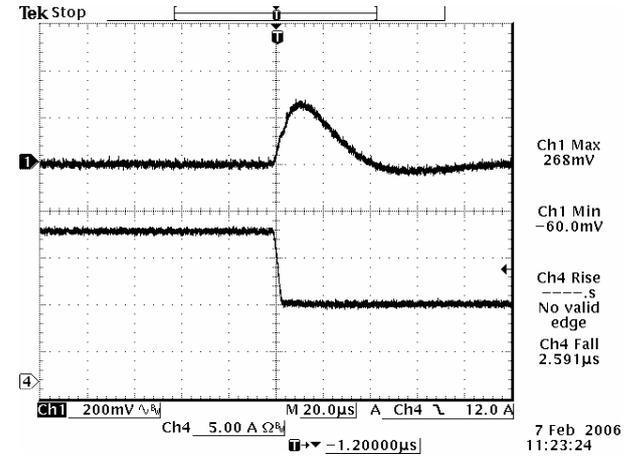

100% to 50% load Transient at 0.75 Vdc output

Note: All specifications are typical at 12 Vdc input and $T_a=25 \text{ deg C}$.



NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input


0.75 Vdc - 5.5 Vdc/16 A Output



Mechanical Outline

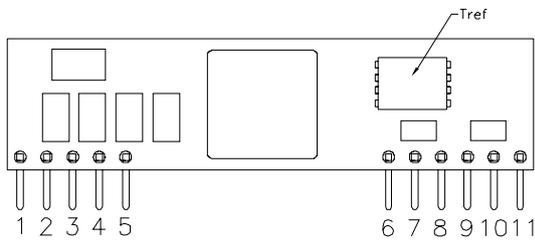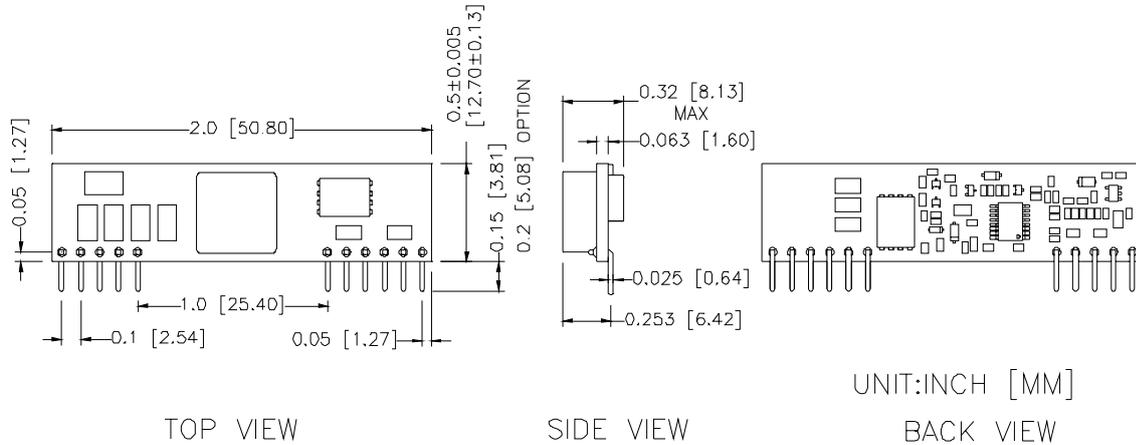

RECOMMENDED PAD LAYOUT

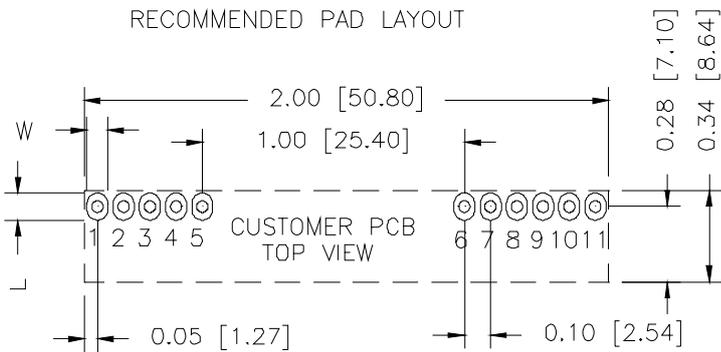

HOLE SIZE: $\varnothing 0.043 \pm 0.003$ [1.08 \pm 0.08]
 PAD SIZE: W 0.063 ± 0.002 [1.63 \pm 0.05]
 L 0.10 ± 0.004 [2.54 \pm 0.10] BOTH SIDE

Pin Connections

Pin	Function
1	Vo
2	Vo
3	Sense+
4	Vo
5	Ground
6	Ground
7	Vin
8	Vin
9	SEQ
10	Trim
11	Remote On/Off

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2007 Bel Fuse Inc. Specifications subject to change without notice. 011507

CORPORATE

Bel Fuse Inc.
 206 Van Vorst Street
 Jersey City, NJ 07302
 Tel 201-432-0463
 Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
 8F/ 8 Luk Hop Street
 San Po Kong
 Kowloon, Hong Kong
 Tel 852-2328-5515
 Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
 Preston Technology Management Centre
 Marsh Lane, Suite G7, Preston
 Lancashire, PR1 8UD, U.K.
 Tel 44-1772-556601
 Fax 44-1772-888366
www.belfuse.com

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9