



## 3D SURROUND AUDIO PROCESSOR FOR HEADPHONE


### ■ GENERAL DESCRIPTION

The **NJM2704** is a high quality 3D surround audio processor designed for headphone applications.

It includes mode control switches for surround function and standby function and realizes low consumption power design by standby function.

It is suitable for portable telephone, PDA and any portable audio applications.

### ■ PACKAGE OUTLINE




**NJM2704V**

### ■ FEATURES

- Operating Voltage 1.8 to 6V
- Low Operating Current 0.45mA typ. (at Active mode)  
0.1μA typ. (at Standby mode)
- Low Output Noise 10μV typ. (at Surround mode, VR: max.)
- Variable Surround Effect by external resistor
- Internal Mode Control Switch
- Bipolar Technology
- Package Outline SSOP14


### ■ PIN CONFIGURATION

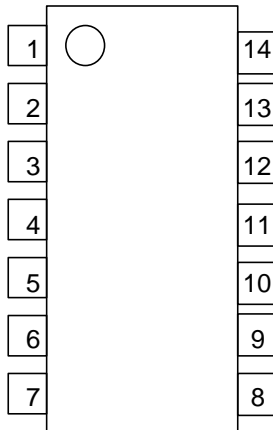

1. STANDBY SW
2. LIN
3. RIN
4. MODE SW
5. VREF
6. GND
7. NC
8. DNC
9. V+
10. NFR
11. NFL
12. ROUT
13. LOU
14. NC

# NJM2704

## ■ BLOCK DIAGRAM

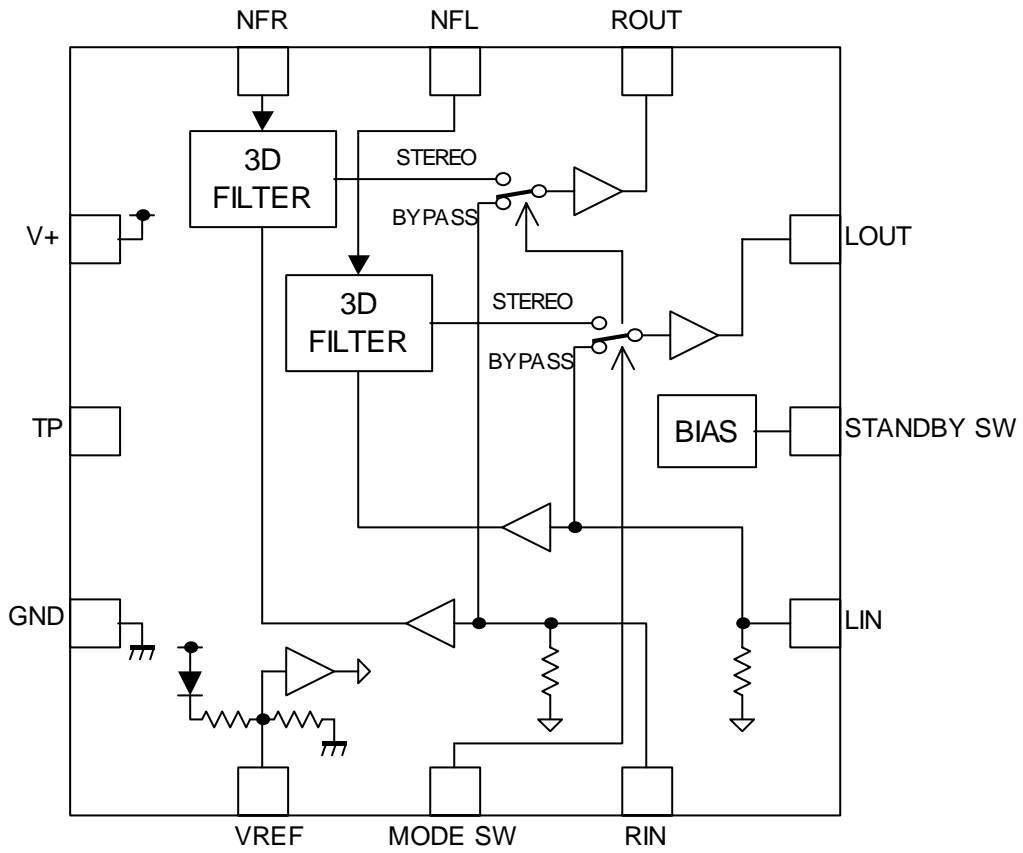

## ■ABSOLUTE MAXIMUM RATING (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V <sup>+</sup>	7	V
Power Dissipation	P <sub>D</sub>	320	mW
Operating Temperature Range	T <sub>opr</sub>	-20 to +75	°C
Storage Temperature Range	T <sub>stg</sub>	-40 to +125	°C

## ■OPERATING VOLTAGE

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V <sup>+</sup>	-	1.8	3.0	6.0	V

## ■ELECTRICAL CHARACTERISTICS (V<sup>+</sup>=3V, Ta=25°C unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION					MIN.	TYP.	MAX.	UNIT	
		INPUT		OUTPUT	MODE	VR					
		L	R								
Operating Current	I <sub>cc</sub>	No Signal	0	0	-	Active	-	-	450	700	μA
			0	0	-	Standby	-	-	0.1	1.0	
Reference Voltage	V <sub>ref</sub>	No Signal	0	0	-	-	-	1.0	1.15	1.3	V

## ●AC CHARACTERISTICS

(V<sup>+</sup>=3V, Ta=25°C, V<sub>IN</sub>=-20dBV(100mVrms), f=1kHz, R<sub>L</sub>=10kΩ, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION					MIN.	TYP.	MAX.	UNIT	
		INPUT		OUTPUT	MODE	VR					
		L	R								
Maximum Input Voltage	V <sub>IM</sub>	f=1kHz T.H.D.=1%	V <sub>IN</sub> 0	0 V <sub>IN</sub>	L R	Bypass	-	-	-2.0 (790)	-	dBV (mVrms)
		f=100Hz T.H.D.=1%	V <sub>IN</sub> 0	0 V <sub>IN</sub>	L R	Surround	MAX	-	-16.0 (160)	-	
		V <sup>+</sup> =1.8V f=1kHz T.H.D.=1%	V <sub>IN</sub> 0	0 V <sub>IN</sub>	L R	Bypass	-	-10.5 (300)	-8.5 (380)	-	
		V <sup>+</sup> =1.8V f=100Hz T.H.D.=1%	V <sub>IN</sub> 0	0 V <sub>IN</sub>	L R	Surround	MAX	-24.5 (60)	-22.5 (75)	-	
Output Noise	V <sub>NO</sub>	R <sub>g</sub> =0Ω A-Weighted	0	0	L R	Bypass	-	-	-112 (2.5)	-106 (5.0)	dBV (μVrms)
		R <sub>g</sub> =0Ω A-Weighted	0	0	L R	Surround	MAX	-	-100 (10)	-94 (20)	
Total Harmonic Distortion	T.H.D.	f=1kHz	V <sub>IN</sub> 0	0 V <sub>IN</sub>	L R	Bypass	-	-	0.02	0.05	%
		f=1kHz	V <sub>IN</sub> 0	0 V <sub>IN</sub>	L R	Surround	MAX	-	0.1	0.5	

# NJM2704

## ●AC CHARACTERISTICS

( $V_+ = 3V$ ,  $T_a = 25^\circ C$ ,  $V_{IN} = -20dBV(100mV_{rms})$ ,  $f = 1kHz$ ,  $R_L = 10k\Omega$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION						MIN.	TYP.	MAX.	UNIT
		INPUT		OUTPUT	MODE	VR					
		L	R								
Bypass Gain	$G_{VBYP}$	$f = 1kHz$	$V_{IN}$ 0	0 $V_{IN}$	L R	Bypass	-	-1.0	0.0	1.0	dB
Surround Gain	$G_{VSUR}$	$f = 100Hz$	$V_{IN}$ 0	0 $V_{IN}$	L R	Surround	MAX	12.5	14.5	16.5	dB
		$f = 100Hz$	0 $V_{IN}$	$V_{IN}$ 0	L R	Surround	MAX	10.5	12.5	14.5	
		$f = 100Hz$	$V_{IN}$ 0	0 $V_{IN}$	L R	Surround	MIN	0.5	2.5	4.5	

## ●CONTROL CHARACTERISTICS ( $V_+ = 3V$ , $T_a = 25^\circ C$ unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION						MIN.	TYP.	MAX.	UNIT
		INPUT		OUTPUT	MODE	VR					
		L	R								
Mode Select Control Voltage	$V_{MODE}$	$V_{IN} =$ High Level	-	-	-	-	-	1.2	-	$V_+$	V
		$V_{IN} =$ Low Level	-	-	-	-	-	0.0	-	0.3	

## ■SWITCH FUNCTION

### MODE SW

MODE	Terminal Status	NOTES
Bypass	L, open	Input Through
Surround	H	Surround Mode (Stereo Input)

### STANDBY SW

MODE	Terminal Status	NOTES
Standby	L, open	IC is non-active
Active	H	IC is active


## TERMINAL DESCRIPTION

PIN No.	SYMBOL	FUNCTION	EQUIVALENT CIRCUIT	Voltage
1	STANDBY SW	Standby switch		0V
2 3	LIN RIN	Lch Input Rch Input		1.15V
4	MODE SW	Mode control switch		0V
5	VREF	Reference voltage		1.15V

# NJM2704

PIN No.	SYMBOL	FUNCTION	EQUIVALENT CIRCUIT	Voltage
6	GND	GND		0V
7 14	NC	No Connect		-
8	DNC	Do Not Connect		-
9	V+	Power Supply		V+
10 11	NFR NFL	Filter terminal Filter terminal		1.15V
12 13	ROUT LOUT	Rch Output Lch Output		1.15V


## APPLICATION CIRCUIT

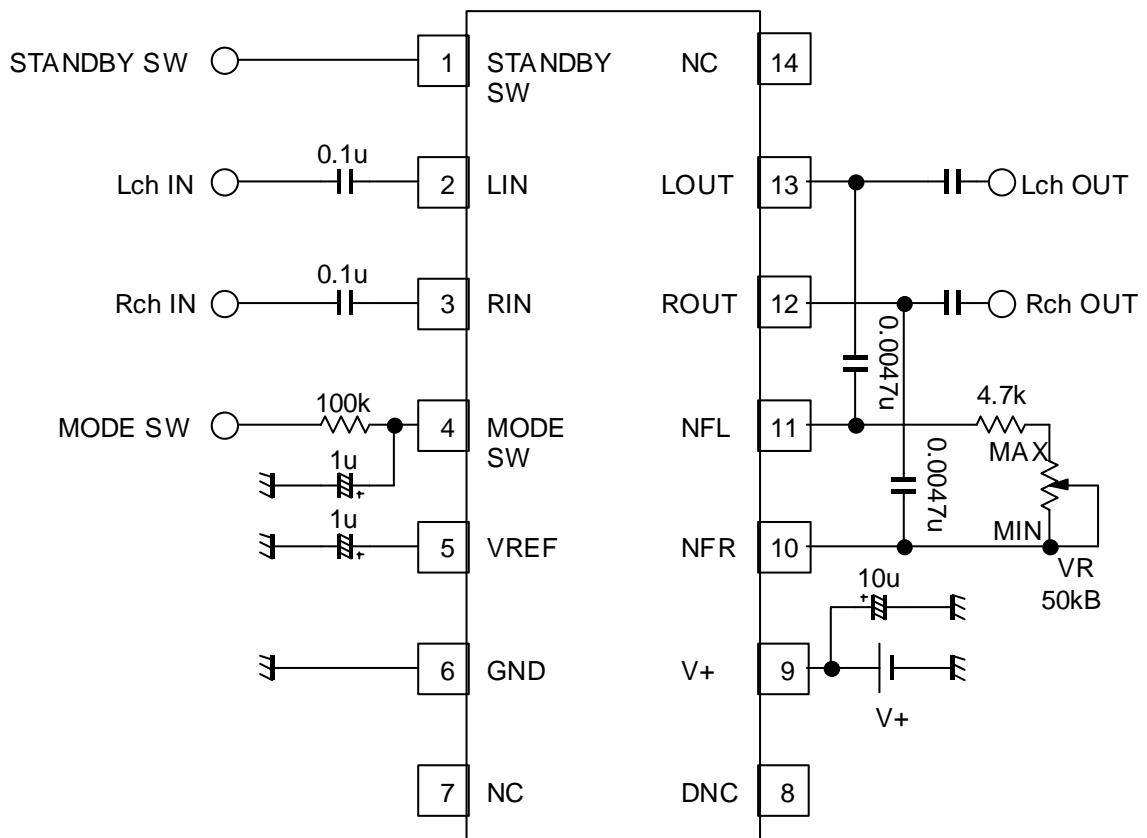

## TYPICAL CHARACTERISTICS


**Supply Current vs. Supply Voltage**

Ta=25degrees

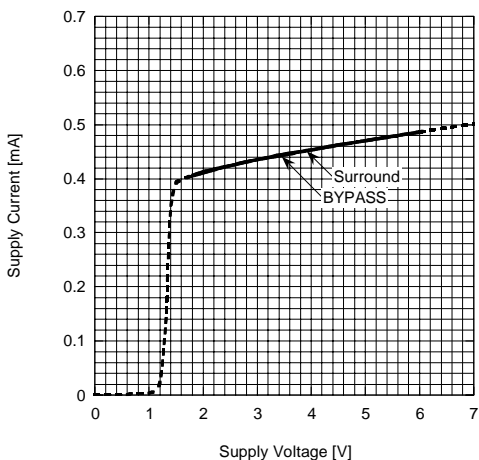


**Supply Current vs. Ambient Temperature**

V+=3V

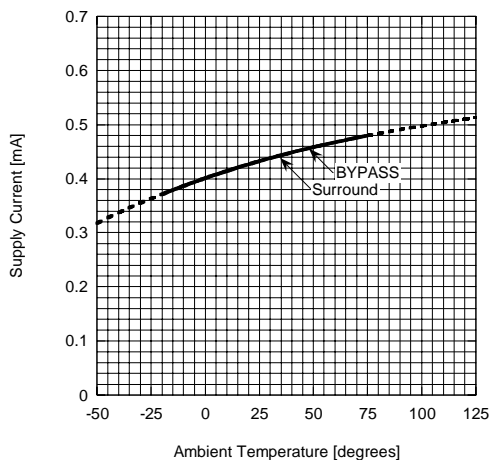


**Reference Voltage vs. Supply Voltage**

Ta=25degrees

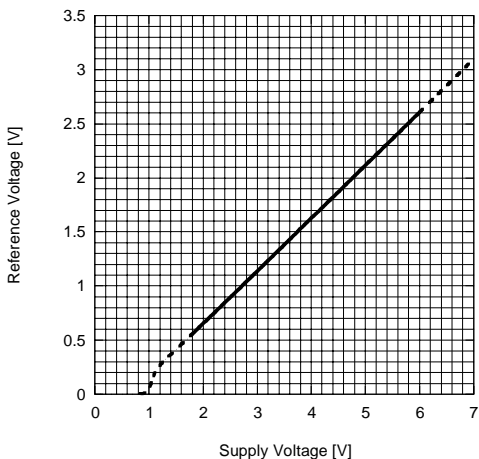


**Reference Voltage vs. Ambient Temperature**

V+=3V

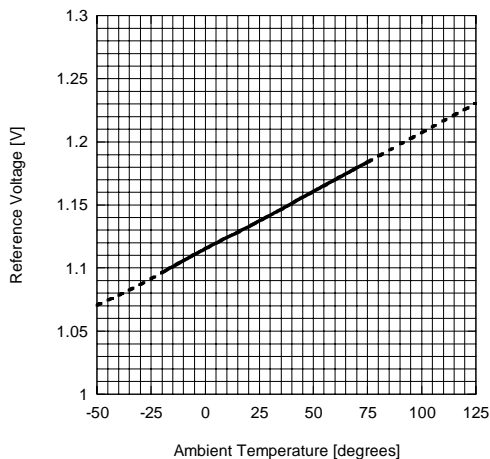


**Maximum Input Voltage vs. Supply Voltage (BYPASS)**

Vin=Lch f=1kHz Vout=Lch RL=10kohm  
THD=1% Ta=25degrees

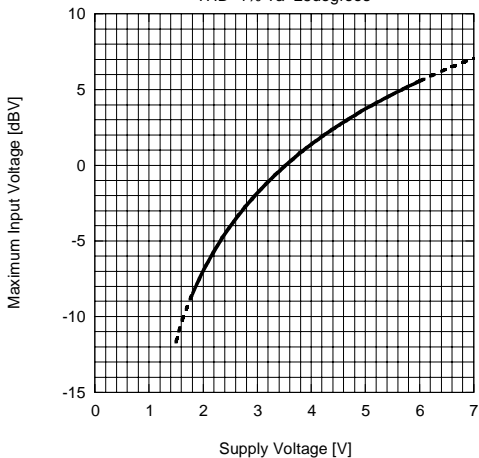

**Maximum Input Voltage vs. Supply Voltage (Surround)**


Vin=Lch f=100Hz Vout=Lch RL=10kohm VR=MAX  
THD=1% Ta=25degrees

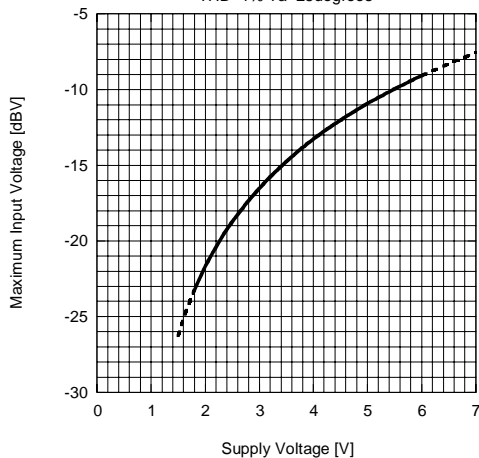




## TYPICAL CHARACTERISTICS


**Maximum Input Voltage vs. Ambient Temperature (BYPASS)**

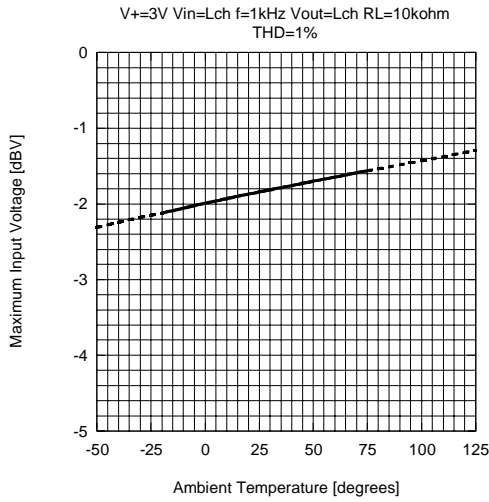


**Maximum Input Voltage vs. Ambient Temperature (Surround)**

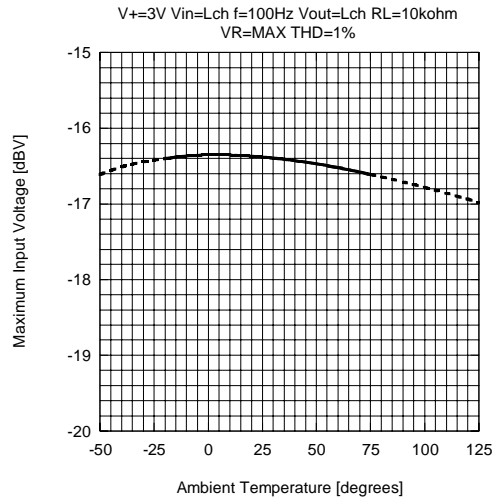


**Maximum Input Voltage vs. Ambient Temperature (BYPASS)**

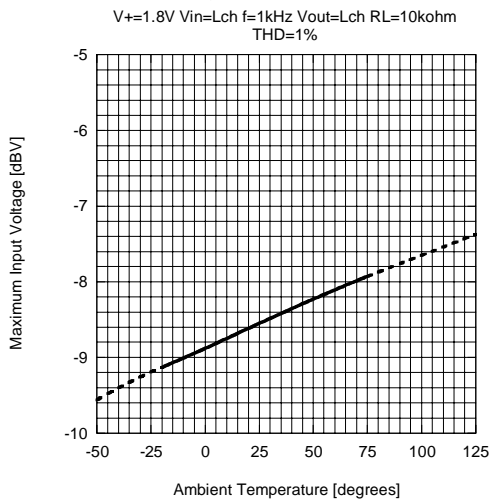


**Maximum Input Voltage vs. Ambient Temperature (Surround)**

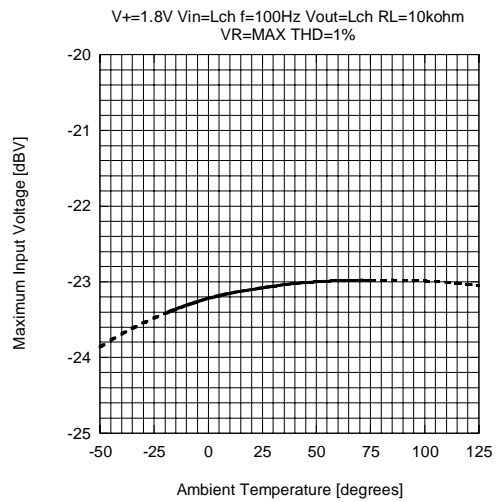

**Output Noise Voltage vs. Ambient Temperature**

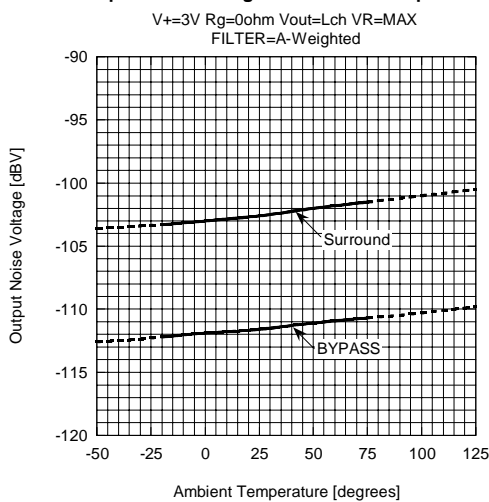


**Output Noise Voltage vs. Ambient Temperature**

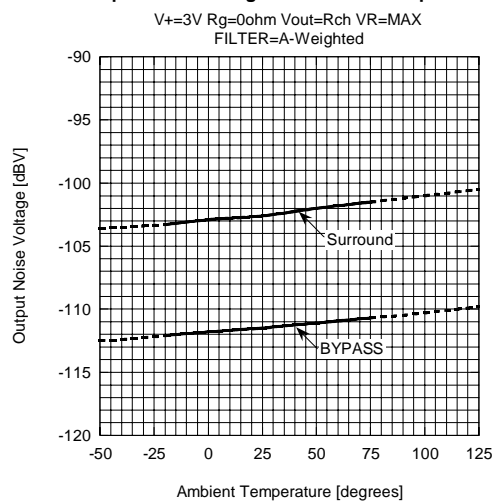


## TYPICAL CHARACTERISTICS


**Total Harmonic Distortion vs. Input Voltage (BYPASS)**

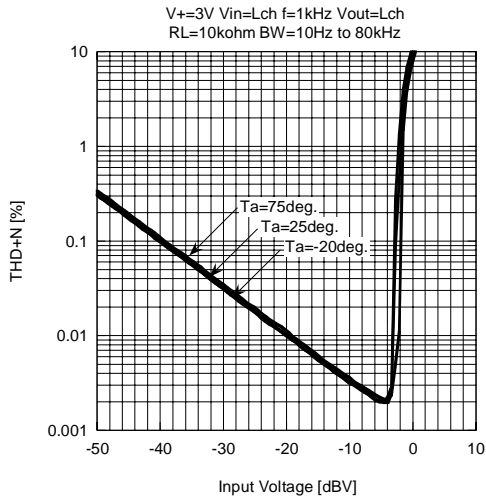


**Total Harmonic Distortion vs. Input Voltage (Surround)**

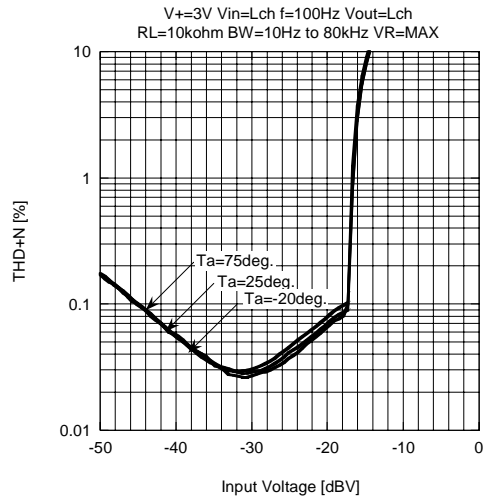


**Voltage Gain vs. Frequency (BYPASS)**

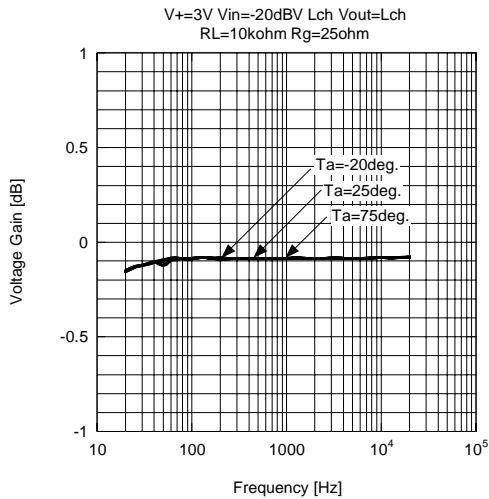


**Voltage Gain vs. Frequency (Surround)**

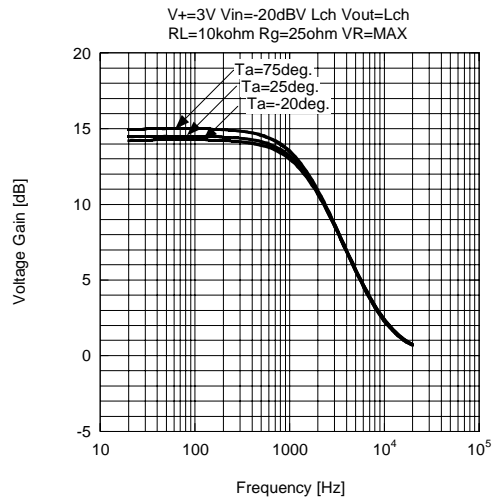

**Voltage Gain vs. Frequency (Surround)**

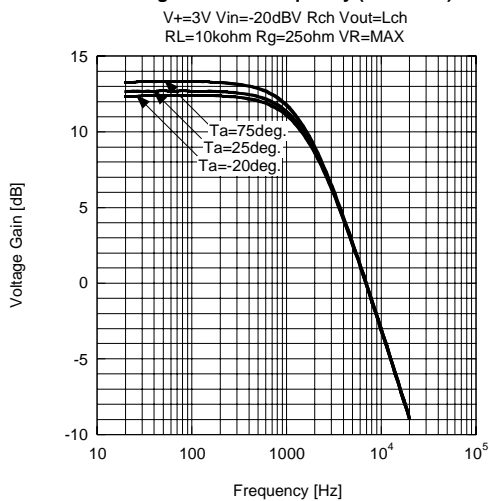


**Voltage Gain vs. Frequency (Surround)**

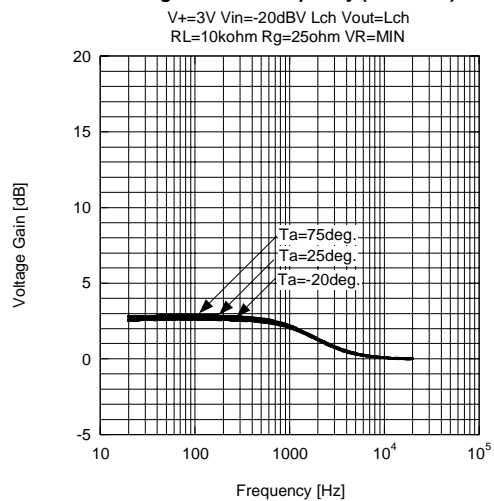

## TYPICAL CHARACTERISTICS


**Voltage Gain vs. SW Terminal Input Voltage**

V+=3V Vin=-20dBV Lch f=100Hz Vout=Lch VR=MAX  
BYPASS to Surround

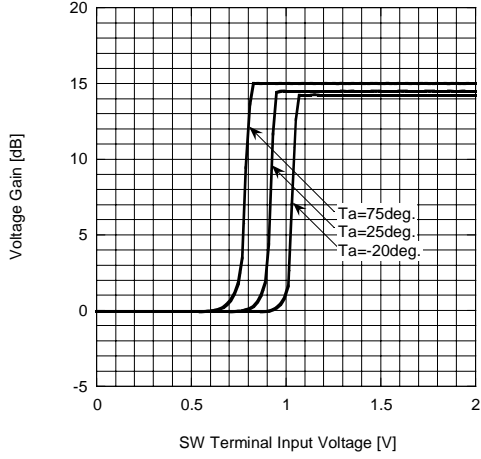

**Output DC Offset Voltage vs. Ambient Temperature**

V+=3V  
BYPASS to Surround

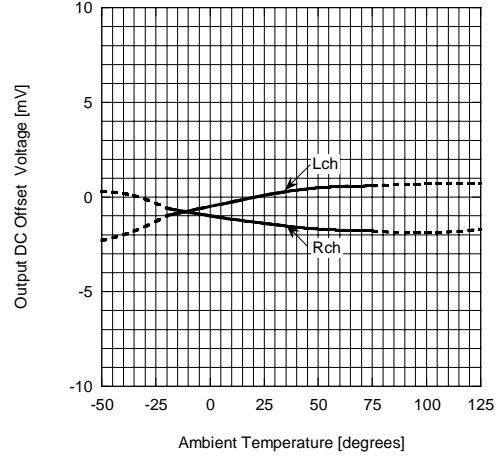

**[CAUTION]**

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM2704V-TE1](#)

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9