

# Multilayer Band Pass Filters(Balance Output Type)

For 2.4GHz W-LAN/Bluetooth

## DEA Series

|       |                                          |
|-------|------------------------------------------|
| Type: | DEA202450BT-7171A1 (2.0×1.25×0.6mm max.) |
|       | DEA202450BT-7190A1 (2.0×1.25×0.6mm max.) |
|       | DEA202450BT-7099A1 (2.0×1.25×0.8mm max.) |
|       | DEA202450BT-7100C1 (2.0×1.25×0.8mm max.) |
|       | DEA202350BT-7196A1 (2.0×1.25×0.9mm)      |
|       | DEA202450BT-7077A1 (2.0×1.25×0.95mm)     |
|       | DEA202450BT-7089C3 (2.0×1.25×1.0mm max.) |
|       | DEA202450BT-7112B1 (2.0×1.25×1.0mm max.) |
|       | DEA202450BT-7112E1 (2.0×1.25×1.0mm max.) |

Issue date: December 2010

- All specifications are subject to change without notice.
- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

# Multilayer Chip Band Pass Filters(Balance Output Type) Conformity to RoHS Directive


## For Bluetooth & 2.4GHz W-LAN

DEA Series DEA202450BT-7171A1


### FEATURES

- Miniature balanced band pass filter.
- Matched to  $34+j60\Omega$ .
- Package size:  $2.0 \times 1.25\text{mm}$ .
- Low profile : 0.6mm max. height.

### SHAPES AND DIMENSIONS

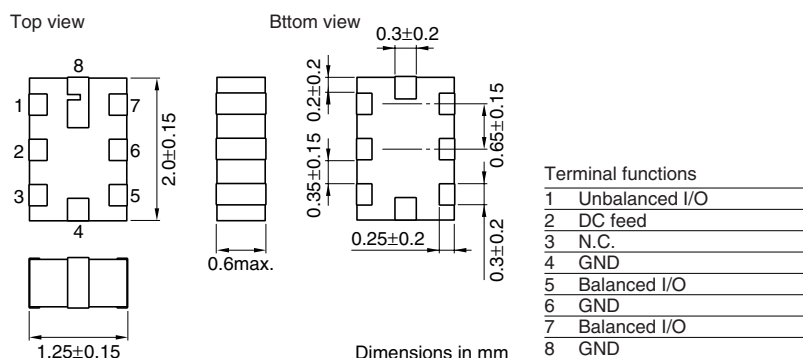

### RECOMMENDED PC BOARD PATTERNS

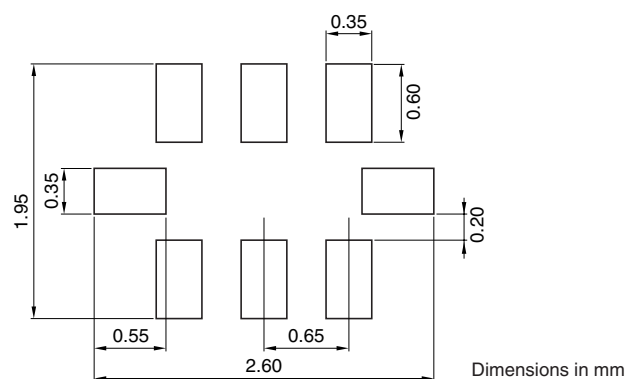


Note 1: Pin 2 of the filter provides a DC feed connection to the balanced ports.

In the event that this function is used, pin 2 should be connected to ground using a de-coupling capacitor.

Note 2: In the event that the pin 2 function is not used, the pin should be left unconnected.

### EVALUATION SETUP

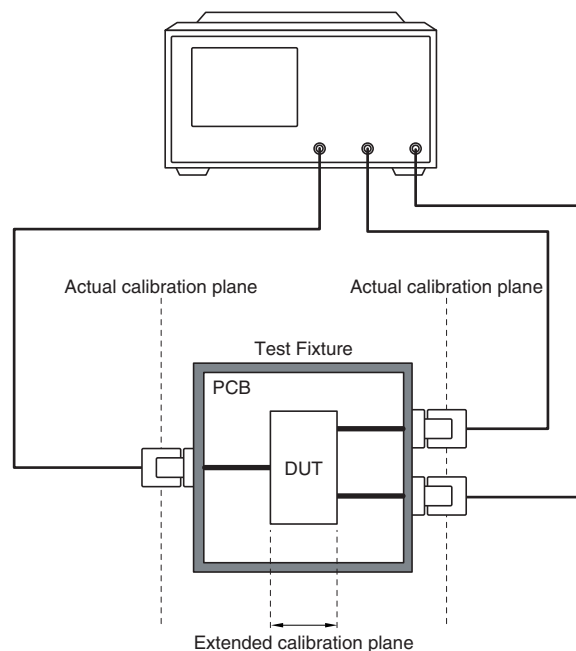

Note 1: The Port Extension function on the Network Analyser is used to extend the calibration plane to the DUT terminals.

Note 2: Loss in the PCB traces is compensated for by measurement data taken on a PCB Thru' line.

- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.


- All specifications are subject to change without notice.

## ELECTRICAL CHARACTERISTICS


|                                                                     |                   |               |
|---------------------------------------------------------------------|-------------------|---------------|
| Insertion Loss                                                      | [2402 to 2480MHz] | 3.0dB max.    |
| Single ended port characteristic impedance                          | —                 | 50Ω (Nominal) |
| Balanced ports impedance, nominal value                             | —                 | 34 + j60Ω     |
| VSWR: Unbalanced port                                               | [2402 to 2480MHz] | 2max.         |
| VSWR: Balanced port<br>(with respect to nominal balanced impedance) | [2402 to 2480MHz] | 2max.         |
| Attenuation                                                         | [880 to 960MHz]   | 35dB min.     |
|                                                                     | [1710 to 1880MHz] | 22dB min.     |
|                                                                     | [1880 to 1910MHz] | 20dB min.     |
|                                                                     | [2110 to 2170MHz] | —             |
|                                                                     | [4804 to 4960MHz] | 18dB min.     |
| Phase difference at balanced port                                   | [2402 to 2480MHz] | 180±10.0°     |
| Amplitude imbalance at balanced port                                | [2402 to 2480MHz] | 0±2dB         |
| Temperature range                                                   | Operating         | −40 to +85°C  |
|                                                                     | Storage           | −40 to +85°C  |

## FREQUENCY CHARACTERISTICS


### SDS21 INSERTION LOSS

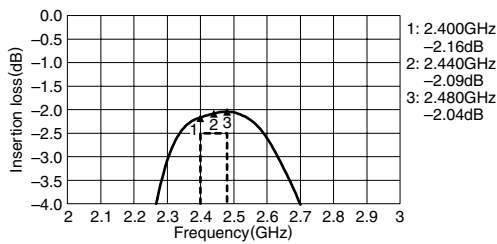

### AMPLITUDE IMBALANCE

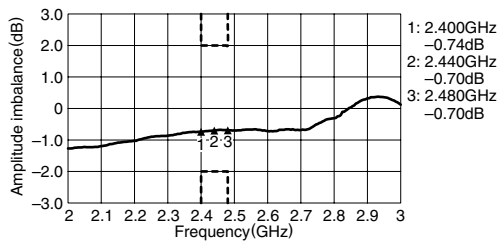


### SSS11 VSWR

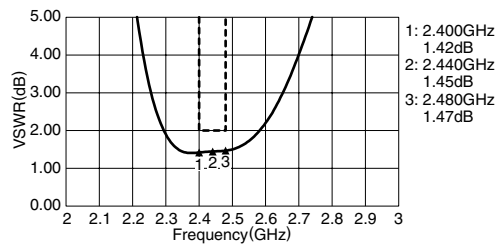


## SMITH CHARTS


### SSS11




### SDD22




### SDS21 ATTENUATION

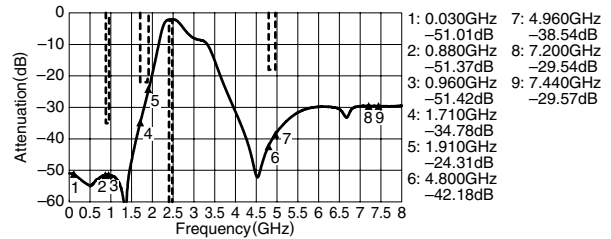

### PHASE IMBALANCE

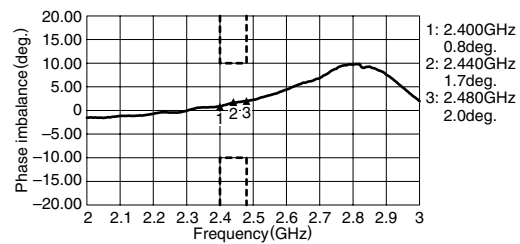


### SDD22 VSWR

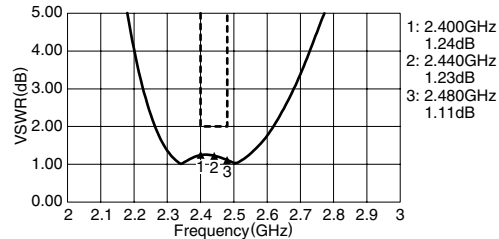


## PACKAGING STYLES

### REEL DIMENSIONS

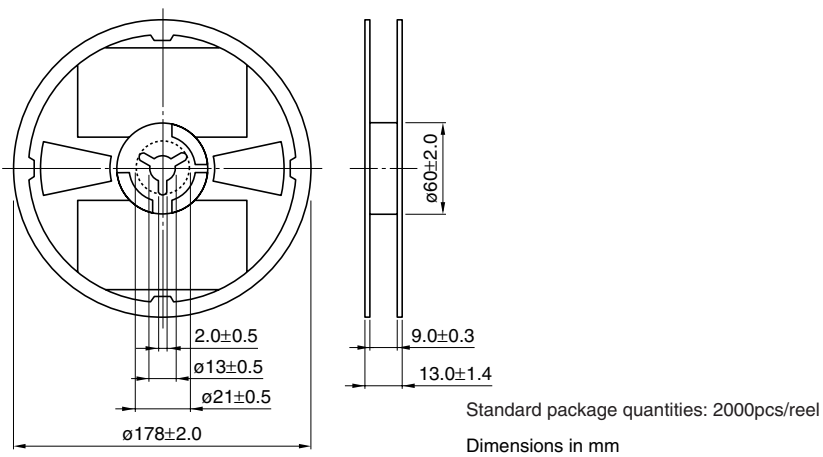

### TAPE DIMENSIONS

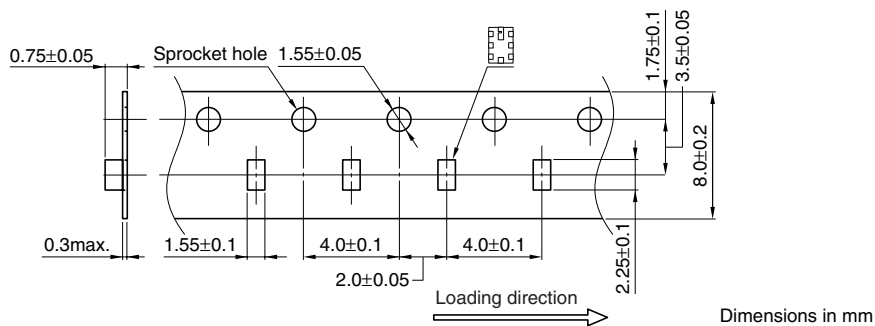

# Multilayer Chip Band Pass Filters(Balance Output Type) Conformity to RoHS Directive


## For Bluetooth & 2.4GHz W-LAN

DEA Series DEA202450BT-7190A1


### FEATURES

- Miniature balanced band pass filter.
- Matched to  $34+j60\Omega$ .
- Package size:  $2.0 \times 1.25\text{mm}$ .
- Low profile : 0.6mm max. height.

### SHAPES AND DIMENSIONS

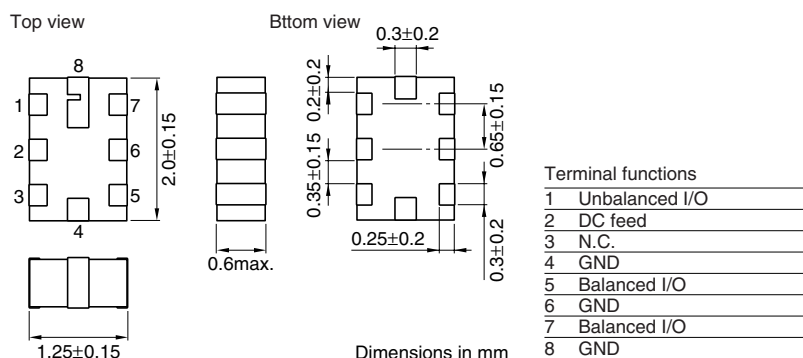


### RECOMMENDED PC BOARD PATTERNS

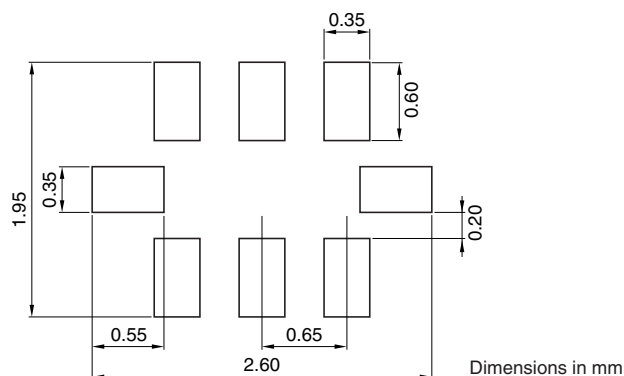

Note 1: Pin 2 of the filter provides a DC feed connection to the balanced ports.  
In the event that this function is used, pin 2 should be connected to ground using a de-coupling capacitor.

Note 2: In the event that the pin 2 function is not used, the pin should be left unconnected.

### EVALUATION SETUP

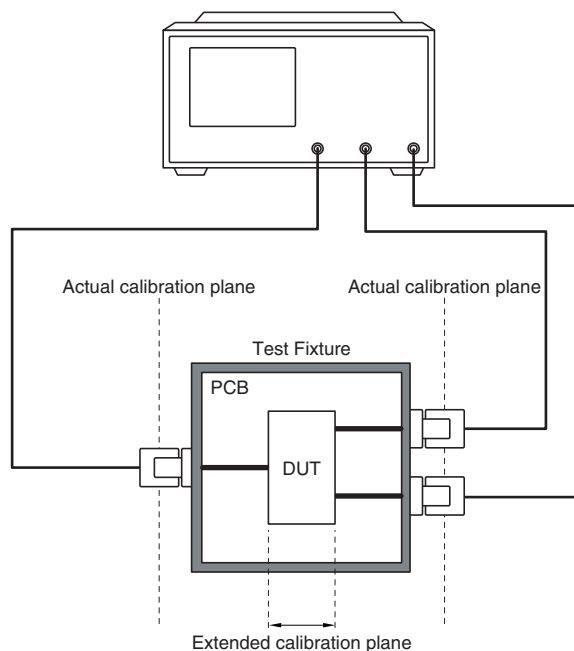

Note 1: The Port Extension function on the Network Analyser is used to extend the calibration plane to the DUT terminals.

Note 2: Loss in the PCB traces is compensated for by measurement data taken on a PCB Thru' line.

- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.


- All specifications are subject to change without notice.

## ELECTRICAL CHARACTERISTICS


|                                                                     |                   |               |
|---------------------------------------------------------------------|-------------------|---------------|
| Insertion Loss                                                      | [2402 to 2480MHz] | 3.0dB max.    |
| Single ended port characteristic impedance                          | —                 | 50Ω (Nominal) |
| Balanced ports impedance, nominal value                             | —                 | 34 + j60Ω     |
| VSWR: Unbalanced port                                               | [2402 to 2480MHz] | 2max.         |
| VSWR: Balanced port<br>(with respect to nominal balanced impedance) | [2402 to 2480MHz] | 2max.         |
| Attenuation                                                         | [880 to 960MHz]   | 35dB min.     |
|                                                                     | [1710 to 1880MHz] | 22dB min.     |
|                                                                     | [1880 to 1910MHz] | 20dB min.     |
|                                                                     | [2110 to 2170MHz] | —             |
|                                                                     | [4804 to 4960MHz] | 18dB min.     |
| Phase difference at balanced port                                   | [2402 to 2480MHz] | 180±10.0°     |
| Amplitude imbalance at balanced port                                | [2402 to 2480MHz] | 0±2dB         |
| Temperature range                                                   | Operating         | −40 to +85°C  |
|                                                                     | Storage           | −40 to +85°C  |

## FREQUENCY CHARACTERISTICS


### SDS21 INSERTION LOSS

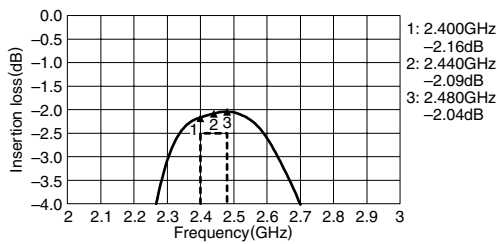


### SDS21 ATTENUATION

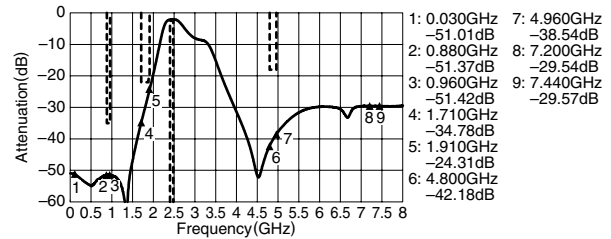


### AMPLITUDE IMBALANCE

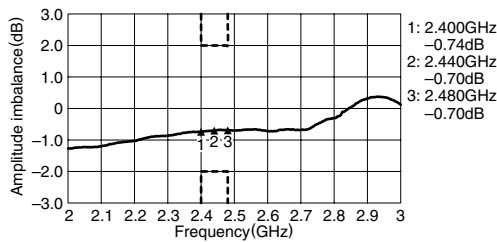


### PHASE IMBALANCE

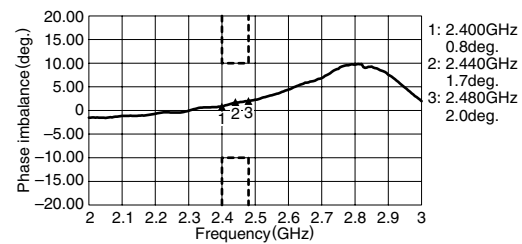

### SSS11 VSWR

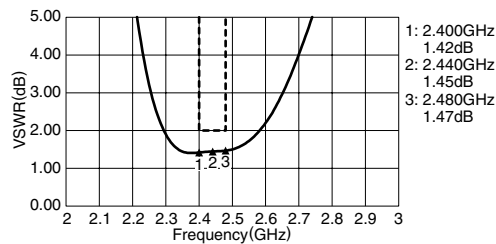


### SDD22 VSWR

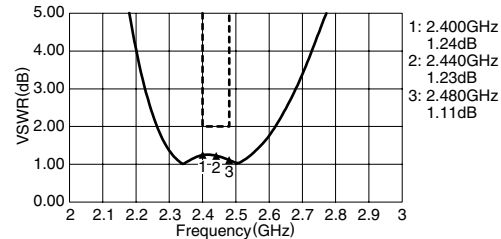


## SMITH CHARTS

### SSS11




### SDD22




## PACKAGING STYLES

### REEL DIMENSIONS

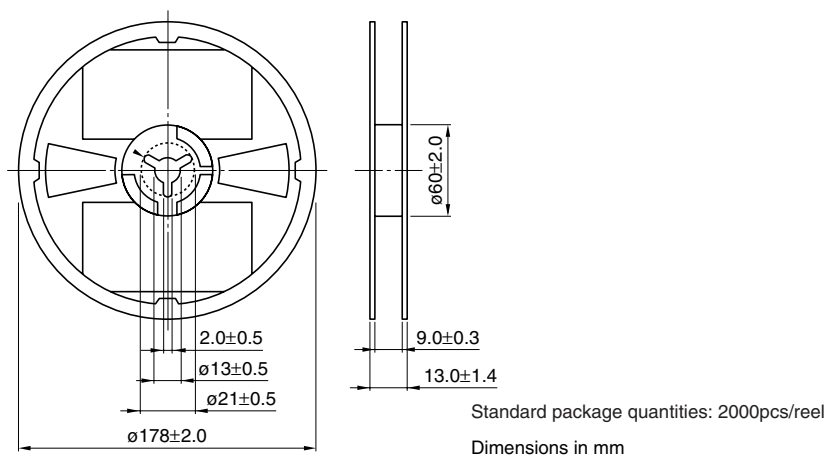

### TAPE DIMENSIONS

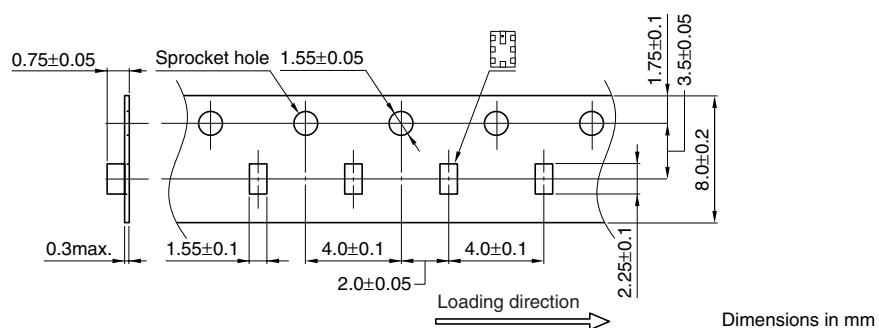

# Multilayer Chip Band Pass Filters(Balance Output Type) Conformity to RoHS Directive


## For Bluetooth & 2.4GHz W-LAN

DEA Series DEA202450BT-7099A1

### FEATURES


- Miniature balanced band pass filter.
- Matched to  $24+j48.8\Omega$ .
- Package size:  $2.0 \times 1.25\text{mm}$ .
- Low profile : 0.8mm max. height.

### SHAPES AND DIMENSIONS

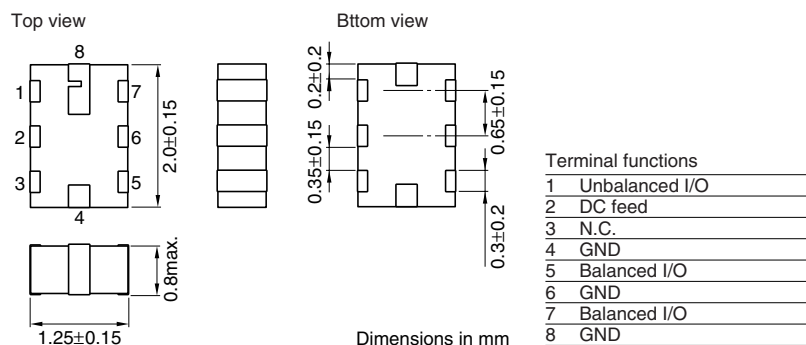

The identification marking in figure refer to prototype components only.  
A different component mark is used for mass production.

### RECOMMENDED PC BOARD PATTERNS

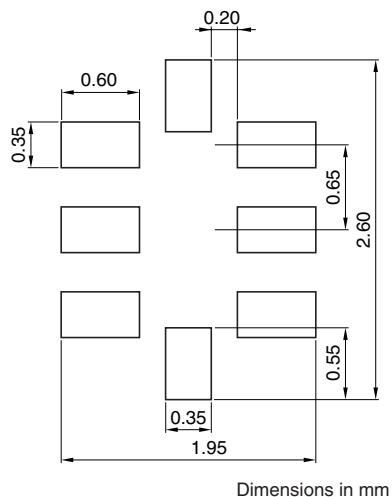

- Pin 2 of the filter provides a DC feed connection to the balanced ports.
- In the event that this function is used pin 2 should be connected to ground using a de-coupling capacitor.

- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.


- All specifications are subject to change without notice.

## ELECTRICAL CHARACTERISTICS


|                                                                            |                   |               |
|----------------------------------------------------------------------------|-------------------|---------------|
| Insertion Loss                                                             | [2402 to 2480MHz] | 2.3dB typ.    |
| Single ended port characteristic impedance                                 | —                 | 50Ω (Nominal) |
| Balanced ports impedance, nominal value                                    | —                 | 24 + j48.8Ω   |
| Return loss: Unbalanced port                                               | [2402 to 2480MHz] | 11.9dB typ.   |
| Return loss: Balanced port<br>(with respect to nominal balanced impedance) |                   | 11dB typ.     |
| Attenuation                                                                | [880 to 960MHz]   | 47dB typ.     |
|                                                                            | [1710 to 1880MHz] | 29dB typ.     |
|                                                                            | [1880 to 1910MHz] | 27dB typ.     |
|                                                                            | [2110 to 2170MHz] | 10dB typ.     |
|                                                                            | [4804 to 4960MHz] | 36dB typ.     |
| Phase difference at balanced port                                          | [2402 to 2480MHz] | 176deg typ.   |
| Amplitude imbalance at balanced port                                       | [2402 to 2480MHz] | 0.9dB typ.    |
| Temperature range                                                          | Operating         | −40 to +85°C  |
|                                                                            | Storage           | −40 to +85°C  |

## FREQUENCY CHARACTERISTICS


### INSERTION LOSS/ATTENUATION

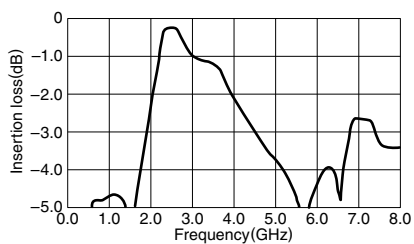


### RETURN LOSS(Balance)

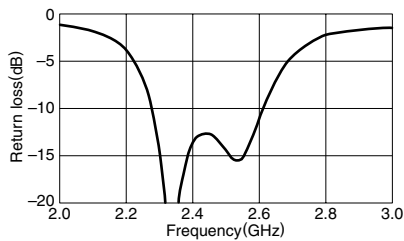


### PHASE DIFFERENCE

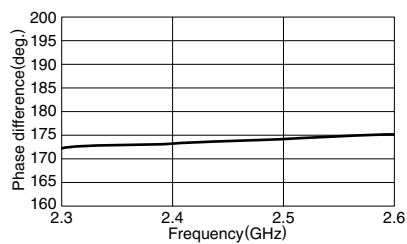


### RETURN LOSS(Unbalance)

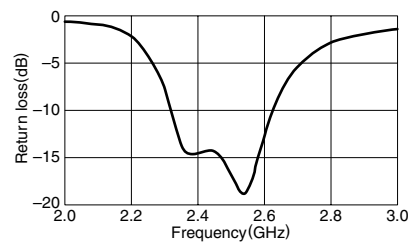

### AMPLITUDE IMBALANCE

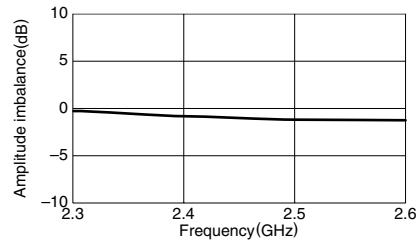

### COMMON MODE

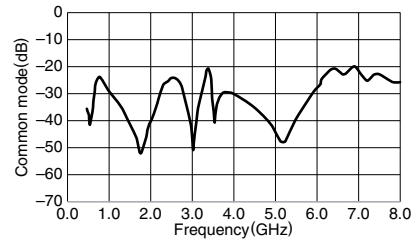


# Multilayer Chip Band Pass Filters(Balance Output Type) Conformity to RoHS Directive


## For Bluetooth & 2.4GHz W-LAN

DEA Series DEA202450BT-7100C1


### SHAPES AND DIMENSIONS

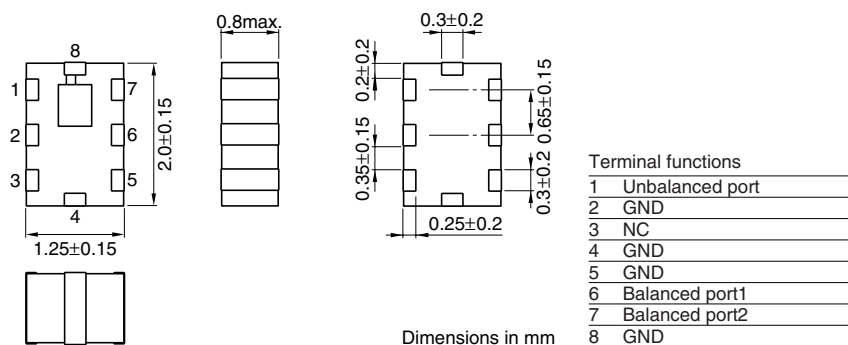

### RECOMMENDED PC BOARD PATTERN

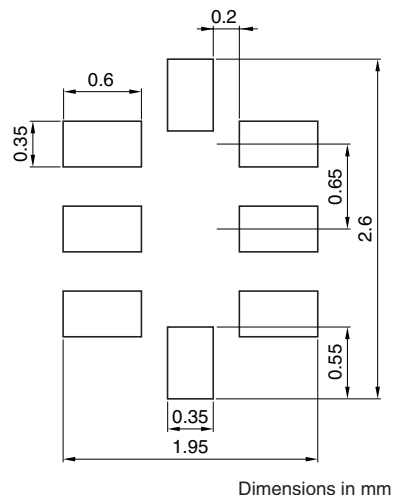

### EVALUATION BOARD

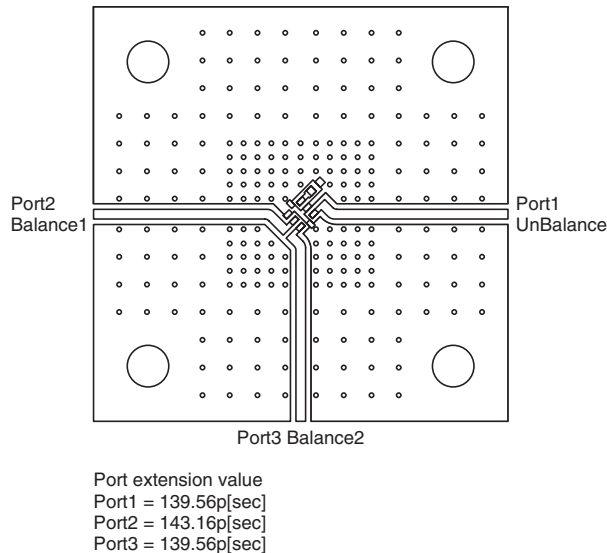

• **Conformity to RoHS Directive:** This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.

## ELECTRICAL CHARACTERISTICS


| Item                                      |                   | Minimum value   | Typical value | Maximum value |
|-------------------------------------------|-------------------|-----------------|---------------|---------------|
| Unbalanced port characteristics impedance | ( $\Omega$ )      | 50[Nominal]     |               |               |
| Balanced port characteristics impedance   | ( $\Omega$ )      | 25+j30[Nominal] |               |               |
| Differential mode insertion loss          | [2402 to 2480MHz] | (dB)            | 3.0           | 3.5           |
|                                           | [65 to 108MHz]    | (dB)            | 70            | —             |
|                                           | [824 to 960MHz]   | (dB)            | 46            | —             |
| Differential mode attenuation             | [1570 to 1580MHz] | (dB)            | 43            | —             |
| [100 $\Omega$ reference]                  | [1710 to 1990MHz] | (dB)            | 44            | —             |
|                                           | [2010 to 2170MHz] | (dB)            | 31            | —             |
|                                           | [7200 to 7500MHz] | (dB)            | 40            | —             |
| Common mode attenuation                   | [1570 to 1580MHz] | (dB)            | 34            | —             |
| [25 $\Omega$ reference]                   | [1710 to 1990MHz] | (dB)            | 36            | —             |
|                                           | [2010 to 2170MHz] | (dB)            | 33            | —             |
|                                           | [4800 to 5000MHz] | (dB)            | 25            | —             |
| In/out return loss                        |                   | (dB)            | 9             | 13            |
| Phase difference at balanced port         |                   | (deg.)          | 180 $\pm$ 10  | 174           |
| Amplitude imbalance at balanced port      |                   | (dB)            | 0 $\pm$ 2.8   | 1.7           |
| Temperature range                         | Operating         | ( $^{\circ}$ C) | —             | +85           |
|                                           | Storage           | ( $^{\circ}$ C) | —             | +85           |

• Ta: +25 $^{\circ}$ C


## FREQUENCY CHARACTERISTICS

Unbalance 50 $\Omega$ /Balance 25+j30 $\Omega$


### SDS21 INSERTION LOSS

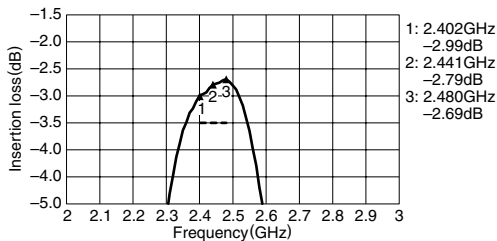


### SDS21 ATTENUATION[100 $\Omega$ REFERENCE]

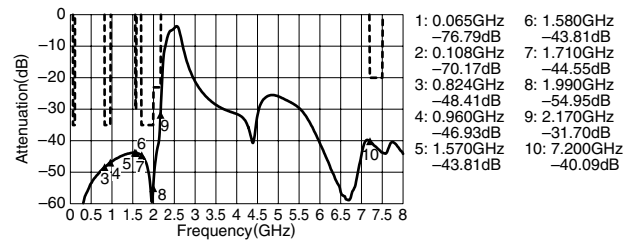


### AMPLITUDE BALANCE

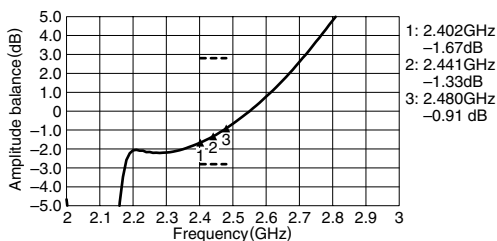


### PHASE BALANCE

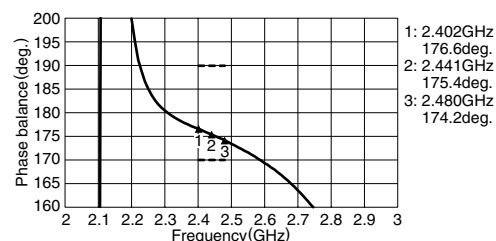

### SSS11 UNBALANCE RETURN LOSS

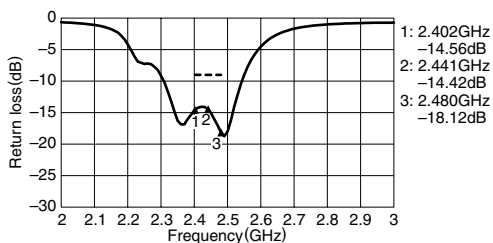

### SDD22 BALANCE RETURN LOSS

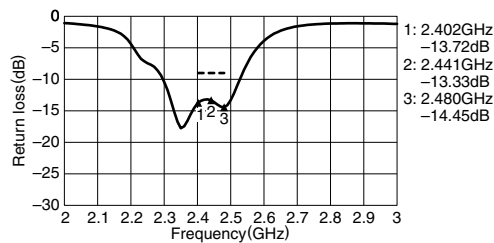


• All specifications are subject to change without notice.


## FREQUENCY CHARACTERISTICS

Unbalance 50Ω/Balance 25+j30Ω


### SCS21 ATTENUATION[25Ω REFERENCE]

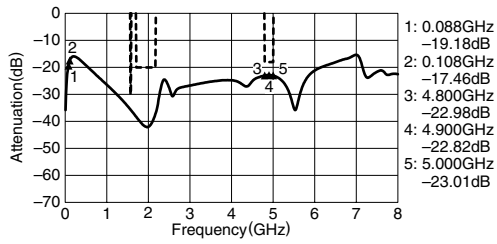

### SCC22 ANGLE[25Ω REFERENCE]

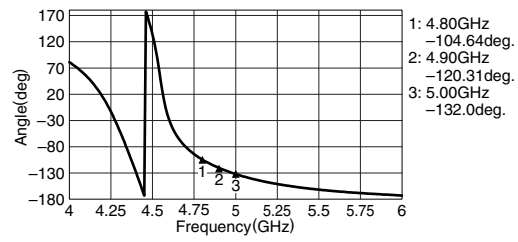



### SCC22 MAGNITUDE[25Ω REFERENCE]

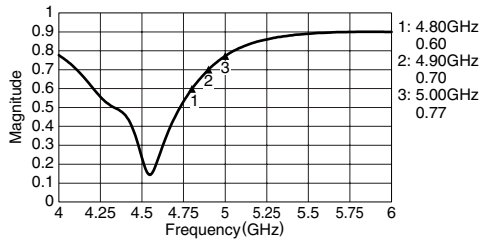

## SMITH CHARTS

S11

SDD22




# Multilayer Chip Band Pass Filters(Balance Output Type) Conformity to RoHS Directive


## For Bluetooth & 2.4GHz W-LAN

DEA Series DEA202350BT-7196A1


### SHAPES AND DIMENSIONS

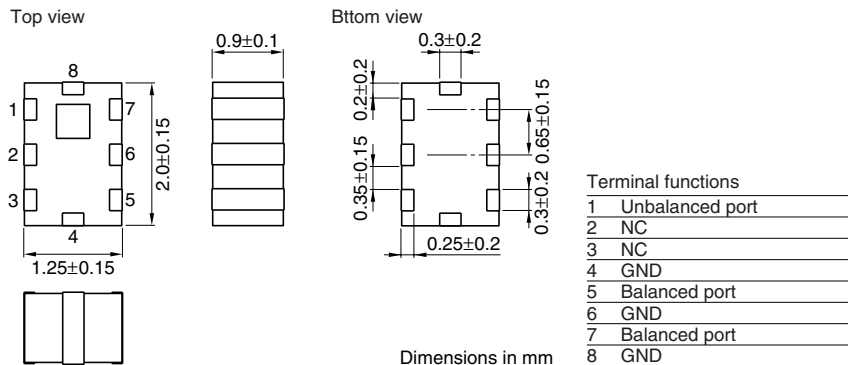

### RECOMMENDED PC BOARD PATTERNS

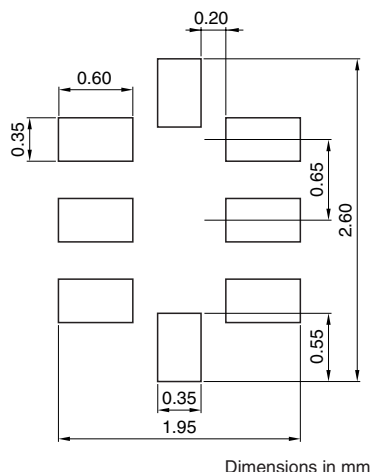

### EVALUATION BOARD

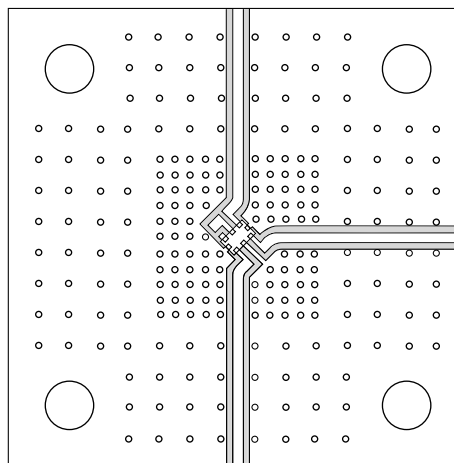

Port extension value is 139.56ps for all port.

### ELECTRICAL CHARACTERISTICS

| Item                                                 | Typical value     |              |           |
|------------------------------------------------------|-------------------|--------------|-----------|
| Frequency range(Pass band)                           | 2300 to 2400MHz   |              |           |
| Insertion loss                                       | [+25°C]           | 2.2dB max.   | 1.76dB    |
|                                                      | [-40 to +85°C]    | 2.5dB max.   | —         |
| Single ended port characteristic impedance           | 50Ω (Nominal)     |              |           |
| Balanced port differential characteristics impedance | 100dB             |              |           |
| Attenuation                                          | [500 to 1000MHz]  | 34dB min.    | 44.3dB    |
|                                                      | [1000 to 1785MHz] | 26dB min.    | 31.6dB    |
|                                                      | [1785 to 1880MHz] | 25dB min.    | 34.9dB    |
|                                                      | [1880 to 1980MHz] | 15dB min.    | 22.6dB    |
|                                                      | [2720 to 5900MHz] | 10dB min.    | 13.2dB    |
| Single ended return loss                             | [2300 to 2400MHz] | —            | 17dB      |
| Phase difference at balanced port                    | [2300 to 2400MHz] | —            | 185.1deg. |
| Amplitude imbalance at balanced port                 | [2300 to 2400MHz] | —            | 0.13dB    |
| Temperature range                                    | Operating         | -40 to +85°C |           |
|                                                      | Storage           | -40 to +85°C |           |

• Ta: +25°C


• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.


## FREQUENCY CHARACTERISTICS

Unbalance 50Ω/Balance 100Ω


### SDS21 INSERTION LOSS

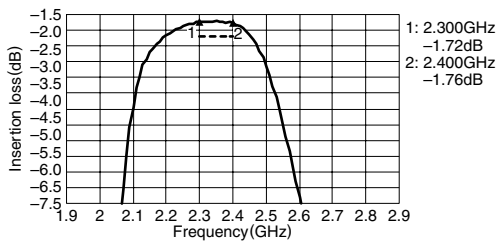


### SDS21 ATTENUATION

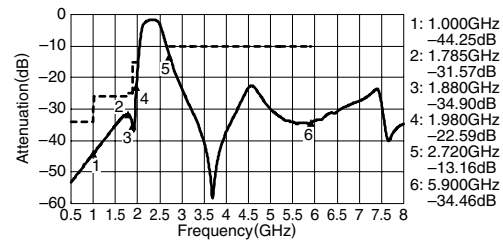


### AMPLITUDE BALANCE

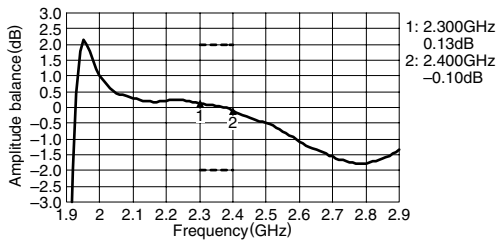


### PHASE BALANCE

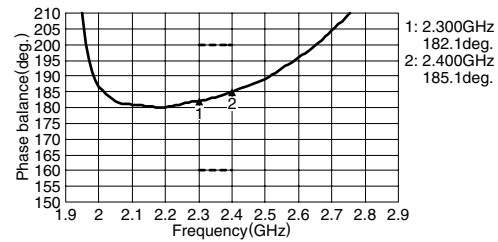


### S11 UNBALANCE RETURN LOSS

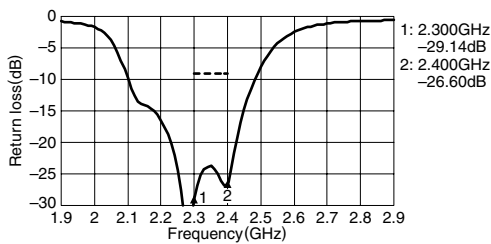

### SDD22 BALANCE RETURN LOSS

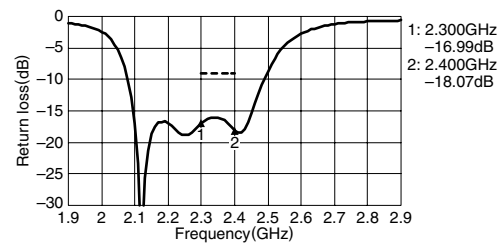



### SCS21

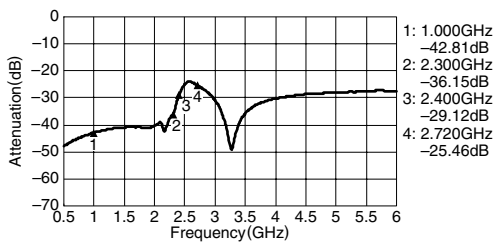

## SMITH CHARTS

S11

SDD22




# Multilayer Chip Band Pass Filters(Balance Output Type) Conformity to RoHS Directive

## For Bluetooth & 2.4GHz W-LAN


DEA Series DEA202450BT-7077A1

### SHAPES AND DIMENSIONS

Top view



Bottom view




Dimensions in mm

#### Terminal functions

|   |                         |
|---|-------------------------|
| 1 | Unbalanced port         |
| 2 | DC feed + RF GND or GND |
| 3 | NC                      |
| 4 | GND                     |
| 5 | Balanced port           |
| 6 | GND                     |
| 7 | Balanced port           |
| 8 | GND                     |

### RECOMMENDED PC BOARD PATTERN

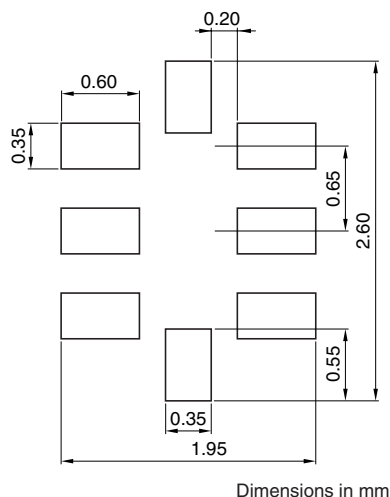

Dimensions in mm

- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

- All specifications are subject to change without notice.

## ELECTRICAL CHARACTERISTICS


| Frequency range(Pass band)                           |                   | 2400MHz                 | 2500MHz    |
|------------------------------------------------------|-------------------|-------------------------|------------|
| Insertion loss                                       | [+25°C]           | —                       | 3.5dB max. |
|                                                      | [−40 to +85°C]    | —                       | 3.8dB max. |
| Single ended port characteristic impedance           |                   | 50Ω (Nominal)           | —          |
| Balanced port differential characteristics impedance |                   | 34+j72Ω (Nominal)       | —          |
| Attenuation                                          | [880 to 960MHz]   | 40dB                    | —          |
|                                                      | [1710 to 1880MHz] | 38dB                    | —          |
|                                                      | [1880 to 1990MHz] | 38dB                    | —          |
|                                                      | [2110 to 2170MHz] | 17dB                    | —          |
|                                                      | [4800 to 5000MHz] | 25dB                    | —          |
|                                                      | [7200 to 7500MHz] | 27dB                    | —          |
| Single ended return loss                             |                   | [2400 to 2500MHz] 9.0dB | —          |
| Balanced return loss                                 |                   | [2400 to 2500MHz] 9.0dB | —          |
| Phase difference at balanced port                    |                   | 170deg.                 | 190deg.    |
| Amplitude imbalance at balanced port                 |                   | −1.0dB                  | 1.0dB      |
| Temperature range                                    | Operating         | −40 to +85°C            |            |
|                                                      | Storage           | −40 to +85°C            |            |

• Ta: +25°C


## FREQUENCY CHARACTERISTICS

Unbalance 50Ω/Balance 34+j72Ω


### SDS21 INSERTION LOSS

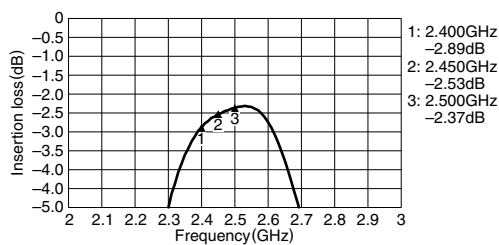


### SDS21 ATTENUATION

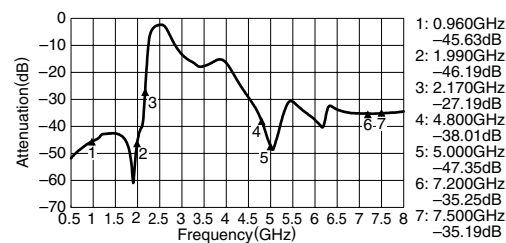


### S11 UNBALANCE RETURN LOSS

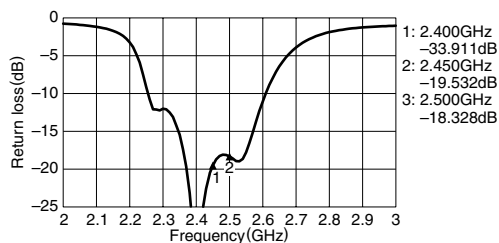


### SDD22 BALANCE RETURN LOSS

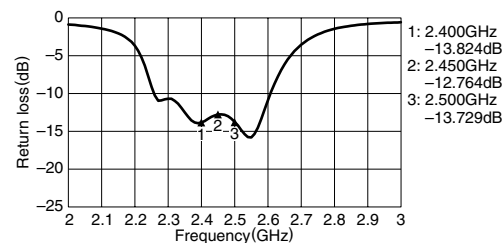


### AMPLITUDE BALANCE

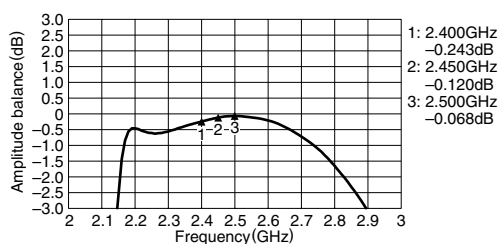



### PHASE BALANCE

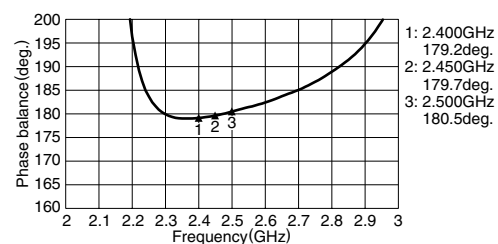

### SCS21 CMRR

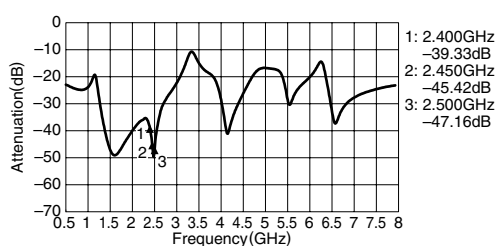

• All specifications are subject to change without notice.


**SMITH CHARTS****S11****SDD22**

# Multilayer Chip Band Pass Filters(Balance Output Type) Conformity to RoHS Directive


## For Bluetooth & 2.4GHz W-LAN

DEA Series DEA202450BT-7089C3

### SHAPES AND DIMENSIONS

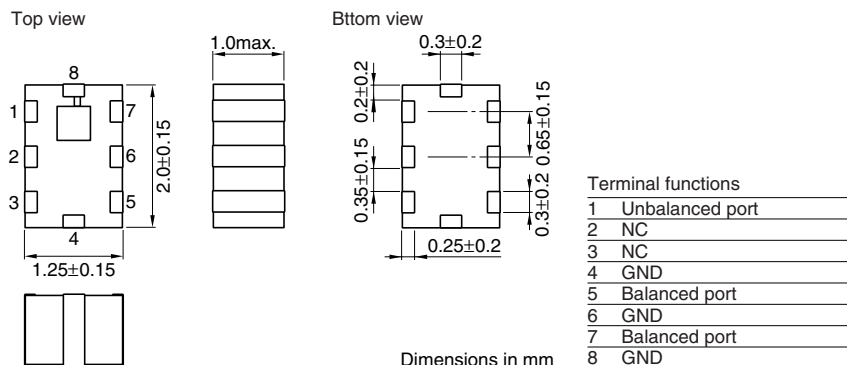

### RECOMMENDED PC BOARD PATTERNS

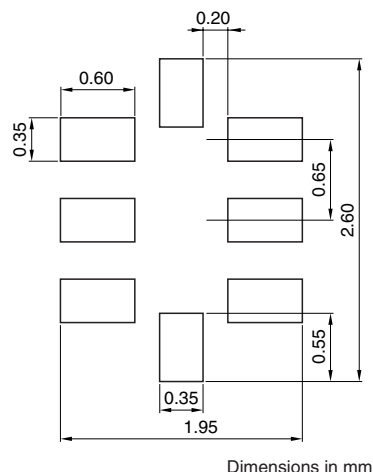

### ELECTRICAL CHARACTERISTICS

| Item                                                 | Typical value     |              |         |
|------------------------------------------------------|-------------------|--------------|---------|
| Frequency range(Pass band)                           | 2400 to 2500MHz   |              |         |
| Insertion loss                                       | [+25°C]           | 3.4dB max.   | 2.95dB  |
|                                                      | [-40 to +85°C]    | 3.7dB max.   | —       |
| Single ended port characteristic impedance           | 50Ω (Nominal)     |              |         |
| Balanced port differential characteristics impedance | 55+j50Ω (Nominal) |              |         |
| Attenuation                                          | [10 to 915MHz]    | 40dB min.    | 46dB    |
|                                                      | [925 to 960MHz]   | 39dB min.    | 45dB    |
|                                                      | [1570 to 1580MHz] | 30dB min.    | 44dB    |
|                                                      | [1710 to 1785MHz] | 39dB min.    | 47dB    |
|                                                      | [1805 to 1880MHz] | 25dB min.    | 55dB    |
|                                                      | [1850 to 1910MHz] | 38dB min.    | 51dB    |
|                                                      | [1920 to 1990MHz] | 33dB min.    | 48dB    |
|                                                      | [2112 to 2168MHz] | 20dB min.    | 31dB    |
|                                                      | [4800 to 5000MHz] | 26dB min.    | 38dB    |
|                                                      | [7200 to 7500MHz] | 26dB min.    | 35dB    |
| Single ended return loss                             | [2400 to 2500MHz] | 8.5dB min.   | 13dB    |
| Balanced return loss                                 | [2400 to 2500MHz] | 8.5dB min.   | 14dB    |
| Phase difference at balanced port                    | [2400 to 2500MHz] | 180±10deg.   | 183deg. |
| Amplitude imbalance at balanced port                 | [2400 to 2500MHz] | 0±2.0dB      | -0.5dB  |
| Temperature range                                    | Operating         | -40 to +85°C |         |
|                                                      | Storage           | -40 to +85°C |         |

• Ta: +25°C


• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.


## FREQUENCY CHARACTERISTICS

Unbalance 50Ω/Balance 55+j50Ω


### SDS21 INSERTION LOSS

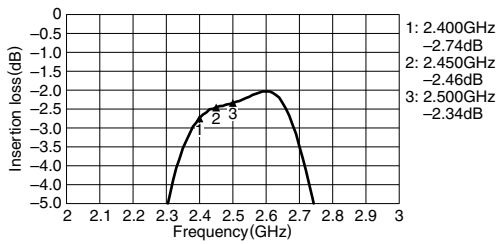


### SDS21 ATTENUATION

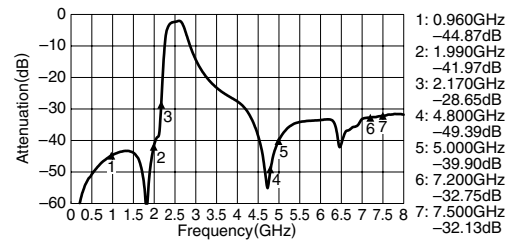


### S11 UNBALANCE RETURN LOSS

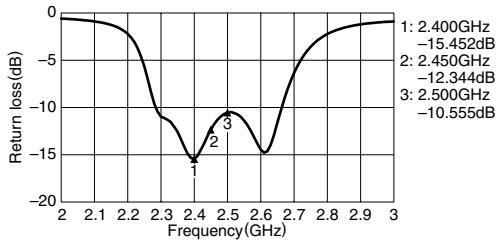


### SDD22 BALANCE RETURN LOSS

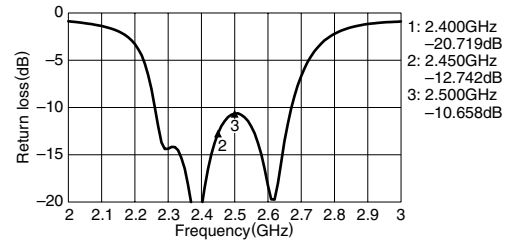


### AMPLITUDE BALANCE

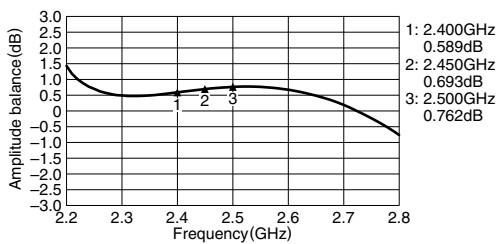

### PHASE BALANCE

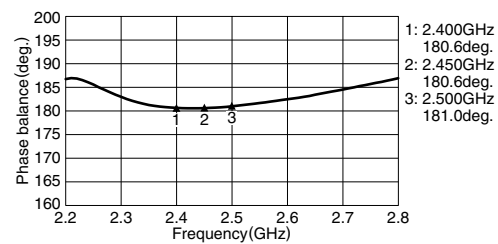



### SCS21 CMRR

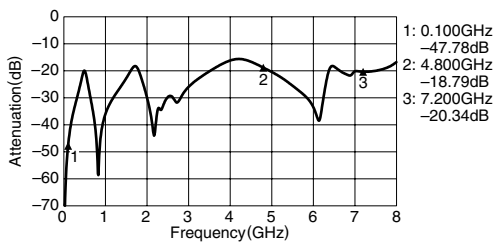

## SMITH CHARTS

S11

SDD22




# Multilayer Chip Band Pass Filters(Balance Output Type) Conformity to RoHS Directive

## For Bluetooth & 2.4GHz W-LAN


DEA Series DEA202450BT-7112B1

### SHAPES AND DIMENSIONS

Top view



Bottom view




Dimensions in mm

#### Terminal functions


|   |                 |
|---|-----------------|
| 1 | Unbalanced port |
| 2 | NC              |
| 3 | NC              |
| 4 | GND             |
| 5 | Balanced port   |
| 6 | GND             |
| 7 | Balanced port   |
| 8 | GND             |

### RECOMMENDED PC BOARD PATTERN

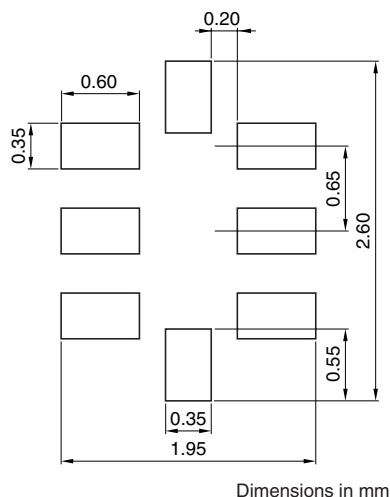

Dimensions in mm

### EVALUATION BOARD

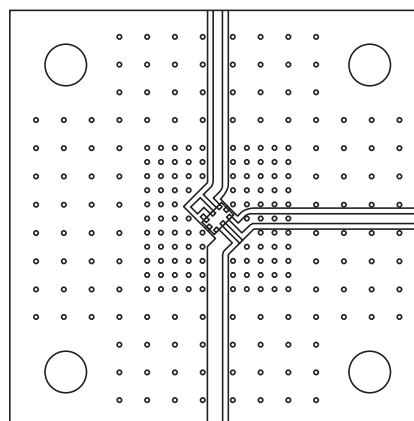

Port extension value is 139.56ps for all port.

- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

- All specifications are subject to change without notice.

## ELECTRICAL CHARACTERISTICS


| Frequency range(Pass band)                           |                   | 2400MHz                   | 2500MHz    |
|------------------------------------------------------|-------------------|---------------------------|------------|
| Insertion loss                                       | [+25°C]           | —                         | 2.5dB max. |
|                                                      | [−40 to +85°C]    | —                         | 2.8dB max. |
| Single ended port characteristic impedance           |                   | 50Ω (Nominal)             | —          |
| Balanced port differential characteristics impedance |                   | 50+j40Ω (Nominal)         | —          |
| Attenuation                                          | [10 to 915MHz]    | 41dB                      | —          |
|                                                      | [925 to 960MHz]   | 34dB                      | —          |
|                                                      | [1570 to 1580MHz] | 30dB                      | —          |
|                                                      | [1710 to 1785MHz] | 40dB                      | —          |
|                                                      | [1805 to 1880MHz] | 26dB                      | —          |
|                                                      | [1850 to 1910MHz] | 40dB                      | —          |
|                                                      | [1920 to 1990MHz] | 31dB                      | —          |
|                                                      | [4800 to 5000MHz] | 25dB                      | —          |
| Single ended return loss                             |                   | [2400 to 2500MHz] 9dB     | —          |
| Balanced return loss                                 |                   | [2400 to 2500MHz] 9dB     | —          |
| Phase difference at balanced port                    |                   | [2400 to 2500MHz] 170deg. | 190deg.    |
| Amplitude imbalance at balanced port                 |                   | [2400 to 2500MHz] −2dB    | 2dB        |
| Common mode attenuation                              | [88 to 108MHz]    | 15dB                      | —          |
|                                                      | [4800 to 5000MHz] | 18dB                      | —          |
| Common mode impedance [4900MHz]                      | Magnitude         | 0.6                       | —          |
|                                                      | Angle             | −45deg.                   | 12deg.     |
| Temperature range                                    | Operating         | −40 to +85°C              | —          |
|                                                      | Storage           | −40 to +85°C              | —          |

• Ta: +25°C


## FREQUENCY CHARACTERISTICS

Unbalance 50Ω/Balance 50+j40Ω


### SDS21 INSERTION LOSS

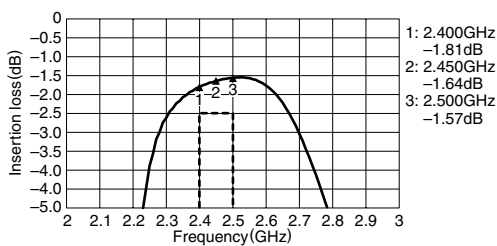


### SDS21 ATTENUATION

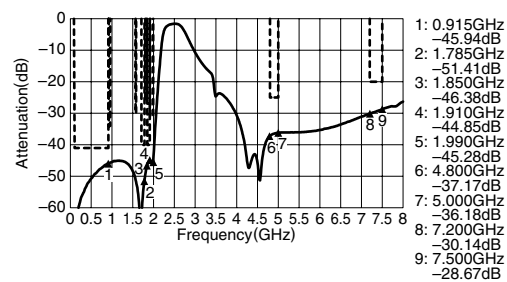


### AMPLITUDE BALANCE

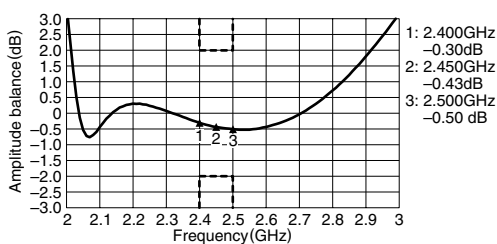


### PHASE BALANCE

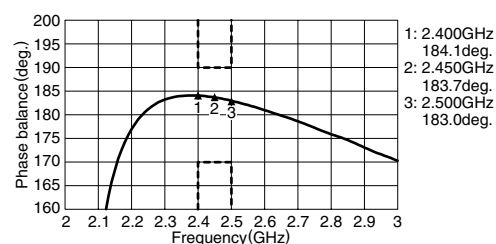

### S11 UNBALANCE RETURN LOSS

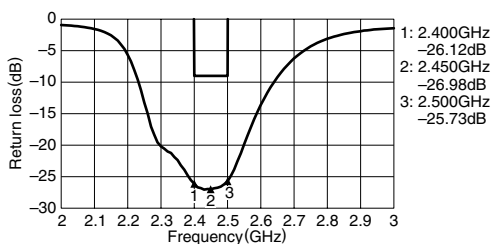

### SDD22 BALANCE RETURN LOSS

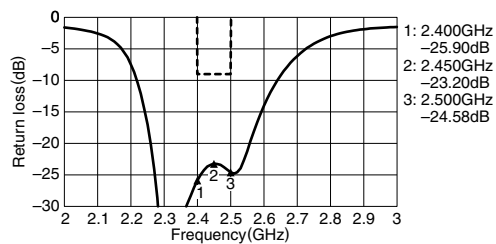


• All specifications are subject to change without notice.


## FREQUENCY CHARACTERISTICS

Unbalance 50Ω/Balance 50+j40Ω


SCS21

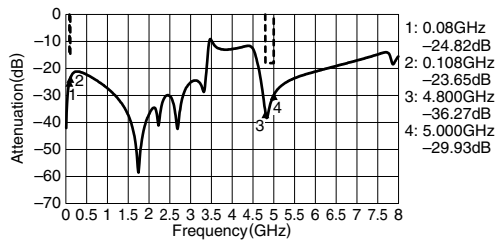

## SCC22 MAGNITUDE

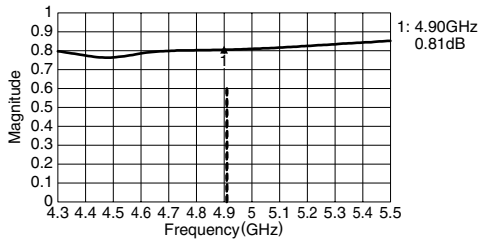

## SCC22 ANGLE

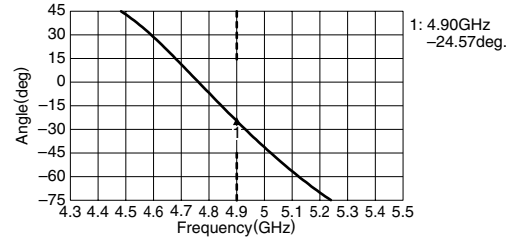


# Multilayer Chip Band Pass Filters(Balance Output Type) Conformity to RoHS Directive


## For Bluetooth & 2.4GHz W-LAN

DEA Series DEA202450BT-7112E1


### SHAPES AND DIMENSIONS

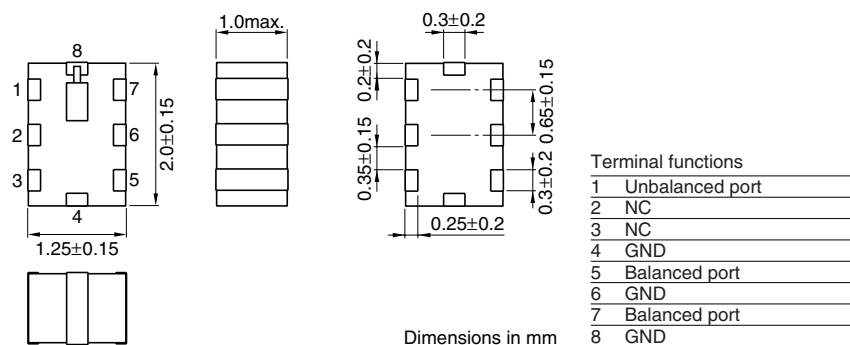

### RECOMMENDED PC BOARD PATTERN

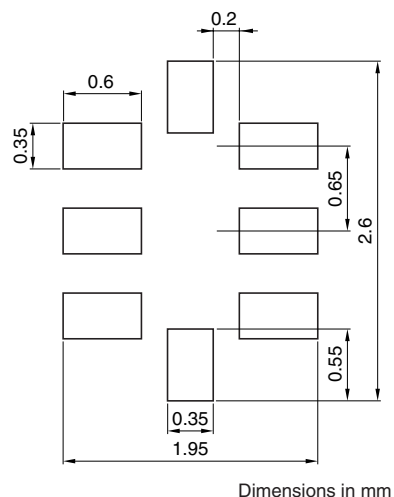

### EVALUATION BOARD

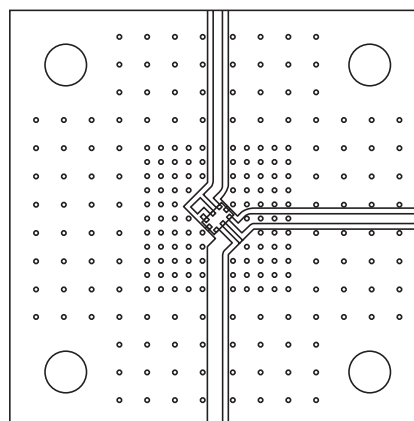

Port extension value is 139.56ps for all port.

- **Conformity to RoHS Directive:** This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

- All specifications are subject to change without notice.

## ELECTRICAL CHARACTERISTICS


| Item                                                 |                   |        | Minimum value | Typical value | Maximum value |
|------------------------------------------------------|-------------------|--------|---------------|---------------|---------------|
| Frequency range(Pass band)                           |                   | (MHz)  | 2400          | —             | 2500          |
| Insertion loss                                       | [+25°C]           | (dB)   | —             | —             | 2.5           |
|                                                      | [-40 to +85°C]    | (dB)   | —             | —             | 2.8           |
| Single ended port characteristic impedance           |                   | (Ω)    | 50[Nominal]   |               |               |
| Balanced port differential characteristics impedance |                   | (Ω)    | 50+j40        |               |               |
| Attenuation                                          | [10 to 915MHz]    | (dB)   | 41            | —             | —             |
|                                                      | [925 to 960MHz]   | (dB)   | 34            | —             | —             |
|                                                      | [1570 to 1580MHz] | (dB)   | 30            | —             | —             |
|                                                      | [1710 to 1785MHz] | (dB)   | 40            | —             | —             |
|                                                      | [1805 to 1880MHz] | (dB)   | 26            | —             | —             |
|                                                      | [1850 to 1910MHz] | (dB)   | 40            | —             | —             |
|                                                      | [1920 to 1990MHz] | (dB)   | 31            | —             | —             |
|                                                      | [4800 to 5000MHz] | (dB)   | 25            | —             | —             |
|                                                      | [7200 to 7500MHz] | (dB)   | 20            | —             | —             |
| Single ended return loss                             | [2400 to 2500MHz] | (dB)   | 9             | —             | —             |
| Balanced return loss                                 | [2400 to 2500MHz] | (dB)   | 9             | —             | —             |
| Phase difference at balanced port                    | [2400 to 2500MHz] | (deg.) | 170           | —             | 190           |
| Amplitude imbalance at balanced port                 | [2400 to 2500MHz] | (dB)   | -2            | —             | 2             |
| Common mode attenuation                              | [88 to 108MHz]    | (dB)   | 15            | —             | —             |
|                                                      | [4800 to 5000MHz] | (dB)   | 18            | —             | —             |
| Common mode impedance [4900MHz]                      | Magnitude         |        | 0.6           | —             | —             |
|                                                      | Angle             | (deg.) | 15            | —             | 75            |
| Power capacity                                       |                   | (mW)   | —             | —             | 500           |
| Temperature range                                    | Operating         | (°C)   | -40           | —             | +85           |
|                                                      | Storage           | (°C)   | -40           | —             | +85           |

• Ta:+25°C


## FREQUENCY CHARACTERISTICS

Unbalance 50Ω/Balance 50+j40Ω


### SDS21 INSERTION LOSS

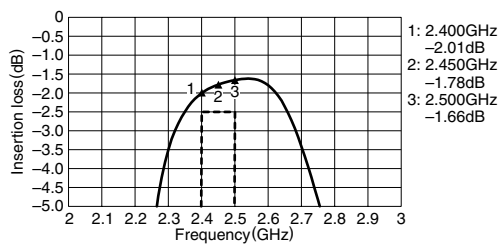


### SDS21 ATTENUATION

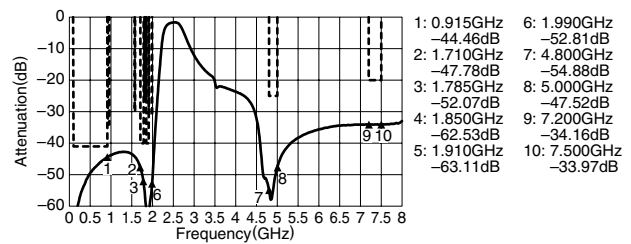


### AMPLITUDE BALANCE

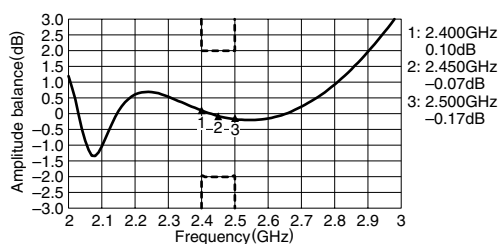


### PHASE BALANCE

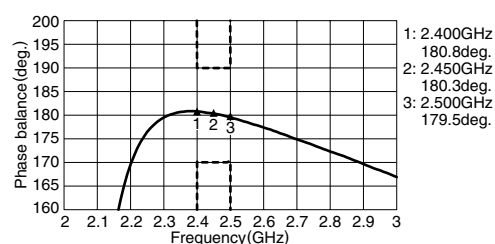

### S11 UNBALANCE RETURN LOSS

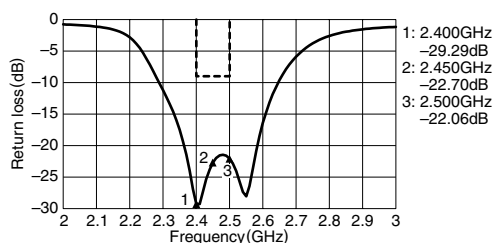

### SDD22 BALANCE RETURN LOSS

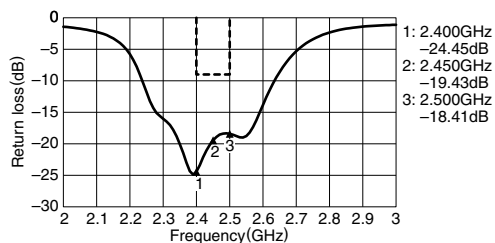


• All specifications are subject to change without notice.


## FREQUENCY CHARACTERISTICS

Unbalance 50Ω/Balance 50+j40Ω


### SCS21 ATTENUATION

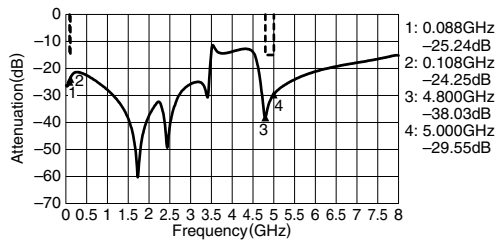

### SCC22 ANGLE

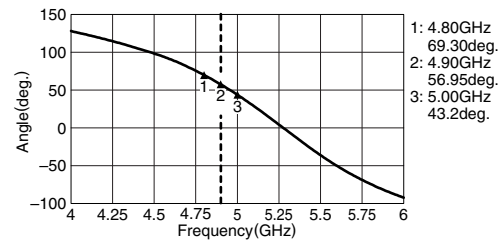


### SCC22 MAGNITUDE

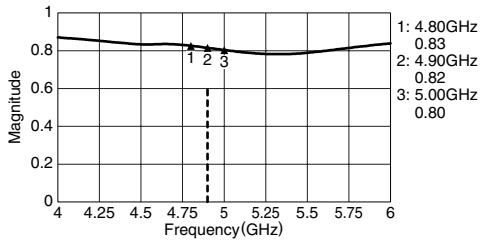


## SMITH CHARTS

### S11



### SDD22



## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9