



# Low-Cost, Micropower, Precision, 3-Terminal, 1.2V Voltage Reference

## General Description

The MAX6120 is the lowest-power 1.2V, precision, three-terminal voltage reference offered in a SOT23 package. Ideal for 3V battery-powered equipment where power conservation is critical, the MAX6120 is a low-power alternative to existing two-terminal shunt references. Unlike two-terminal references that throw away battery current and require an external series resistor, the MAX6120 has a 70 $\mu$ A maximum supply current (typically only 50 $\mu$ A) that is independent of the input voltage. This feature translates to maximum efficiency at all battery voltages.

The MAX6120 operates from a supply voltage as low as 2.4V, and initial accuracy is  $\pm 1\%$  for the SOT23 package. Output voltage temperature coefficient is typically only 30ppm/ $^{\circ}$ C, and is guaranteed to be less than 100ppm/ $^{\circ}$ C in the SOT23 package. For a guaranteed output voltage temperature coefficient of less than 50ppm/ $^{\circ}$ C, see the MAX6520 data sheet.

## Applications


Battery-Powered Systems

Portable and Hand-Held Equipment

Data-Acquisition Systems

Instrumentation and Process Control

## Typical Operating Circuit

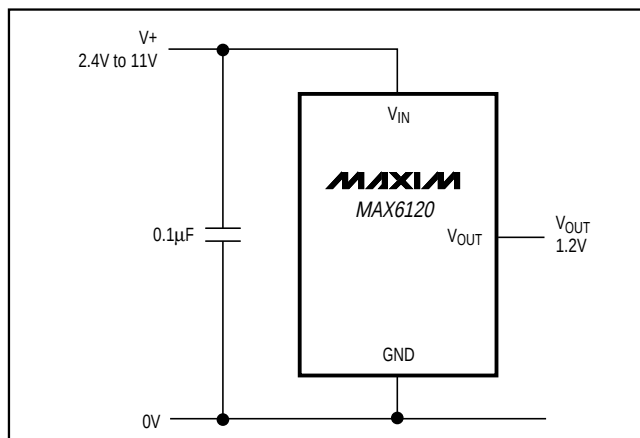

## Features



- ♦ 3-Pin SOT23 Package
- ♦ Supply Current Independent of Input Voltage Over Temperature
- ♦ 50 $\mu$ A Supply Current
- ♦ 2.4V to 11V Input Voltage Range
- ♦ 30ppm/ $^{\circ}$ C Typical Tempco (SOT23)
- ♦  $\pm 1\%$  Initial Accuracy (SOT23)

## Ordering Information

| PART       | TEMP. RANGE                          | PIN-PACKAGE |
|------------|--------------------------------------|-------------|
| MAX6120ESA | -40 $^{\circ}$ C to +85 $^{\circ}$ C | 8 SO        |
| MAX6120EUR | -40 $^{\circ}$ C to +85 $^{\circ}$ C | 3 SOT23-3   |

## Pin Configurations

TOP VIEW



# Low-Cost, Micropower, Precision, 3-Terminal, 1.2V Voltage Reference

## ABSOLUTE MAXIMUM RATINGS

|                                                            |                              |                                     |                 |
|------------------------------------------------------------|------------------------------|-------------------------------------|-----------------|
| Supply Voltage ( $V_{IN}$ )                                | -0.3V to +12V                | Operating Temperature Range         | -40°C to +85°C  |
| $V_{OUT}$                                                  | -0.3V to ( $V_{IN} + 0.3V$ ) | Storage Temperature Range           | -65°C to +160°C |
| Output Short-Circuit Duration                              | Continuous to Either Supply  | Lead Temperature (soldering, 10sec) | +300°C          |
| Continuous Power Dissipation ( $T_A = +70^\circ\text{C}$ ) |                              |                                     |                 |
| SOT23 (derate 4mW/°C above +70°C)                          | 320mW                        |                                     |                 |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## DC ELECTRICAL CHARACTERISTICS

( $V_{IN} = 2.4V$ ,  $I_{LOAD} = 0mA$ ,  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)




| PARAMETER                                  | SYMBOL            | CONDITIONS                                                       | MIN   | TYP   | MAX   | UNITS                     |
|--------------------------------------------|-------------------|------------------------------------------------------------------|-------|-------|-------|---------------------------|
| Output Voltage                             | $V_{OUT}$         | MAX6120EUR (SOT23)                                               |       |       |       |                           |
|                                            |                   | $T_A = +25^\circ\text{C}$                                        | 1.188 | 1.200 | 1.212 | V                         |
|                                            |                   | $T_A = T_{MIN}$ to $T_{MAX}$ (Note 2)                            | 1.176 |       | 1.224 | V                         |
| Output Voltage Temperature Coefficient     | $TCV_{OUT}$       | MAX6120EUR (SOT23), $T_A = T_{MIN}$ to $T_{MAX}$ (Note 2)        |       | 30    | 100   | ppm/°C                    |
| Output Voltage Noise                       | $e_n$             | 0.1Hz to 10Hz                                                    |       | 10    |       | $\mu\text{Vp-p}$          |
|                                            |                   | 10Hz to 10kHz                                                    |       | 400   |       |                           |
| Line Regulation                            | $V_{OUT}/V_{IN}$  | $V_{IN} = 2.4V$ to $11V$ , $T_A = T_{MIN}$ to $T_{MAX}$ (Note 1) |       | 2     | 30    | $\mu\text{V/V}$           |
| Load Regulation                            | $V_{OUT}/I_{OUT}$ | $I_{LOAD} = -50\mu\text{A}$ to $400\mu\text{A}$ (Note 1)         |       | 0.1   | 1     | $\mu\text{V}/\mu\text{A}$ |
| Quiescent Supply Current                   | $I_Q$             | $T_A = +25^\circ\text{C}$                                        |       | 50    | 58    | $\mu\text{A}$             |
|                                            |                   | $T_A = T_{MIN}$ to $T_{MAX}$ (Note 1)                            |       |       | 70    |                           |
| Change in Supply Current vs. Input Voltage | $I_Q/V_{IN}$      | $V_{IN} = 2.4V$ to $11V$                                         |       | 1.5   | 5     | $\mu\text{A/V}$           |
| Short-Circuit Output Current               | $I_{SC}$          | $V_{OUT}$ shorted to GND                                         |       | 4.3   |       | mA                        |
|                                            |                   | $V_{OUT}$ shorted to $V_{IN}$                                    |       | 400   |       | $\mu\text{A}$             |

**Note 1:** Production testing done at  $T_A = +25^\circ\text{C}$ , over temperature limits guaranteed by parametric correlation data.

**Note 2:** Contact factory for availability of a higher-grade, lower-TC option in a SOT23 package.

## Typical Operating Characteristics

( $V_{IN} = 3V$ ,  $I_{LOAD} = 0mA$ ,  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

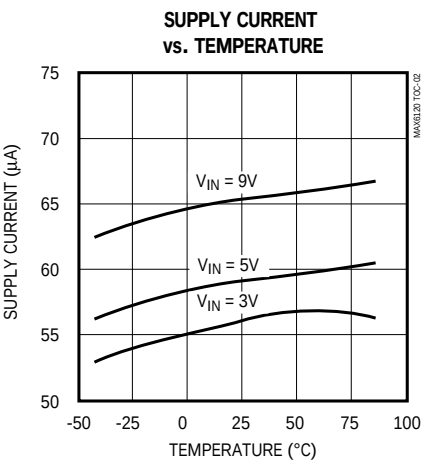
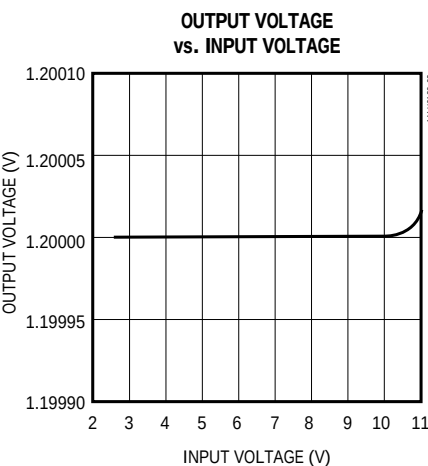
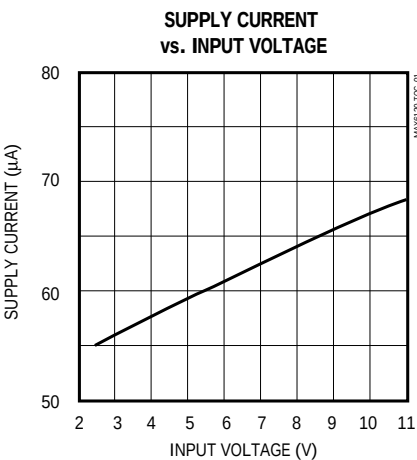


# Low-Cost, Micropower, Precision, 3-Terminal, 1.2V Voltage Reference


MAX6120

## Typical Operating Characteristics (continued)


( $V_{IN} = 3V$ ,  $I_{LOAD} = 0mA$ ,  $T_A = +25^{\circ}C$ , unless otherwise noted.)

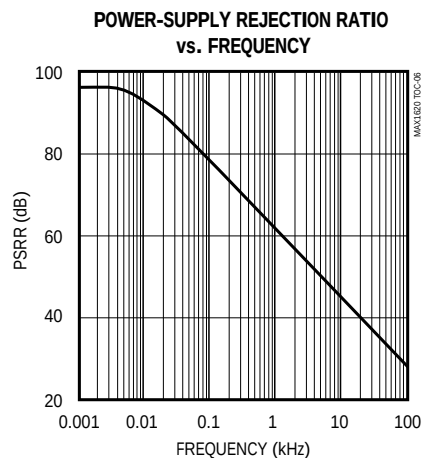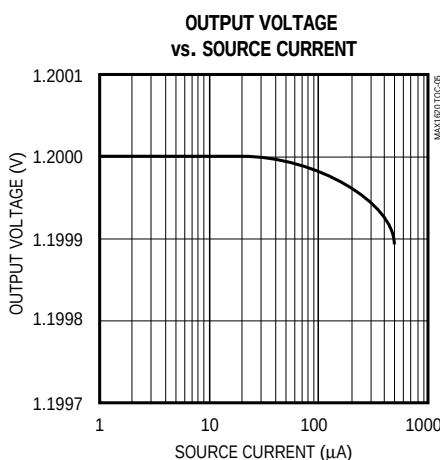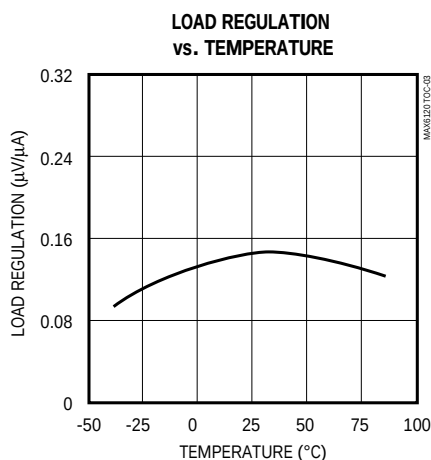


0.1Hz TO 100Hz NOISE

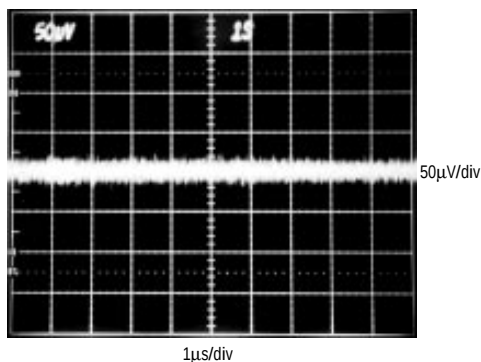


LOAD-TRANSIENT RESPONSE

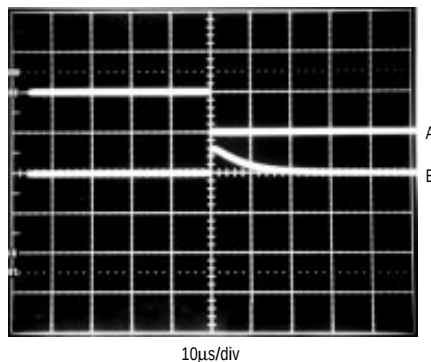

LOAD-TRANSIENT RESPONSE

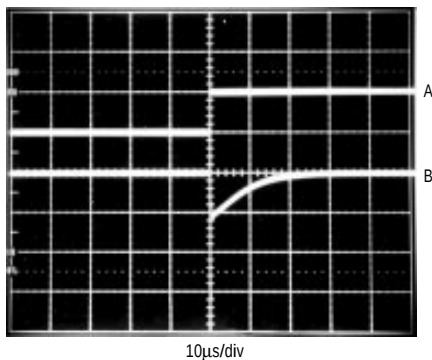

LINE-TRANSIENT RESPONSE

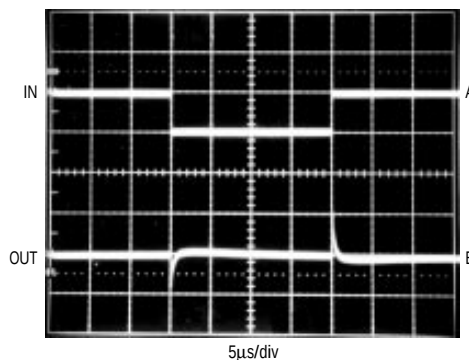

# Low-Cost, Micropower, Precision, 3-Terminal, 1.2V Voltage Reference

## Pin Description

| PIN   |               | NAME             | FUNCTION                            |
|-------|---------------|------------------|-------------------------------------|
| SOT23 | SO            |                  |                                     |
| 1     | 8             | V <sub>IN</sub>  | Input Voltage                       |
| 2     | 1             | V <sub>OUT</sub> | Reference Output                    |
| 3     | 4             | GND              | Ground                              |
| —     | 2, 3, 5, 6, 7 | N.C.             | No Connect—not internally connected |

## Applications Information

### Input Bypassing

For the best line-transient performance, decouple the input with a 0.1μF ceramic capacitor as shown in the *Typical Operating Circuit*. Locate the capacitor as close to the device pin as possible. Where transient performance is less important, no capacitor is necessary.

### Output Bypass

The MAX6120 performs well without an output decoupling capacitor. If your application requires an output charge reservoir (e.g., to decouple the reference from the input of a DAC), then make sure that the total output capacitive load does not exceed 10nF.

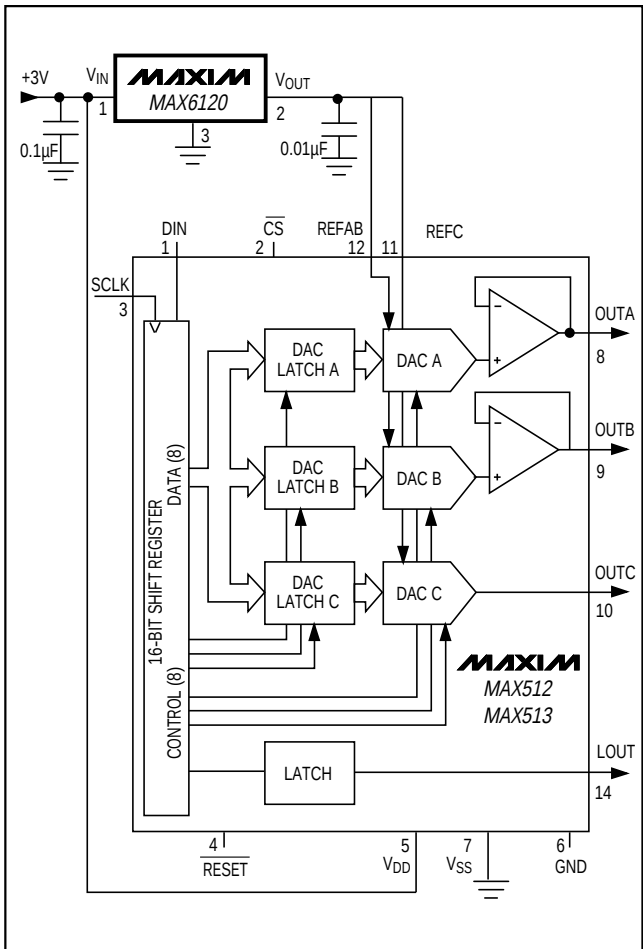


Figure 1. 3V, Triple, 8-Bit Serial DAC

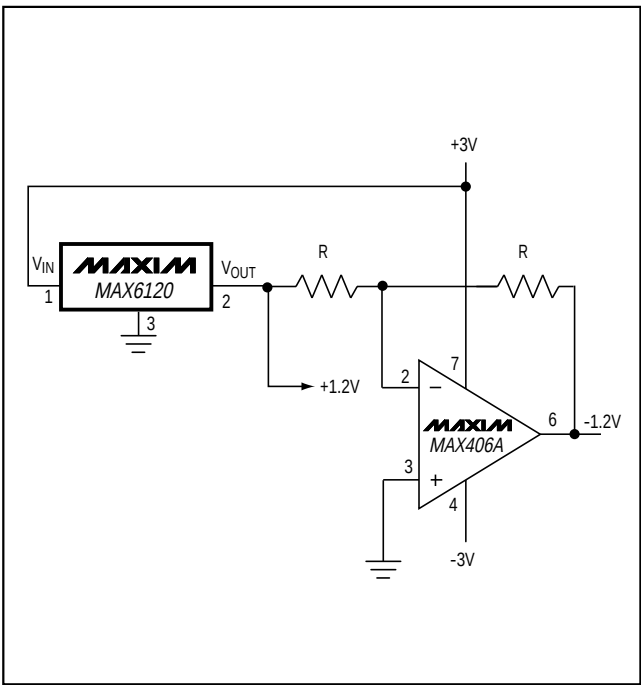


Figure 2. Low-Power ±1.2V Reference



## Chip Information

TRANSISTOR COUNT: 39



# Low-Cost, Micropower, Precision, 3-Terminal, 1.2V Voltage Reference

Tape-and-Reel Information

MAX6120

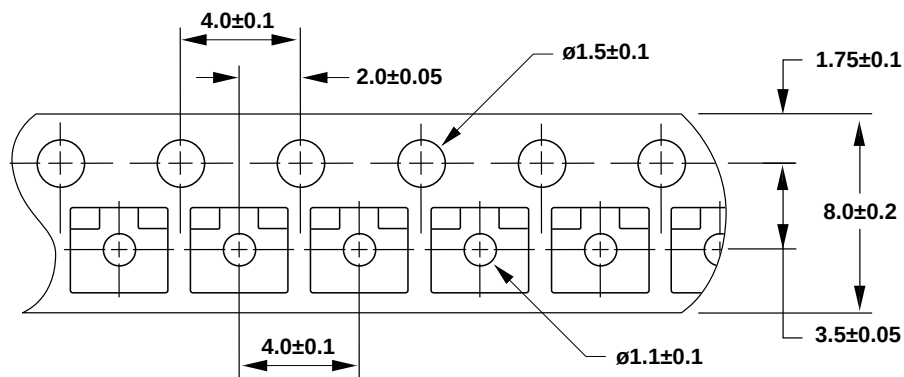


NOTE: DIMENSIONS ARE IN MM.  
AND FOLLOW EIA481-1 STANDARD.



<sup>†</sup> ICs MAY ALSO BE MARKED WITH FULL PART NAME: MAX6120

# Low-Cost, Micropower, Precision, 3-Terminal, 1.2V Voltage Reference

## Package Information

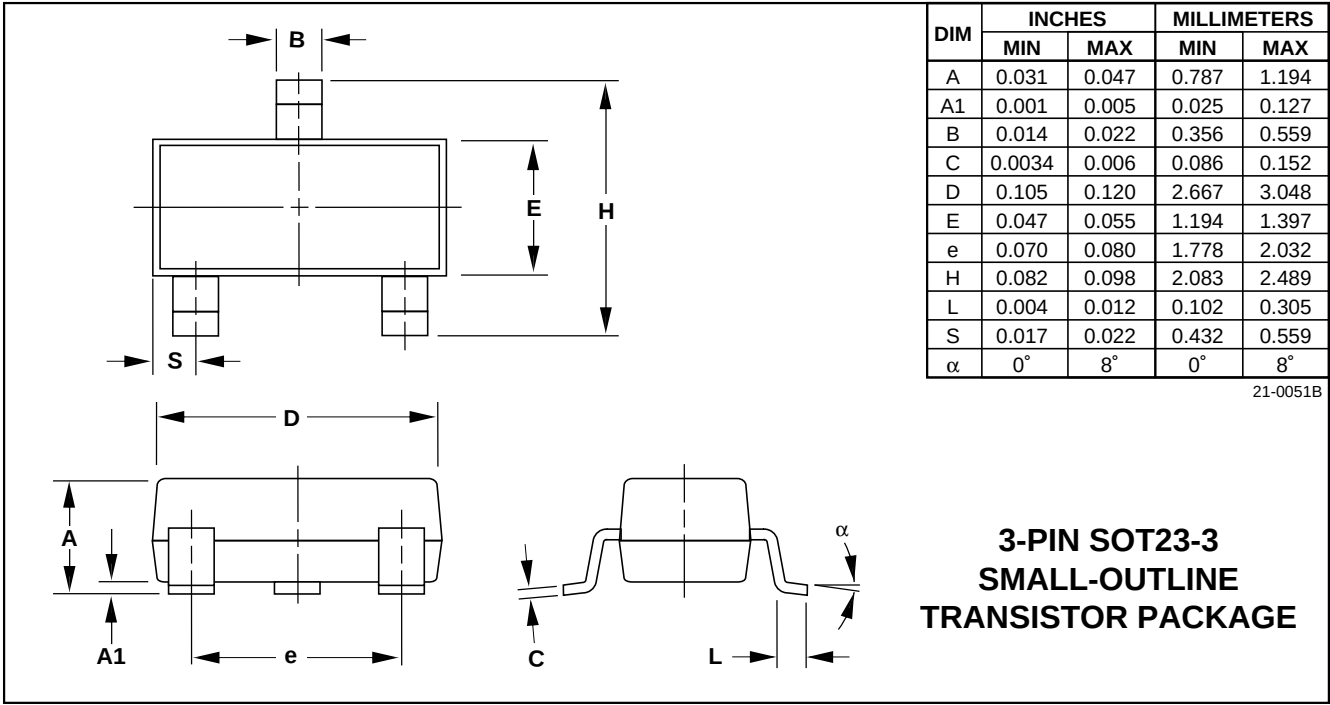

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

6 Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 (408) 737-7600

© 1996 Maxim Integrated Products Printed USA MAXIM is a registered trademark of Maxim Integrated Products.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9