

EMI Suppression Beads (2643250202)



Part Number: 2643250202

43 SHIELD BEAD

Explanation of Part Numbers:

- Digits 1&2 = product class,
- 3&4 = material grade and
- last digit 1= not burnished, 2 = burnished and 4 = Parylene coated.
- Beads with a “1” as the last digit of the part number are not burnished. Parts that are burnished to break the sharp edges have a “2” as the last digit.
- Upon request beads can be supplied with a Parylene coating. The last digit of the Parylene coated part is a “4”. The minimum coating thickness beads is 0.005 mm (0.0002”).

Fair- Rite offers a broad selection of ferrite EMI suppression beads with guaranteed minimum impedance specifications.

- Our “Shield Bead Kit” (part number 0199000019) contains a selection of these beads.
- For any EMI suppression bead requirement not listed here, feel free to contact our customer service for availability and pricing.
- The C dimension, the bead length, can be modified to suit specific applications.

Weight: 2.5 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	6.35	±0.15	0.25	=
B	2.95	+0.45	0.125	=
C	25.4	±0.75	1	=

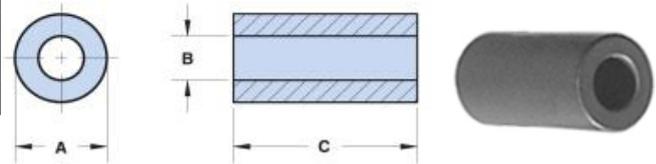


Chart Legend

+ Test frequency

• The column "H (Oe)" gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of “H” times the actual NI (ampere- turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note How to choose Ferrite Components for EMI Suppression .

Typical Impedance (Ω)	
10 MHz	83
25 MHz ⁺	135
100 MHz ⁺	200
250 MHz	196


Electrical Properties	
H(Oe)	0.91

The column “H (Oe)” gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of “H” times the actual NI (ampere- turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note How to choose Ferrite Components for EMI Suppression .

Suppression beads are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Single turn impedance tests for 73 and 43 material beads are performed on the 4193A Vector Impedance Analyzer. The 61 material beads are tested on the 4291A RF Impedance Analyzer. Beads are tested with the shortest practical wire length.

2643250202

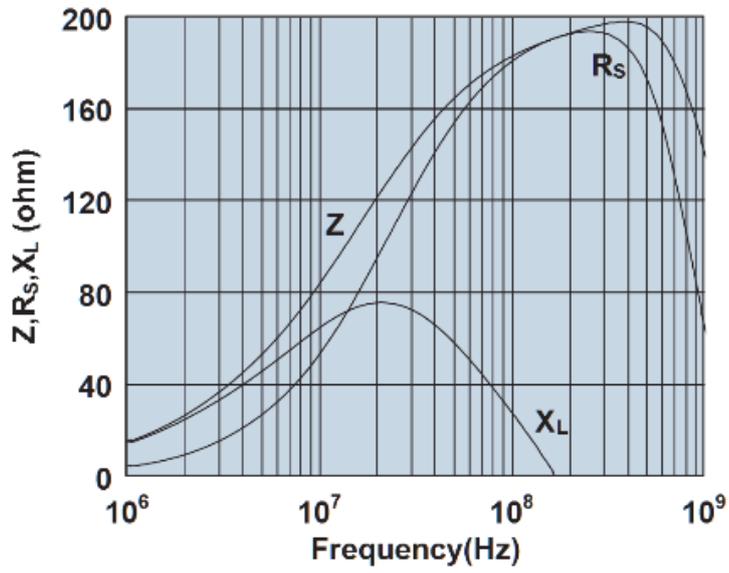

Impedance, reactance, and resistance vs. frequency.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9