


## Programmer for PureSilicon™ Oscillators

### FEATURES:

- Small dongle interfaces thru USB to PC
- Automatic software upgrades via Internet
- Field Programmable Dongle for
  - ASxM series – 1st generation MEMS CMOS output
  - ASxMB series – 2nd generation MEMS CMOS output
  - ASxMPC series – Low Jitter MEMS CMOS output
  - ASxMPLP series – Low Jitter MEMS LVPECL output
  - ASxMPLV series – Low Jitter MEMS LVDS output
  - ASxMPHC series – Low Jitter MEMS HCSL output
- Socket Adapter cards supports:
  - 2.5 x 2.0 x 0.85 mm (Available for 1st and 2nd generation CMOS only)
  - 3.2 x 2.5 x 0.85 mm (Available for Low Jitter, 1st and 2nd generation MEMS)
  - 5.0 x 3.2 x 0.85 mm (Available for Low Jitter, 1st and 2nd generation MEMS)
  - 7.0 x 5.0 x 0.85 mm (Available for Low Jitter, 1st and 2nd generation MEMS)

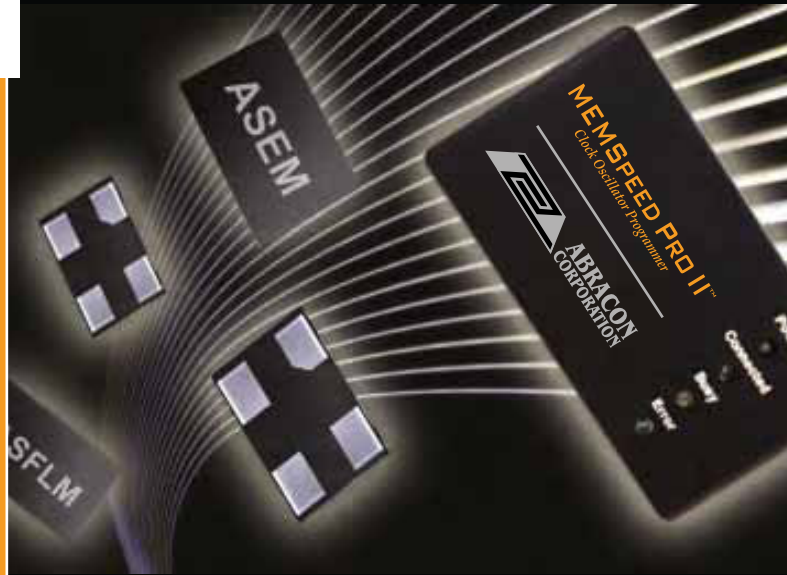


# MEMSPEED PRO II™

## *Clock Oscillator Programmer*


The MEMSpeed Pro II programmer allows users to instantly program Abracon MEMS oscillators to a custom frequency in seconds through a Microsoft Windows GUI program on a PC. Abracon MEMSpeed Pro II supports CMOS, LVPECL, LVDS, and HCSL output MEMS oscillators in variety of package sizes. The oscillators can be programmed over their respective frequency range in increments of 100Hz (up to four decimal point resolution).

The MEMSpeed Pro II kit includes a programming dongle, USB cable, antistatic tweezers and USB flash drive with a Windows based PC installation program. The MEMSpeed Pro II is used with device dependent socket adapter cards and the appropriate package devices. (\* Additional Socket Adapter is required for ASxM BLANK MEMS oscillators. Please contact Abracon for details.)

Abracon MEMSpeed Pro II offers quick turn drop-in solutions to traditional quartz crystal oscillators.

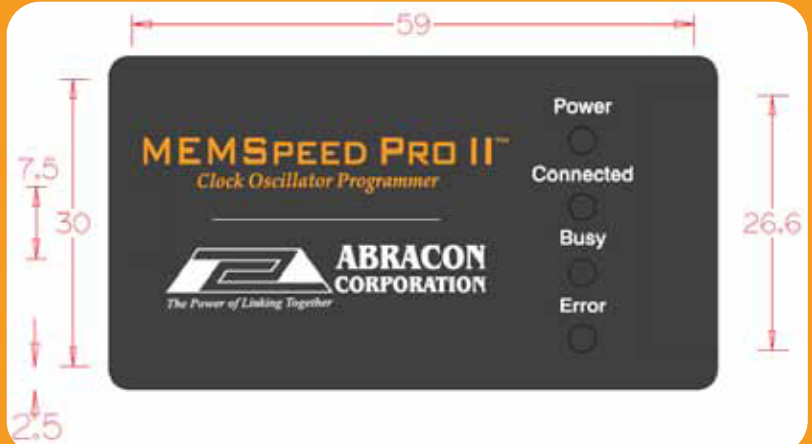

## MEMSPEED PRO II™ Clock Oscillator Programmer

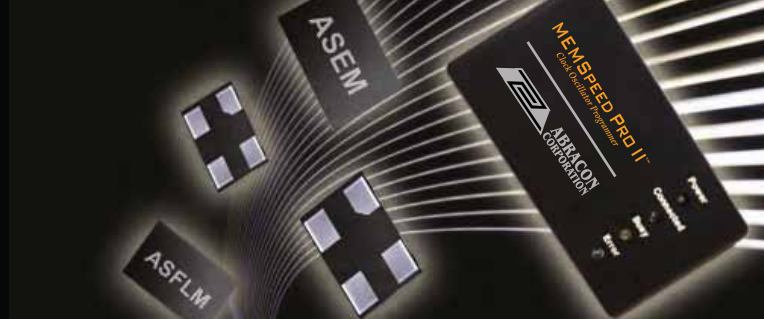

### MEMSPEEDPRO II SPECIFICATIONS

| Programmer Power Supply             | Supplied thru USB cable (micro USB to USB A)                        |
|-------------------------------------|---------------------------------------------------------------------|
| Oscillator Operating Supply Voltage | 1.8 to 3.6V                                                         |
| Programming Time                    | 2 seconds                                                           |
| Operating System Supported          | MS Windows, XP: 32bit version<br>Vista, and Windows 7: 32 or 64 bit |
| Programmer Size                     | 2.50" x 1.25" x 0.50"                                               |
| Programmer Weight                   | 0.2 lb                                                              |

### Socket Adapter Kits

| ABRACON PART #        | KIT CONTENTS                                                                                                                            |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| ASVM- ADAPTER-KIT *   | Kit includes 4 pin 7.0x5.0mm socket adapter and 50 unprogrammed 7.0X5.0mm ASVM oscillators with $\pm 25$ ppm over -40 to +85°C          |
| ASFLM- ADAPTER-KIT *  | Kit includes 4 pin 5.0x3.2mm socket adapter and 50 unprogrammed 5.0X3.2mm ASFLM oscillators with $\pm 25$ ppm over -40 to +85°C         |
| ASEM- ADAPTER-KIT *   | Kit includes 4 pin 3.2x2.5mm socket adapter and 50 unprogrammed 3.2X2.5mm ASEM oscillators with $\pm 25$ ppm over -40 to +85°C          |
| ASDM- ADAPTER-KIT *   | Kit includes 4 pin 2.5x2.0mm socket adapter and 50 unprogrammed 2.5X2.0mm ASDM oscillators with $\pm 25$ ppm over -40 to +85°C          |
| ASVMB- ADAPTER-KIT    | Kit includes 4 pin 7.0x5.0mm socket adapter and 50 unprogrammed 7.0X5.0mm ASVMB oscillators with $\pm 25$ ppm over -40 to +85°C         |
| ASFLMB- ADAPTER-KIT   | Kit includes 4 pin 5.0x3.2mm socket adapter and 50 unprogrammed 5.0X3.2mm ASFLMB oscillators with $\pm 25$ ppm over -40 to +85°C        |
| ASEMB- ADAPTER-KIT    | Kit includes 4 pin 3.2x2.5mm socket adapter and 50 unprogrammed 3.2X2.5mm ASEMB oscillators with $\pm 25$ ppm over -40 to +85°C         |
| ASDMB- ADAPTER-KIT    | Kit includes 4 pin 2.5x2.0mm socket adapter and 50 unprogrammed 2.5X2.0mm ASDMB oscillators with $\pm 25$ ppm over -40 to +85°C         |
| ASVMPC- ADAPTER-KIT   | Kit includes 6 pin 7.0x5.0mm socket adapter and 5 unprogrammed 7.0X5.0mm ASVMPC oscillators with $\pm 25$ ppm over -40 to +85°C         |
| ASFLMPC- ADAPTER-KIT  | Kit includes 6pin 5.0x3.2mm socket adapter and 5 unprogrammed 5.0X3.2mm ASFLMPC oscillators with $\pm 25$ ppm over -40 to +85°C         |
| ASEMPC- ADAPTER-KIT   | Kit includes 6 pin 3.2x2.5mm socket adapter and 5 unprogrammed 3.2X2.5mm ASEMPC oscillators with $\pm 25$ ppm over -40 to +85°C         |
| ASVMPLP- ADAPTER-KIT  | Kit includes 6 pin 7.0x5.0mm socket adapter and 5 unprogrammed 7.0X5.0mm ASVMPLP LVPECL oscillators with $\pm 25$ ppm over -40 to +85°C |
| ASFLMPLP- ADAPTER-KIT | Kit includes 6pin 5.0x3.2mm socket adapter and 5 unprogrammed 5.0X3.2mm ASFLMPLP LVPECL oscillators with $\pm 25$ ppm over -40 to +85°C |
| ASEMPLP- ADAPTER-KIT  | Kit includes 6 pin 3.2x2.5mm socket adapter and 5 unprogrammed 3.2X2.5mm ASEMPLP LVPECL oscillators with $\pm 25$ ppm over -40 to +85°C |
| ASVMPLV- ADAPTER-KIT  | Kit includes 6 pin 7.0x5.0mm socket adapter and 5 unprogrammed 7.0X5.0mm ASVMPLV LVDS oscillators with $\pm 25$ ppm over -40 to 85°C    |
| ASFLMPLV- ADAPTER-KIT | Kit includes 6pin 5.0x3.2mm socket adapter and 5 unprogrammed 5.0X3.2mm ASFLMPLV LVDS oscillators with $\pm 25$ ppm over -40 to +85°C   |
| ASEMPLV- ADAPTER-KIT  | Kit includes 6 pin 3.2x2.5mm socket adapter and 5 unprogrammed 3.2X2.5mm ASEMPLV LVDS oscillators with $\pm 25$ ppm over -40 to +85°C   |
| ASVMPHC- ADAPTER-KIT  | Kit includes 6 pin 7.0x5.0mm socket adapter and 5 unprogrammed 7.0X5.0mm ASVMPHC HCSL oscillators with $\pm 25$ ppm over -40 to +85°C   |
| ASFLMPHC- ADAPTER-KIT | Kit includes 6pin 5.0x3.2mm socket adapter and 5 unprogrammed 5.0X3.2mm ASFLMPHC HCSL oscillators with $\pm 25$ ppm over -40 to +85°C   |
| ASEMPHC- ADAPTER-KIT  | Kit includes 6 pin 3.2x2.5mm socket adapter and 5 unprogrammed 3.2X2.5mm ASEMPHC HCSL oscillators with $\pm 25$ ppm over -40 to +85°C   |

\* The Socket Adapters for MEMSpeed Pro II are used for 1st generation ASxM BLANK MEMS oscillators. Please contact Abracon for details.

### Ordering Information

| ABRACON PART #  | KIT CONTENTS                                                                                                 |
|-----------------|--------------------------------------------------------------------------------------------------------------|
| MEMSpeed Pro II | Kit includes MEMSPEED II programmer, USB cable, tweezers, Quick Start guide and Installation USB Flash drive |

For programming of devices, a MEMSpeed Pro II programmer and an appropriate adapter card kit are required.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9