

## Tilt Sensor Switch

|          |           |             |               |               |   |
|----------|-----------|-------------|---------------|---------------|---|
| Item No. | RBS380102 | Description | Photoelectric | Version       | 1 |
| Page     | 1 of 9    |             | Publish Date  | Feb. 12, 2019 |   |

### ● FUNCTIONS

1. Tilt Angles: 20° within a 360° radius
2. Suitable for vertical PCB
3. Vibration Detecting



### ● APPLICATIONS

1. Rotation detection for LCD monitor
2. Automatically shut off for home appliances
3. Automatically shut off for Sporting equipment
4. Automatically shut off for motorbike
5. Alarm system
6. Anti-theft / Anti-tamper devices
7. Being motion detection (personal locator)
8. Wake up systems for power saving, such like remote controllers
9. Earthquake Detecting



## Tilt Sensor Switch

|          |           |             |               |               |   |
|----------|-----------|-------------|---------------|---------------|---|
| Item No. | RBS380102 | Description | Photoelectric | Version       | 1 |
| Page     | 2 of 9    |             | Publish Date  | Feb. 12, 2019 |   |

### ● FEATURES

1. Housing made of high insulation plastic material, free from electric conduction and rust problem.
2. Detecting with photo transistors, generating highly reliable and stable signals.
3. All plastic materials subject to industrial purpose, resist high temperature and meet fireproof function.
4. Simple ON and OFF signals, easy for design.
5. RoHS compliance, an ideal substitute for mercury switch.
6. A more economical tilt and vibration detection option than IC design solution.
7. All made in Taiwan and examined before shipment.

### ● PATENTS

1. Taiwan Patent No. M 450817
2. Taiwan Patent No. M 529259
3. Taiwan Patent No. I 553684
4. Taiwan Patent No. I 359430
5. Taiwan Patent No. I 584326
6. Taiwan Patent No. I 451463
7. Europe Patent No. EP 2157591
8. U.S.A Patent No.US 9,863,802 B2
9. China Patent No. ZL 200820126206.9
10. China Patent No. ZL 201620373881.6
11. China Patent No. ZL 201220539712.7
12. Japan Patent No. 3148127




### Tilt Sensor Switch

|          |           |             |               |               |   |
|----------|-----------|-------------|---------------|---------------|---|
| Item No. | RBS380102 | Description | Photoelectric | Version       | 1 |
| Page     | 3 of 9    |             | Publish Date  | Feb. 12, 2019 |   |

● DIMENSIONS / OPERATION / P.C.B. LAYOUT (Unit: mm, Tolerance:  $\pm 0.25$ mm)

Fig. 1

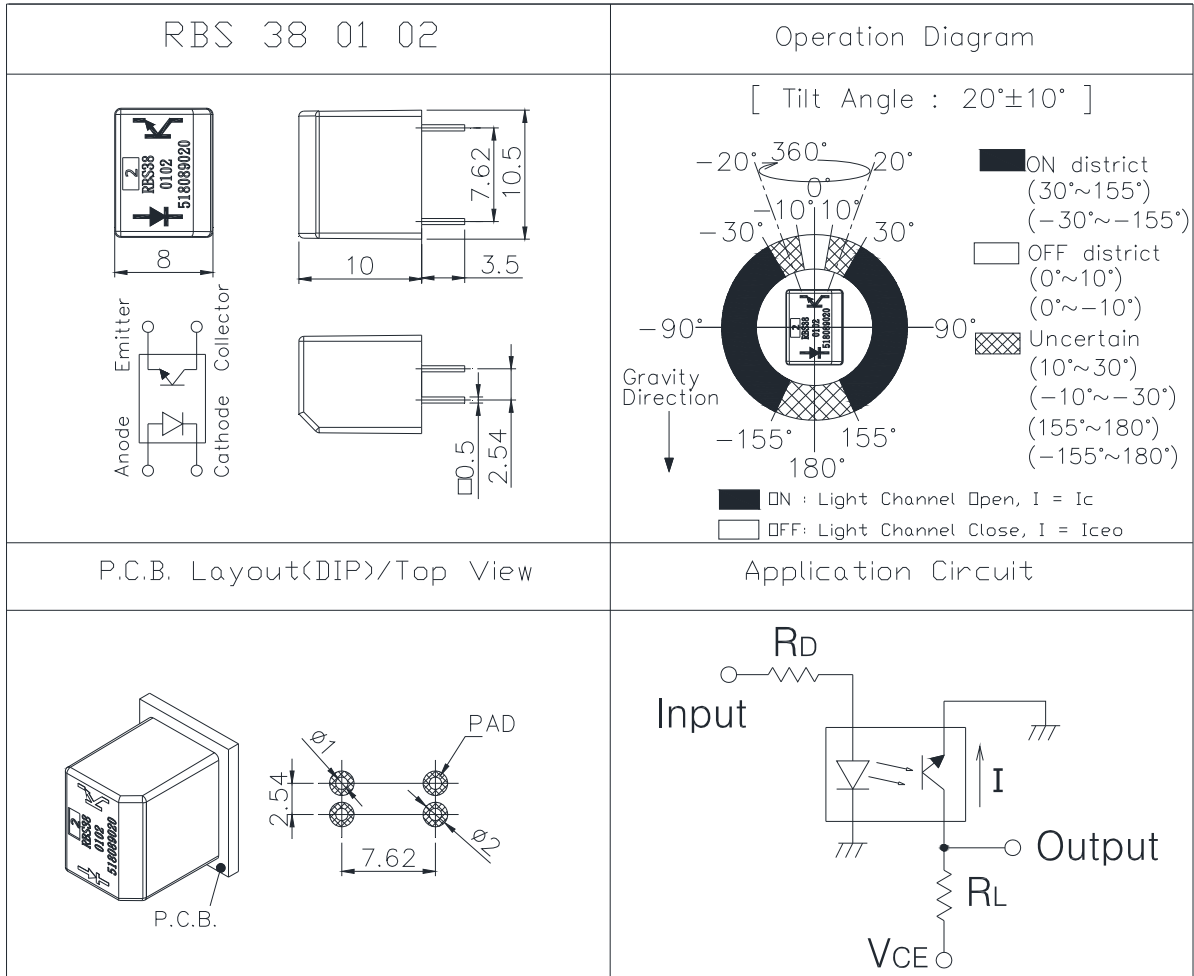

## Tilt Sensor Switch

|          |           |             |               |               |   |
|----------|-----------|-------------|---------------|---------------|---|
| Item No. | RBS380102 | Description | Photoelectric | Version       | 1 |
| Page     | 4 of 9    |             | Publish Date  | Feb. 12, 2019 |   |

## ● Current/Voltage Suggested

| Input Current (mA) | Operating Voltage (V) | Conditions  |
|--------------------|-----------------------|---|
| 10                 | 3.3                   | V <sub>CE</sub> =3.3V<br>R <sub>D</sub> =200 ohm<br>R <sub>L</sub> =75K ohm |
| 10                 | 5                     | V <sub>CE</sub> =5V<br>R <sub>D</sub> =390 ohm<br>R <sub>L</sub> =100K ohm  |

\* Please refer to above Application Circuit for designing electrical circuit.

## ● Absolute Maximum Rating ( Ta=25°C )

| Item                       |                             | Symbol           | Rating  | Unit |
|----------------------------|-----------------------------|------------------|---------|------|
| Input                      | Power Dissipation           | P <sub>d</sub>   | 75      | mW   |
|                            | Reverse Voltage             | V <sub>R</sub>   | 5       | V    |
|                            | Forward Current             | I <sub>F</sub>   | 50      | mA   |
|                            | Peak Forward Current        | I <sub>FP</sub>  | 1       | A    |
| Output                     | Collector Power Dissipation | P <sub>C</sub>   | 100     | mW   |
|                            | Collector Current           | I <sub>C</sub>   | 20      | mA   |
|                            | C-E Voltage                 | V <sub>CEO</sub> | 30      | V    |
|                            | E-C Voltage                 | V <sub>ECO</sub> | 5       | V    |
| Operating Temperature      |                             | T <sub>opr</sub> | -25~+85 | °C   |
| Storage Temperature        |                             | T <sub>stg</sub> | -40~+85 | °C   |
| Soldering Temperature (*1) |                             | T <sub>sol</sub> | 260     | °C   |

(\*1) t=5 Sec



## Tilt Sensor Switch

|          |           |             |               |               |   |
|----------|-----------|-------------|---------------|---------------|---|
| Item No. | RBS380102 | Description | Photoelectric | Version       | 1 |
| Page     | 5 of 9    |             | Publish Date  | Feb. 12, 2019 |   |

● Electrical Optical Characteristics (Ta=25°C)

| Parameter              | Symbol               | Condition                                 | Min. | Typ. | Max. | Unit            |
|------------------------|----------------------|---|------|------|------|-----------------|
| Forward Voltage        | $V_F$                | $I_F=20\text{mA}$                         | -    | 1.2  | 1.5  | V               |
| Reverse Current        | $I_R$                | $V_R=5\text{V}$                           | -    | -    | 10   | $\mu\text{A}$   |
| Peak Wavelength        | $\lambda_p$          | $I_F=10\text{mA}$                         |      | 940  |      | nm              |
| Dark Current           | $I_{ceo}$            | $V_{CE}=10\text{V}$                       | -    | -    | 2    | $\mu\text{A}$   |
| C-E Saturation Voltage | $V_{CE}(\text{sat})$ | $I_C=0.25\text{mA}$<br>$I_F=20\text{mA}$  | -    | -    | 0.4  | V               |
| Light Current          | $I_C$                | $V_{CE}=5\text{V}$<br>$I_F=20\text{mA}$   | 0.5  | 5    | -    | mA              |
| Rise Time              | $T_r$                | $I_C=0.8\text{mA}$<br>$V_{CC}=30\text{V}$ | -    | 5    | -    | $\mu\text{sec}$ |
| Fall Time              | $T_f$                | $R_L=1\text{K}\Omega$                     | -    | 5    | -    | $\mu\text{sec}$ |
| Operation Diagram      | $\theta$             | Fig.1                                     | 10   | 20   | 30   | $^\circ$        |



## Tilt Sensor Switch

|          |           |             |               |               |   |
|----------|-----------|-------------|---------------|---------------|---|
| Item No. | RBS380102 | Description | Photoelectric | Version       | 1 |
| Page     | 6 of 9    |             | Publish Date  | Feb. 12, 2019 |   |

● Typical Electrical / Optical Characteristics Curves (Ta=25°C)

Fig.1 Power Dissipation vs. Ambient Temperature

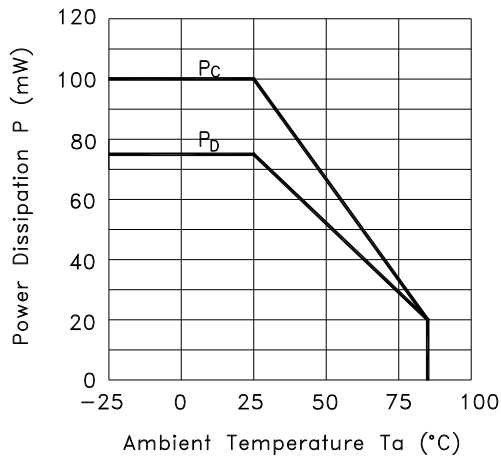


Fig.2 Forward Current vs. Forward Voltage

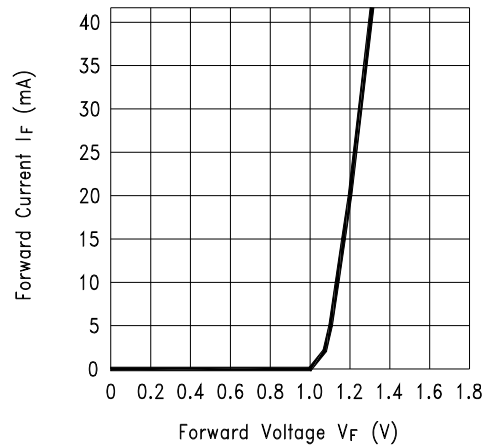


Fig.3 Collector Current vs. Collector-emitter Voltage


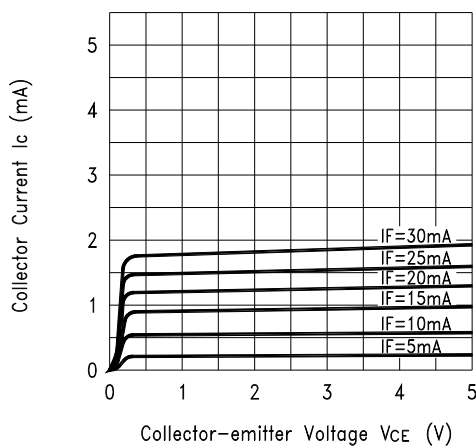



Fig.4 Collector Current vs. Ambient Temperature

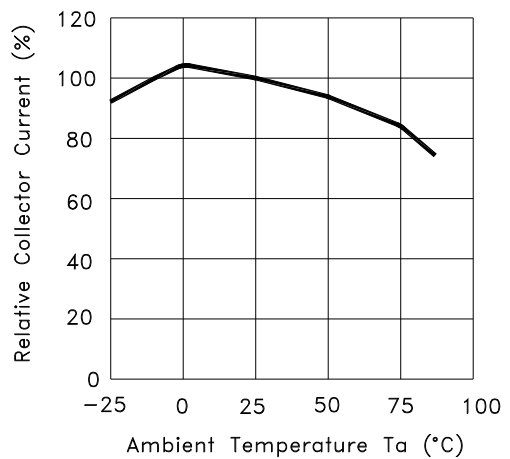

## Tilt Sensor Switch

|          |           |             |               |               |   |
|----------|-----------|-------------|---------------|---------------|---|
| Item No. | RBS380102 | Description | Photoelectric | Version       | 1 |
| Page     | 7 of 9    |             | Publish Date  | Feb. 12, 2019 |   |

Fig.5 Collector-emitter Saturation Voltage vs. Ambient Temperature

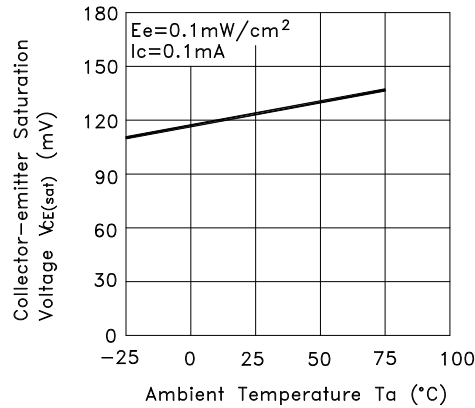

### ● RELIABLE TEST ITEMS

Reliable Test for RBS380102

|   | Test Item             | Test Content   |
|---|-----------------------|--|
| 1 | Operation Temperature | -25°C ~ 85°C   |
| 2 | Storage Temperature   | -40°C ~ 85°C   |
| 3 | Humidity              | 40 °C / 95 %RH   |
| 4 | Mechanical Life       | 2Hz, horizontal<br>1,000,000 times                           |
| 5 | Electrical Life       | $I_F=20\text{ mA}$ , $V_{CE}=5\text{ V}$<br>TIME: 30,000 hrs |



## Tilt Sensor Switch

|          |           |             |               |               |   |
|----------|-----------|-------------|---------------|---------------|---|
| Item No. | RBS380102 | Description | Photoelectric | Version       | 1 |
| Page     | 8 of 9    |             | Publish Date  | Feb. 12, 2019 |   |

### ● SOLDERING CONDITION


Following soldering conditions are for reference only, please use soldering information that solder paste manufacturer recommends.

| Condition                   | Soldering Temperature | Soldering Time   | Wattage of Manual Soldering                    | Type |
|-----------------------------|-----------------------|------------------|--|------|
| Suitable Production Process |                       |                  |  |      |
| Wave Soldering              | 260±5°C               | < 5 seconds max. | -  | DIP  |
| Manual Soldering            | 300±5°C               | < 3 seconds max. | 30W or Temperature-controlled manual soldering | DIP  |

### ● PACKAGE

|    | Part Number | Package      | Quantity | Total      | Dimension(mm)  |
|----|-------------|--------------|----------|------------|----------------|
| 1. | RBS380102   | IC tube      | 48 pcs   | 48 pcs     | 525L*10W*17.5H |
|    |             | Inner box    | 84 tubes | 4,032 pcs  | 539L*130W*130H |
|    |             | Outer carton | 4 boxes  | 16,128 pcs | 551L*285W*288H |

※ Package shown as below for reference.

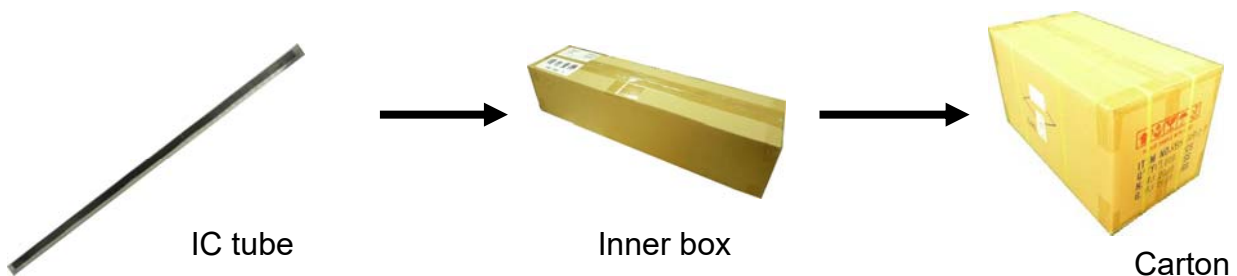



## Tilt Sensor Switch

|          |           |             |               |               |   |
|----------|-----------|-------------|---------------|---------------|---|
| Item No. | RBS380102 | Description | Photoelectric | Version       | 1 |
| Page     | 9 of 9    |             | Publish Date  | Feb. 12, 2019 |   |

### ● NOTES

1. Suggestion for usage: For vibration usage or application, we suggest to add hysteresis for IC.
2. For the continued product improvement as one of the company policy, specifications may change or update without notice. The latest information can be obtained through our sales offices. Normally, all products are supplied under our standard conditions.

### ● PRECAUTIONS FOR USE

1. If the products is intended to be used for other endurance equipment requiring higher safety and reliability such as life support system, space and aviation devices, disaster and safety system, it's necessary to make verification of conformity or contact us for the details before using.
2. Do not try to clean the switch with a solvent or similar substance after the soldering process.
3. Use water-soluble flux may damage the switch.
4. Please follow the soldering instruction accordingly, otherwise might lead to defective.
5. Do not use switch in the environment of high humidity, because such an environment may cause the leakage current between the terminals.
6. Please do not exceed the rated load as there will be a risk of disabling the product function.
7. In the circuit, switch should not be near or directly connected with the magnetic component solder joints (for example: relays, transformers, etc.).
8. To prevent damaging IR and PT, please make electrostatic protective treatment, for example: wearing a conductive wrist strap or antistatic gloves during production process, and grounding machinery etc.



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9