

LT8711 Micropower Synchronous Sepic Converter

DESCRIPTION

Demonstration circuit 2234A is a synchronous sepic converter featuring the LT[®]8711 multitopology switching controller. The LT8711 is a current mode PWM DC/DC controller with a dual input LDO to optimize gate driver efficiency. Ultralow 15 μ A quiescent current in low noise Burst Mode[®] operation achieves high efficiency at very light loads and helps extend the run-time in battery powered applications when in standby mode. The LT8711 switching frequency can be programmed either via oscillator resistor or external clock over a 100kHz to 750kHz range.

The demo board regulates a 12V, 4A output from a 4.5V to 40V input source, and operates at 200kHz switching frequency. The rated maximum load current is 4A, while derating is necessary for certain input voltage and thermal conditions.

The SYNC pin on the demo board is grounded (JP1 at BURST position) by default for low ripple high efficiency Burst Mode operation at light load. To synchronize to an external clock, move JP1 to SYNC and apply the external clock to the SYNC turrel. Force continuous conduction mode can be selected by moving JP1 shunt to FCM position.

The DC2234A can be modified from a SEPIC converter to other topologies. Synchronous BOOST and some other schematics are provided in the data sheet. Please consult the factory or LT8711 data sheet for details regarding how to customize the DC2234A or how to design different topologies for custom specifications.

The LT8711 includes many other features such as user configurable under voltage lockout, soft-start, input voltage feedforward regulation, and it is easily configured as synchronous buck, boost, SEPIC or nonsynchronous buck-boost converter.

The data sheet gives a complete description of the device, operation and application information. The data sheet must be read in conjunction with this demo manual for DC2234A. The LT8711 is assembled in a 20-lead plastic TSSOP package with a thermally enhanced ground pad. Proper board layout is essential for maximum thermal performance. See the Layout Considerations section in the data sheet.

Design files for this circuit board are available at <http://www.linear.com/demo/DC2234A>

LT, LT, LTC, LTM, Linear Technology, Burst Mode and the Linear logo are registered trademarks of Analog Devices, Inc. All other trademarks are the property of their respective owners.

PERFORMANCE SUMMARY Specifications are at T_A = 25°C

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V _{IN}	Input Voltage Range		4.5		40	V
V _{OUT}	Output Voltage		11.6	12	12.4	V
I _{OUT}	Maximum Output Current	Derating is Necessary for Certain V _{IN} and Thermal Conditions	4			A
t _{SW}	Switching Frequency		185	200	215	kHz
EFF	Efficiency at DC	V _{IN} = 5V, I _{OUT} = 1A V _{IN} = 12V, I _{OUT} = 2A V _{IN} = 24V, I _{OUT} = 4A V _{IN} = 36V, I _{OUT} = 4A		91.9 92 91.4 90.2		% % % %

QUICK START PROCEDURE

DC2234A is easy to set up to evaluate the performance of the LT8711. Refer to Figure 3 for proper measurement equipment setup and follow the procedure below:

NOTE: When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. See Figure 4 for the proper scope technique.

1. Set an input power supply that is capable of 40V/12A. Then turn off the supply.
2. With power off, connect the supply to the input terminals V_{IN} and GND.
3. Turn on the power at the input.
NOTE: Make sure that the input voltage never exceeds 40V.
4. Check for the proper output voltage of 12V. Turn off the power at the input.
5. Once the proper output voltage is established, connect a variable load capable of sinking 4A at 12V to the output terminals V_{OUT} and GND. Set the current for 0A.
- a. If efficiency measurements are desired, an ammeter can be put in series with the output load in order to measure the DC2234A's output current.


- b. A voltmeter can be placed across the output terminals in order to get an accurate output voltage measurement.

6. Turn on the power at the input.

NOTE: If there is no output, temporarily disconnect the load to make sure that the load is not set too high.



7. Once the proper output voltage is again established, adjust the load and/or input within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other desired parameters.
8. An external clock can be added to the SYNC terminal when SYNC function is used (JP1 on the SYNC position). Please ensure that the chosen RT sets the LT8711 switching frequency to equal or below the lowest SYNC frequency. See the data sheet section, Clock Synchronization.

QUICK START PROCEDURE

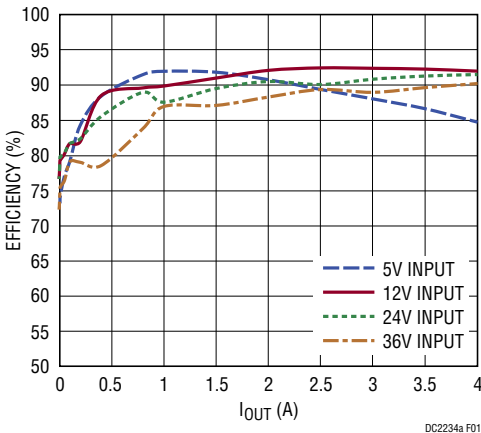

DC2234a F01

Figure 1. Efficiency vs Load Current at 200kHz Switching Frequency

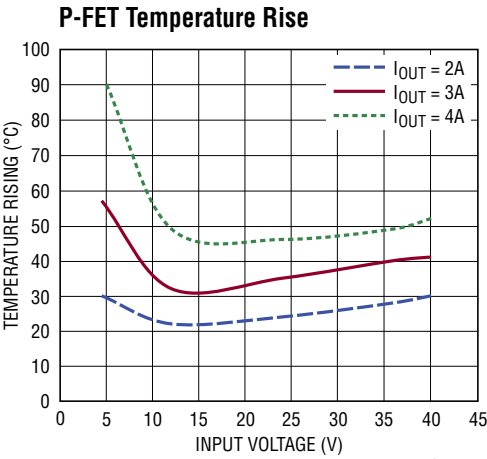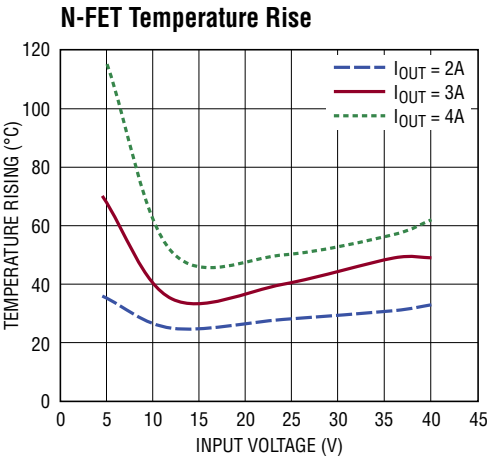

DC2234a F02

Figure 2. DC2234A Temperature Rising vs Input Voltage

QUICK START PROCEDURE

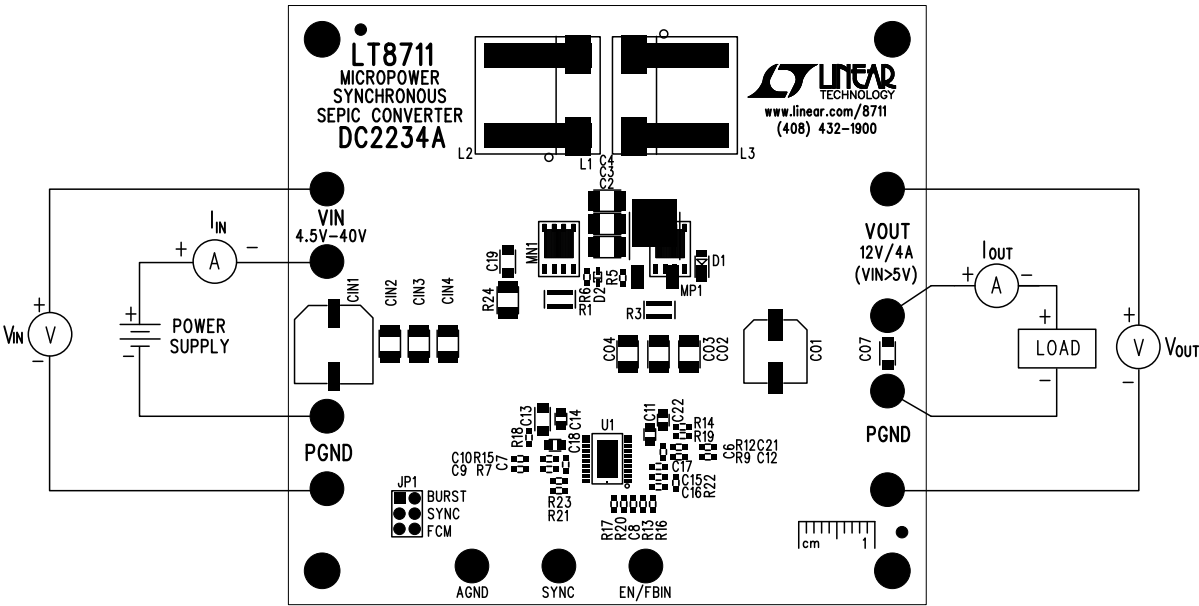


Figure 3. Proper Measurement Equipment Setup

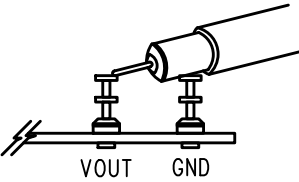


Figure 4. Measuring Output Ripple

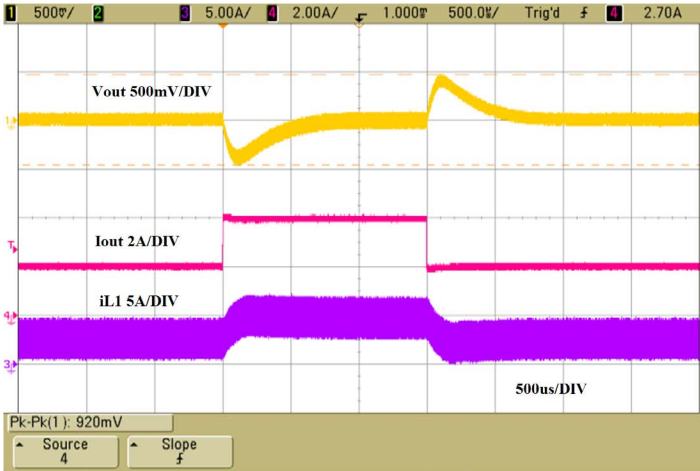


Figure 5. DC2234A 12V Input 2A to 4A Load Transient

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	6	C2, C3, C4, CIN2, CIN3, CIN4	CAP, X7R, 10 μ F, 50V, 10% 1210	MURATA, GRM32ER71H106KA12L
2	1	C01	ALUM, POLYMER, 270 μ F, 16V, 20%	PANASONIC, 16SVPC270M
3	3	C02, C03, C04	CAP, X7R, 22 μ F, 25V, 10% 1210	MURATA, GRM32ER71E226KE15L
4	1	C07	CAP, X7R, 10 μ F, 25V, 10% 1206	MURATA, GRM31CR71E106KA12L
5	1	C7	CAP, X7R, 10nF, 25V, 10% 0603	MURATA, GRM188R71E103KA01D
6	4	C11, C14, C18, C22	CAP, X7R, 2.2 μ F, 16V, 10% 0805	MURATA, GRM21BR71C225KA12L
7	1	C13	CAP, X7R, 4.7 μ F, 50V, 10% 1206	TDK, C3216X7R1H475K160AC
8	1	C15	CAP, X7R, 4.7nF, 25V, 10% 0603	MURATA, GRM188R71E472KA01D
9	1	C16	CAP, C0G, 100pF, 50V, 5% 0603	TDK, C1608C0G1H101J080AA
10	1	C17	CAP, X7R, 0.47 μ F 16V 10% 0603	MURATA, GRM188R71C474KA88D
11	1	C19	CAP, X7R, 1000pF, 100V, 10% 1206	MURATA, GRM319R72A102KA01D
12	1	D1	DIODE, 60V, 2A, POWERDI-123	DIODES INC, DFLS260-7
13	1	D2	DIODE, 80V, 125mA, SOD-523	DIODES INC, 1N4148WT-7
14	1	L2	IND, 8.2 μ H	COILCRAFT, XAL1510-822MEB
15	1	L3	IND, 15 μ H	COILCRAFT, XAL1510-153MEB
16	1	MN1	N-MOSFET, 80V, POWERPAK SO-8	VISHAY, SIR826ADP-T1-GE3
17	1	MP1	P-MOSFET, 60V, POWERFLAT 5x6	STMicroelectronics, STL42P6LLF6
18	2	R1, R3	RES, SENSE, 0.002 Ω , 1.5W, 2%, KRL3216	SUSUMU, KRL3216E-C-R002-G-T5
19	6	R5, R9, R12, R14, R18, R19	RES, CHIP, 0 Ω , 0.1W, 0603	NIC, NRC06ZOTRF
20	1	R6	RES, CHIP, 3.3 Ω , 0.1W, 1%, 0603	VISHAY, CRCW06033R30FKEA
21	2	R7, R15	RES, CHIP, 10 Ω , 0.1W, 1%, 0603	VISHAY, CRCW060310R0FKEA
22	1	R13	RES, CHIP, 1M, 0.1W, 1%, 0603	VISHAY, CRCW06031M00FKEA
23	1	R16	RES, CHIP, 71.5k, 0.1W, 1%, 0603	VISHAY, CRCW060371K5FKEA
24	2	R17,R23	RES, CHIP, 100k, 0.1W, 1%, 0603	NIC, NRC06F1003TRF
25	1	R21	RES, CHIP, 118k, 0.1W, 1%, 0603	NIC, NRC06F1183TRF
26	1	R22	RES, CHIP, 49.9k, 0.1W, 1%, 0603	VISHAY, CRCW060349K9FKEA
27	1	R24	RES, CHIP, 3.3 Ω , 1/2W, 5%, 1210	VISHAY, CRCW12103R30JNEA
28	1	U1	IC, LT8711EFE 20-LEAD TSSOP	LINEAR TECH, LT8711EFE#PBF
Additional Demo Board Circuit Components				
1	1	CIN1	EP-CAP, 56 μ F, 50V, HVH SERIES	SUN ELECT, 50HVH56M
2	0	CIN5, CIN6, C05, C06, C20(OPT)	CAP, 1210	
3	0	C1 (OPT)	CAP, 2220	
4	0	C6, C8, C9, C10, C12, C21(OPT)	CAP, 0603	
5	0	L1 (OPT)	IND, 8.2 μ H	
6	0	MN2 (OPT)	N-MOSFET, POWERPAK SO-8	
7	0	MP2 (OPT)	P-MOSFET, POWERFLAT 5x6	
8	0	R4 (OPT)	RES, 1210	
9	0	R20 (OPT)	RES, 0603	

DEMO MANUAL DC2234A

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Hardware: For Demo Board Only				
1	11	E1 TO E11	TESTPOINT, TURRET, 0.094"	MILL-MAX, 2501-2-00-80-00-00-07-0
2	1	JP1	DOUBLE ROW HEADER 2 x 3 0.079"	WURTH ELEKTRONIK, 62000621121
3	1	XJP1	SHUNT, 0.079" CENTER	WURTH ELEKTRONIK, 60800213421
4	4	MH1 TO MH4	STAND-OFF, NYLON 0.50" TALL	KEYSTONE, 8833 (SNAP ON)



DEMO MANUAL DC2234A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9