

### DEMO MANUAL DC2220A

LTC3643

# Bidirectional Charger/Regulator for System Power Backup

#### DESCRIPTION

Demonstration circuit 2220A is a 2A, bidirectional charger/regulator featuring the LTC®3643, a bidirectional synchronous step-up charger and step-down converter. DC2220A implements backup by charging a storage capacitor up to 40V in boost mode, when the input voltage is present. It discharges the storage capacitor in buck mode, providing a regulated load voltage of 3V to 17V (set to 5V), when the input is interrupted. Its wide voltage range, both in capacitor charger mode and in system backup mode, makes it well suited to a wide variety of applications. The ability of the LTC3643 to boost an input rail to a relatively high voltage of 40V, combined with the DC2220 option of adding external capacitor banks, makes this regulator an excellent choice for energy storage applications.

The DC2220A features automatic switching from charge to backup mode, 2A input current limit during charging, the ability to set maximum current in the backup mode of operation, Burst Mode® operation, fast 1MHz switching frequency, and open-collector outputs to indicate charge status and input power fail.

The 1MHz constant-frequency operation results in a small and efficient circuit. In backup mode, the LTC3643 provides high output voltage accuracy over a wide load range with no minimum load requirement.

Demo circuit 2220A is set up for automatic mode operation. In this mode, the DC2220 automatically charges the energy storage capacitor when a system voltage is present. It automatically switches to work as a step-down DC/DC converter providing system backup power to the load when system power is removed. An on board MOSFET isolates the backup circuit from the input line if the system voltage is not present, implementing PowerPath™ functionality.

The DC2220A supports three levels of load current limits: 2A, 3A and 4A when working as step-down converter discharging the energy storage capacitor.

The DC2220A has a small circuit footprint. It is a high performance and cost effective solution for high voltage capacitor backup converters, servers, solid-state drives, RAID and RF systems.

The LTC3643's input disconnect circuitry protects the DC2220A from short circuit and overcurrent conditions in the boost mode of operation, in case a short circuit occurs on a high voltage rail. A similar circuit protects the DC2220A against a short circuit in step-down mode, when the load is supplied from an energy storage capacitor.

Design files for this circuit board are available at http://www.linear.com/demo/DC2220A

L, LT, LTC, LTM, Linear Technology, Burst Mode and the Linear logo are registered trademarks and PowerPath is a trademark of Linear Technology Corporation. All other trademarks are the property of their respective owners.

### **PERFORMANCE SUMMARY** Specifications are at T<sub>A</sub> = 25°C

PARAMETER	CONDITIONS		UNITS
Minimum Input Supply Voltage		3.0	V
Maximum Input Supply Voltage		17.0	V
System Voltage Range	Backup (Step-Down) Mode	3.0 to 17.0	V
Energy Storage Capacitor Voltage Range		3.0V to 40V	V
Typical Switching Frequency		1.0	MHz
Efficiency Typical, Backup Mode	$V_{CAP} = 12V, V_{LOAD} = 5.0V, I_{LOAD} = 0.5A$	93	%



### **QUICK START PROCEDURE**

Demonstration circuit 2220A is easy to set up to evaluate the performance of the LTC3643 bidirectional regulator. Refer to Figure 1 for the proper measurement equipment setup and follow the procedure below.

NOTE: When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the  $V_{IN}$  or  $V_{OUT}$  and GND terminals. See Figure 2 for proper scope probe technique.

To verify the capability of the DC2220A for charging energy storage capacitors, proceed with the following steps:

- 1. Place jumper RUN (JP1) to OFF position.
- 2. Place jumper ILIM\_BUCK (JP2) to 2.0A position.
- 3. With power off, connect the input power supply to terminals  $V_{IN}$  (E1) and GND, voltmeter to  $V_{CAP}$  (E8) and GND, load to LOAD (E3) and GND as shown on Figure 1.

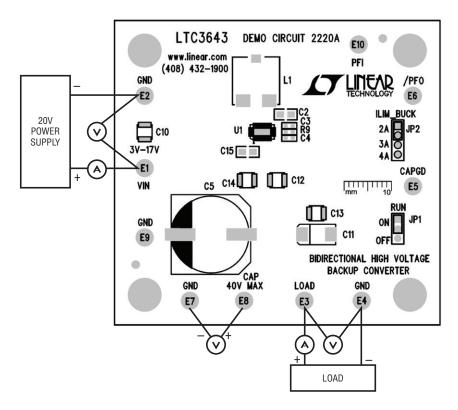


Figure 1. Proper Measurement Equipment Setup




Figure 2. Measuring Input or Output Ripple

LINEAR TECHNOLOGY

### **QUICK START PROCEDURE**

- 4. Turn the input power source on and slowly increase the input voltage to 5.5V. Set the load to 0.1A. You have to see voltage around 4.8V on terminal LOAD, a diode forward voltage drop lower compared to V<sub>IN</sub>. If there is no output, temporarily disconnect the load to make sure that the load is not set too high.
- 5. Place jumper RUN (JP1) in the ON position. Voltage on V<sub>CAP</sub> terminal should rise to 39V level. Voltage on terminal LOAD should be equal to input voltage.


To verify the ability of DC2220 to work in backup mode, proceed with the following:

- Disconnect input power from V<sub>IN</sub> terminal; energy storage capacitor C5 starts discharging from 39V level, however LTC3643 will maintain a voltage of 5.0V on terminal LOAD.
- 7. To increase holdup time, install optional capacitor C6 on the bottom side of DC2220A or connect additional capacitor bank to terminals  $V_{CAP}$  (E8) and GND (E7).

- 8. Repeat steps 1 to 7 for different load currents and  $V_{\text{IN}}$  voltages.
- 9. You can measure voltage regulation and ripple in backup mode on V<sub>I OAD</sub> terminals.
- 10. Make sure that input voltage on  $V_{\text{IN}}$  terminals does not exceed 17V and  $V_{\text{CAP}}$  voltage is not set above 40V.

Figure 3 illustrates power interruption. In the beginning of the process  $V_{IN}$  (yellow) is 5.5V and supplies LOAD rail, PFI signal is low and step-down converter is OFF. Once  $V_{IN}$  value is reduced to 4.75V, PFI signal changes state to high, the step-down converter turns ON and starts to supply the LOAD rail by 5.0V taking energy from the storage capacitor C5. The efficiency curve is presented in Figure 4.

The efficiency measurement was conducted in step-down mode. A constant DC voltage of 12V was applied to the  $V_{CAP}$  and GND terminals with the input voltage disconnected from the  $V_{IN}$  and GND terminals.

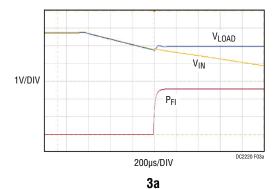

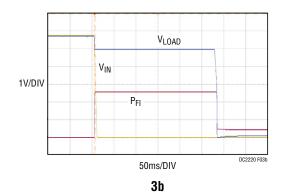


Figure 3. Power interruption, V<sub>LOAD</sub> 5.0V, I<sub>LOAD</sub> 0.5A




Figure 4. Efficiency vs Load, V<sub>CAP</sub> 12V, LOAD 5.0V, Step-Down Mode



dc2220afb

# **PARTS LIST**

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER	
Required Circuit Components					
1	1	C1	CAP., X7R, 0.1µF, 25V, 10%, 0603	AVX, 06033C104KAT2A	
2	1	C2	CAP., X5R, 4.7μF,16V, 10%, 0805	TDK C2012X5R1C475K	
3	1	C3	CAP., COG, 470pF 50V, 5%, 0603	AVX, 06035A471JAT2A	
4	1	C4	CAP., COG, 22pF, 25V, 5%, 0603	AVX, 06033A220JAT2A	
5	1	C5	CAP., ALUM., ELECT., 1000µF, 50V, 16x16.5	PANASONIC, EEEFK1H102AM	
6	2	C9, C11	CAP., POS 47µF, 20V, 20%,TQC-D2	PANASONIC, 20TQC47MYF	
7	1	C10	CAP., X7R, 4.7μF, 50V, 10%,1210	AVX, 12105C475KAT2A	
8	3	C12, C13, C14	CAP., X7R, 10µF, 50V, 10%, 210	AVX, 12105C106KAT2A	
9	1	C15	CAP., X7S, 1µF, 100V, 10%, 0805	TDK C2012X7S2A105K	
10	1	L1	IND, 7.2µH POWER	SUMIDA, CDEP105NP-7R2MC-88	
11	1	Q1	MOSFET, P-CHN, 30V, LFPAK	VISHAY, Si4491EDY-T1-GE3	
12	1	R1	RES., CHIP, 511k, 1/10W, 1%, 0603	VISHAY, CRCW0603511KFKEA	
13	1	R2	RES., CHIP, 0.01, 1/4W, 1%, 1206	VISHAY, WSL1206R0100FEA	
14	1	R3	RES., CHIP, 133k <sub>,</sub> 1/16W, 1%, 0603	VISHAY, CRCW0603133KFKEA	
15	1	R4	Res., CHIP, 1MEG, 1/10W, 1%, 0603	VISHAY, CRCW06031M00FKEA	
16	1	R5	RES., CHIP, 37.4k, 1/10W, 1%, 0603	VISHAY, CRCW060337K4FKEA	
17	2	R6, R11	RES., CHIP, 5.11k, 1/10W, 1%, 0603	VISHAY, CRCW06035K11FKEA	
18	2	R7, R8	RES., CHIP, 510k <sub>,</sub> 1/10W, 1%, 0603	VISHAY, CRCW0603510KFKEA	
19	1	R9	RES., CHIP, 402k <sub>,</sub> 1/10W, 1%, 0603	VISHAY, CRCW0603402K0FKEA	
20	1	R10	RES., CHIP, 332k <sub>,</sub> 1/10W, 1%, 0603	VISHAY, CRCW0603332KFKEA	
21	1	U1	I.C., LTC3643EUDD, QFN24UDD-3X5	LINEAR TECH., LTC3643EUDD#PBF	
Additional Demo Board Circuit Components					
1		C6	CAP., ALUM. OPTION,16X16.5	OPT	
2		C7, C8	CAP., OPTION, 0603	OPT	
3		R12	RES., OPTION, 0603	OPT	
Hardware: For Demo Board Only					
1	10	E1 – E10	TP, TURRET, 0.094"	MILL-MAX, 2501-2-00-80-00-07-0	
2	1	JP1	HEADER, 1X3, 0.079 SINGLE ROW	WURTH, 620-003-111-21	
3	1	JP2	HEADER, 1X4, 0.079 SINGLE ROW	WURTH, 620-004-111-21	
4	2	XJP1, XJP2	SHUNT, 0.079" CENTER	WURTH, 608-002-134-21	

# SCHEMATIC DIAGRAM

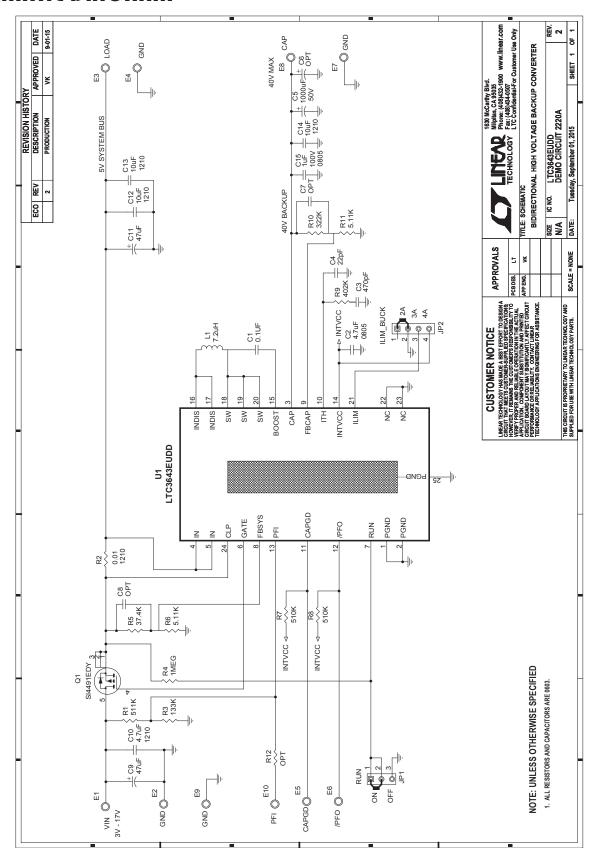


Figure 5. DC2220A Demo Circuit Schematic

dc2220afb

### DEMO MANUAL DC2220A

#### DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following AS IS conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.

LTC currently services a variety of customers for products around the world, and therefore this transaction is not exclusive.

**Please read the DEMO BOARD manual prior to handling the product**. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged**.

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology 1630 McCarthy Blvd. Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation



### **ПОСТАВКА** ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

## Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

#### http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

#### Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru\_6 moschip.ru 4 moschip.ru 9