


# UR SERIES

## VOLTAGE CONTROL RELAY

UL listed CSA recognized

- **AC or DC Voltage Control**
- **Manual or Automatic Operation**
- **Adjustable Threshold**
- **5 to 50% Hysteresis Range**
- **LED Relay Status Indicator**

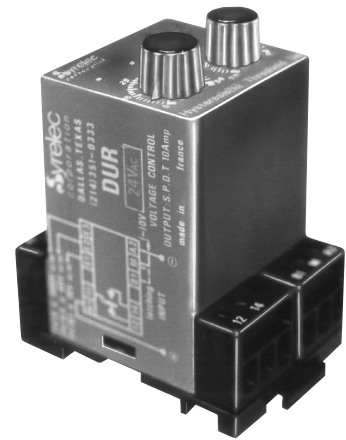


### 1. AC/DC voltage control without latching:

The output relay is energized when the voltage (AC peak voltage) exceeds the selected threshold. It de-energizes when the voltage falls below the hysteresis setting (5 to 50%) or when supply breaks. The hysteresis is controlled by a potentiometer and its selection does not change the chosen threshold.

### 2. AC/DC voltage control with latching:

The output relay is energized when the voltage reaches the selected threshold and stays latched in this position. The contact between terminal B1 and M (or 8 or 9) should be opened or the input power of the device interrupted to reset.

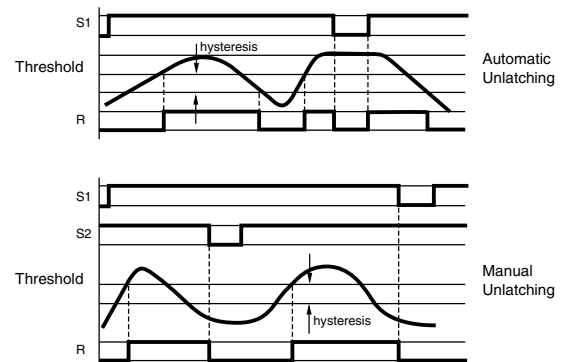

### SPECIFICATIONS:

|                            |                                               |                         |                |
|----------------------------|-----------------------------------------------|-------------------------|----------------|
| Input                      | 24 VDC, 24, 48, 110, 220 VAC                  |                         |                |
|                            | ±15%, 50/60 Hz                                |                         |                |
| Power consumption          | 24 VAC: 1 VA                                  |                         |                |
|                            | 48 VAC: 1.2 VA                                |                         |                |
|                            | 110 VAC: 3.5 VA                               |                         |                |
|                            | 220 VAC: 7 VA                                 |                         |                |
| Control Range              | Input Resistance                              | Acceptance load (input) |                |
| AC or DC                   |                                               | Permanent               | Less than      |
| 0.1 to 10 V                | 10 kΩ                                         | (max)                   | 10ms peak max. |
| 0.4 to 40 V                | 40 kΩ                                         | 50 V                    | 100 V          |
| 4 to 400 V                 | 400 kΩ                                        | 100 V                   | 300 V          |
|                            |                                               | 440 V                   | 750 V          |
| Hysteresis selection       | 5 to 50% of set point                         |                         |                |
| Repeat accuracy            | ±2% at a constant ambient                     |                         |                |
| Output Relay               | SPDT Relay                                    |                         |                |
| Contact material           | AgCdO                                         |                         |                |
| Maximum loading            | 10 A AC resistive 8 A DC inductive            |                         |                |
| Maximum switching voltage  | 250 VAC                                       |                         | 250 VDC        |
| Relay maximum power rating | 2200 VA                                       |                         |                |
| Transient protection       | 2500 volts                                    |                         | 30 W           |
| Mechanical life of relay   | 30 x 10 <sup>6</sup> operations               |                         |                |
| Electrical life of relay   | 2 x 10 <sup>5</sup> at 2400 VA resistive load |                         |                |
| Repetition accuracy        | ±0.5% at a constant ambient                   |                         |                |
| Response time              | 100 ms on make                                |                         |                |
|                            | 200 ms on break                               |                         |                |
| Operating temperature      | -4°F to +140°F                                |                         | -20°C to +60°C |
| Weight                     | 7 oz. (200g)                                  |                         |                |

**Option:** 24 VDC power – the voltage and the measured current must be from separate sources.

### ORDERING INFORMATION:

**D**  
MOUNTING

**MOUNTING**  
D = DIN-rail mounting  
L = 11 pin plug-in


**UR**  
SERIES

**SERIES**  
UR  
UR SP50

**24A**  
INPUT POWER

**INPUT POWER**  
24A = 24VAC  
24D = 24VDC  
48A = 48VAC  
110A = 110VAC  
220A = 220VAC

### WIRING DIAGRAM:

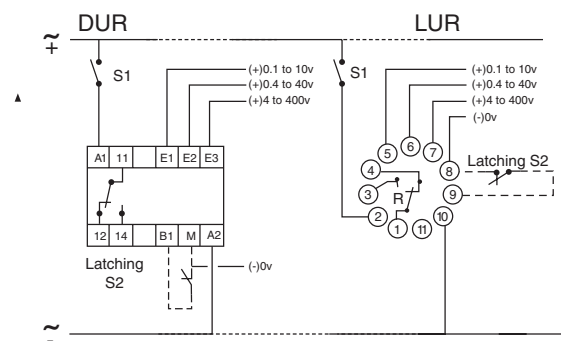


Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)


# SR SERIES

## UNDER VOLTAGE RELAY

UL listed CSA recognized

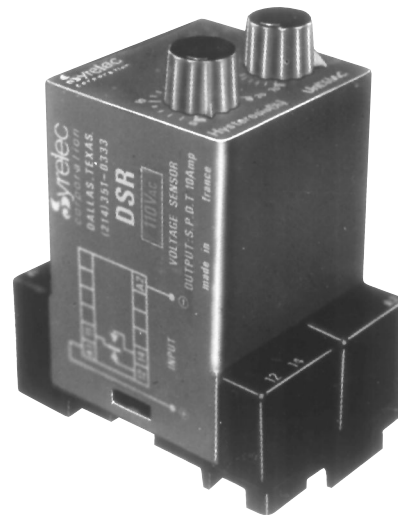


- **Multiple AC/DC Voltages**
- **5 to 20% Hysteresis Adjustment**
- **Automatic Operation**
- **Adjustable Threshold**

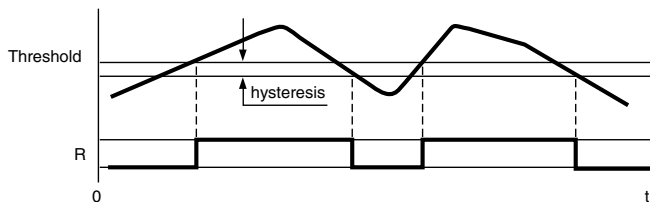


The voltage threshold SR Relay controls a voltage supply which is its own supply. The output relay is energized when the supply (effective for AC) exceeds the selected threshold. It de-energizes when the controlled supply falls below (5 to 20% Hysteresis) of the supply voltage or when the input power breaks. Hysteresis is controlled by a potentiometer and its selection does not change the chosen threshold. Pulses or drops of 100ms or less are ignored.

### SPECIFICATIONS:

|                                  |                                                                                                                          |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <b>Input</b>                     | 12 VDC, 24 VAC, 24 VDC, 48 VAC<br>48 VDC, 110 VAC, 220 VAC, 50/60 Hz<br>-20% to +30% DC,<br>-30% to +15% AC              |
| <b>Maximum power consumption</b> | 24 VAC: 1.5 VA      24 VDC: .6 W<br>48 VAC: 2 VA      24 VDC: .8 W<br>110 VAC: 5 VA      48 VDC: 1.8 W<br>220 VAC: 11 VA |
| <b>Residual ripple</b>           | <Hysteresis value                                                                                                        |
| <b>Output relay</b>              | .SPDT Relay                                                                                                              |
| <b>Contact material</b>          | AgCdO                                                                                                                    |
| <b>Maximum loading</b>           | 10 A AC resistive    8 A DC inductive                                                                                    |
| <b>Maximum switching voltage</b> | 250 VAC      250 VDC                                                                                                     |
| <b>Maximum power rating</b>      | 2200 VA      80 W                                                                                                        |
| <b>Mechanical life of relay</b>  | .30 x 10 <sup>6</sup> operations                                                                                         |
| <b>Electrical life of relay</b>  | .2 x 10 <sup>6</sup> at 2200 VA resistive load                                                                           |
| <b>Operating temperature</b>     | +14°F to 140°F    -10°C to +60°C                                                                                         |
| <b>Weight</b>                    | .2.8 oz. (100g)                                                                                                          |

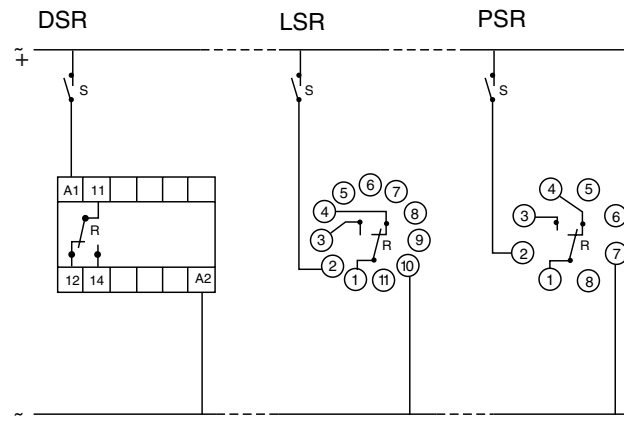

### ORDERING INFORMATION:

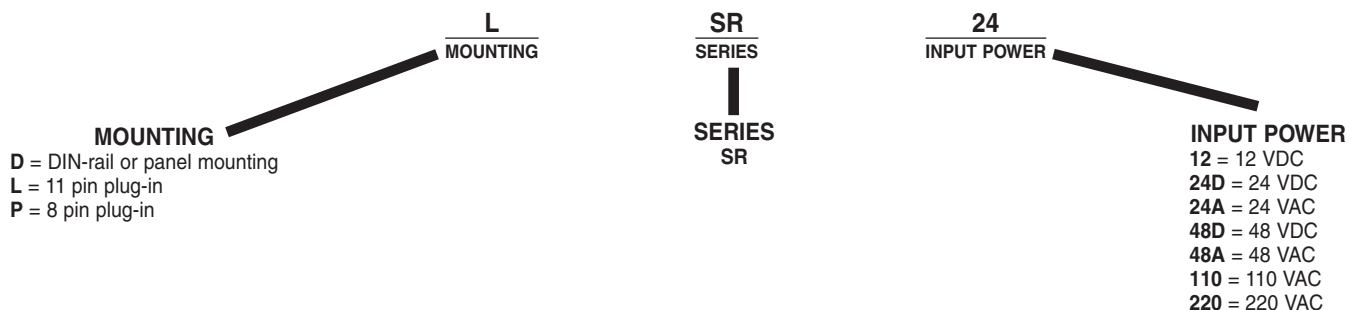

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9