

LTC3805-5

Low Noise SEPIC DC/DC Converter

DESCRIPTION

Demonstration circuit 1576 is high efficiency non-isolated SEPIC (Single Ended Primary Inductor Converter) converter featuring the LTC3805-5 switching controller. The DC1576 converts 5V to 30V input to 12V output and provides over 3A of output current. The converter operates at 300kHz with efficiency over 90%. With proper amount of airflow, the DC1576 converter can generate over 3A of output current. The DC1576 can be easily modified to generate output voltages in the range from 0.8V to 48V.

Also, the DC1576 can be modified for other input voltages like 5V-36V, 9V-36V, 36V-72V, and so on. The wider input voltage range will decrease the converter

efficiency. Therefore, narrow input voltage range will be more desirable.

The LTC3805-5 can be synchronized to an external clock of up to 400kHz. Please refer to LTC3805-5 data sheet for design details and applications information.

Design files for this circuit board are available. Call the LTC factory.

LT, LTC, LTM, LT, Burst Mode, OPTI-LOOP, Over-The-Top and PolyPhase are registered trademarks of Linear Technology Corporation. Adaptive Power, C-Load, DirectSense, Easy Drive, FilterCAD, Hot Swap, LinearView, µModule, Micropower SwitcherCAD, Multimode Dimming, No Latency ΔΣ, No Latency Delta-Sigma, No R_{SENSE}, Operational Filter, PanelProtect, PowerPath, PowerSOT, SmartStart, SoftSpan, Stage Shedding, SwitcherCAD, ThinSOT, UltraFast and VLDO are trademarks of Linear Technology Corporation. Other product names may be trademarks of the companies that manufacture the products.

Table 1. Performance Summary

PARAMETER	CONDITION	VALUE
Minimum Input Voltage	I _{OUT} = 0A to 3A	5V
Maximum Input Voltage	I _{OUT} = 0A to 3A	30V
V _{OUT}	V _{IN} = 5V to 20V, I _{OUT} = 0A to 3A	12V ±3%
Typical Output Ripple V _{OUT}	V _{IN} = 5V to 20V, I _{OUT} = 0A to 3A	100mV _{p-p}
Nominal Switching Frequency		300kHz

QUICK START PROCEDURE

Demonstration circuit 1576 is easy to set up to evaluate the performance of LTC3805-5 circuit. Refer to **Figure 1** for proper measurement equipment setup and follow the procedure below:

NOTE: When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the Vin or Vout and GND terminals. See Figure 2. for proper scope probe technique.

1. With power off, connect the input power supply to Vin and GND. Make sure that the input power sup-

ply has sufficient current rating at minimum input voltage for the required output load.

2. Turn on the power at the input.

NOTE: Make sure that the input voltage does not exceed 30V.

3. Check for the proper output voltage.
V_{out} = 12V, +/-3%.

If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

4. Once the proper output voltage is established, adjust the load within the operating range and ob-

serve the output voltage regulation, ripple voltage, efficiency and other parameters.

5. The DC1576 is equipped with an output capacitor C_{OUT4} (150uF) that approximates typical system rail capacitance. If system board already has capacitance of similar value C_{OUT4} can be removed. The

input capacitor C_{in1} is optional and is used to help with filtering when board is connected to lab supply with long leads. The capacitor C_{in1} can be removed if the input power source is close and has low source impedance.

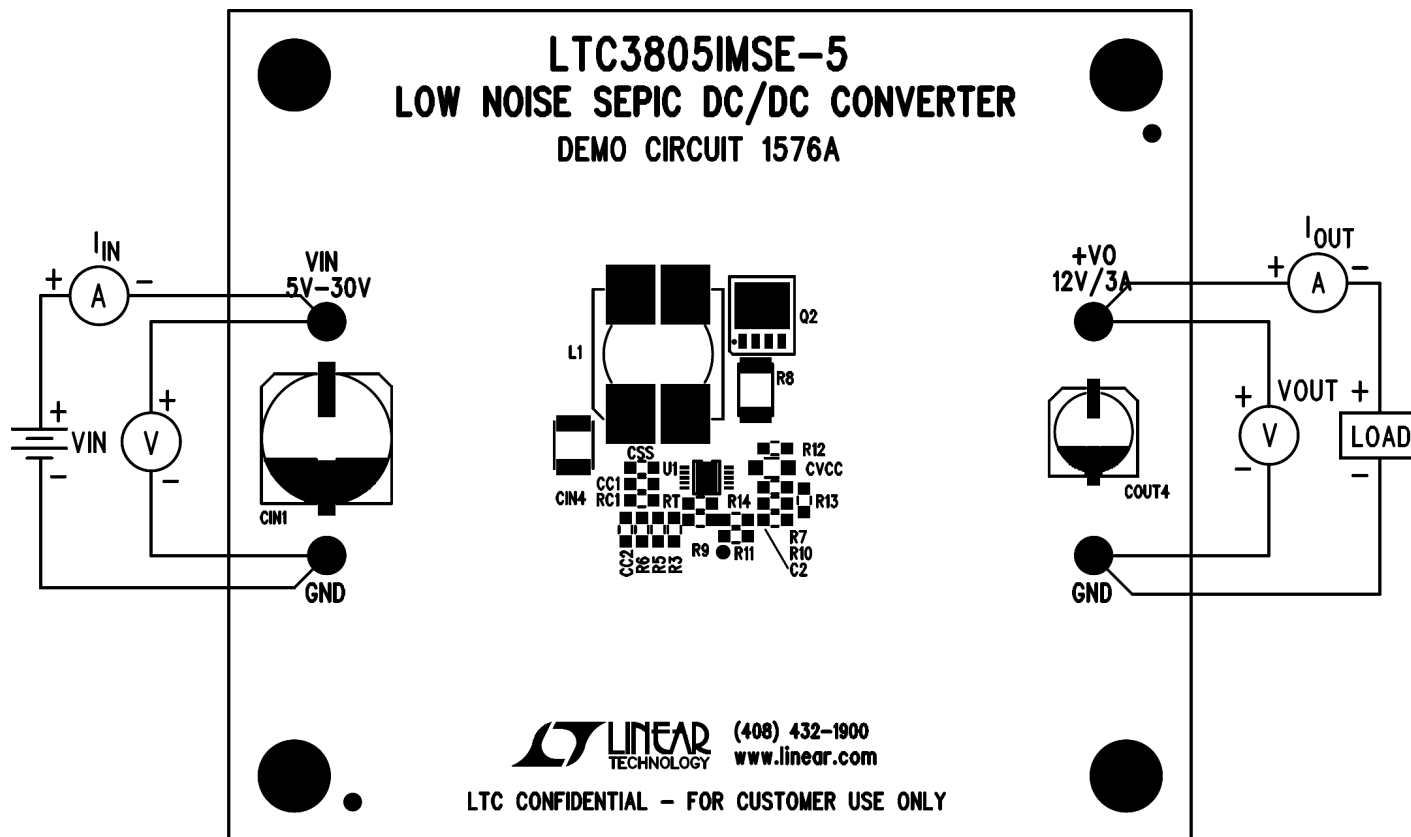


Figure 1. Proper Measurement Equipment Setup




Figure 2. Measuring Input or Output Ripple

CHANGING THE OUTPUT VOLTAGE

To set the output voltage lower than 12V, change the bottom voltage divider resistor connected to FB pin

of U1 (see the schematic on page 5). For example, to get 9V output, change R3 resistor value to 11k.

However, keep in mind that changing the transformer as well may increase the efficiency.

The optional Q1 circuit is used to get the circuit running. Once the circuit is running, the 12V output is used to bias U1 via D2. The startup circuit Q1 is turned off by pulling the emitter of Q1 above 7V. Please contact LTC factory for details.

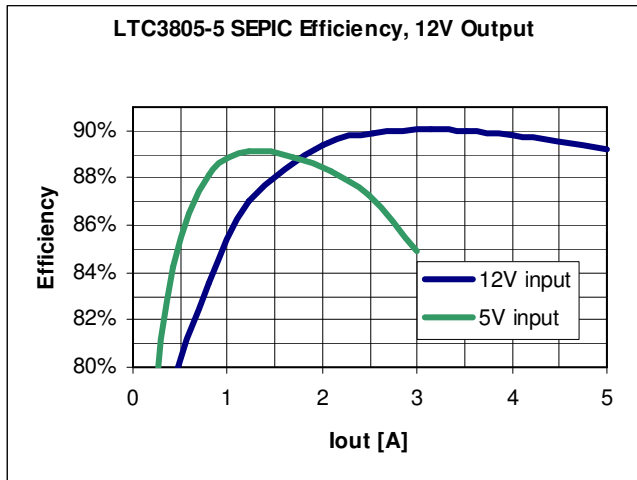


Figure 3. High efficiency of DC1576 allows the board to be used in thermally critical applications with outputs over 3A.

OUTPUT LOAD STEP RESPONSE

The load step response of DC1576 is very fast even though relatively small amount of output capacitance is present (100uF ceramic and 150uF electrolytic). The load step transients are shown in Figure 4. To improve load step response further or to reduce the output ripple, more output capacitance can be added. Low ESR output caps will have greatest effect on reducing the ripple and load step transients.

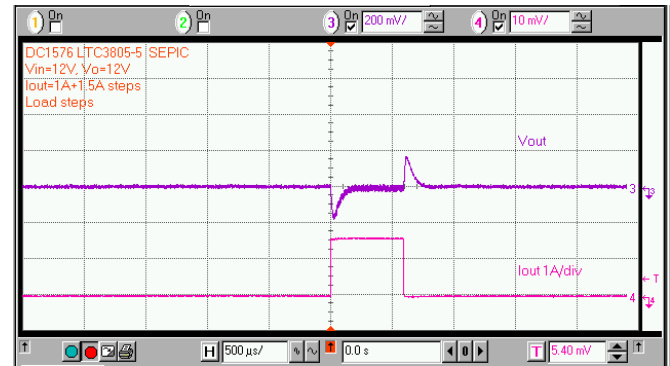


Figure 4. Fast transient response of DC1576 is achieved with a small amount of output capacitance.

SOFT START FUNCTION

The DC1576 features soft-start circuit that controls the inrush current and output voltage ramp at startup. The capacitor C_{SS} controls the startup period. The startup waveforms are shown in figure 5.


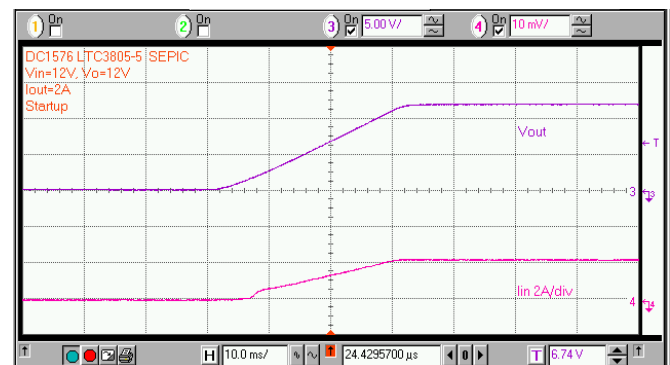


Figure 5. The DC1576 ramps the output slowly at startup without generating an input current surge.

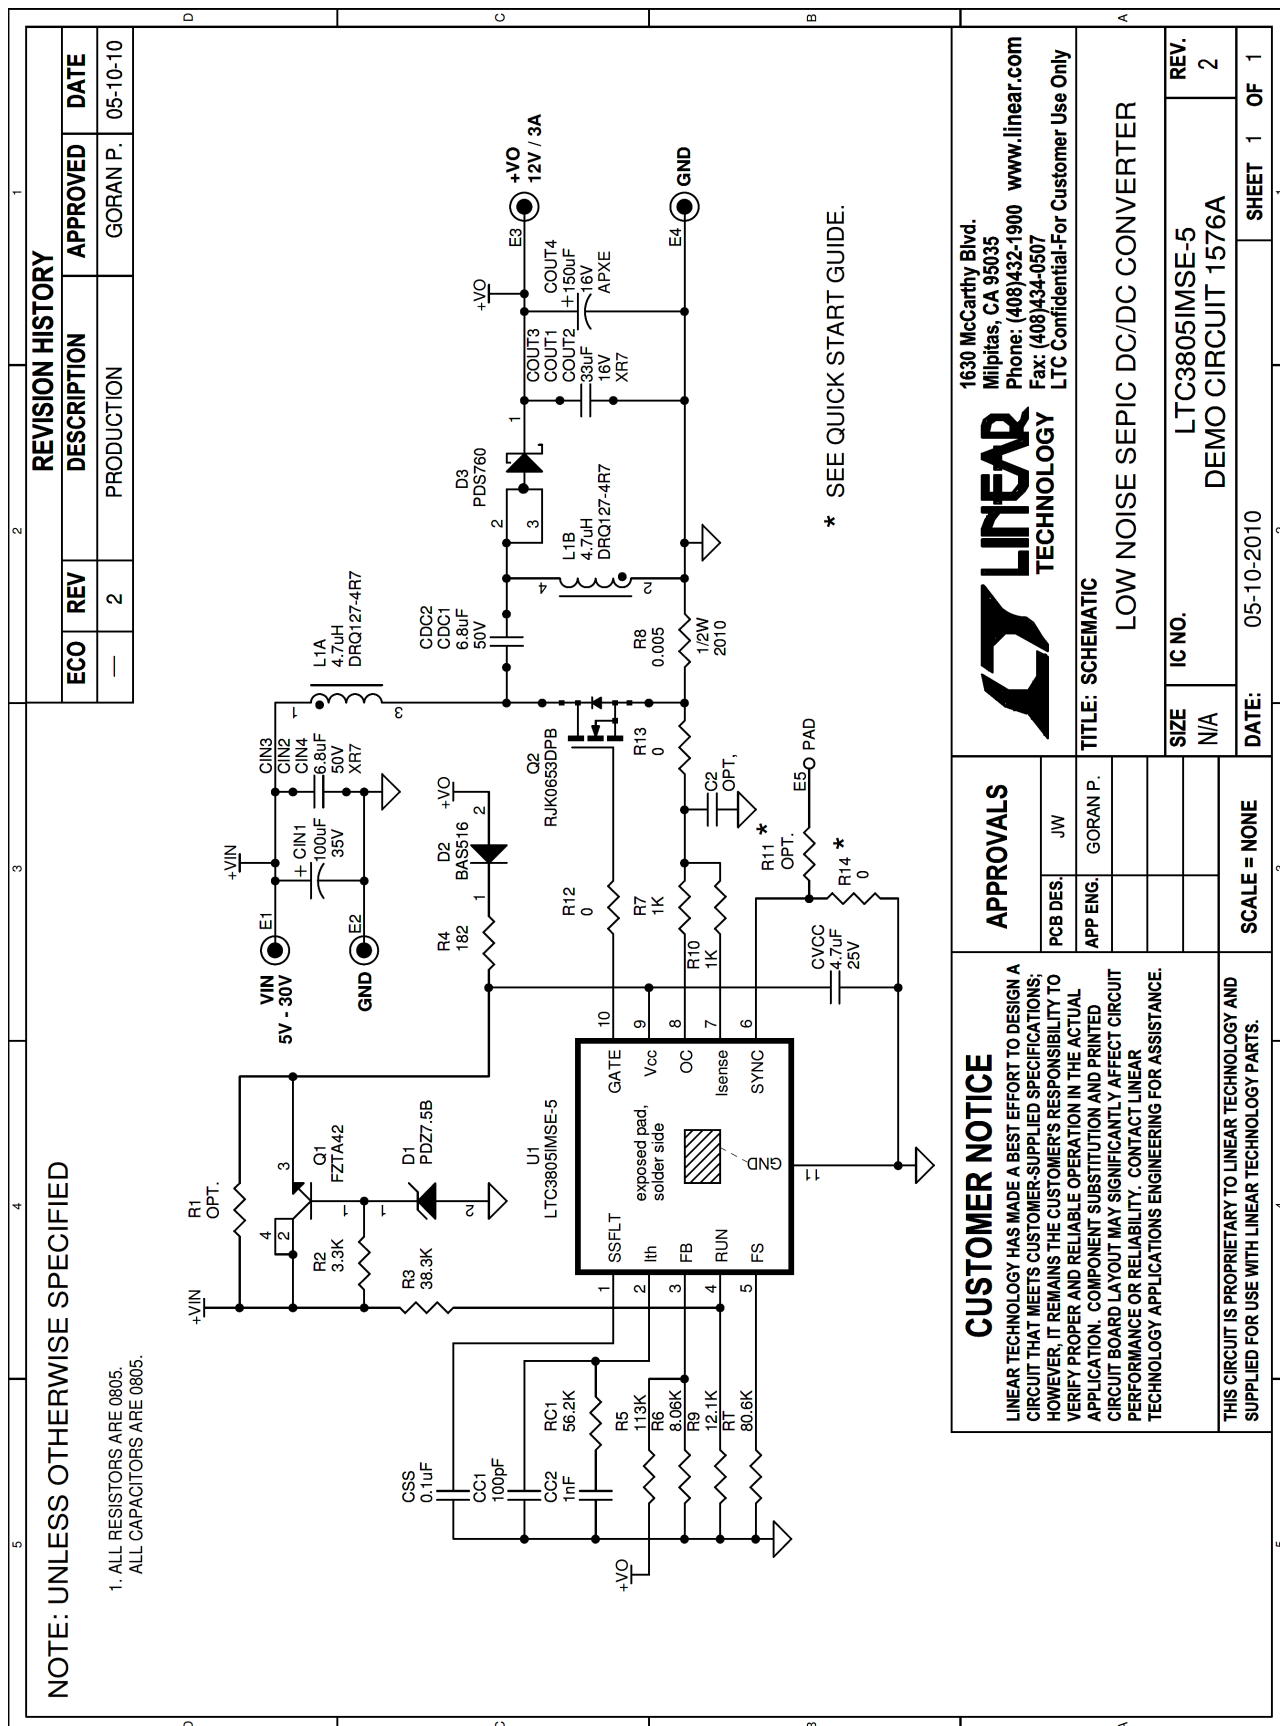

REQUIRED CIRCUIT COMPONENTS:

<i>Item</i>	<i>Qty</i>	<i>Reference</i>	<i>Part Description</i>	<i>Manufacturer / Part #</i>
1	1	CC1	CAP., X7R, 100pF, 50V, 10%, 0805	AVX, 08055C101KAT1A
2	1	CC2	CAP., C0G, 1000pF, 50V, 5%, 0805	TDK, C2012C0G1H102J
3	1	CIN1	CAP., HVH Series, 100uF 35V 20%	SUN ELECT., 35HVH100M
4	5	CIN2,CIN3,CIN4,CDC1,CDC2	CAP., X7R, 6.8uF, 50V, 20%, 1812	TDK, C4532X7R1H685M
5	3	COUT1,COUT2,COUT3	CAP., X5R, 33uF, 16V, 20%, 1812	TDK, C4532X5R1C336M
6	1	COUT4	CAP., ALUM., 150uF, 16V	NIPPON CHEMI-CON, APXE160ARA151MH80G
7	1	CSS	CAP., X7R, 0.1uF, 50V, 20%, 0805	AVX, 08055C104MAT2A
8	1	CVCC	CAP., X5R, 4.7uF, 25V, 20%, 0805	AVX, 08053D475MAT2A
9	1	D1	DIODE, VOLTAGE REGULATOR, 7.5V, SOD323	NXP, PDZ7.5B
10	1	D2	DIODE, HIGH-SPEED DIODE, SOD-523	NXP, BAS516
11	1	D3	DIODE, SCHOTTKY RECTIFIER 7A, POWERDI5	DIODES/ZETEX, PDS760-13
12	1	L1	IND., 4.7uH Coupled Inductor	COILTRONICS, DRQ127-4R7-R
13	1	Q1	XSTR, NPN, HIGH VOLTAGE, FZTA42, SOT223	DIODES/ZETEX, FZTA42TA
14	1	Q2	MOSFET, N-CH, POWER,	RENESAS RJK0653DPB
15	1	R1	RES., CHIP 100K 1/8W 5%, 0805	VISHAY, CRCW0805100KJNEA
16	1	R2	RES., CHIP 3.3K 1/8W 5%, 0805	VISHAY, CRCW08053K30JNEA
17	1	R3	RES., CHIP 38.3K 1/8W 1%, 0805	VISHAY, CRCW080538K3FKEA
18	1	R4	RES., CHIP 182 1/8W 1% 0805	VISHAY, CRCW0805182RFKEA
19	1	R5	RES., CHIP 113K 1/8W 1%, 0805	VISHAY, CRCW0805113KFKEA
20	1	R6	RES., CHIP 8.06K 1/8W 1%, 0805	VISHAY, CRCW08058K06FKEA
21	2	R7,R10	RES., CHIP 1K 1/8W 5%, 0805	VISHAY, CRCW08051K00JNEA
22	1	R8	RES., CHIP 0.005 OHMS 1/2W, 1%, 2010	VISHAY, WSL20105L000FEA
23	1	R9	RES., CHIP 12.1K 1/8W 1%, 0805	VISHAY, CRCW080512K1FKEA
24	3	R12,R13,R14	RES., CHIP 0 1/8W 0805	VISHAY, CRCW08050000Z0EA
25	1	RC1	RES., CHIP 56.2K 1/8W 1%, 0805	VISHAY, CRCW080556K2FKEA
26	1	RT	RES., CHIP 80.6K 1/8W 1%, 0805	VISHAY, CRCW080580K6FKEA
27	1	U1	IC, LTC3805IMSE-5	LINEAR TECH., LTC3805IMSE-5

ADDITIONAL DEMO BOARD CIRCUIT COMPONENTS:

1	0	C2 (OPT)	CAP., 0805	
2	0	R11 (OPT)	OPT.	

HARDWARE-FOR DEMO BOARD ONLY:

1	4	MTG 4 CORNERS	STAND-OFF, NYLON, 0.25" TALL (SNAP ON)	KEYSTONE, 8831 (SNAP ON)
---	---	---------------	--	--------------------------

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9